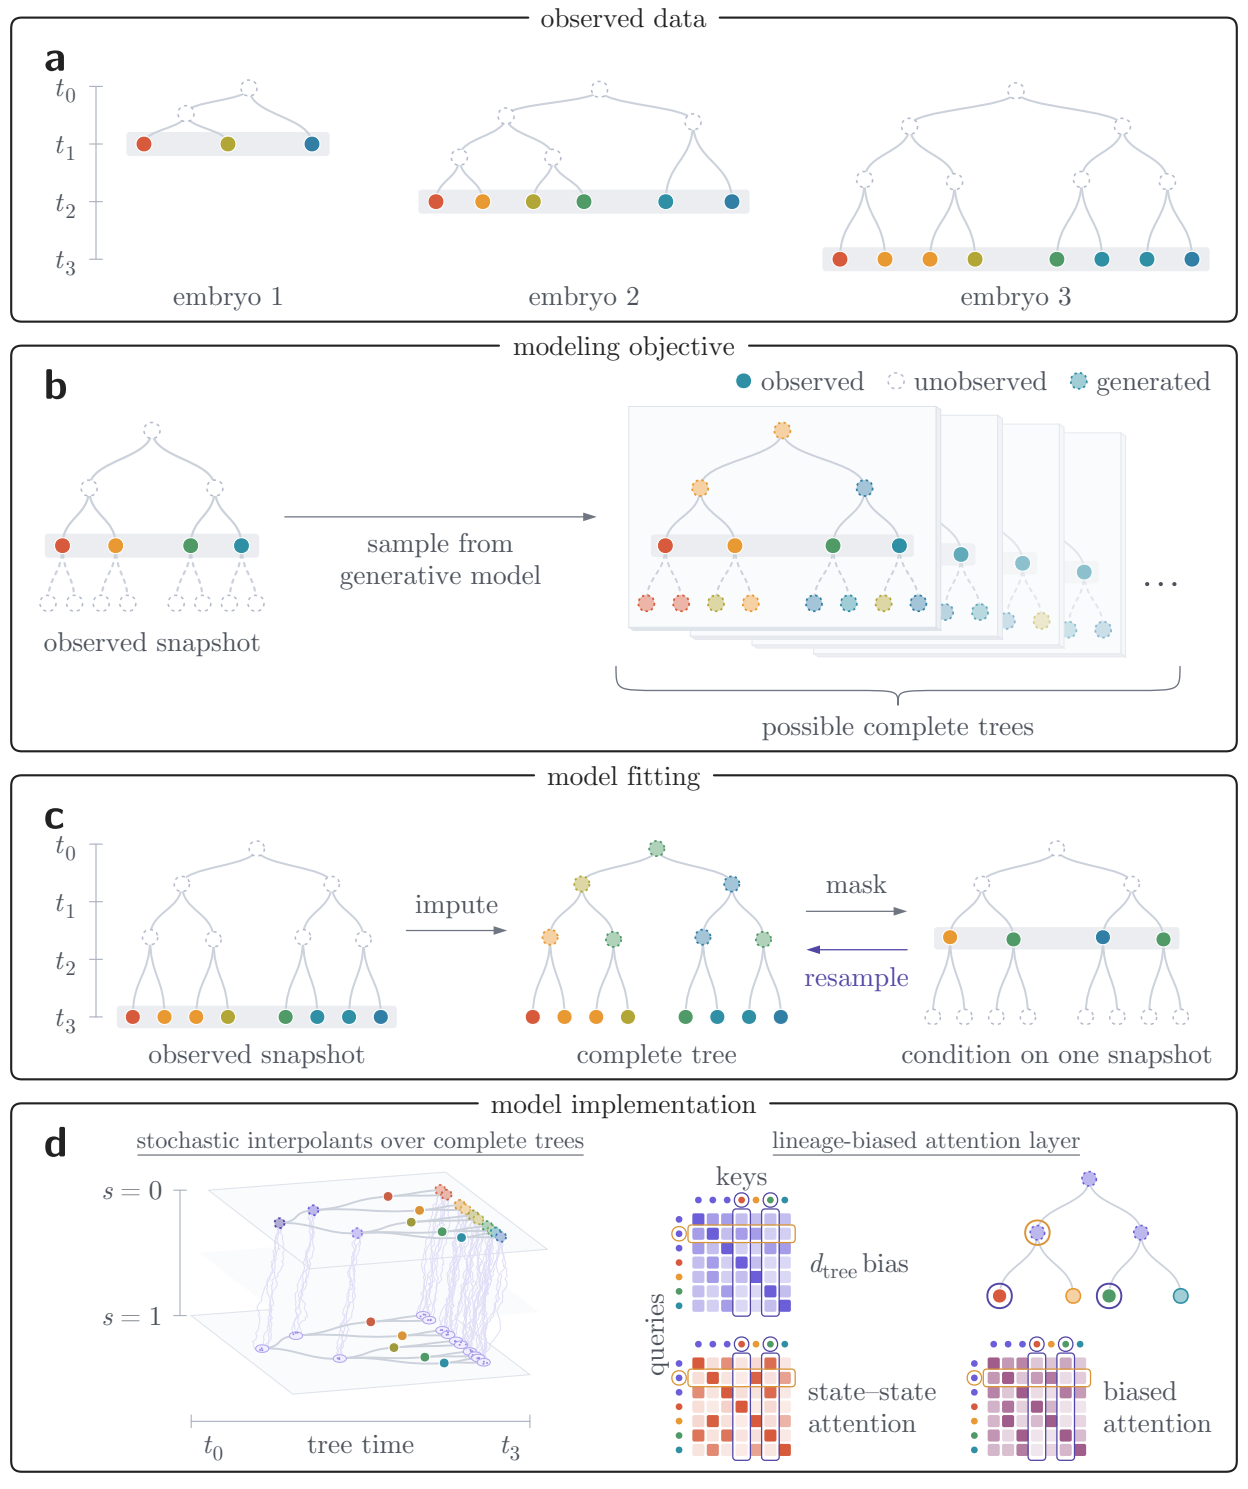

observed data
a
t_0
t_1
t_2
t_3
embryo 1
embryo 2
embryo 3
modeling objective
b
observed
unobserved
generated
observed snapshot
sample from
generative model
...
possible complete trees
model fitting
c
t_0
t_1
t_2
t_3
observed snapshot
impute
complete tree
mask
resample
condition on one snapshot
model implementation
d
stochastic interpolants over complete trees
$s = 0$
$s = 1$
t_0
tree time
t_3
lineage-biased attention layer
keys
queries
d_{tree} bias
state–state
attention
biased
attention