


SlideAI 專案 Zeabur 部署指南


本文件說明如何將包含 Database、Backend 與 Frontend (Next.js/React) 的 SlideAI 專案部署至 Zeabur。

第一步：調整費用(Billing)，免費方案無法運行專案


1. 至個人介面點選 Billing

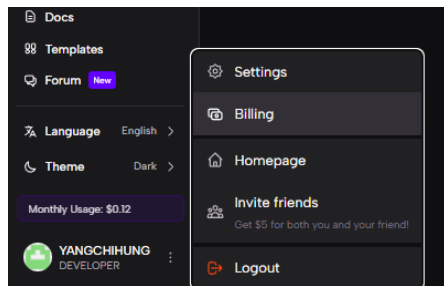

2. 點選 Upgrade

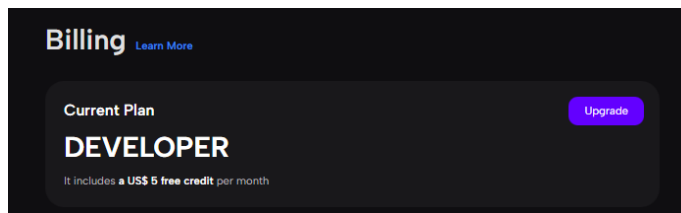


3. 選擇中間的 Developer

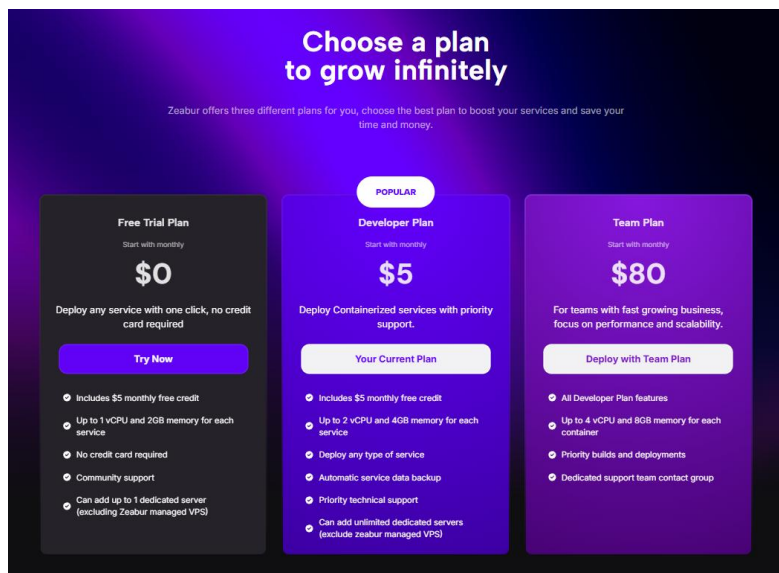


第二步：創建 Project

1. 至 <https://zeabur.com/projects> 點選 New Project

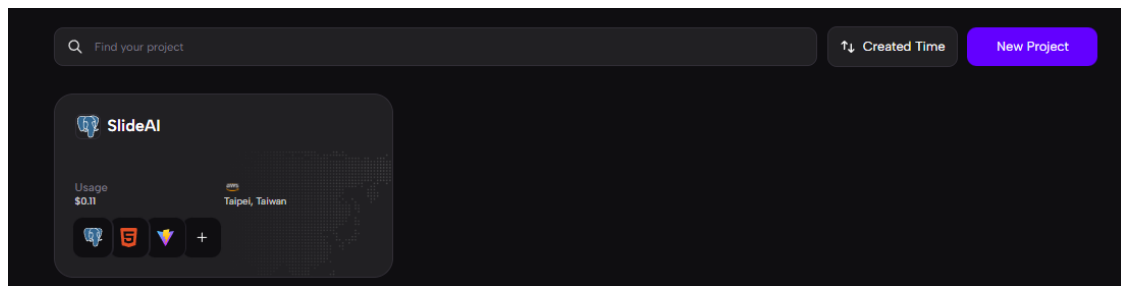

2. 選擇 Share Cluster（共享叢集）

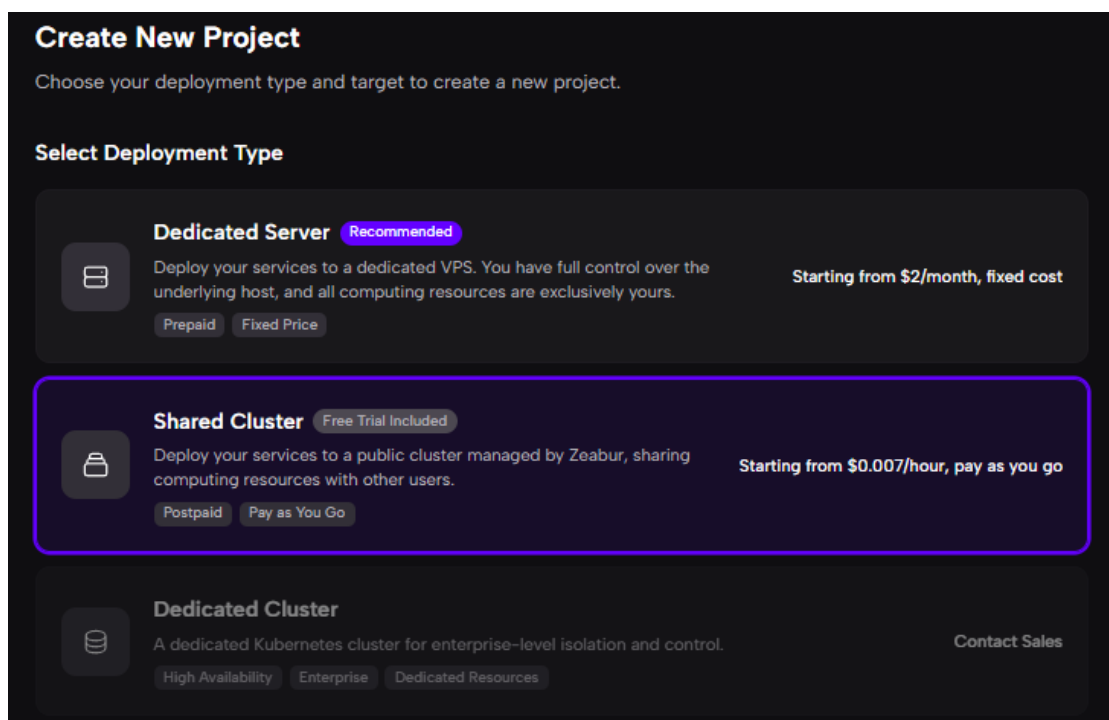

3. 區域選擇 Taipei, Taiwan（距離近速度快），並點選 Create Project

Select a Region

Region	Provider
 Tokyo, Japan Developer Plan	Amazon Web Services
 California, United States Developer Plan	Amazon Web Services
 Frankfurt, Germany Developer Plan	Amazon Web Services
 Taipei, Taiwan Developer Plan	Amazon Web Services
 Hong Kong Developer Plan	Amazon Web Services

Free Trial Clusters

For testing purposes only. Services may be interrupted or suspended at any time. New deployments may require queuing during peak hours. Do not use for production environments.

Region	Provider
 Silicon Valley, United States Free Plan	Tencent Cloud ⚠ High demand, queuing may be required
 Jakarta, Indonesia Free Plan	Volcengine ⚠ High demand, queuing may be required

China Mainland Clusters

These clusters are located in mainland China, providing low latency and stable connections for users within the GFW. Custom domains require ICP filing. If you don't have a filed domain, you can use Zeabur's "Pre-filed Subdomain" or apply for Huawei Cloud's ICP filing service code from Zeabur.

Region	Provider
 Shanghai, China Developer Plan	Huawei Cloud


Team Plan Reserved Clusters

These shared clusters are reserved for enterprise customers.


Region	Provider
 Taipei, Taiwan Team Plan	Google Cloud

Create Project

第三步：部署 Database, PostgreSQL 服務

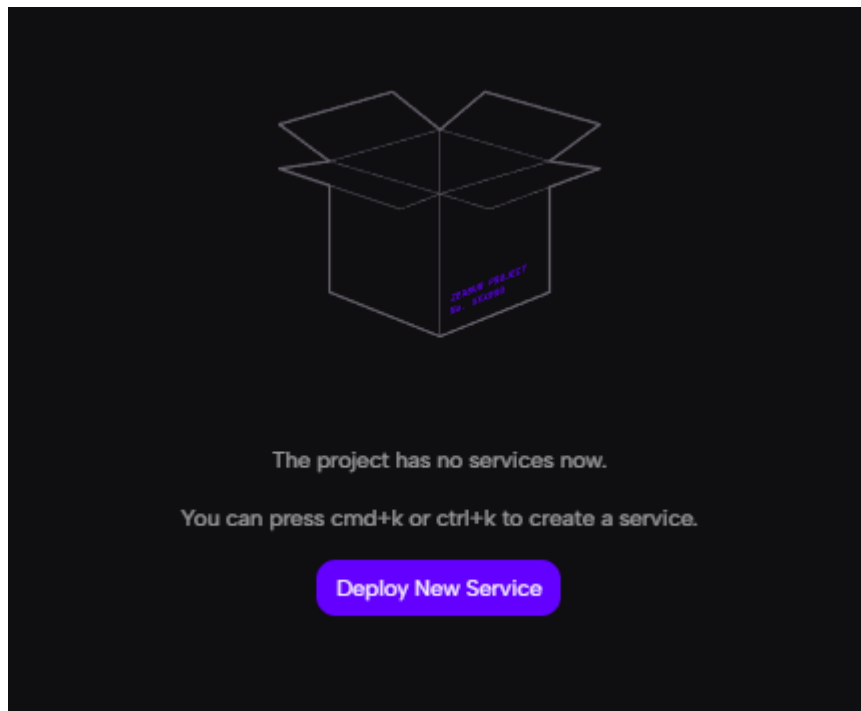

1. 在輸入欄輸入 PostgreSQL

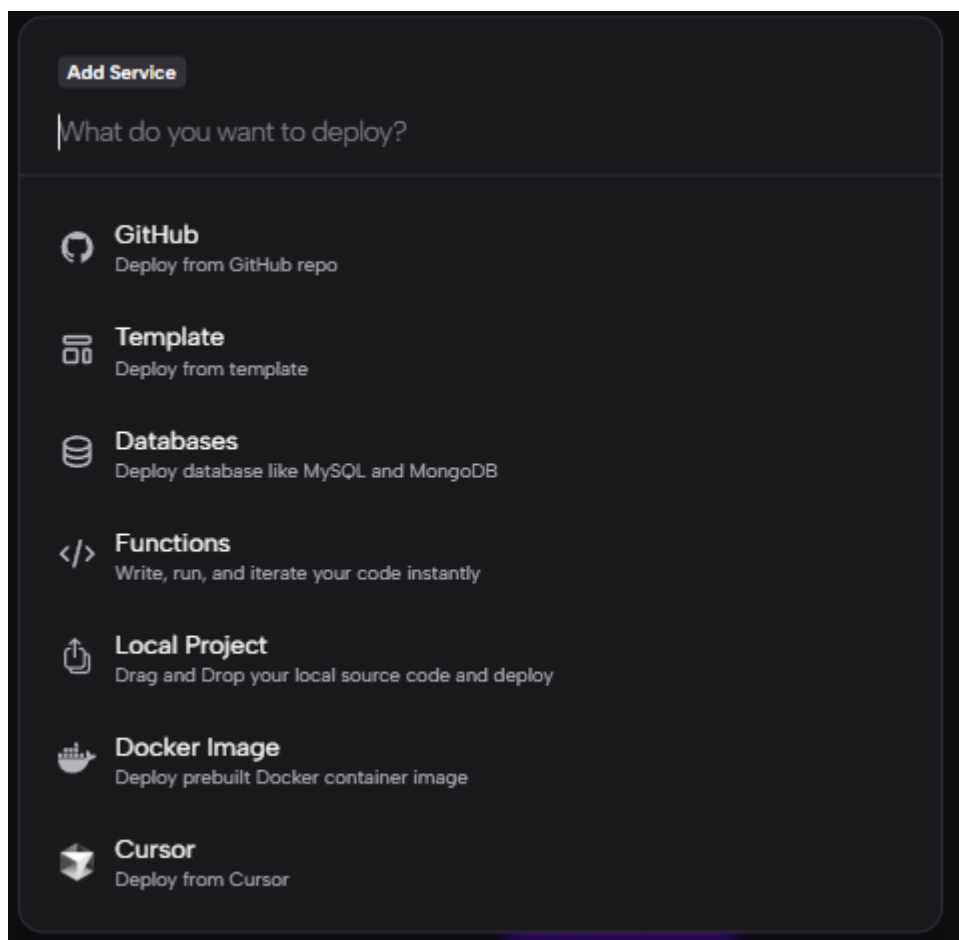

2. 選擇第一個，點擊 Deploy

[Add Service](#)

PostgreSQL

Template

**PostgreSQL**

Deploy

A free and open-source relational database management system emphasizing extensibility and SQL compliance.



PostgreSQL with pgvector

1 Service

↓ 476

A free and open-source relational database management system emphasizing extensibility and SQL compliance, with "pgvector" installed.



PostgreSQL with TLS

1 Service

↓ 106

A free and open-source relational database management system emphasizing extensibility and SQL compliance with self-signed TLS certificate



FastAPI – PostgreSQL

2 Services

↓ 56

A comprehensive FastAPI and PostgreSQL template.



PostgreSQL HA

6 Services

↓ 29

High Availability PostgreSQL cluster with Patroni and etcd. Provides automatic failover and replication for production-grade database deployments.



PostgreSQL (with PostGIS)

1 Service

↓ 22

The PostgreSQL distribution with PostGIS included



PostgreSQL (with PostGIS and pgvector)


1 Service

↓ 17


PostgreSQL distribution with PostGIS (geospatial data) and pgvector (vector similarity search) extensions included.

第四步：部署後端服務


1. Add Service，選擇 GitHub

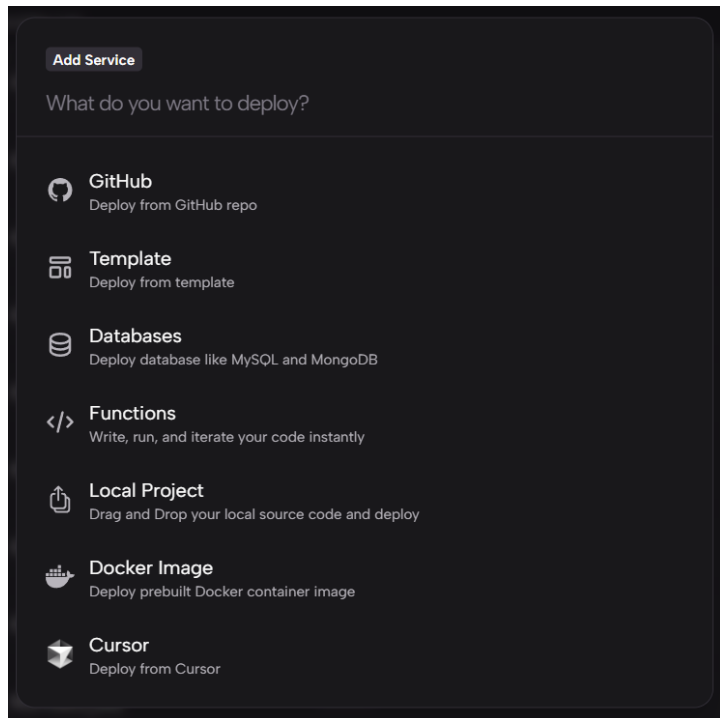


2. 選擇 SlideAI 專案，之後選擇 main

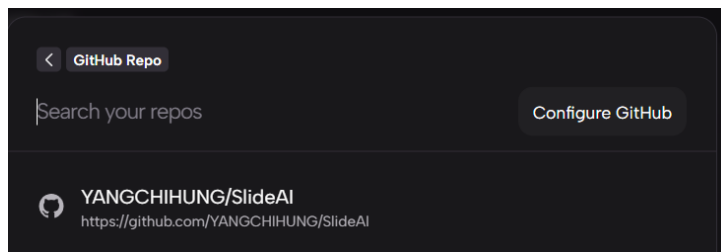

3. 點選 Deploy

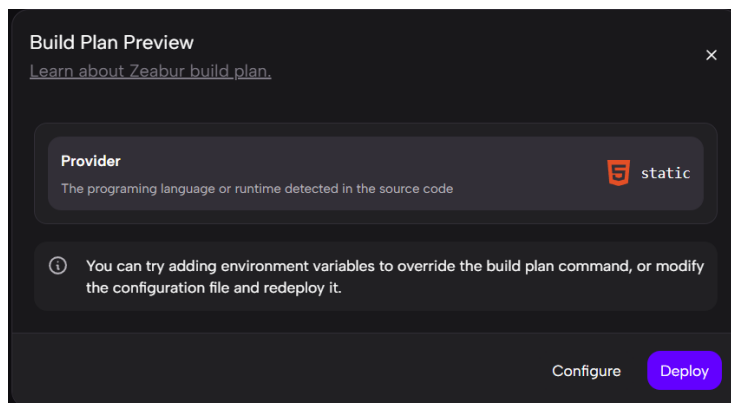


4. 至 Settings 更改名字成 backend 並點選 Save，以利於辨識

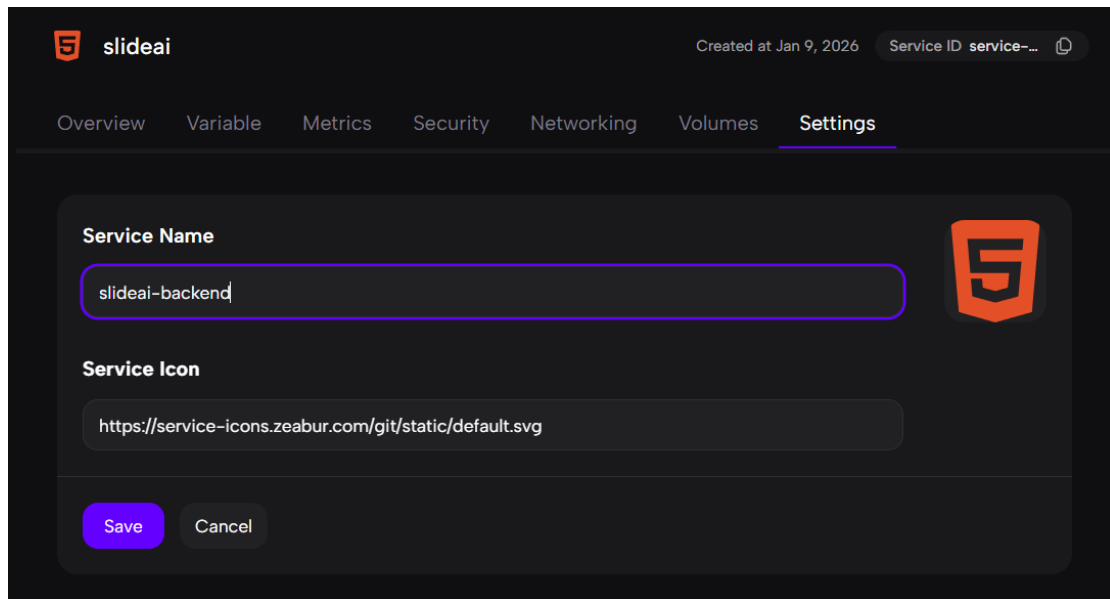

The screenshot shows the Zeabur interface for a service named 'slideai'. The 'Settings' tab is selected. The 'Service Name' field contains 'slideai-backend'. The 'Service Icon' field contains the URL 'https://service-icons.zeabur.com/git/static/default.svg'. There are 'Save' and 'Cancel' buttons at the bottom.

5. 繼續在 Settings 設定以下參數

- Dockerfile: 複製專案中 backend/Dockerfile.zeabur 中的內容並貼上再點選 Save

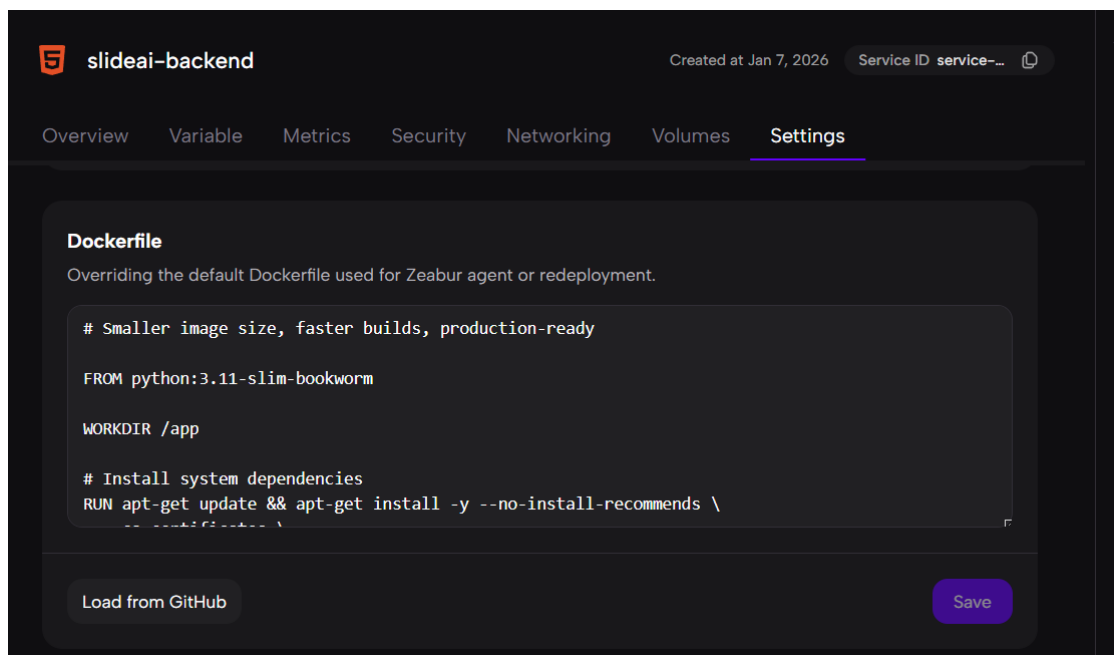

The screenshot shows the Zeabur interface for a service named 'slideai-backend'. The 'Settings' tab is selected. The 'Dockerfile' section is visible, showing the following content:


```
# Smaller image size, faster builds, production-ready
FROM python:3.11-slim-bookworm

WORKDIR /app

# Install system dependencies
RUN apt-get update && apt-get install -y --no-install-recommends \
```

At the bottom of the Dockerfile section, there are 'Load from GitHub' and 'Save' buttons.

- Resource Limit 中的 Memory 調整成 2048 並點選 Save

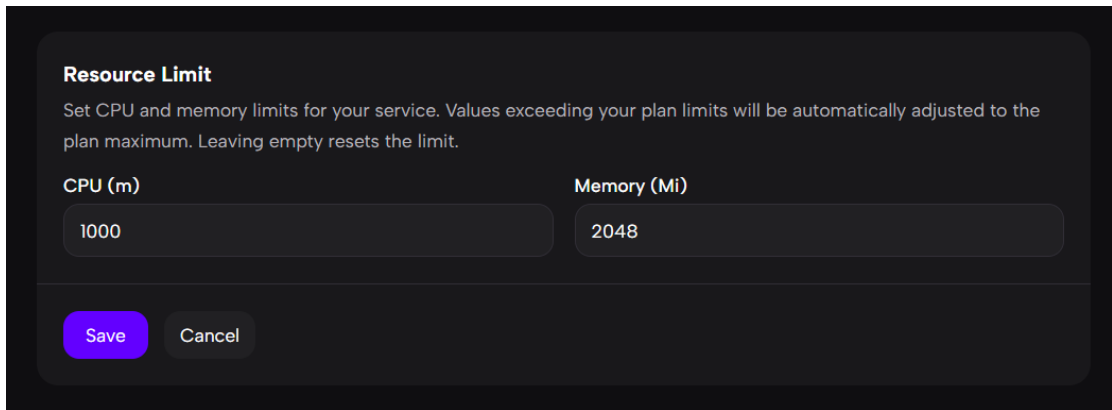

Resource Limit

Set CPU and memory limits for your service. Values exceeding your plan limits will be automatically adjusted to the plan maximum. Leaving empty resets the limit.

CPU (m) Memory (Mi)

1000 2048

Save Cancel

6. 設定 Variable 參數

DATABASE_URL: 至 PostgreSQL 服務中的 Variable 中尋找「PostgreSQL Connection String」(以 postgres:// 開頭的那串網址)，複製貼上。

WEB_CONCURRENCY: 1

api_key: 您的 GoogleAPIKey (請自行設定，並建議購買流量)


PYTHONUNBUFFERED: 1

ALLOWED_HOSTS: *

FORWARDED_ALLOW_IPS: *

FRONTEND_URL: *(暫時設為星號，等前端部署完再回來改)

7. 在 Backend 中點選 Networking，並在下方的 Public 中點選 Generate Domain，輸入 slideai-backend(若重複就取其他名字)並點選 Confirm。

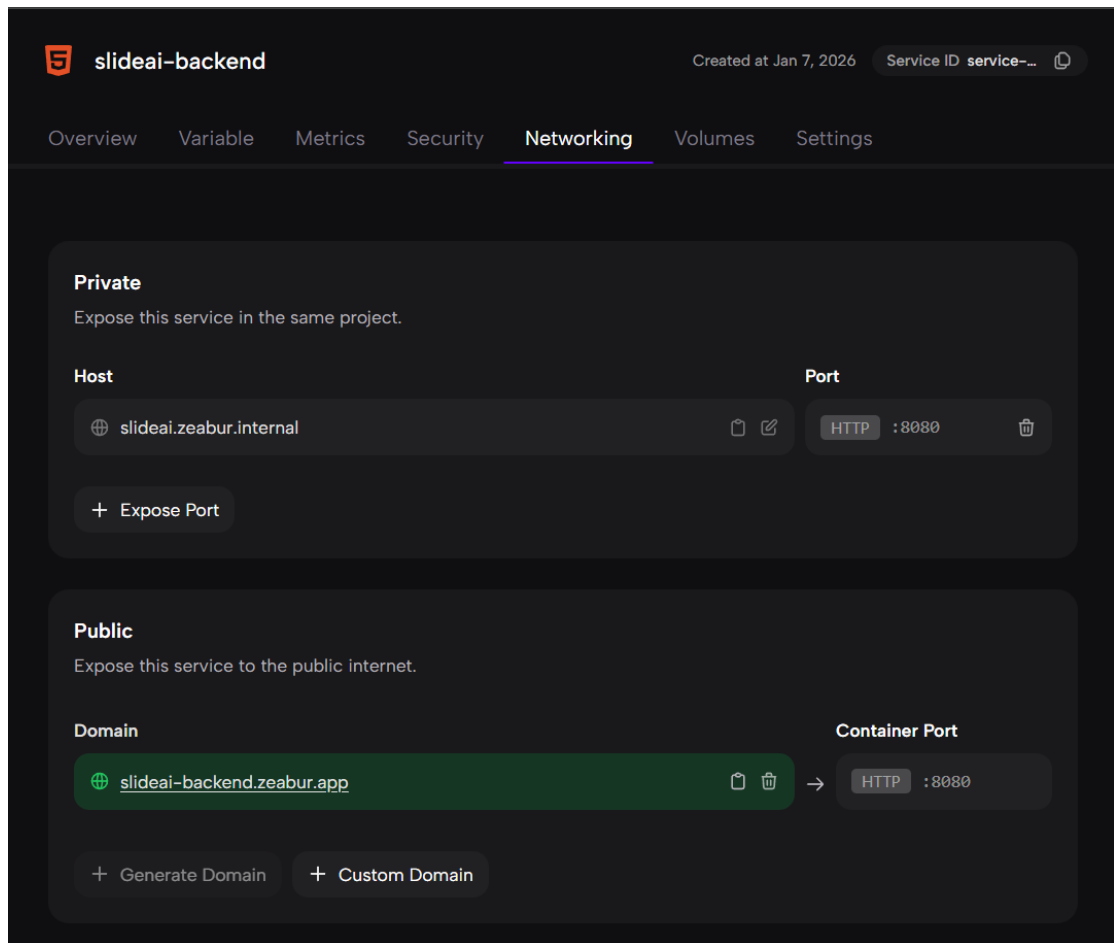

完成！前端網站即是專案的主要網站。

第五步：部署前端服務 (Frontend)


1. 建立服務：

- 點擊 Create Service -> GitHub -> 選擇您的 SlideAI Repository。

2. 更改服務名稱為 slideai-frontend

3. 設定運行環境 (Settings)

- 在 Dockerfile 的輸入欄填入專案中 frontend/Dockerfile.zeabur 的內容，並點選 Save。

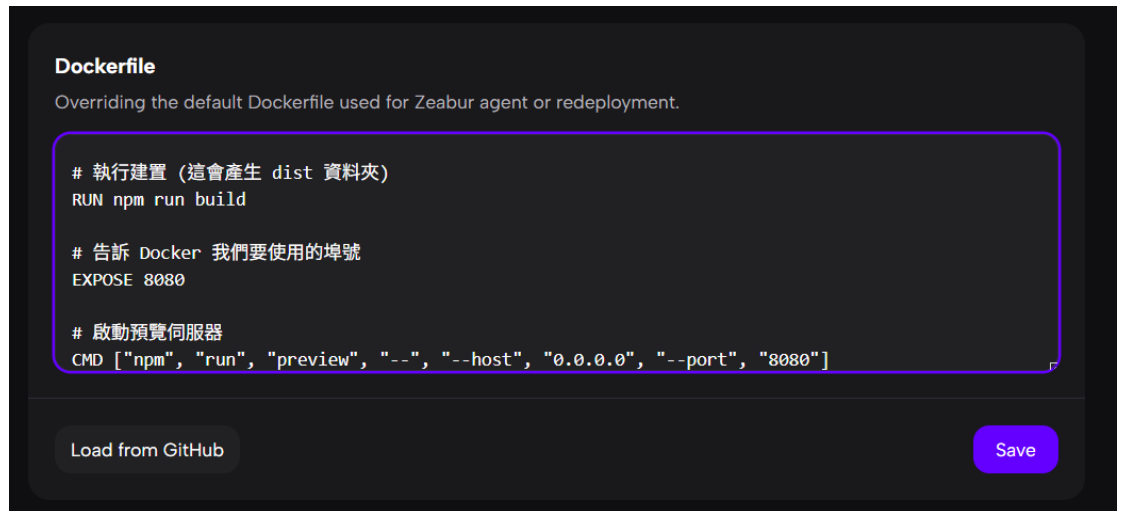

Dockerfile

Overriding the default Dockerfile used for Zeabur agent or redeployment.

```
# 執行建置 (這會產生 dist 資料夾)
RUN npm run build


# 告訴 Docker 我們要使用的埠號
EXPOSE 8080

# 啟動預覽伺服器
CMD ["npm", "run", "preview", "--", "--host", "0.0.0.0", "--port", "8080"]
```

Load from GitHub Save

4. 設定環境變數 (Settings -> Variables)：

- VITE_API_URL: (貼上後端的網址，例如 <https://slideai-backend.zeabur.app>)

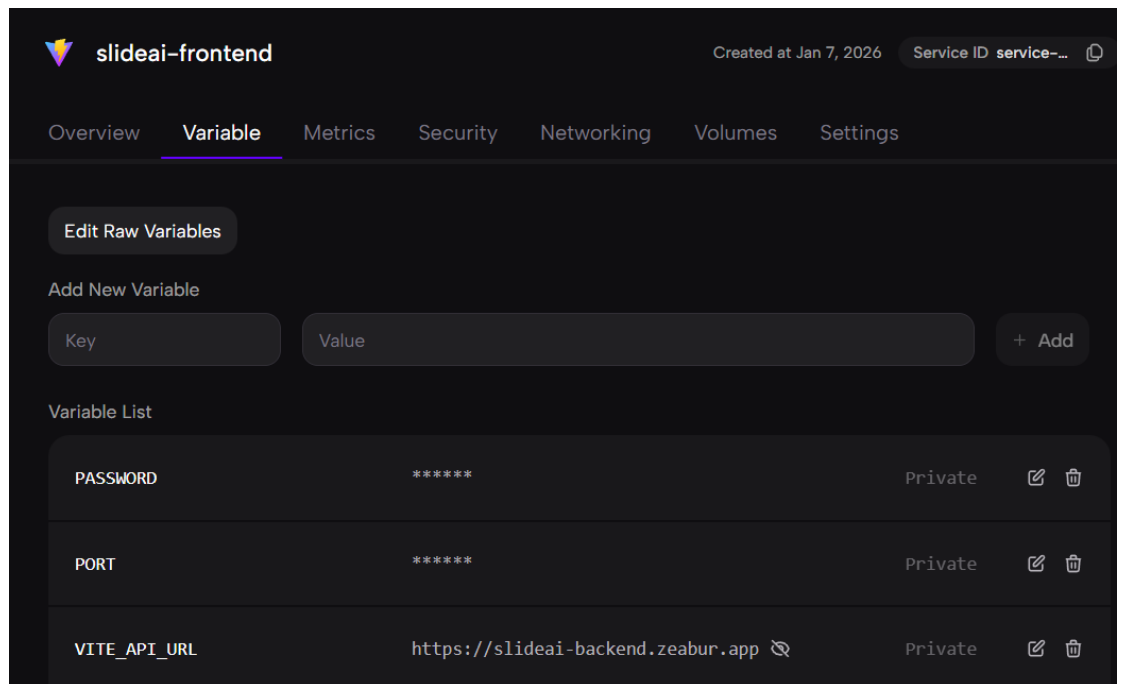

slideai-frontend Created at Jan 7, 2026 Service ID service-...

Overview Variable Metrics Security Networking Volumes Settings

Edit Raw Variables

Add New Variable

Key Value + Add

Variable List

PASSWORD	*****	Private	✎	🗑
PORT	*****	Private	✎	🗑
VITE_API_URL	https://slideai-backend.zeabur.app	Private	✎	🗑

5. 產生網址 (Networking)：

- 在 Frontend 中點選 Networking，並在下方的 Public 中點選 Generate Domain，輸入 slideai-frontend(若重複就取其他名字)並點選 Confirm。

6. 串接

1. 回到 後端服務 (Backend)
2. 進入 Settings -> Variable
3. 修改 FRONTEND-URL

- 將原本的 * 改為前端的網址（上一個步驟您取名的網址）