SQL 1

Gage Powell
ISIN 325
February 10, 2026
Dr. Greg Gogolin

Table Of Contents

Page 1…….Cover Page

Page 2……...……Table of Contents

Page 3……..Task 1: Count Rows in Patient Table and Task 2: Delete Record in ProviderType Table (Before & After)

Page 4……..……Task 3: Two-Table Implied Join and Task 4: Three-Table Implied Join

Page 5……Task 5: Twelve SQL Functions and Task 6: LIKE Clause Query

Page 6……..Task 7: ROWCOUNT Demonstration & Alternative

Page 7…….Task 8: Insert Routine for Ailment Table and Task 9: Update Middle Name in Patient Table

Page 8…….Task 10: Truncate & Populate New Table and Task 11: Insert Multiple Ailments for Two Patients

Page 9……...Task 12: GROUP BY Query (Patient & Ailment) and Task 13: SUBSTRING Function

Page 10……..…Task 14: DISTINCT, ASC, DESC Query

Page 11……..Task 15: @@VERSION and Task 16: Count Ailments

Page 12……..Task 18: Patient with Most Ailments and Task 19: Provider with Longest Last Name

Page 13……...Task 20: Insert & Display Patient with Multiple Ailments

1) Display the count of the number of rows in the Patient table.

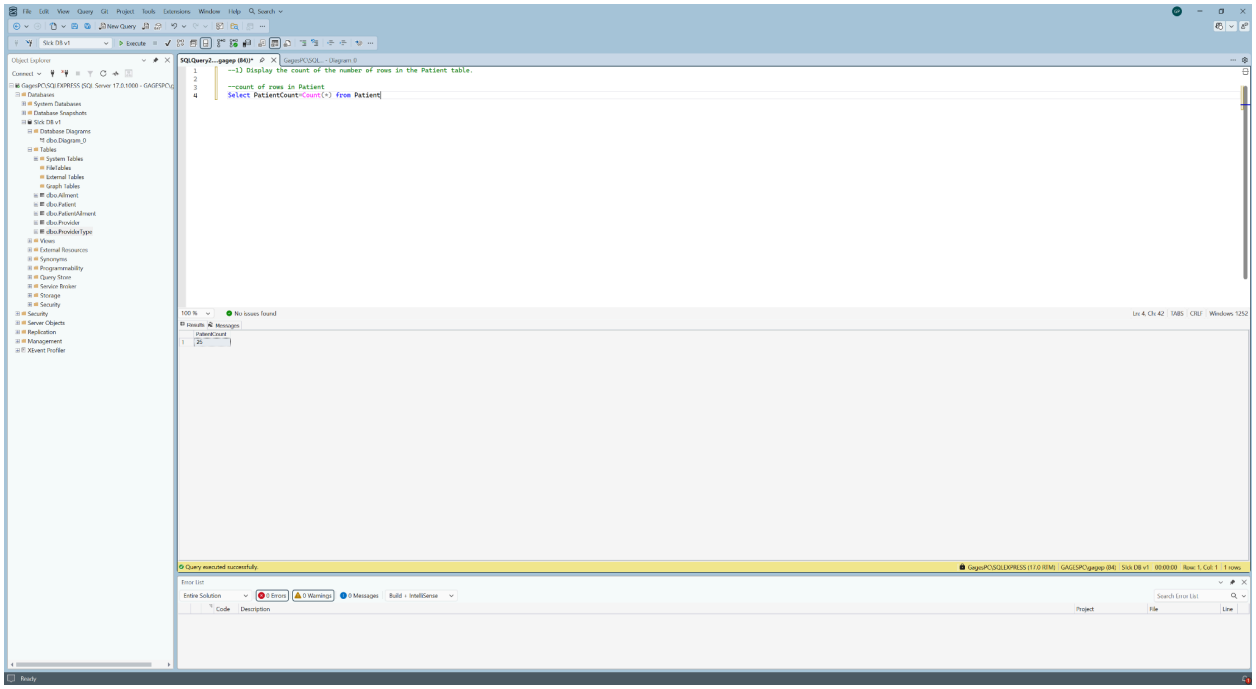

Comments: Our count properly displays the number of rows in the Patient table.

2) Delete a specified record in the ProviderType table and prove that it is deleted. before/after

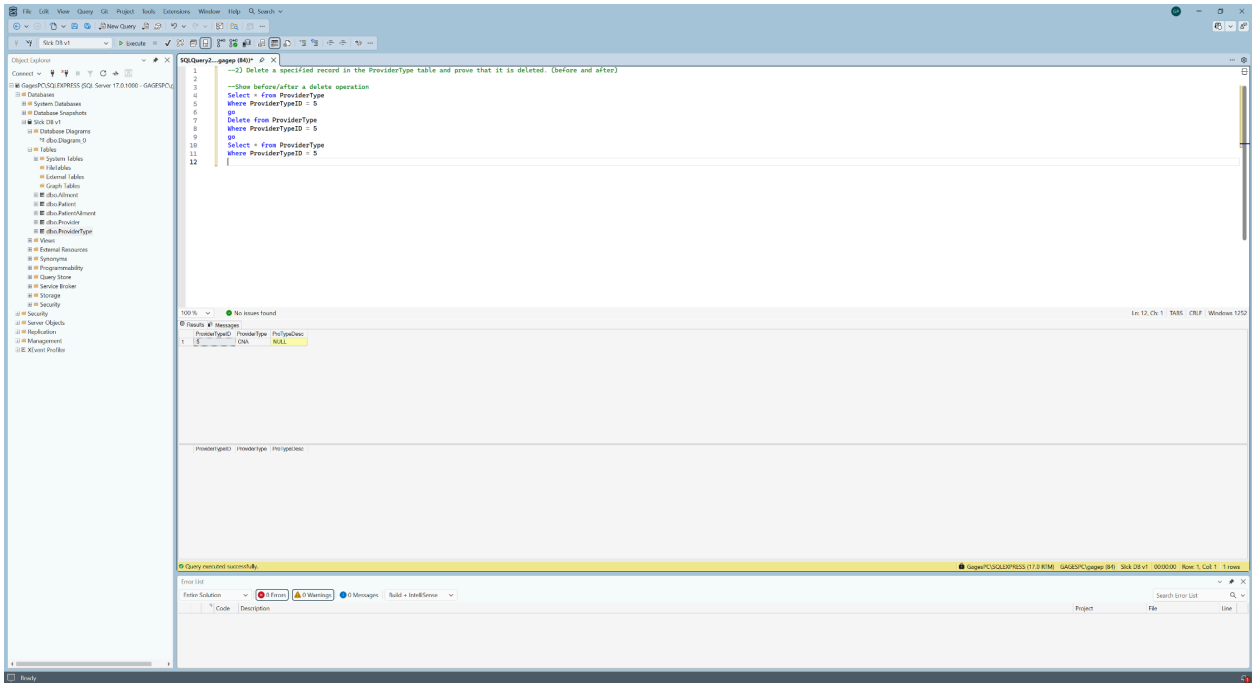

Comments: In this query we deleted the CNA record from the ProviderType and you can see that it is deleted from the results window.

3) Two table implied join qualified with a key value.

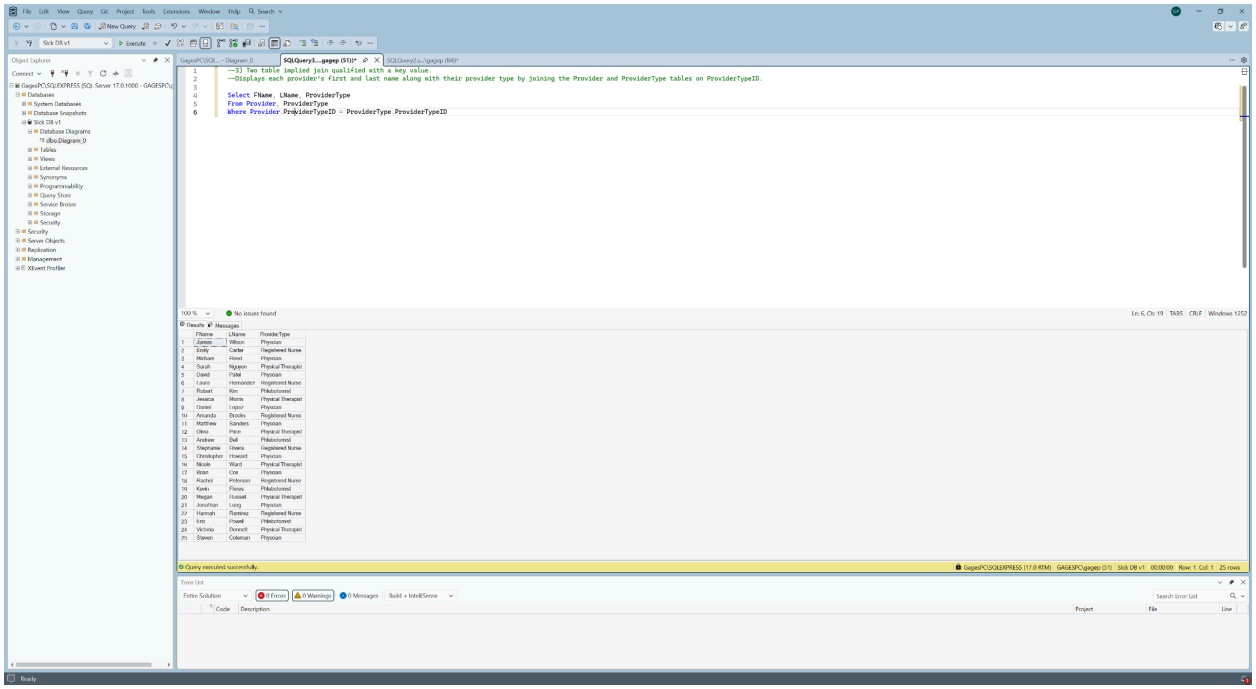

Comments: This query joins two tables using a shared key field.

4) Three table implied join qualified with a key value.

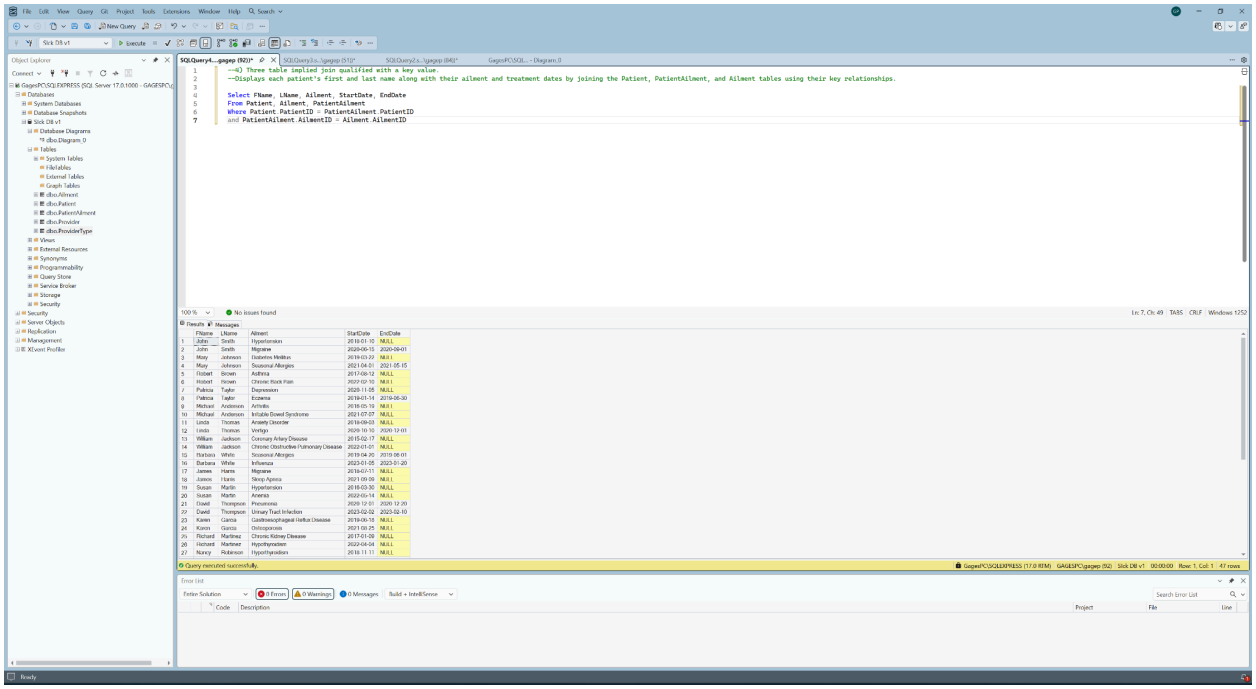

Comments: This query joins three tables using a shared key field.

5) Use twelve SQL functions (such as SUM). This should be twelve queries with at least one function for each query.

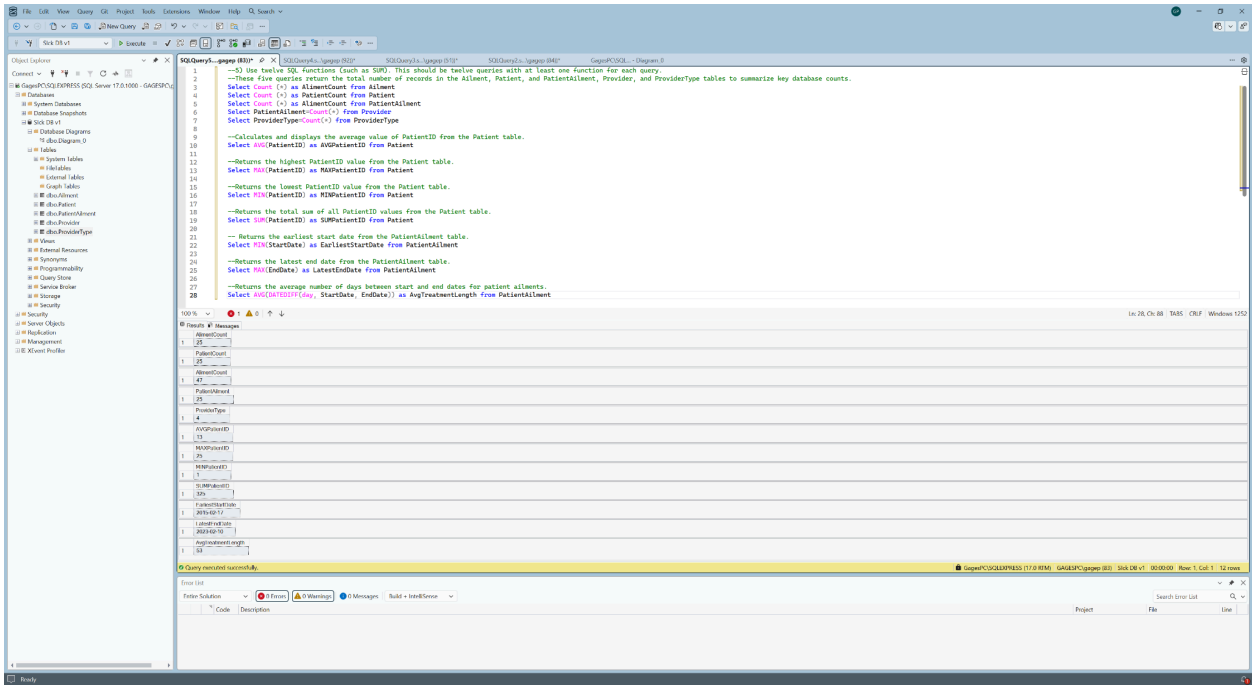

Comments: In this query I used 12 SQL functions including five different counts, sum, average, maximum, and minimum.

6) Write an SQL statement that utilizes 'like' in the where clause.

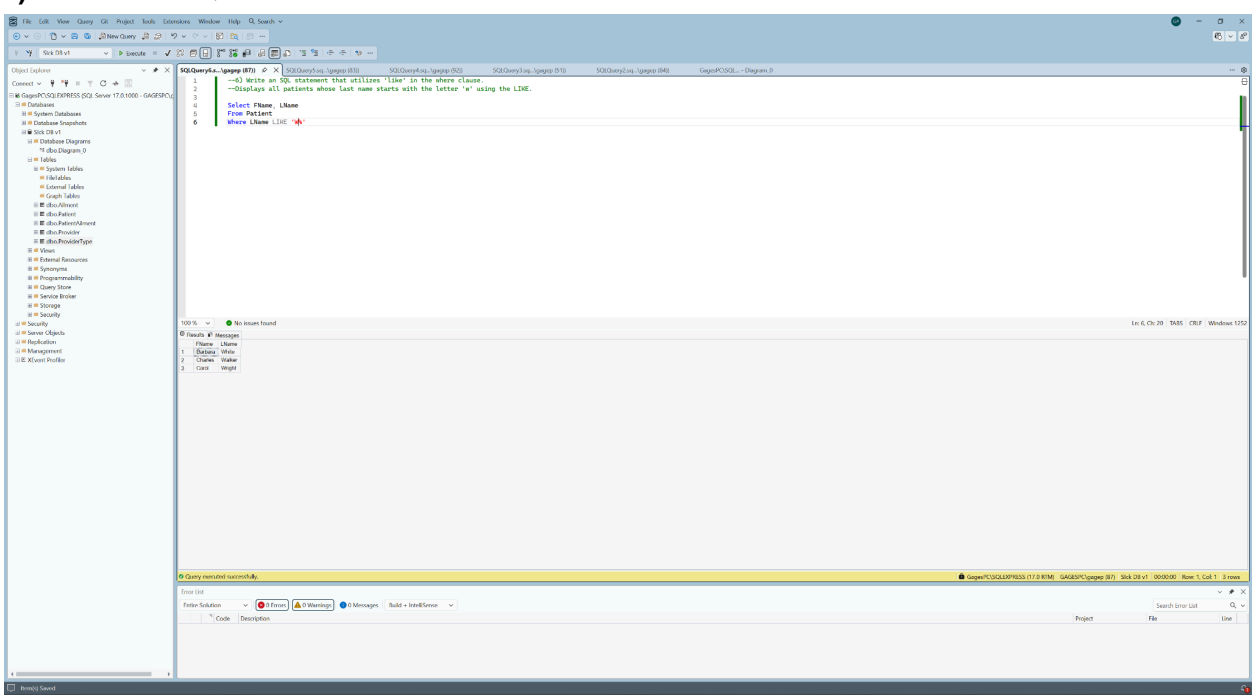

Comments: Displays all patients whose last name starts with the letter W using the ‘like’ in the where clause.

7) Demonstrate the use of the rowcount feature to return 4 rows from a table that has more than 4 rows. Then demonstrate the use of the rowcount feature to reset the number of rows returned to all of the rows in a table. Demonstrate an alternative to rowcount that has similar functionality.

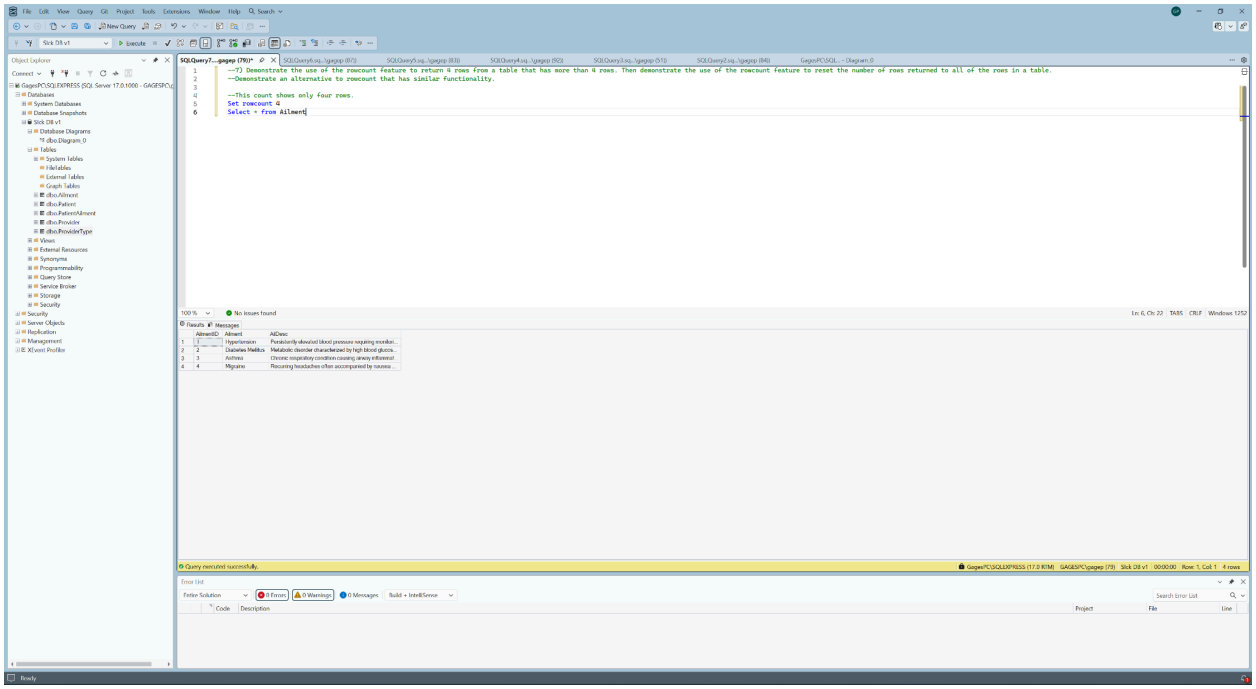

Comments: This count displays 4 rows.

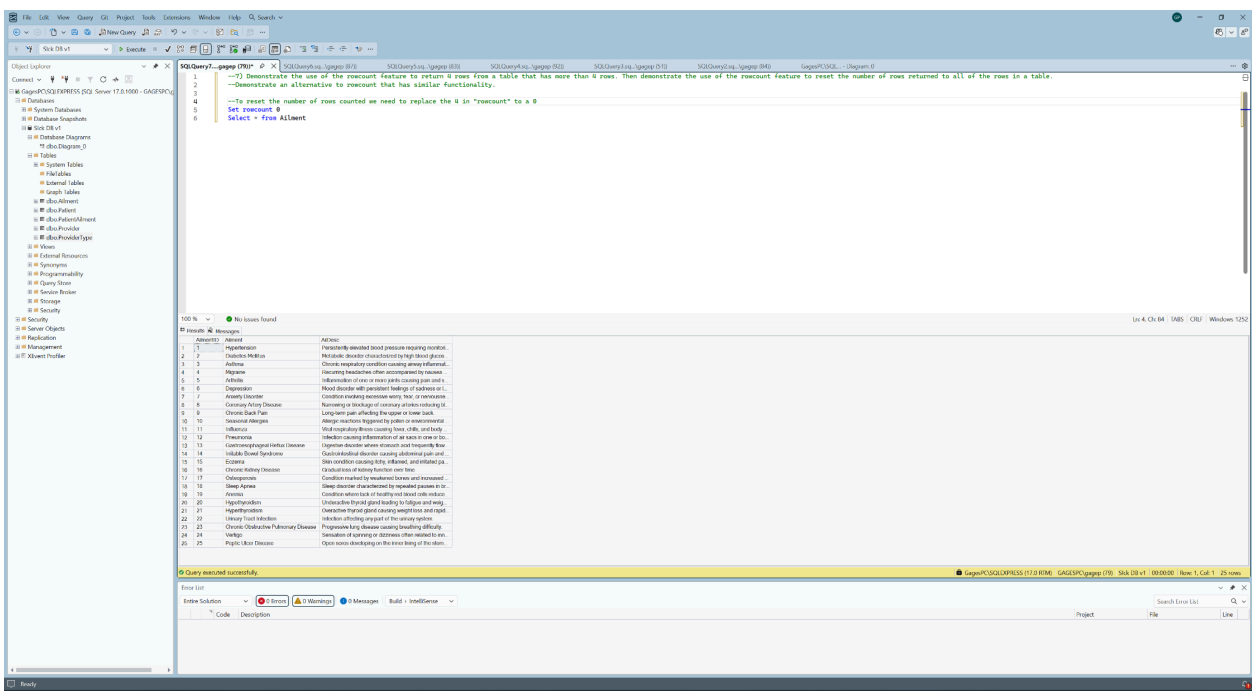

Comments: This count is reset so all rows are displayed by replacing the "rowcount" 4 to a 0.

8) Create a SQL routine to insert values into the Ailment table.

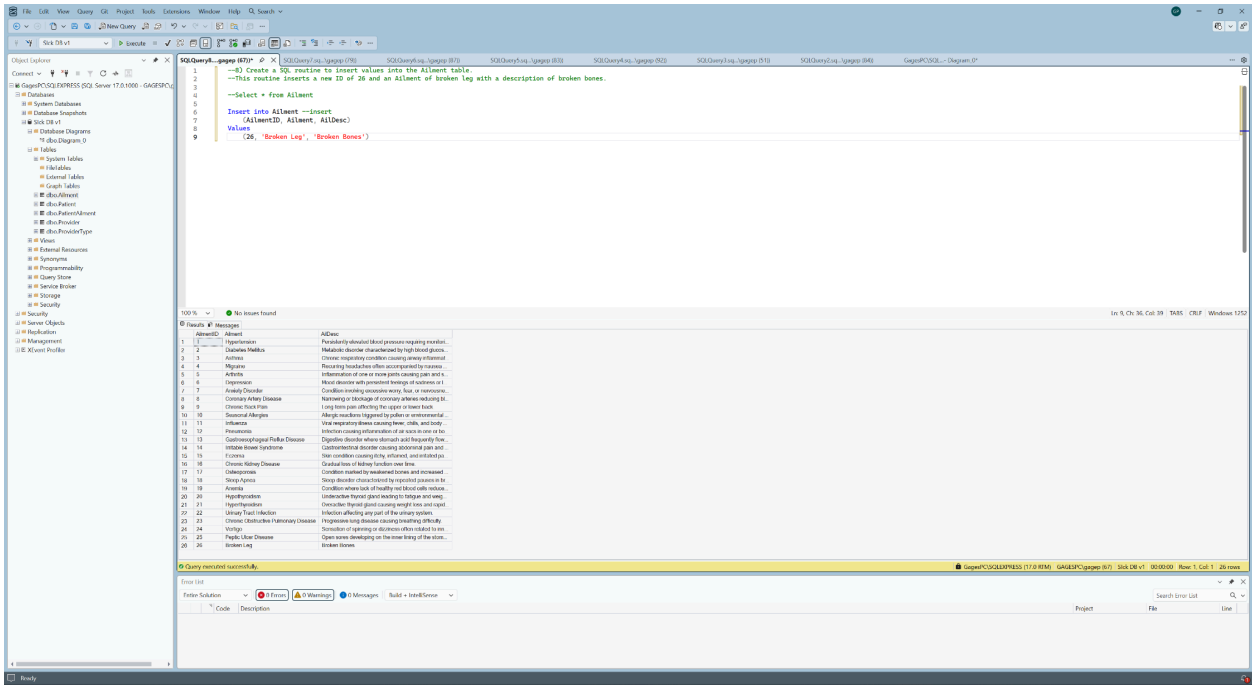

Comments: Inserts new ailment records into the Ailment table.

9) Create a SQL routine to update one middle name in the Patient table.

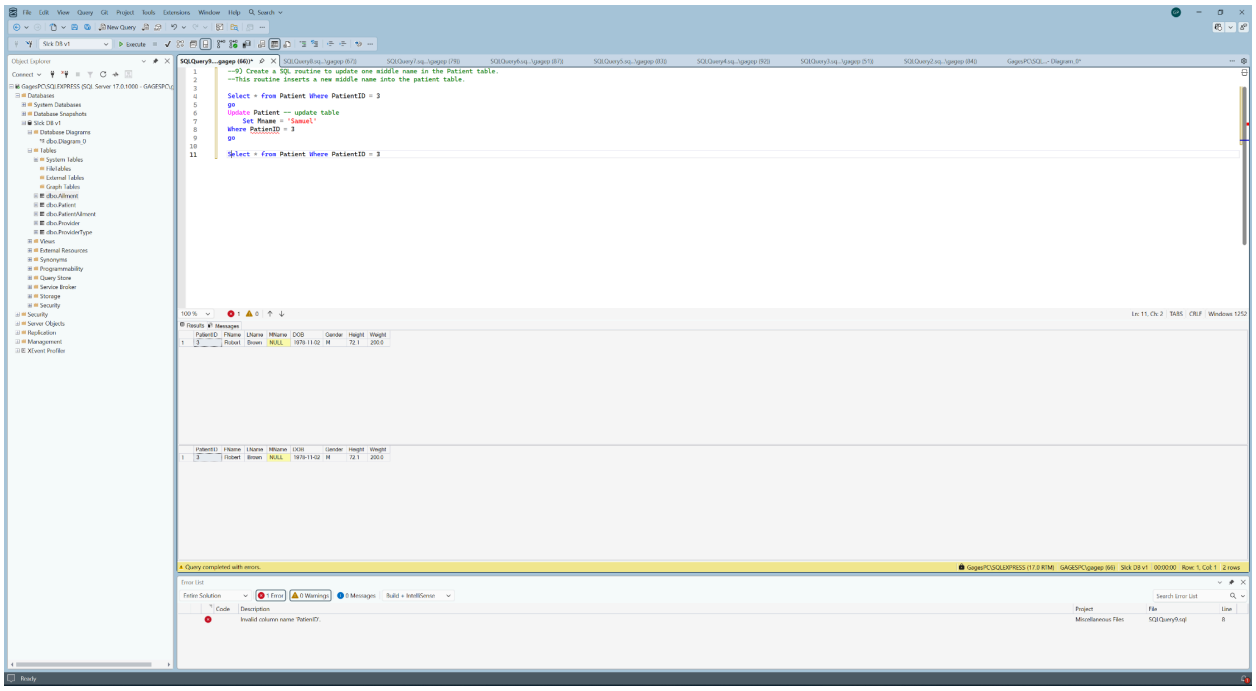

Comments: Updates the middle name for a specific patient record.

10) Create SQL to truncate and populate a new table with at least 10 rows using data you supply in the insert statement. Table must have at least 3 columns and is not a table in the Sick database.

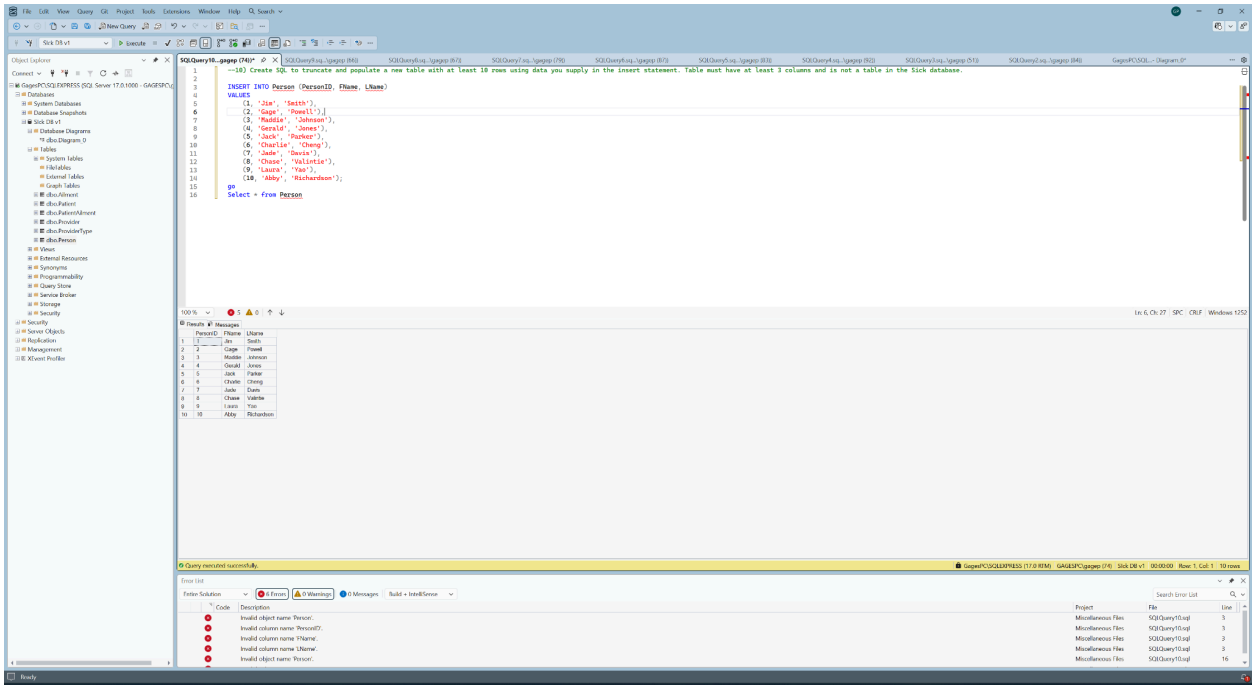

```
--10) Create SQL to truncate and populate a new table with at least 10 rows using data you supply in the insert statement. Table must have at least 3 columns and is not a table in the Sick database.

INSERT INTO Person (PersonID, FName, LName)
VALUES
    (1, 'Jim', 'Smith'),
    (2, 'Gage', 'Powell'),
    (3, 'Maddie', 'Johnson'),
    (4, 'Gerald', 'Jones'),
    (5, 'Jack', 'Parker'),
    (6, 'Charlie', 'Cheng'),
    (7, 'Jade', 'Davis'),
    (8, 'Chase', 'Valintie'),
    (9, 'Laura', 'Yao'),
    (10, 'Abby', 'Richardson');

go
Select * from Person
```

Comments: Clears all data from a table and inserts at least 10 new records into it.

11) Create a SQL statement that inserts 2 Ailments for a Patient of your choice and 3 Ailments for another Patient of your choice.

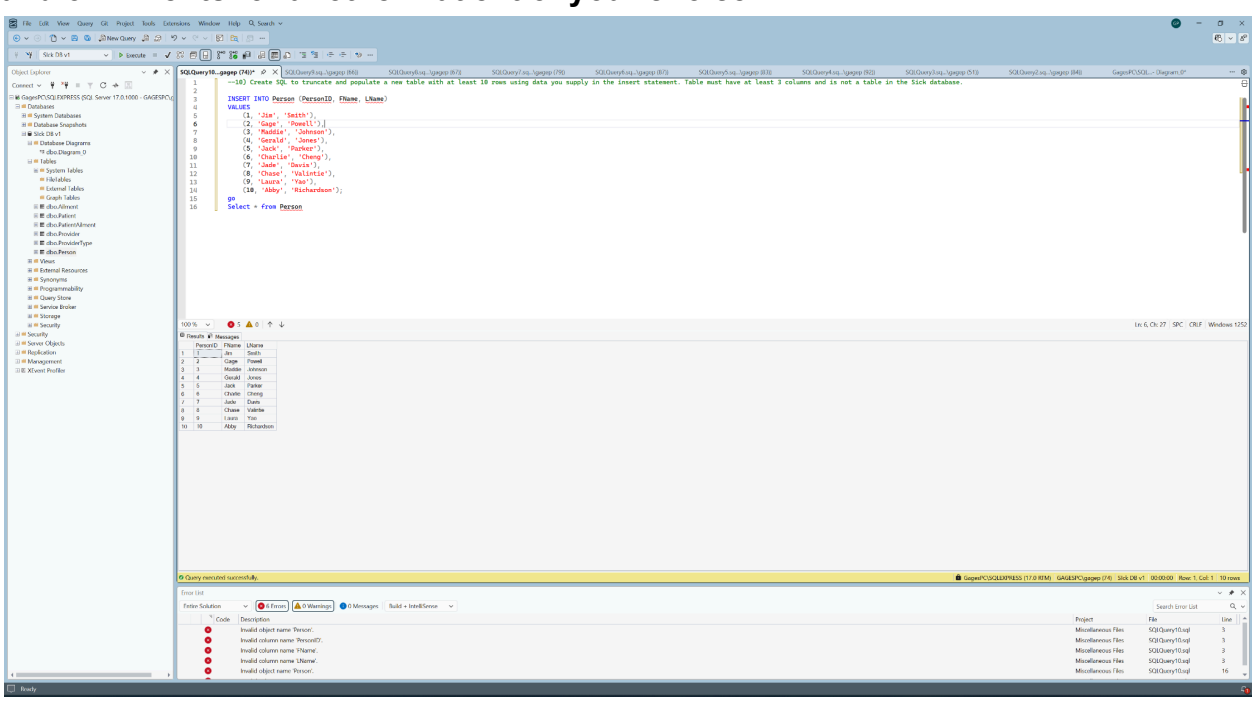

```
--10) Create SQL to truncate and populate a new table with at least 10 rows using data you supply in the insert statement. Table must have at least 3 columns and is not a table in the Sick database.

INSERT INTO Person (PersonID, FName, LName)
VALUES
    (1, 'Jim', 'Smith'),
    (2, 'Gage', 'Powell'),
    (3, 'Maddie', 'Johnson'),
    (4, 'Gerald', 'Jones'),
    (5, 'Jack', 'Parker'),
    (6, 'Charlie', 'Cheng'),
    (7, 'Jade', 'Davis'),
    (8, 'Chase', 'Valintie'),
    (9, 'Laura', 'Yao'),
    (10, 'Abby', 'Richardson');

go
Select * from Person
```

Comments: Assigns multiple ailments to two different patients.

12) Create a query that uses Group By with the Patient and Ailment table.

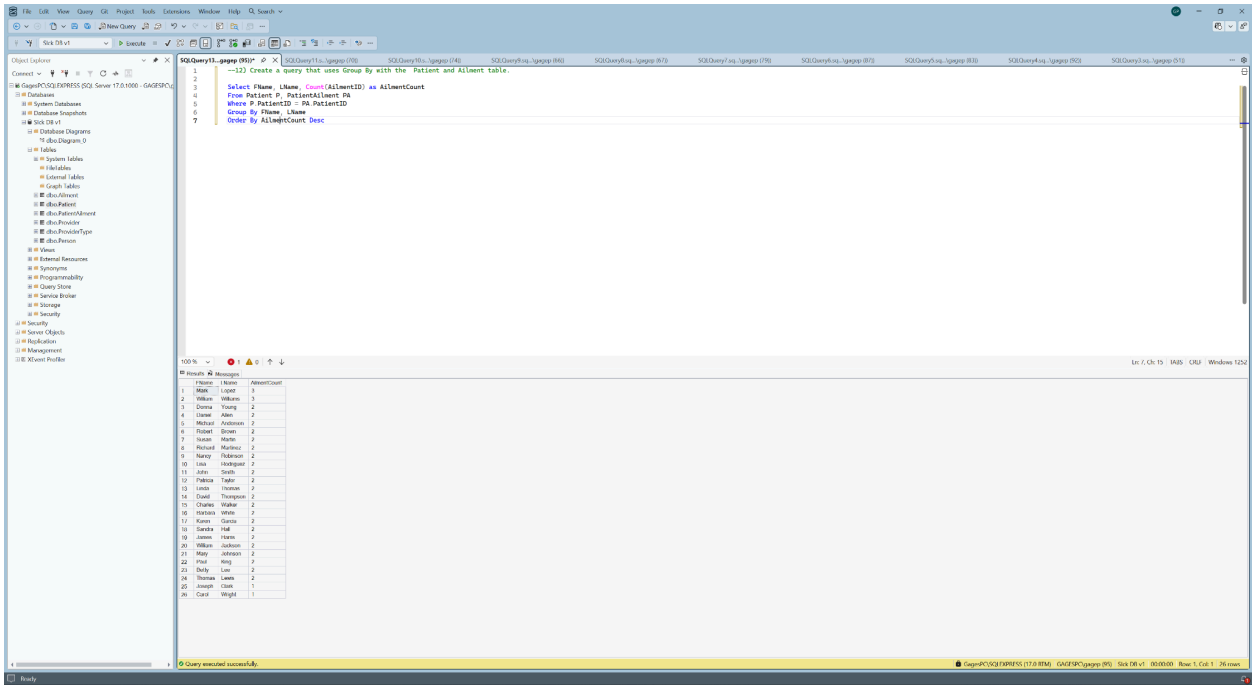

Comments: Groups patient and ailment data to summarize results.

13) Create a SQL statement that utilizes the substring command.

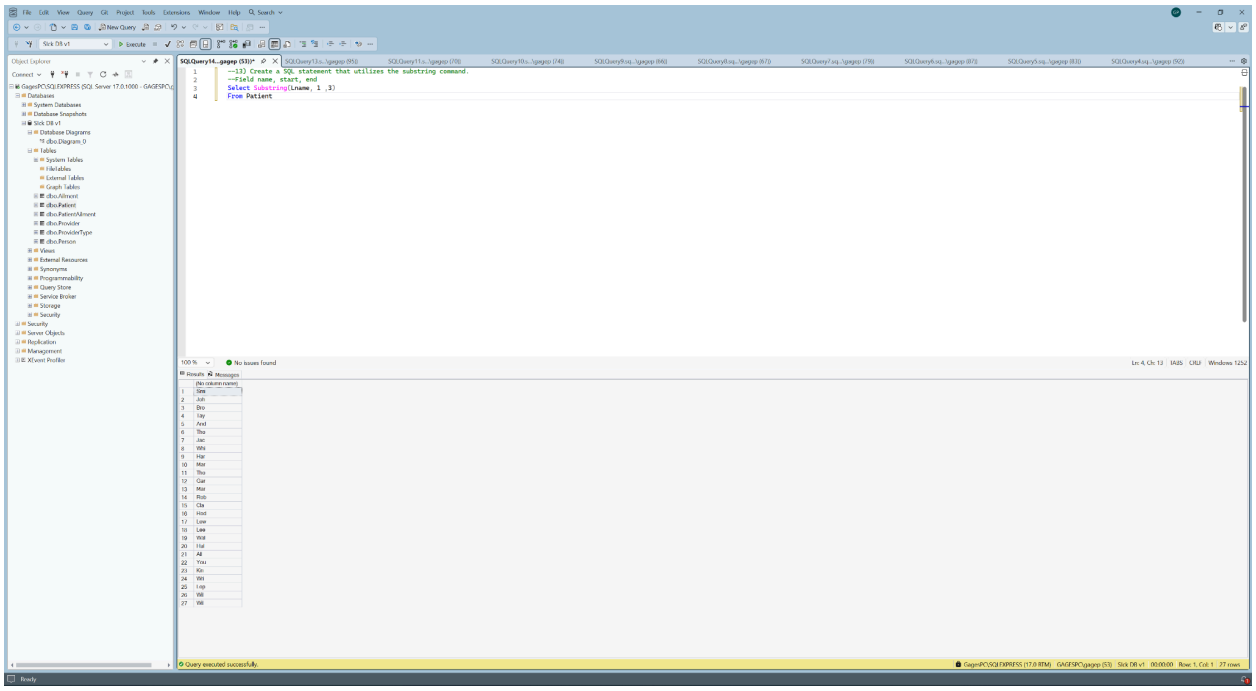

Comments: Extracts a portion of a text field using the SUBSTRING function.

14) Demonstrate the use of distinct, ascending, descending in a query.

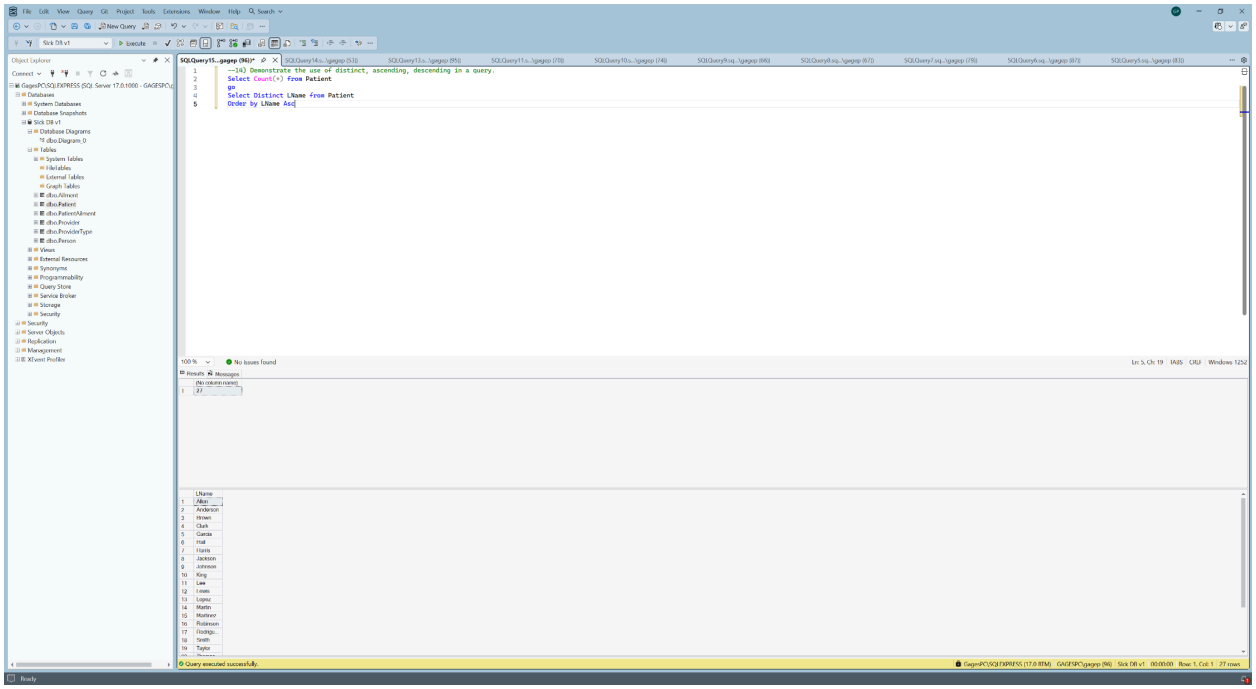

Comments: This displays the order of LName in ascending order.

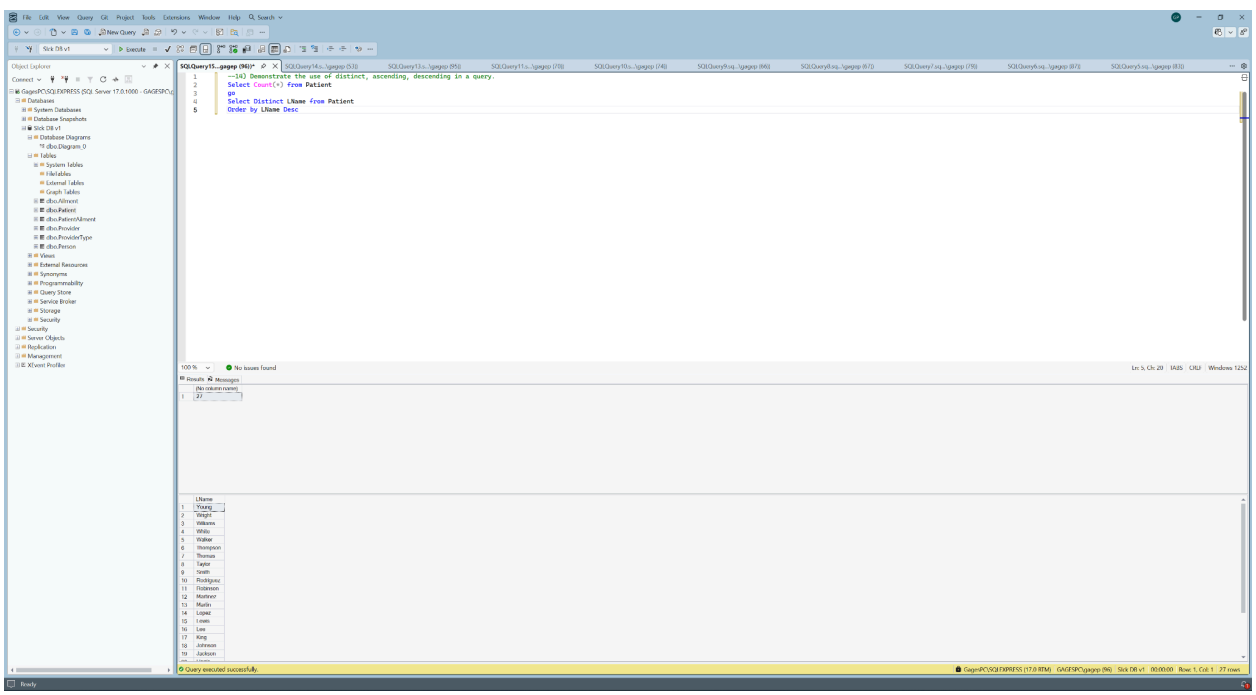

Comments: This displays the order of LName in descending order.

15) Demonstrate @@version.

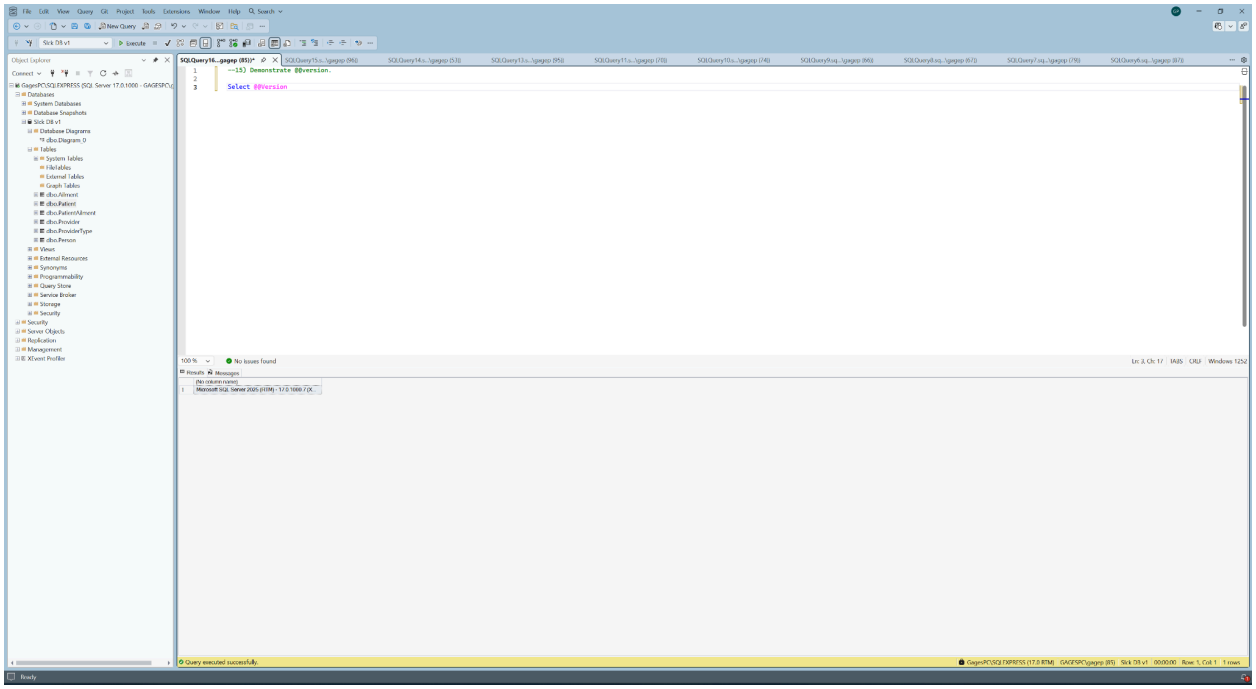

Comments: This command tells me what version of SQL Server I am running - Microsoft SQL Server 2025 (RTM) - 17.0.1000.7 (X64) Oct 21 2025 12:05:57 Copyright (C) 2025 Microsoft Corporation Express Edition (64-bit) on Windows 10 Home 10.0 <X64> (Build 26200:)

16) How many Ailments are in Ailment table (number, not the list of records).

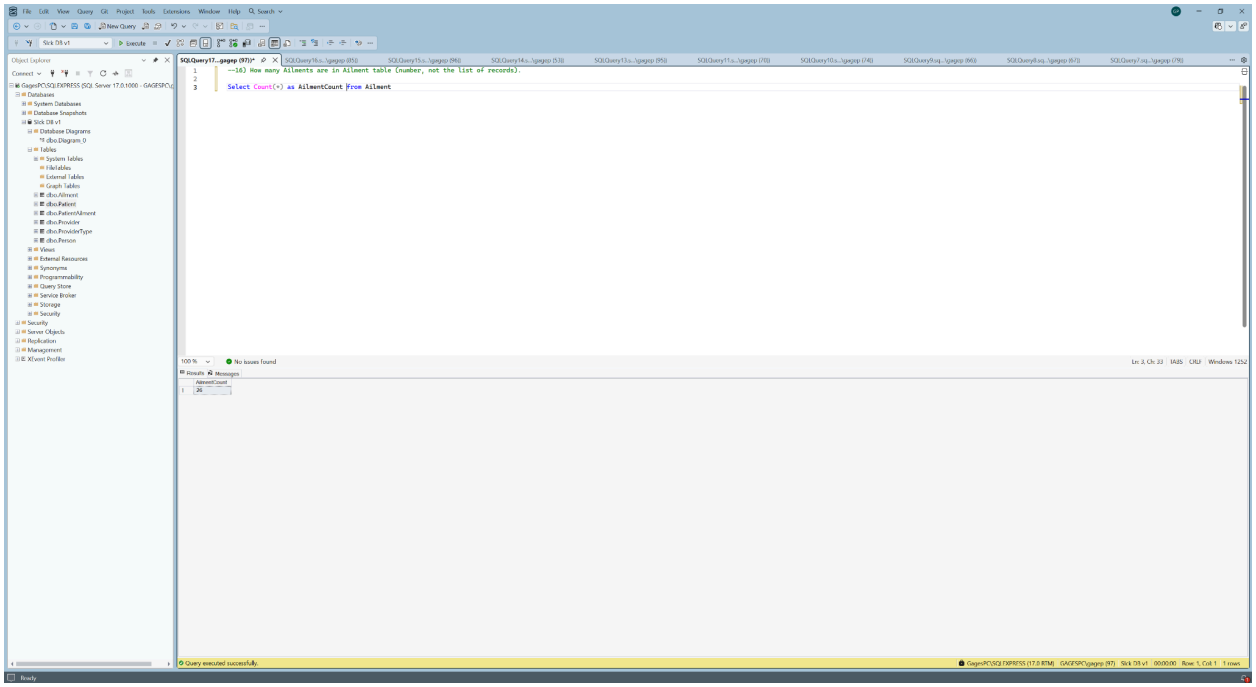

Comments: This command shows that we have 26 ailments in the Ailment table.

18) Which Patient had the most Ailments.

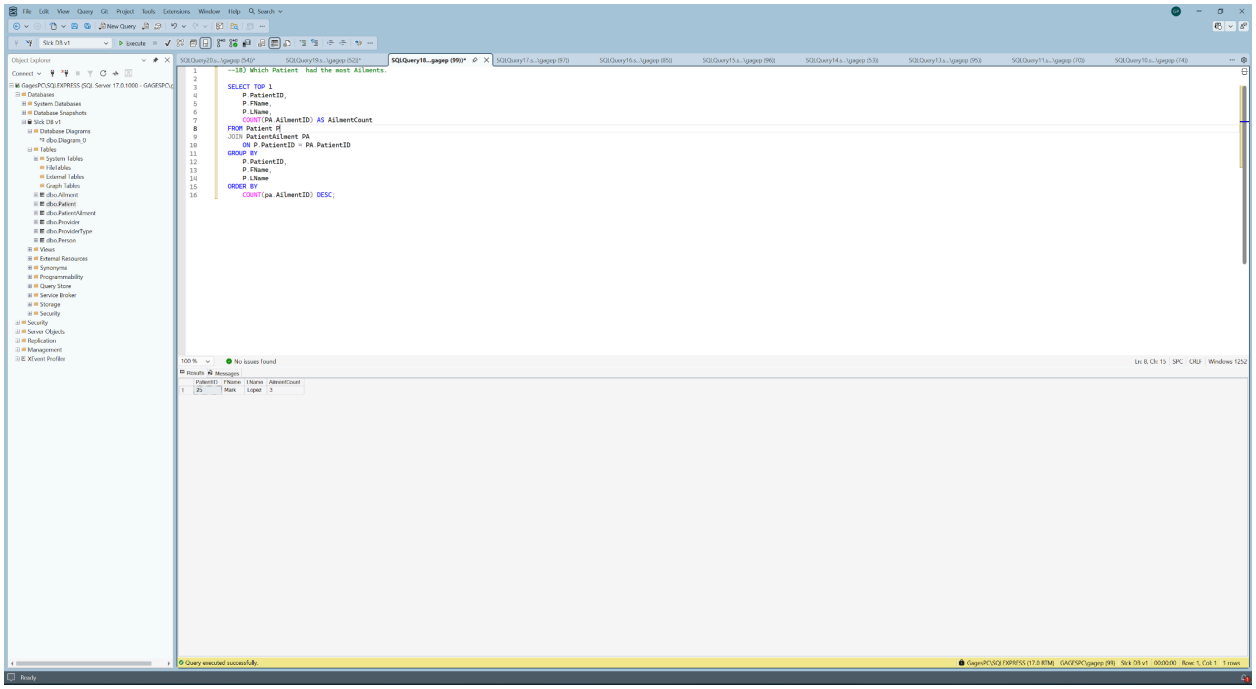

Comments: After running the query we can see that Mark Lopez had the most ailments with 3.

19) Which Provider member had the longest Last Name.

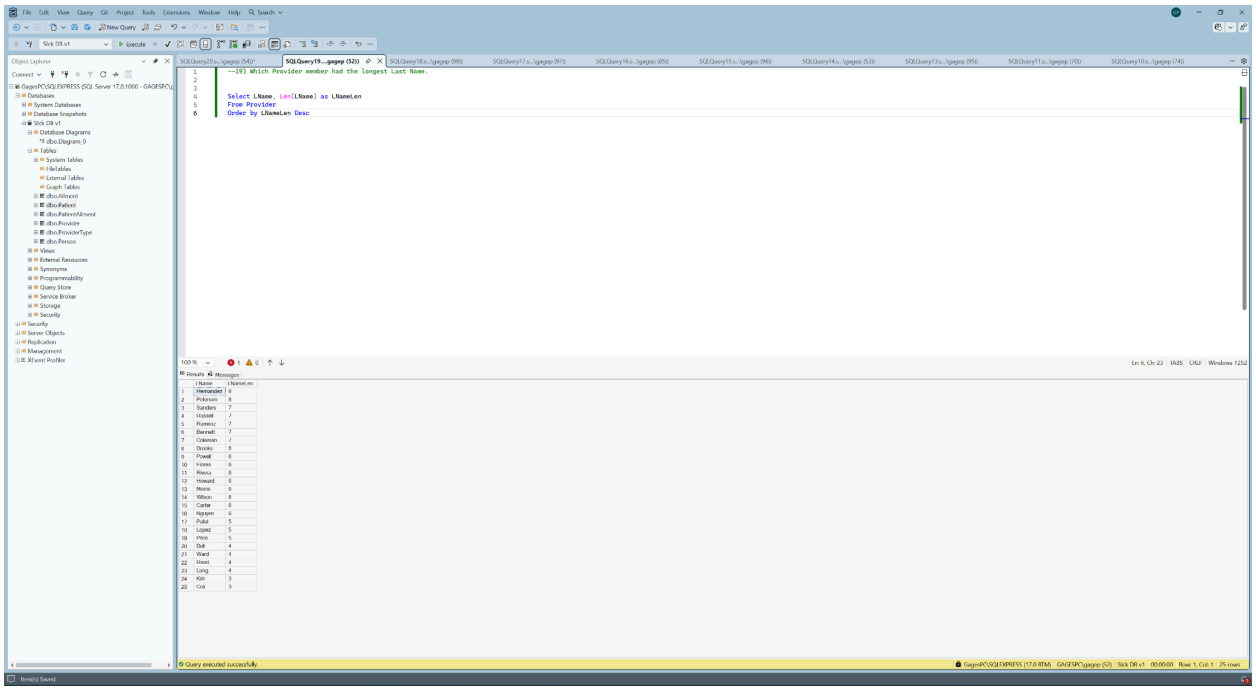

Comments: After running this query we can see that Hernandez has the longest last name.

20) Write a script that creates the data to have a Patient with more than one Ailment as well as a script to display that Patient and their Ailments.

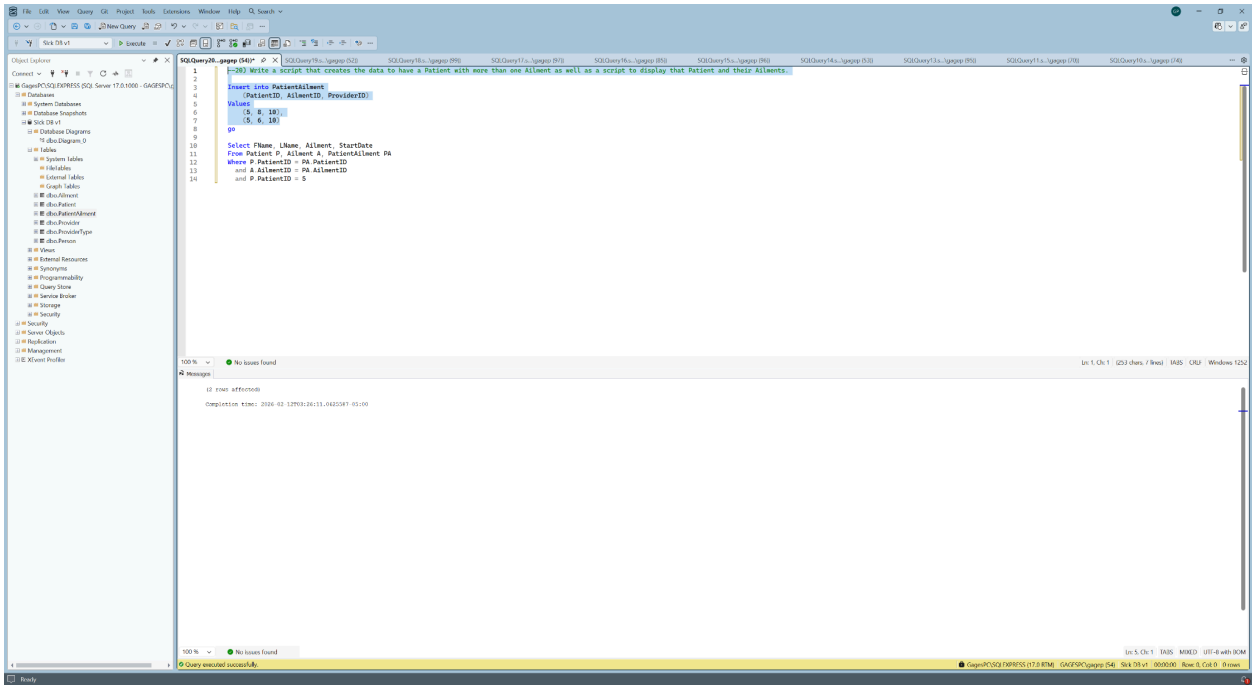

Comments: The first part of this query inserts data to have a patient who has more than one ailment.

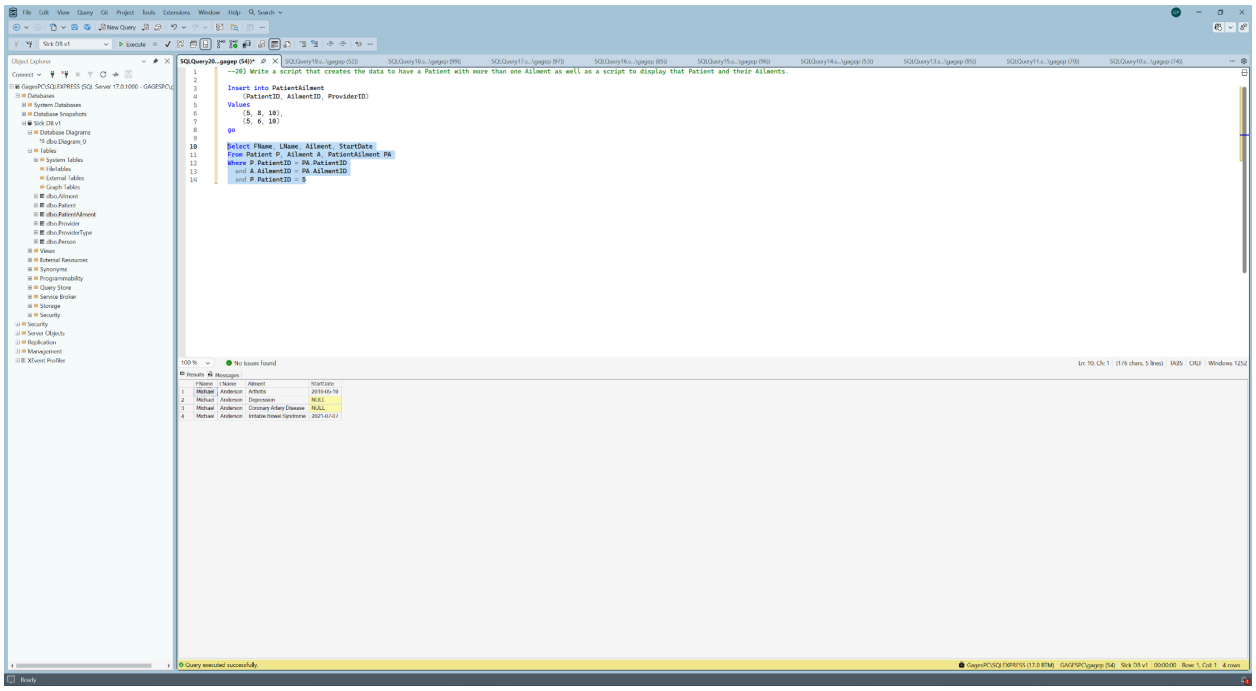

Comments: The second part of this query is a display of the patient with multiple ailments.