


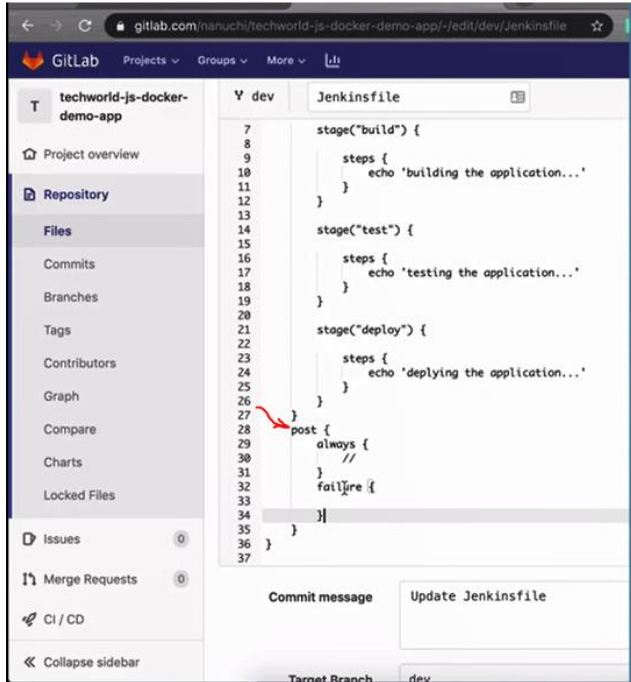

The screenshot shows the GitLab web interface for editing a Jenkinsfile. The left sidebar contains navigation links for Project overview, Repository, Files, Commits, Branches, Tags, Contributors, Graph, Compare, Charts, Locked Files, Issues, Merge Requests, CI/CD, and Collapse sidebar. The main editor displays the Jenkinsfile content, which defines a pipeline with three stages: 'build', 'test', and 'deploy'. Each stage contains a single step with an 'echo' command. After the 'deploy' stage, there is a 'post' block with three conditions: 'always', 'failure', and 'success'. A red arrow points to the 'post' block. The right side of the image is a blue overlay with white text explaining the 'post' block's purpose and conditions.

Execute some logic
AFTER all stages executed

Conditions:

- always
- success
- failure

Build Status or Build Status Changes

To define condition for stage, we can use when:

```
stage("test") {  
  
  when {  
  
    expression {  
  
      BRANCH_NAME == 'dev'  
  
    }  
  
  }  
  
  steps {  
  
    echo 'testing the application...'  
  
  }  
  
}
```

<http://localhost:8080/env-vars.html/>


Using Credentials in Jenkinsfile

- 1) Define Credentials in Jenkins GUI
- 2) "credentials("credentialId")" binds the credentials to your env variable
- 3) For that you need "Credentials Binding" Plugin

```
environment {  
  
    NEW_VERSION = '1.3.0'  
  
    SERVER_CREDENTIALS = credentials('global')  
  
}
```

To use with Credentials-Wrapper:

```
stage("deploy") {  
    steps {  
        echo 'deploying the application...'  
        withCredentials([usernamePassword(credentialsId: 'JLoka', usernameVariable: 'MY_USERNAME',  
passwordVariable: 'MY_PASSWORD')]) {  
            sh 'echo "Username: $MY_USERNAME"'  
            sh 'echo "Password: $MY_PASSWORD"'  
        }  
    }  
}
```

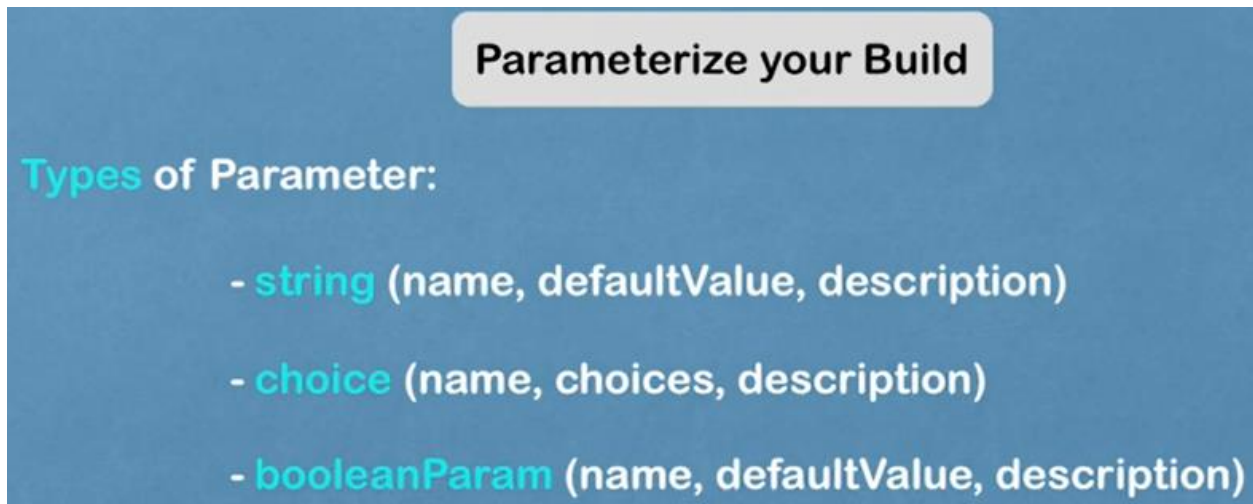

Parameterize your Build

Types of Parameter:

- **string** (name, defaultValue, description)
- **choice** (name, choices, description)
- **booleanParam** (name, defaultValue, description)

```
parameters {
```

```
  string(name: 'jloka_01', defaultValue: '', description: 'simple parameter-01')
```

```
  choice(name: 'jloka_02', choices: ['1.1.0', '1.2.0', '1.3.0'], description: 'simple parameter-02')
```

```
  booleanParam(name: 'jloka_03', defaultValue: true, description: 'simple parameter-03')
```

```
}
```

The screenshot shows the Jenkins web interface in a browser. The address bar indicates the URL is `localhost:8080/job/my-pipeline/job/dev/`. The page title is "Jenkins / my-pipeline / dev". On the left sidebar, the "Build with Parameters" option is highlighted with a red arrow. The main content area shows the "dev" pipeline status as "Success" (green checkmark). Below the status, it says "Full project name: my-pipeline/dev". There is a section for "Permalinks" with a list of build links: "Last build (#13), 0.15 sec ago", "Last stable build (#12), 3 min 6 sec ago", "Last successful build (#12), 3 min 6 sec ago", "Last failed build (#8), 1 day 23 hr ago", "Last unsuccessful build (#8), 1 day 23 hr ago", and "Last completed build (#12), 3 min 7 sec ago". At the bottom left, there is a "Builds" section with a filter input and a list of recent builds: #13 (11:33 AM), #12 (11:30 AM), #11 (11:27 AM), and #10 (11:25 AM). All builds are marked as successful with green checkmarks. In the bottom right corner, there is a "Activate Windows" watermark.

The complete Jenkins file:

```
pipeline {  
  
    agent any  
  
    environment {  
  
        NEW_VERSION = '1.3.0'  
  
    }  
  
    parameters {  
  
        string(name: 'jloka01', defaultValue: 'JLoka-01', description: 'simple parameter-01')  
  
        choice(name: 'jloka02', choices: ['1.1.0', '1.2.0', '1.3.0'], description: 'simple parameter-02')  
  
        booleanParam(name: 'jloka03', defaultValue: true, description: 'simple parameter-03')  
  
    }  
  
    stages {  
  
        stage("build") {  
  
            steps {  
  
                echo 'building the application...'  
  
                echo "building version ${NEW_VERSION}"  
  
                echo "The jloka_01 is: ${params.jloka01}"  
  
                echo "The jloka_02 is: ${params.jloka02}"  
  
                echo "The jloka_03 is: ${params.jloka03}"  
  
            }  
  
        }  
  
    }  
}
```

```
}
```

```
}
```

```
stage("test"){
```

```
  when {
```

```
    expression {
```

```
      BRANCH_NAME == 'dev' || BRANCH_NAME == 'master'
```

```
    }
```

```
  }
```

```
  steps {
```

```
    echo 'testing the application...'
```

```
  }
```

```
}
```

```
stage("deploy"){
```

```
  steps {
```

```
    echo 'deploying the application...'
```

```
    // withCredentials([usernamePassword(credentialsId: 'JLoka', usernameVariable: 'MY_USERNAME',  
passwordVariable: 'MY_PASSWORD')]) {
```

```
      // sh 'echo "Username: $MY_USERNAME"'
```

```
      // sh 'echo "Password: $MY_PASSWORD"'
```

```
    //}
```

}

}

}

}
