LENGUAJEHTML.COM

DOCUMENT AND HEADER TAGS

Created by @Manz (https://manz.dev/) https://lenguajehtml.com/

S Syntax

HTML TAG / ATTRIBUTE SYNTAX

`<tag attr="value">content</tag>`

D Document

MAIN TAGS

- `<!DOCTYPE html>` HTML5 document
- `<html>` document content (root tag)
- `<head>` metadata header (related docs)
- `<body>` page content (visible content)

G Global

GLOBAL ATTRIBUTES

DOM

- `id` element identifier (unique per page)
- `class` element class (multiple per page)
- `style` inline CSS style (css properties)
- `slot` element slot (reference to `<slot>`)

GENERAL

- `accesskey` shortcut key (to focus)
- `dir` `ltr` `rtl` `auto` text direction
- `is` `custom-elem` custom built-in el
- `lang` `code` content lang: en,es,fr...
- `nonce` `hash` whitelist script/style [CSP]
- `title` set tooltip text (mouse hover)
- `translate` `yes` `no` disable translation
- `tabindex` `num` set element order
- `data-*` custom metadata (on element)
- `writingsuggestions` `true` `false`

STATUS

- `contenteditable` allow edit element
- `draggable` `auto` enable drag and drop
- `spellcheck` disable grammar check
- `popover` convert into popover element
- `hidden` hide element (not relevant)
- `inert` non-interactive element

HINT

- `enterkeyhint` `enter` `done` `search` `go` `previous` `next` `send` virtual keyb label
- `inputmode` `none` `text` `tel` `url` `email` `numeric` `decimal` `search`

MICRODATA

- `itemid` set global unique id
- `itemscope` new metadata item
- `itemtype` set microdata genre url
- `itemref` `id list` set reference to "id"
- `itemprop` `token` set property & value

S Style

INLINE STYLES

- `<style>` embed css style on document
  - `title` set title to stylesheet set
  - `blocking` `render` potentially render-block

<LINK>, PICTURE <SOURCE> <META>, & <STYLE>

- `media` apply styles `all` `print` `speech`

C Comment

HTML COMMENT SYNTAX

```
<!-- developer notes and comments -->
```

L Link (Relations)

RELATIONS

- `<link>` document relation
  - `href` link to related document
  - `hreflang` `code` doc language: en, es...
  - `title` set title to stylesheet set
  - `sizes` hint size favicon (64x64, 96x96...)
  - `blocking` `render` render-block resource
  - `rel` relation type (with other document)

RELATIONS VALUES

CSS

- `stylesheet` imports a css style sheet
- `icon` link to favicon URL (tab icon)

URLS

- `alternate` link to alternate version
- `author` link to author URL
- `help` link to help URL
- `search` link to search page URL
- `license` link to license URL
- `privacy-policy` link to privacy URL
- `terms-of-service` link to legal URL

DATA

- `manifest` link to PWA `json`
- `pingback` link to pingback server

SEO

- `canonical` link to preferred URL
- `prev` `next` other parts of document

M Meta

DOCUMENT METADATA

- `<title>` page document title (tab title)
- `<meta>` document metadata
  - `charset` `enc` encoding: `utf-8`, ...
  - `name` name of metadata
    - `application-name` webapp name
    - `author` name of page's author
    - `description` seo page description
    - `generator` software used to build
    - `keywords` comma-separated tags
    - `referrer` default page referrer policy
    - `theme-color` primary theme css color
    - `viewport` hint to initial size viewport
  - `http-equiv` pragma directive (legacy)
    - `refresh` redirect: `10;URL=file.html`
    - `content-security-policy` force CSP
  - `content` metadata value
- `<base>` set document base url
  - `href` link to base url to use
  - `target` `context` place to open link

U URL Loading

RESOURCE HINTS <LINK REL="..." HREF="...">

- `dns-prefetch` resolve dns domain
- `preconnect` pre connect to domain
- `expect` wait resource (block render)
- `prefetch` fetch/cache link for future
- `preload` fetch/cache link for now
- `modulepreload` fetch module map
- `as` `script` `font` `image` `audio` `video` `fetch` `document` `embed` `object` `stylesheet` `track` `worker` file type

SECURITY <LINK>, <SCRIPT>, <IMG>, ...

- `referrerpolicy` `mode` behaviour
- `crossorigin` `mode` CORS support
- `integrity` verify integrity hash

S Social Metadata

GOOGLE SEO RECOMMENDATIONS

- `<title>` 50-60 characters title
- `<meta>` search metadata
  - `name` metadata name
    - `description` 50-160 chars
    - `google` disable google features
    - `rating` `adult` secure exclude
    - `viewport` optimized-mobile
    - `robots` `googlebot` behaviour
  - `content` metadata name
    - `noindex` `nofollow` `none`
    - `noarchive` `nosnippet` `noodp`
    - `notranslate` `noimageindex`
    - `unavailable_after:` `date`

SOCIAL NETWORKS

- `<meta property="...">` opengraph
- `<meta name="...">` twitter cards
  - `content` metadata value

OPENGRAPH	TWITTER CARDS
`og:title`	`twitter:title`
`og:site_name`	`twitter:site`
`og:description`	`twitter:description`
`og:image`	`twitter:image`

OTHER PROPERTIES

OPENGRAPH

- `og:type` content object type
  - `music` `video` `article` `book` `profile` `website`
- `og:url` canonical & absolute full url

TWITTER

- `twitter:card` content object type
  - `summary` `app` `player` `summary_large_image`
- `twitter:creator` author @Manz

LENGUAJEHTML.COM

FORMS & INTERACTIVE ELEMENTS

Created by @Manz (https://manz.dev/) https://lenguajehtml.com/

F Forms

MAIN ELEMENTS

- `<form>` form elements collection
  - `name` form name (document.forms api)
  - `method` `get` `post` `dialog` send method
  - `action` url to backend form submission
  - `accept-charset` `enc` force encoding `utf-8`
  - `autocomplete` `on` `off` autofill for all form
  - `autocorrect` `on` `off` disable form autocorrect
  - `novalidate` bypass form validation
  - `target` `context` place to put response
  - `enctype` `multipart/form-data` `text/plain` `application/x-www-form-urlencoded`
- `<label>` associate element with caption
  - `for` reference to related element `id`

GROUP FORMS

- `<fieldset>` group of form elements
  - `name` name in form `form` link fieldset → form
  - `disabled` avoid select this group items
- `<legend>` caption text for fieldset

I Input

USER INPUT DATA

TEXTAREA+INPUT

- `<input>` `<textarea>` short text / large text
  - `name` name in form `form` link input → form
  - `autocomplete` `on` `off` autofill for input
  - `autofocus` focus input when loaded
  - `dirname` submit element directionality
  - `placeholder` user visual hint

INPUT

- `type` `text` `hidden` `search` `tel` `url` `email` `number` `range` `color` `file` `password` `date` `datetime-local` `time` `week` `month` `radio` `checkbox` `submit` `image` `reset` `button`
  - `value` current value of input element
  - `size` size of element (in characters)
  - `list` associate with `id` of `<datalist>`
  - `accept` hint for expected file (in upload)
  - `checked` enable (in radio or checkbox)
  - `multiple` allow multiple values
  - `alpha` allow transparency on `<input>` color

IMAGE

- `src` url or name of image button
- `alt` alternative text to image
- `width` `height` image width/height size

SUBMIT

- `formaction` `formtarget` `formnovalidate` `formenctype` `formmethod` attributes to alter main form submission

AREA

- `<textarea>` multiline text input (large text)
  - `rows` `cols` number of lines and columns
  - `wrap` wrap text

S Select data

SELECT ELEMENTS

- `<select>` form elements collection
  - `name` form name (document.forms api)
  - `form` associate input with a form
  - `size` size of element (in characters)
  - `autocomplete` `on` `off` autofill input
  - `autofocus` focus input when loaded
  - `disabled` avoid press button
  - `required` required field (def: optional)
  - `multiple` allow select multiple values
- `<selectedcontent>` current option
- `<datalist>` predefined & open data list

CHILD ELEMENTS

- `<option>` child items of select/datalist
  - `label` user-visible text
  - `value` value for form submit
  - `selected` default selected options
  - `disabled` disallow option
- `<optgroup>` group of `<option>`
  - `label` user-visible group text
  - `disabled` avoid select this items

B Button

GENERIC BUTTONS

GENERAL

- `<button>` generic button container
  - `name` button name
  - `type` `submit` `reset` `button`
  - `value` button value (submission)
  - `form` link input → form
  - `disabled` avoid press button

INVOKERS

- `command` `show-popover` `close` `hide-popover` `toggle-popover` `request-close` `show-modal` `...`
  - `commandfor` id of target element

POP

- `popovertarget` `id` target element
  - `popovertargetaction` `toggle` `show` `hide` action to target element

I Ideogramatic

RUBY ELEMENTS

- `<ruby>` ruby annotation wrapper
- `<rp>` ruby fallback () `<rt>` ruby text
- `<bdo>` force text direction `<bdi>` isolate

E Edit

TEXT SEMANTIC TAGS

- `<ins>` `<del>` mark content as add/del
  - `cite` link to source quotation (optional)
  - `datetime` date/time change (optional)

I Interactive

INTERACTIVE ELEMENTS

- `<details>` accordion or expander
  - `name` mutually exclusive accordion
  - `open` keep accordion opened
- `<summary>` caption/title for <details>
- `<dialog>` window box container
  - `open` keep dialog opened
  - `closedby` `any` `closerequest` `none`

VISUAL CONTROL ELEMENTS

- `<output>` calculation (input/output)
  - `name` element name
  - `form` link input → form
  - `for` link result → other element
- `<progress>` show a bar progress
  - `value` bar progress current value
  - `max` bar progress max value
- `<meter>` show a known range meter
  - `value` current value of meter
  - `low` `high` lower/upper limit range
  - `min` `max` lower/upper bound range
  - `optimum` optimum value in gauge

V Validations

USER INPUT DATA VALIDATION

TEXT

- `minlength` minimum visual size
- `maxlength` maximum visual size

MAIN

- `required` required field
- `disabled` deny edit (not send)
- `readonly` deny edit (but send)

NUM

- `min` `max` limit value
- `step` fine-step between values

P

- `pattern` `regexp` test validation

A ARIA

ACCESIBLE RICH INTERNET APPS

- `role` accessible role for element
  - `complementary` `list` `listitem` `main` `navigation` `region` `tab` `alert` `application` `article` `banner` `button` `cell` `checkbox` `contentinfo` `dialog` `document` `feed` `figure` `form` `grid` `gridcell` `heading` `img` `listbox` `row` `rowgroup` `search` `switch` `table` `tabpanel` `textbox` `timer`
- `aria-label` set a string as label
- `aria-hidden` `true` `false`

`<tag>` `attr` `value` `boolean` `default`

LENGUAJEHTML.COM

GROUP, TEXT AND MULTIMEDIA ELEMENTS

Created by @Manz (https://manz.dev/) https://lenguajehtml.com/

G Groups

GROUP ELEMENTS

GENERAL

- `<div>` generic division or layer (block)
- `<p>` text paragraph
- `<hr>` thematic break
- `<pre>` preformatted text
- `<main>` dominant content
- `<search>` search or filter container
- `<blockquote>` section with quote
  - `cite` link to URL with quotation source

LIST & TERMS

- `<ul>` `<ol>` unorderer & orderer list
  - `start` first value of list
  - `reversed` backwards list
  - `type` `1` `a` `A` `i` `I` kind of marker
- `<li>` item from `<ul>` or `<ol>` list
  - `value` ordinal value of item
- `<menu>` toolbar buttons container
- `<dl>` description list container
- `<dt>` `<dd>` description term (name & value)

FIG

- `<figure>` figure or concept
- `<figcaption>` caption or legend for figure

SEMANTIC TAGS

- `<article>` entity content (post, comment...)
- `<section>` thematic group of content
- `<nav>` section with navigation links
- `<aside>` secondary content (sidebar, menu...)
- `<hgroup>` header and subheader container
- `<h1>` `<h2>` `<h3>` `<h4>` `<h5>` `<h6>` headings
- `<header>` introductory header group
- `<footer>` section footer group
- `<address>` contact information group

T Table

TABLE ELEMENTS

- `<table>` table container
- `<caption>` title of table (optional)
- `<thead>` table header (includes headers)
- `<tbody>` table body (includes body data)
- `<tfoot>` table footer (includes summary)

COLUMNS

- `<col>` `<colgroup>` col/group of columns
  - `span` number of columns to span

ITEMS

TR / TD

- `<tr>` table row (horizontal container)
- `<th>` `<td>` table header & table cell data
  - `colspan` number of columns to span
  - `rowspan` number of rows to span
  - `headers` one or more `id` of `<th>` elements

TH

- `scope` `auto` `row` `col` `rowgroup` `colgroup`
- `abbr` short abbreviated description

T Text

TEXT SEMANTIC TAGS

TEXT

- `<span>` generic text division (inline)
- `<em>` emphatized text (← `<i>`)
- `<strong>` important text (← `<b>`)
- `<mark>` highlight text (← `<u>`)
- `<i>` alternate voice/mood (legacy)
- `<b>` w/o extra purposes (legacy)
- `<u>` non-textual data span (legacy)
- `<s>` no longer relevant (strike text)

MEANING

- `<sub>` `<sup>` sub/superscript
- `<small>` side comments (small print)
- `<cite>` title of a work (book,song...)
- `<q>` another source quoted group
  - `cite` link to source url (optional)
- `<dfn>` defining instance of a term
  - `title` full term (optional)
- `<abbr>` abbreviation of acronymm
  - `title` abbreviation expansion

TECHNICAL

- `<var>` math or programming variable
- `<samp>` computing system sample
- `<kbd>` user input (keyboard shortcut)
- `<data>` machine-data to text
  - `value` machine-readable value
- `<time>` machine-date to date
  - `datetime` machine-datetime
- `<code>` fragment of computer code

BRK

- `<br>` line-break (visual enter)
- `<wbr>` line-break hint (long words)

A Anchors

HYPERLINKS & AREA MAP

- `<a>` `<area>` link / image map area
  - `href` link to url or filename
  - `hreflang` `code` language: en,es...
  - `download` same name download
  - `download` specific name download
  - `rel` `alternate` `author` `bookmark` `external` `help` `license` `prev` `next` `search` `tag` `opener` `noopener` `noreferrer` `nofollow`
  - `target` `context` place to open link
  - `ping` url list space-separated to ping
  - `referrerpolicy` `mode` referer policy

ONLY FOR <AREA>

- `shape` `rect` `circle` `poly`
- `coords` coords list for shape
- `alt` alternative when no images

I Images

IMAGES / PICTURE NEXT-GEN

`JPG` `PNG` `SVG` `WEBP` `AVIF` `JXL` `APNG`

IMG

- `<img>` show image element
  - `src` link to URL image source
  - `alt` alternative text if no image
  - `width` `height` size (no CLS)
  - `loading` `auto` `lazy` `eager` lazy
  - `decoding` `auto` `sync` `async`
  - `fetchpriority` `auto` `high` `low`
  - `usemap` imagemap name
  - `ismap` server-side map img part
- `<map>` imagemap `<a>` & `<area>`
  - `name` imagemap used `usemap`

PICT / SRC

- `<picture>` multiple img container
- `<source>` alternative source image
  - `src` link to url img source
  - `type` MIME `video/mp4; codecs="..."`
  - `media` resource media query

SRC / IMG

- `srcset` image list candidates
  - `width` a.jpg 300w, b.jpg 600w...
  - `density` a.jpg 1x, b.jpg 2x...
- `sizes` rendered width list `640w`

M Multimedia

VIDEO / AUDIO CONTAINER

`MP4` `WEBM` `HEVC` `AV1` `OGV`

`MP3` `AAC` `OGG` `OPUS` `FLAC` `WAV`

AUDIO / VIDEO

- `<video>` `<audio>` media parent
  - `src` link to URL video audio source
  - `preload` buffering media hints
    - `auto` `metadata` `none`
  - `autoplay` autoplay (interact user)
  - `loop` restart when finished
  - `muted` silence media by default
  - `controls` show play, pause...

VIDEO

- `poster` cover image (before play)
- `width` `height` video/audio size
- `playsinline` try play video inline

VIDEO / AUDIO CHILD

- `<source>` alternative source media
  - `src` link to url media source
  - `type` MIME `video/mp4;codecs='...'`
- `<track>` external subtitles/tracks
  - `src` url subtitle `srclang` language
  - `label` user-visible text track
  - `kind` `subtitles` `descriptions` `captions` `chapters` `metadata`
  - `default` set default enabled track

LENGUAJEHTML.COM

IFRAMES, SCRIPTING & SVG

Created by @Manz (https://manz.dev/) https://lenguajehtml.com/

E Embedded

EXTERNAL CONTENT (IFRAME)

- `<iframe>` embedded content
  - `src` link to url resource (website, file...)
  - `srcdoc` document content (html syntax)
  - `name` name context for target attribute
  - `loading` `auto` `lazy` `eager` lazy load
  - `allowfullscreen` iframe fullscreen
  - `width` `height` horizontal/vertical sizes
- `<fenced-frame>` privacy-focus iframe (js)
  - `width` `height` horizontal/vertical sizes

IFRAME SECURITY, PRIVACY & POLICY

- `sandbox` `allow-scripts`
  - `allow-modals` `allow-forms`
  - `allow-orientation-lock`
  - `allow-downloads` `allow-popups`
  - `allow-pointer-lock` `...`
- `allow` `feature` features allowed
  - `fullscreen` `autoplay` `geolocation`
  - `payment` `camera` `display-capture`
  - `picture-in-picture` `clipboard-read`
  - `clipboard-write` `...`
- `referrerpolicy` `mode` behaviour

LEGACY EMBED/OBJECT

- `<embed>` external non-html content
- `<object>` external resource multipurpose
- `<param>` external resource multipurpose

EXPERIMENTAL TAGS

- `<model>` embed interactive 3d model
  - `src` link to model url `.GLB` / `.USDZ`
- `<portal>` guest embedded (~iframe)
  - `src` link to url (website, file...)

P SVG Path

POWERFUL PATHS

- `<path>` define a outline of a shape
  - `d` command/coords space-separated
  - `pathLength` total length of the path

PATH COMMANDS GUIDE

M	m	Move to	path begins · M10,30
Z	z	Close path	path ends · Z
L	l	Line to	draw line · L90,90
H	h	Horiz line to	horizontal line · H40
V	v	Vert line to	vertical line · V20
C	c	Cubic Bézier	C30,90 25,10 50,10
S	s	Smooth C.B.	S70,90 90,90
Q	q	Quadratic Bézier	Q90,60 50,90
T	t	Smooth Q.B.	T30,0 30,0 30,0 30,0
A	a	Elliptical Arc	A20,20 0,0,1 50,30

S SVG

SCALAR VECTORIAL GRAPHICS TAGS

SVG / GROUP

- `<svg>` svg container (standalone svg)
  - `viewBox` `x` `y` `width` `height`
  - `width` `height` viewport size
  - `preserveAspectRAtio` `align` `option`
    - `align` `none` `x` *** `Y` *** `Min` `Mid` `Max`
    - `option` `meet` `slice`
- `<g>` related group container

META

- `<title>` short text title alternative
- `<desc>` detailed textual information
- `<metadata>` metadata elements container

REUSE

- `<defs>` referenced elements container
- `<symbol>` set reuse template (no render)
- `<use>` reference another element (reuse)
  - `href` url link to be cloned for rendering

BASIC SHAPES

- `<rect>` rectangle
  - `x` `y` position
  - `width` `height` sizes
  - `rx` `ry` radius
- `<line>` segment
  - `x1` `y1` start point
  - `x2` `y2` end point
  - `pathLength` total
- `<circle>`
  - `cx` `cy` center position
  - `r` radius
- `<ellipse>`
  - `cx` `cy` center position
  - `rx` `ry` radius
- `<polyline>` `<polygon>` line/closed shape
  - `points` set of coords space-separated
  - `pathLength` total length of the path

TEXT / IMAGE ELEMENTS

TEXT+TSPAN

- `<text>` `<tspan>` text layer & text container
  - `x` `y` start position of text
  - `dx` `dy` relative position of descendant
  - `rotate` `number` rotate degrees per glyph

TEXTPATH

- `<textPath>` put text on path
  - `path` equivalent of `d` attribute `<path>`
  - `href` url reference to `<path>`
  - `startOffset` `length` offset from start path
  - `method` `align` `stretch` how render glyph
  - `spacing` `align` `auto` space between glyph
  - `side` `left` `right` side of the path to render

ALL

- `lengthAdjust` `spacing` `spacingAndGlyphs`
- `textLength` `number` length per glyph

S SVG

SVG IMAGES

- `<image>` set reference to image
  - `href` url link to image to rendering
  - `preserveAspectRatio` `align` `option`
  - `crossorigin` CORS support

S Scripting

SCRIPTING ELEMENTS

- `<script>` include dynamic script
  - `src` link to script (instead inline)
  - `type` associate fieldset → form
    - `text/javascript` classic mode
    - `module` load javascript module
    - `importmap` set module list (json)
    - `speculationrules` predictions
    - `application/json` data block
  - `nomodule` fallback for old browsers
  - `defer` defer script execution
  - `async` exec script when available
  - `blocking` `render` render-block
  - `fetchpriority` `auto` `high` `low`

SCRIPT DOWNLOAD & PARSE MODES

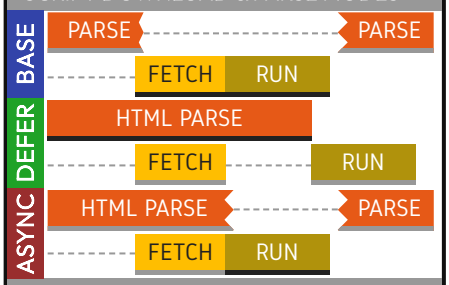

JAVASCRIPT-RELATED TAGS

- `<noscript>` scripting is disabled
- `<template>` inert html (to clone)
  - `shadowrootmode` `open` `closed`
- `<slot>` create separate DOM trees
  - `name` shadow tree slot name
- `<canvas>` create bitmap canvas (js)
  - `width` `height` canvas size
- `<custom-elem>` encapsulated DOM

A SVG Attrs

STYLE SVG ATTRIBUTES

- `fill` `black` `color` fills colorshape
- `fill-rule` `nonzero` `eventodd`
- `fill-opacity` `1` `opacity` alpha
- `stroke` `none` `color` set color line
- `stroke-width` `1` `width` width line
- `stroke-opacity` `1` `opacity`
- `stroke-linecap`
  - `butt` `round` `square` limit type
- `stroke-linejoin` `miter`
  - `miter-clip` `round` `bevel` `arcs`
- `stroke-miterlimit` `4` `number`
- `stroke-dasharray`
  - `none` `numberlist` pattern
- `stroke-dashoffset` `0` `number`