

a One window

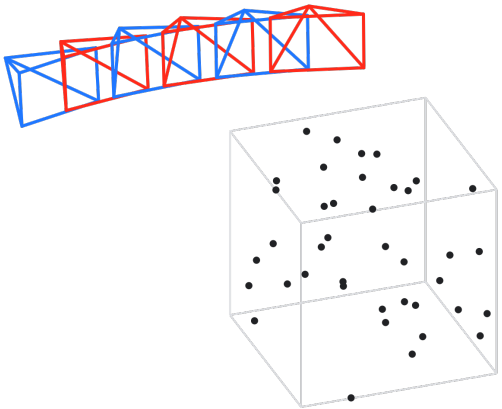


40 points in a cube, six calibrated cameras on a 30° arc. Interleaved split: V_A = cameras 0, 2, 4 and V_B = 1, 3, 5, each reconstructed projectively on its own.

Jitter




Independent offsets per point and view

Drift




Coherent offsets that grow along the arc

Local warp



A smooth bump on a cluster of points

Track swaps



Neighbouring tracks exchanged (15%)

Global map



A projective map of all of V_B: invisible

One view of V_B: grey dots are the true image points, coloured arrows the injected displacements (30% of the points, all for the global map; drawn ×4, swaps to scale). The dose is the induced RMS pixel displacement. The global map is a gauge: every pencil cross-ratio is unchanged, so no frame-free test can see it.