Image Processing - Pattern recognition and drone controlling with OpenCV", Gabriel Hidasy, HIRWAAT.PTE

1 The Problem

In the context of this project a drone is an unmanned aerial vehicle, capable of hover, particularly a Quad-copter.

Drones can be controlled remotely by a human or by an autonomous program, this project aims to produce a framework for controlling the drone from a computer and integrate it with a pattern recognition algorithm to follow the pattern in a room. This project does not aim to guarantee an stable flight but the modular nature of it makes it easy to integrate it in another program.

2 The equipment

The quad-copter used in this project is a Parrot AR-Drone 2.0, the drone has a front facing camera and is controlled by WiFi.



The controlling application is written in JavaScript and tested in a notebook and an ARM board (that has the added advantage of being light enough to be carried by the drone, enabling long range autonomous flights)



3 The solution

The solution is divided in 2 independent modules, a controlling application that communicates with the drone and the pattern matcher that finds the pattern and gives commands to the controller, this applications communicate through a web interface and do not need to be hosted in the same machine.

The controlling application is based in a NodeJS library that handles the low level communication, it exports a series of URLs that correspond to various functions of the drone.

More then one application can access this API at a time, there are no security features implemented for now, but it would not be hard to add an authorization token.

The functions available in the API are:

- takeoff
- land
- up ([speed, optional, default 0.5],[time, optional, default 500ms])
- down ([speed, optional, default 0.5],[time, optional, default 500ms])
- front ([speed, optional, default 0.5],[time, optional, default 500ms])
- back ([speed, optional, default 0.5],[time, optional, default 500ms])
- left ([speed, optional, default 0.5],[time, optional, default 500ms])
- right ([speed, optional, default 0.5],[time, optional, default 500ms])

- rotatel ([speed, optional, default 0.5],[time, optional, default 500ms])
- rotater ([speed, optional, default 0.5],[time, optional, default 500ms])
- stop
- flip
- img.jpg (This returns a jpg snapshot from the drone)


The functions are exported by a Web API available by accessing the URL ¡IP¿:8002/¡functionName¿. Parameters can be passed by GET or POST, eg:

127.0.0.1:8002/up?speed=0.8&time=100


The pattern matching application is composed of:

• A SURF detector from OpenCV SURF is responsible for finding key-points in an image. A key-point is a point in the image with some robust feature. A robust feature is a detail of an image that can be detected even if its scaled, rotated, or slightly deformed.





- A FLANN matcher from OpenCV
 - FLANN is a smart algorithm to find matches in a set of data points, it was used in place of an exhaustive search because, despite not being as accurate, it is good enough and a lot faster, enabling the algorithm to run in a cheap ARM board with low power requirements. As seem in the image, SURF was applied to a binarized image, this was done as it reduce problems related to illumination.
- A filter: It is possible to see many imperfect matches, they are filtered out by iteractively removing the points farther away from the gravity center of the set.
- A decision algorithm: A simple algorithm to decide in witch direction the drone should move based on where the pattern is found (for up,

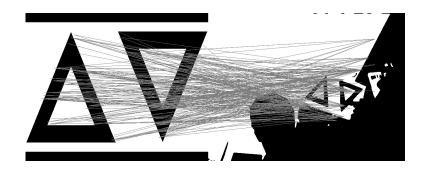

down, left and right), and the size it appears to have (for front and back), at this iteration of the project the drone is set to move at only 30% of its speed and move for 0.5s at a time.

The drone stays still when no pattern is detected, in a future iteration it could be usefull to have the drone rotating or flying in circles, as it would increase the chance it would come accross the pattern changing the point of view.

4 The Results

In the following 3 pages a log of a test flight is included, it consists of the output from the pattern matcher, to be read as:

- Date
- Position (x,y) of the pattern and the geometry of the image
- Log of commands executed

At this iteration the pattern matcher was not modulating the speed and time for each function. It was also not commanding the drone to go front or back.

```
Wed May 13 14:18:04 CEST 2015
(371, 268, (640,360))
goright
godown
Wed May 13 14:18:05 CEST 2015
(367, 268, (640,360))
godown
Wed May 13 14:18:09 CEST 2015
(322, 205, (640, 360))
Wed May 13 14:18:11 CEST 2015
(459, 251, (640, 360))
goright
godown
Wed May 13 14:18:13 CEST 2015
(292, 303, (640,360))
godown
Wed May 13 14:18:14 CEST 2015
(456, 262, (640, 360))
goright
godown
Wed May 13 14:18:14 CEST 2015
(352, 192, (640,360))
Wed May 13 14:18:15 CEST 2015
(429, 145, (640,360))
goright
Wed May 13 14:18:16 CEST 2015
(468, 115, (640,360))
goright
goup
Wed May 13 14:18:16 CEST 2015
(404, 125, (640,360))
goright
goup
Wed May 13 14:18:17 CEST 2015
(434, 118, (640,360))
goright
goup
Wed May 13 14:18:19 CEST 2015
(412, 133, (640,360))
goright
Wed May 13 14:18:19 CEST 2015
(441, 180, (640,360))
goright
Wed May 13 14:18:20 CEST 2015
```

```
(418, 274, (640,360))
goright
godown
Wed May 13 14:18:21 CEST 2015
(425, 217, (640,360))
goright
Wed May 13 14:18:21 CEST 2015
(411, 232, (640,360))
goright
godown
Wed May 13 14:18:22 CEST 2015
(428, 151, (640,360))
goright
Wed May 13 14:18:23 CEST 2015
(408, 183, (640,360))
goright
Wed May 13 14:18:24 CEST 2015
(423, 136, (640,360))
goright
Wed May 13 14:18:25 CEST 2015
(412, 133, (640,360))
(403, 78, (640,360))
goright
goup
Wed May 13 14:18:26 CEST 2015
(367, 81, (640, 360))
goup
Wed May 13 14:18:28 CEST 2015
(416, 58, (640,360))
goright
goup
Wed May 13 14:18:29 CEST 2015
(398, 68, (640,360))
goright
goup
Wed May 13 14:18:31 CEST 2015
(406, 58, (640, 360))
goright
goup
Wed May 13 14:18:33 CEST 2015
(297, 74, (640,360))
goup
Wed May 13 14:18:33 CEST 2015
(273, 38, (640,360))
```

```
goup
Wed May 13 14:18:35 CEST 2015
(312, 52, (640,360))
goup
Wed May 13 14:18:35 CEST 2015
(310, 51, (640,360))
Wed May 13 14:18:36 CEST 2015
(345, 141, (640,360))
Wed May 13 14:18:37 CEST 2015
(422, 167, (640,360))
goright
Wed May 13 14:18:37 CEST 2015
(472, 171, (640,360))
goright
Wed May 13 14:18:38 CEST 2015
(524, 149, (640,360))
goright
Wed May 13 14:18:39 CEST 2015
(523, 200, (640,360))
goright
```