


Science & Technology Program Protection (STPP) – RFFF Retrieval Platform
Authorization Boundary Diagram (ABD)

Cold-start seed is pulled from STPP Platform One. All inbound and outbound approved external connectors are shown as TCP/443 (TLS).

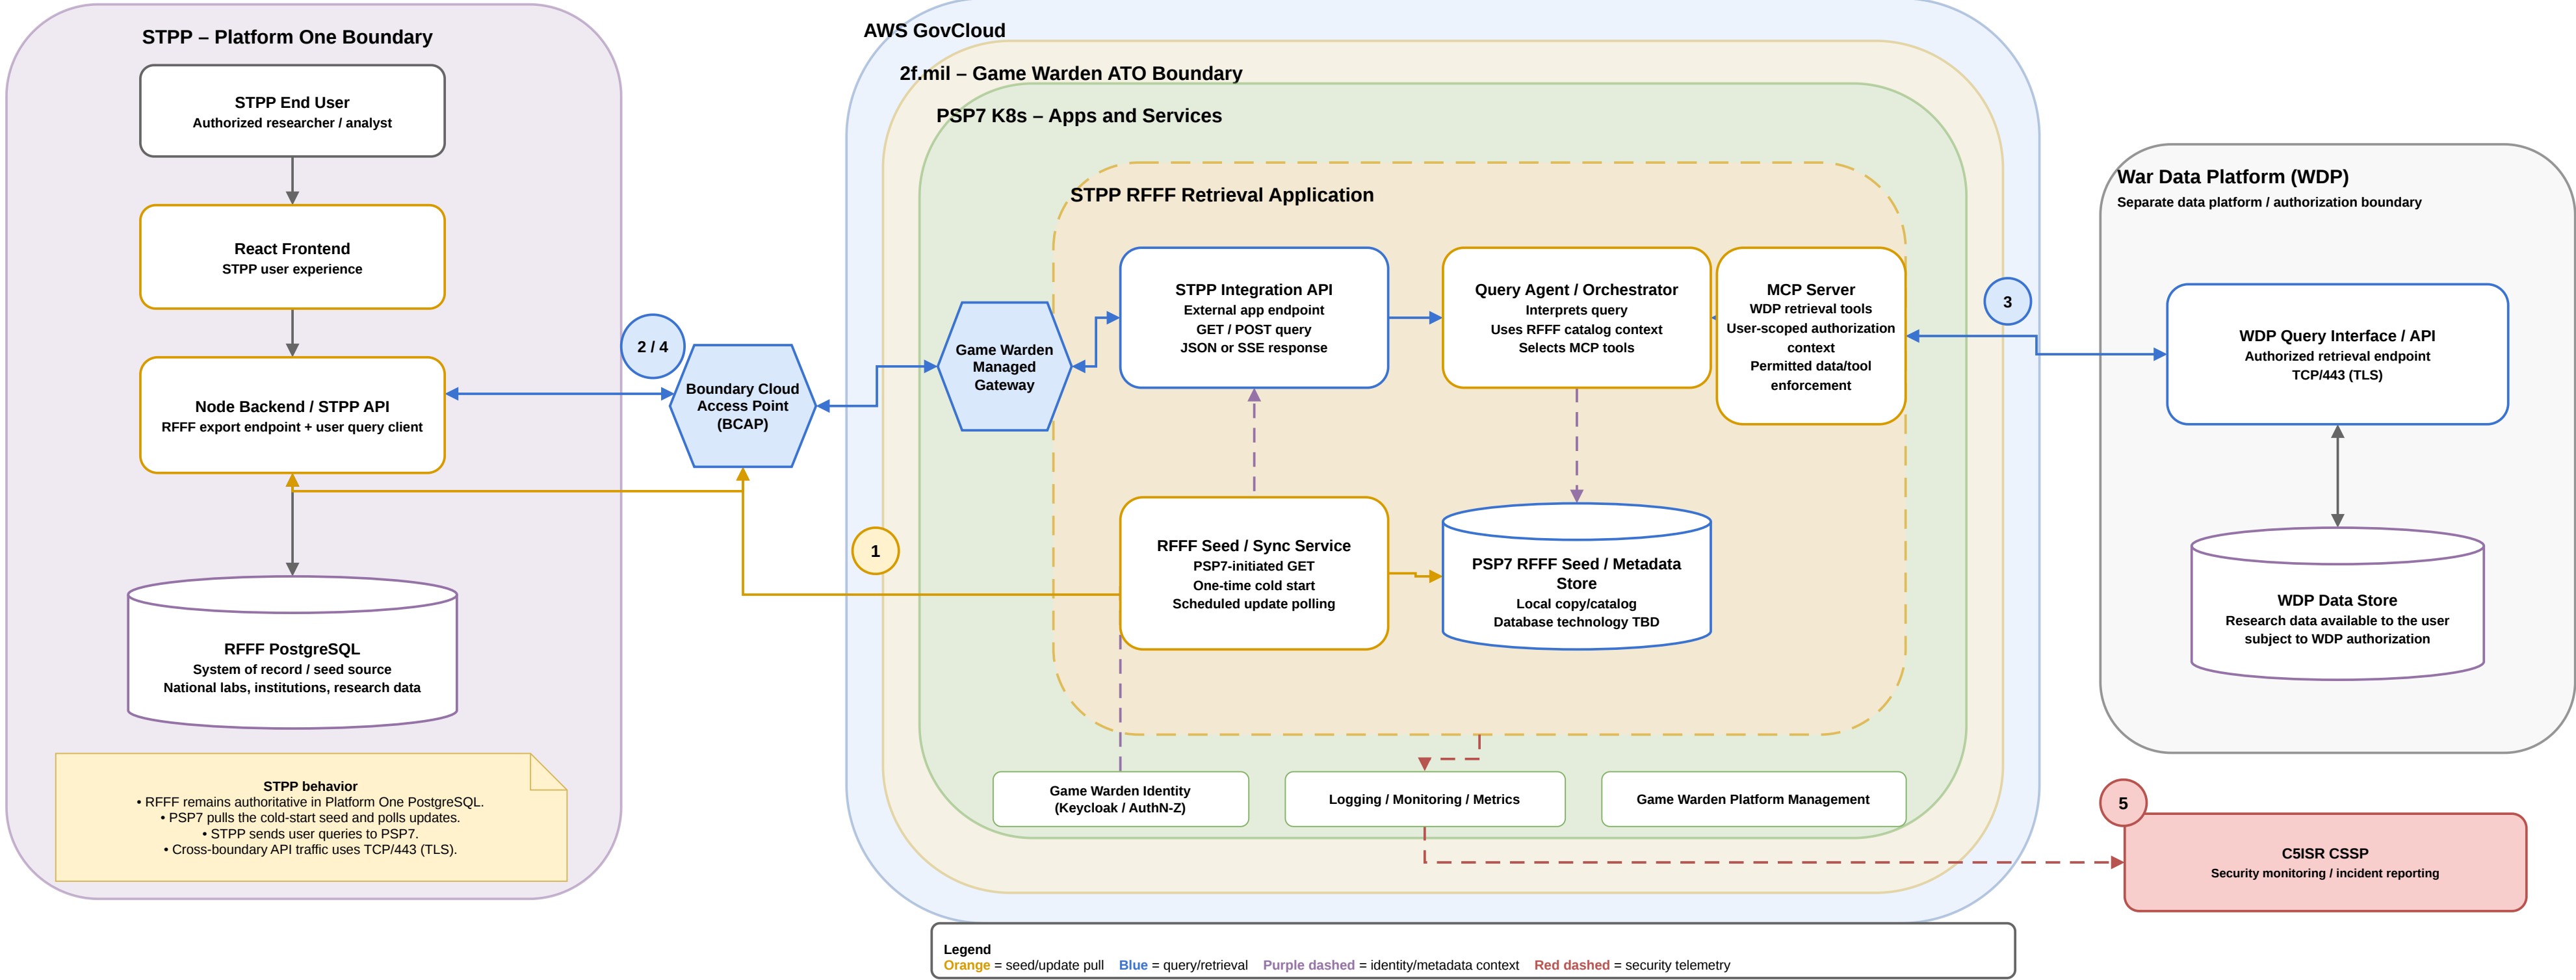

NUMBERED DATA FLOWS

- 1 – Cold start + update polling:** PSP7 Seed / Sync Service initiates a TCP/443 (TLS) GET to the STPP Node API. The Node API reads the Platform One RFFF PostgreSQL system of record and returns RFFF records. PSP7 stores them in its RFFF Seed / Metadata Store. The same pull pattern is reused on a schedule for delta updates.
- 2 – User query inbound to PSP7:** STPP Node sends a TCP/443 (TLS) GET or POST to the PSP7 Integration API through BCAP and the Game Warden Managed Gateway. The request carries the user query plus delegated identity / authorization context.
- 3 – Outbound retrieval from PSP7 to WDP:** Query Agent calls the MCP Server. MCP uses the delegated user authorization context to expose only permitted tools/data and queries WDP over TCP/443 (TLS).
- 4 – Outbound response from PSP7 back to STPP:** WDP results return through MCP → Agent → Integration API. PSP7 returns an OpenAPI-defined REST/JSON response or an SSE streaming response back to STPP over TCP/443 (TLS).
- 5 – Security telemetry:** Application/audit/security telemetry is sent to Game Warden logging/monitoring and forwarded to C5ISR CSSP over TCP/443 (TLS).