# Modulo 2 document

# Gabriel Rosero 7/4/2018

## this is level one

#### this is level two

#### this is level three

#### R Markdown

This is an R Markdown document. Markdown is a simple formatting syntax for authoring HTML, PDF, and MS Word documents. For more details on using R Markdown see http://rmarkdown.rstudio.com.

Here is a link to GOOGLE

Here is a word in **bold** and another word in **bold**.

Here is a word in *italics* and another word in *italics*.

When we compile our document, we are using the rmarkdown package.

```
2+2 mean(c(1,2,3,4,5))
```

Here is an example of a non-numbered list:

- Breakfast
  - food
    - \* eggs
    - \* toast
    - \* bacon
  - drink
    - \* apple juice
- Lunch
  - taco
- Dinner
  - baked chicken
  - broccoli
  - rice

Here is an example of a numbered list:

- 1. Breakfast
  - a. food
    - i. eggs
    - ii. toast
    - iii. bacon
  - b. drink
    - i. apple juice
- 2. Lunch
  - a. taco
- 3. Dinner
  - a. baked chicken

- b. broccoli
- c. rice Here is an example of a blockquote:

This is a block quote. This paragraph has two lines.

- 1. This is a list inside a block quote.
- 2. Second item.

Here is an example of a nested blockquote:

This is a block quote. This paragraph has two lines.

This text is nested

Here is an example of code in a blockquote:

```
2+2 mean(c(1,2,3,4,5))
```


When you click the **Knit** button a document will be generated that includes both content as well as the output of any embedded R code chunks within the document. You can embed an R code chunk like this:

### summary(cars)


```
##
        speed
                          dist
           : 4.0
                               2.00
##
    Min.
                    Min.
                            :
##
    1st Qu.:12.0
                    1st Qu.: 26.00
##
    Median:15.0
                    Median : 36.00
                            : 42.98
##
    Mean
            :15.4
                    Mean
    3rd Qu.:19.0
                    3rd Qu.: 56.00
##
    Max.
            :25.0
                    Max.
                            :120.00
```

## **Including Plots**

You can also embed plots, for example:

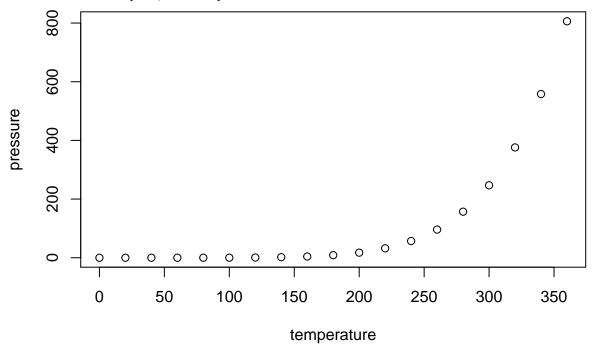

Note that the echo = FALSE parameter was added to the code chunk to prevent printing of the R code that

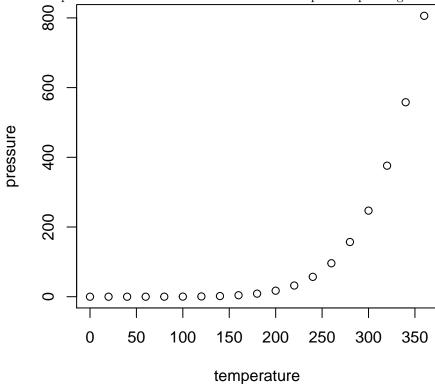

generated the plot.

## Insert tables

knitr::kable(head(cars))

speed	dis
4	9
4	10
7	4
7	25
8	10
9	10