PI: PRODUCTION AND INDUSTRIAL ENGINEERING

EE25BTECH11023-Venkata Sai

Duration: Three Hours   *Maximum Marks:* 100

1) The fixed cost and the variable cost of production of a product are Rs. 20000 and Rs. 50 per unit, respectively. The demand for the item is 500 units. To break even, the unit price of the items in Rs. should be

   a) 50   b) 75   c) 90   d) 100

                                                                                (GATE PI 2013)

2) Therbligs refer to the
   a) basic types of fixtures used in machining
   b) fundamental motions used in manual work
   c) basic types of waste in manufacturing process
   d) fundamental types of material handling systems

                                                                                (GATE PI 2013)

3) Customers arrive at a ticket counter at a rate of 50 per hour and tickets are issued in the order of their arrival. The average time taken for issuing a ticket is 1 min. Assuming that customer arrivals form a Poisson process and service times are exponentially distributed, the average waiting time in queue (in min) is

   a) 3   b) 4   c) 5   d) 6

                                                                                (GATE PI 2013)

4) Circular blanks of 10 mm diameter are punched from an aluminum sheet of 2 mm thickness.The shear strength of aluminum is 80 MPa.The minimum punching force required (in kN) is

   a) 2.57   b) 3.29   c) 5.03   d) 6.33

                                                                                (GATE PI 2013)

5) A metric thread of pitch 2 mm and thread angle 60° is inspected for its pitch diameter using 3-wire method. The diameter of the best size wire (in mm) is

   a) 0.866   b) 1.000   c) 1.154   d) 2.000

                                                                                (GATE PI 2013)

6) Match the CORRECT pairs.

P.Processes	1.Characteristics / Applications
Q.Gas Metal Arc Welding	2.Joining of thick plates
R.Tungsten Inert Gas Welding	3.Consumable electrode wire
S.Electroslag Welding	4.Joining of cylindrical dissimilar materials

a) P-4, Q-3, R-1, S-2 c) P-2, Q-3, R-4, S-1
b) P-4, Q-2, R-3, S-1 d) P-2, Q-4, R-1, S-3

7) In a rolling process, the state of stress of the material undergoing deformation is

a) pure compression c) compression and shear
b) pure shear d) tension and shear

8) Consider one-dimensional steady state heat conduction along x-axis ($0 \leq x \leq L$), through a plane wall; with the boundary surfaces (x=0 and x=L) maintained at temperatures of 0°C and 100°C. Heat is generated uniformly throughout the wall. Choose the **CORRECT** statement.
  a) The direction of heat transfer will be from 100°C to 0°C
  b) The maximum temperature inside wall must be greater than 100Â°C
  c) The temperature distribution is linear
  d) The temperature distribution is symmetric about mid-plane

9) A cylinder contains 5 m³ of an ideal gas at a pressure of 1 bar. This gas is compressed in a reversible isothermal process till its pressure increases to 5 bar. The work required (in kJ) is

a) 804.7 b) 953.2 c) 981.7 d) 1012.2

10) A planar closed kinematic chain is formed with rigid links PQ=2.0 m, QR=3.0 m, RS=2.5 m, SP=2.7 m with all revolute joints. The link to be fixed to obtain a double rocker (rocker-rocker) mechanism is

a) PQ b) QR c) RS d) SP

11) Let X be a normal random variable with mean 1 and variance 4. The probability $P\{X < 0\}$ is

a) 0.5 c) greater than 0.5 and less than 1.0
b) greater than 0 and less than 0.5 d) 1.0

12) Choose the **CORRECT** set of functions which are linearly dependent.

a) $\sin x, \sin^2 x, \cos^2 x$ c) $\cos 2x, \sin^2 x, \cos^2 x$
b) $\cos x, \sin x, \tan x$ d) $\cos 2x, \sin x, \cos x$

13) The eigenvalues of a symmetric matrix are all:
  a) complex with non-zero positive imaginary part
  b) complex with non-zero negative imaginary part
  c) real
  d) pure imaginary

14) The partial differential equation $\frac{\partial u}{\partial t} + \frac{u \partial u}{\partial x} = \frac{\partial^2 u}{\partial x^2}$ is a

a) linear equation of order 2
b) non-linear equation of order 1

c) linear equation of order 1
d) non-linear equation of order 2

15) Match the **CORRECT** pairs.

Number Integration Schemes	Order of fitting polynomial
P.Simpson's 3/8 Rule	1.First
Q.Trapezoidal Rule	2.Second
R.Simpson's 1/3 Rule	3.Third

a) P-2, Q-1, R-3
b) P-3, Q-2, R-1

c) P-1, Q-2, R-3
d) P-3, Q-1, R-2

16) A rod of length L having uniform cross-sectional area A is subjected to a tensile force P as shown in the figure below. If the Young's modulus varies linearly from E_1 to E_2 along the length of the rod, the normal stress developed at section SS is
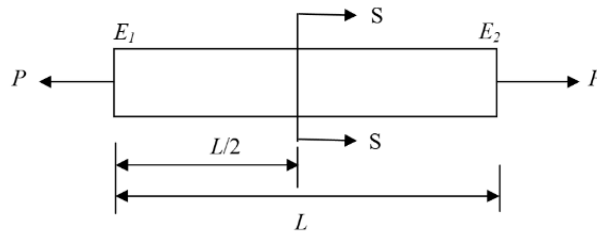

Fig. 1

a) $\frac{P}{A}$

b) $\frac{P(E_1 - E_2)}{A(E_1 + E_2)}$

c) $\frac{PE_2}{AE_1}$

d) $\frac{PE_1}{AE_2}$

17) For steady, fully developed flow inside a straight pipe of diameter D, neglecting gravity effects, the pressure drop Δp over length L and the wall shear stress tau_w are related by

a) $\tau_w = \frac{\Delta p D}{4L}$

b) $\tau_w = \frac{\Delta p D^2}{4L^2}$

c) $\tau_w = \frac{\Delta p D}{2L}$

d) $\tau_w = \frac{4 \Delta p L}{D}$

18) For a ductile material, toughness is a measure of

a) resistance to scratching
b) ability to absorb energy up to fracture

c) ability to absorb energy till elastic limit
d) resistance to indentation

19) A cube shaped casting solidifies in 5 min. The solidification time in min for a cube of the same material, which is 8 times heavier than the original casting, will be

a) 10
b) 20
c) 24
d) 40

20) A steel bar 200 mm in diameter is turned at a feed of 0.25 mm/rev with a depth of cut of 4 mm. The rotational speed of the workpiece is 160 rpm. The material removal rate in mm^3/s is

a) 160   b) 167.6   c) 1600   d) 1675.5

21) In the 3-2-1 principle of fixture design, 3 refers to the number of
   a) clamps required
   b) locators on the primary datum face
   c) degrees of freedom of the workpiece
   d) operations carried out on the primary datum face

22) In simple exponential smoothing forecasting, to give higher weightage to recent demand information, the smoothing constant must be close to

   a) -1   b) zero   c) 0.5   d) 1

23) A company manufactures 1000 toys every day. On an average, 10% of the toys are defective and 40% of the defective toys can be reworked into defect-free ones. The average number of defect-free toys manufactured daily is

   a) 900   b) 920   c) 940   d) 960

24) The type of control chart used to monitor the amount of dispersion in a sample is

   a) c-chart   b) p-chart   c) $\bar{x}$-chart   d) R-chart

25) Which one of the following is modeled based on adaptation capabilities of biological systems?

   a) Relational database   c) Simulated annealing algorithm
   b) Fuzzy system   d) Genetic algorithm

26) A company plans to purchase a machine whose uptime needs to be at least 95%. They have shortlisted two models of the machine with the following operational characteristics:

Machine	MTBF (hr)	MTTR (hr)
Model M	60	4
Model N	48	2

   The company should buy

   a) only Model M   c) either Model M or N
   b) only Model N   d) neither Model M nor N

27) A manufacturer produces bars designed to be of 10 mm diameter with a tolerance of ±0.1 mm. Historical data indicates that manufactured bars have an average diameter of 9.98 mm with a standard deviation of 0.15 mm. The process capability index is

   a) 0.08   b) 0.12   c) 0.18   d) 0.27

28) Let (P) denote the linear programming formulation of a transportation problem with m sources and n destinations. Then, the dual linear program of (P) has

a) *nm* variables and *nm* constraints   c) $n + m$ variables and $n + m$ constraints
b) *nm* variables and $n + m$ constraints   d) $n + m$ variables and *nm* constraints

29) Following data refers to an automat and a center lathe, which are being compared to machine a batch of parts in a manufacturing shop.

	Automat	Center Lathe
Machine Setup Time (min)	120	30
Machine Setup Cost (Rs./min)	800	150
Machining Time per piece (min)	2	25
Machining Cost (Rs./min)	500	100

Automat will be economical if the batch size exceeds

a) 28   b) 32   c) 61   d) 75

30) Cylindrical pins of $25.010^{+0.020}_{+0.010}$ mm diameter are electroplated in a shop. Thickness of the plating is 30 ± 0.2 microns. Neglecting gage tolerances, the size of the GO gage in mm to inspect the plated components is

a) 25.042   b) 25.052   c) 25.074   d) 25.084

31) During the electrochemical machining (ECM) of iron (atomic weight = 56, valency = 2) at a current of 1000 A with 90% current efficiency, the material removal rate was observed to be 0.26 gm/s. If titanium (atomic weight = 48, valency = 3) is machined by the ECM process at the current of 2000 A with 90% current efficiency, the expected material removal rate in gm/s will be

a) 0.11   b) 0.23   c) 0.30   d) 0.52

32) Specific enthalpy and velocity of steam at inlet and exit of a steam turbine, running under steady state, are as given below:

	Specific enthalpy (kJ/kg)	Velocity (m/s)
Inlet steam condition	3250	180
Exit steam condition	2360	5

The rate of heat loss from the turbine per kg of steam flow rate is 5 kW. Neglecting changes in potential energy of steam, the power developed in kW by the steam turbine per kg of steam flow rate is

a) 901.2   b) 911.2   c) 17072.5   d) 17082.5

33) A simply supported beam of length L is subjected to a varying distributed load $\sin(3\pi x/L)$ Nm^{-1}, where the distance x is measured from the left support. The magnitude of the vertical reaction force in N at the left support is

a) zero b) $L/3\pi$ c) L/π d) $2L/\pi$

34) The probability that a student knows the correct answer to a multiple choice question is $\frac{2}{3}$. If the student does not know the answer, then the student guesses the answer. The probability of the guessed answer being correct is $\frac{1}{4}$. Given that the student has answered the question correctly, the conditional probability that the student knows the correct answer is

a) $\frac{2}{3}$ b) $\frac{3}{4}$ c) $\frac{5}{6}$ d) $\frac{8}{9}$

35) The solution to the differential equation

$$\frac{d^2u}{dx^2} - k^2u = 0$$

where k is a constant, subjected to the boundary conditions $u(0) = 0$ and $u(L) = U$, is

a) $u = \frac{Ux}{L}$ b) $u = U(\frac{1-e^{kx}}{1-e^{kL}})$ c) $u = U(\frac{1-e^{-kx}}{1-e^{-kL}})$ d) $u = U(\frac{1+e^{-kx}}{1+e^{-kL}})$

36) The value of the definite integral $\int_1^e \ln(x)\,dx$ is

a) $\frac{4\sqrt{e^3}}{9} + \frac{2}{9}$ b) $\frac{2\sqrt{e^3}}{9} - \frac{4}{9}$ c) $\frac{2\sqrt{e^3}}{9} + \frac{4}{9}$ d) $\frac{4\sqrt{e^3}}{9} - \frac{2}{9}$

37) The following surface integral is to be evaluated over a sphere for the given steady velocity vector field $\mathbf{F} = x\mathbf{i} + y\mathbf{j} + z\mathbf{k}$ where S is the sphere $x^2 + y^2 + z^2 = 1$ and $\mathbf{n}$ is the outward unit normal vector to the sphere:

$$\iint_S \frac{1}{4}(\mathbf{F} \cdot \mathbf{n}).dA$$

The value of the surface integral is

a) π c) $\frac{3\pi}{4}$
b) 2π d) 4π

38) The function $f(t)$ satisfies the differential equation $\frac{d^2f}{dt^2} + f = 0$ and the auxiliary conditions $f(0) = 0$, $\frac{df}{dt}(0) = 4$ The Laplace transform of $f(t)$ is:

a) $\frac{2}{s+1}$ b) $\frac{4}{s+1}$ c) $\frac{4}{s^2+1}$ d) $\frac{2}{s^4+1}$

39) A flywheel connected to a punching machine has to supply energy of 400 Nm while running at a mean angular speed of 20 rad/s. If the total fluctuation of speed is not to exceed $\pm2\%$, the mass moment of inertia of the flywheel in kgÂ·m^2 is

a) 25 b) 50 c) 100 d) 125

40) A single riveted lap joint of two similar plates has the following data:

Fig. 2

Plate width = 200 mm
Plate thickness = 5 mm
Number of rivets = 3, Rivet diameter = 10 mm
Rivet hole diameter = 11 mm
Allowable tensile stress of plate σ_p = 200 MPa
Allowable bearing stress of rivet σ_c = 150 MPa.
If the plates are designed to avoid tearing failure, the maximum permissible load P in kN is

a) 83
b) 125

c) 167
d) 501

41) Two cutting tools are being compared for a machining operation. The tool life equations are:

$$\text{Carbide tool} : VT^{1.6} = 3000$$
$$\text{HSS tool} : VT^{0.6} = 200$$

where V is cutting speed in m/min and T is tool life in min. The carbide tool will provide higher tool life if the cutting speed in m/min exceeds

a) 15.0
b) 39.4
c) 49.3
d) 60.0

42) In a CAD package, mirror image of a 2D point $P(5, 10)$ is to be obtained about a line which passes through the origin and makes an angle of 45° counterclockwise with the X-axis. The coordinates of the transformed point will be

a) (7.5, 5)
b) (10, 5)
c) (7.5, -5)
d) (10, -5)

43) In water jet machining, the water jet is issued through a 0.3 mm diameter orifice at a pressure of 400 MPa. The density of water is 1000 kg/m³. The coefficient of discharge is 1.0. Neglecting all losses during water jet formation through the orifice, the power of the water jet in kW is

a) 25.3
b) 50.6
c) 75.9
d) 101.2

44) A linear programming problem is shown below:

Maximize
$$3x + 7y$$

Subject to:
$$3x + 7y \leq 10$$
$$4x + 6y \leq 8$$
$$x, y \geq 0$$

It has:

a) an unbounded objective function
b) exactly one optimal solution

c) exactly two optimal solutions
d) infinitely many optimal solutions

45) Consider a two-machine flow shop where jobs are first processed in Machine X and then in Machine Y, in the same sequence. The processing times of four jobs (1, 2, 3 and 4) on the machines are:

Job	Processing time (in min)	
	Machine X	Machine Y
1	6	5
2	3	4
3	7	6
4	5	4

The sequence of jobs on the machines that minimizes make span is:

a) 2–3–1–4   b) 1–2–3–4   c) 2–1–3–4   d) 3–1–4–2

46) Match the CORRECT pairs:

Group 1	Group 2
P. Man-machine chart	1.Determines standard time of jobs
Q. Learning curve	2. Finds the preferred method of doing work
R. Time study	3. Measures work improvement
S. Motion study	4. Shows idle times

a) P-2, Q-3, R-4, S-1
b) P-3, Q-2, R-4, S-1

c) P-4, Q-1, R-3, S-2
d) P-4, Q-3, R-1, S-2

47) A firm produces 120 units of product in every 8-hour shift. Four operations as given below are needed to manufacture each unit:

Operation	Precedence	Processing time(in min)
P	none	1
Q	P	1
R	P	4
S	Q,R	3

The above operations are to be assigned to workstations such that one or more operations are performed in each workstation. Only one unit of product will be processed in each workstation at a time. The minimum number of workstations that will achieve the production target, without violating the precedence constraints, is:

a) 1   b) 2   c) 3   d) 4

Common Data Questions
Common Data for Questions 48 and 49:

A disc of 200 mm outer and 80 mm inner diameter is faced at a feed of 0.1 mm/rev with a depth of cut of 1 mm. The facing operation is undertaken at a constant cutting speed of 90 m/min in a CNC lathe. The main (tangential) cutting force is 200 N.

48) Neglecting the contribution of the feed force towards cutting power, the specific cutting energy in J/mm^3 is:

   a) 0.2   b) 2   c) 200   d) 2000

49) Assuming approach and over-travel of the cutting tool to be zero, the machining time in minutes is:

   a) 2.93   b) 5.86   c) 6.66   d) 13.33

Common Data for Questions 50 and 51:

The demand for soap at a retailer is 40 kg per day. The retailer buys soap in bulk at a cost of Rs. 50 per kg. The ordering cost is Rs. 200 per order and the holding cost is Rs. 0.1 per kg per day. The lead time is 3 days. The retailer's current policy is to order 200 kg every 5 days.

50) To avoid stock-out situations, the retailer needs to place orders when the inventory level (in kg) drops to:

   a) 40   b) 60   c) 80   d) 120

51) If the retailer uses an optimum policy to minimize the total cost,the saving in Rs. in the total cost as compared to the current policy will be

   a) 10   b) 20   c) 40   d) 50

Linked Answer Questions
Statement for Linked Answer Questions 52 and 53:
A project consists of seven activities, whose durations are independent normal random variables, as shown in the table below. Activities are identified by their beginning node i and ending node j.

Activity (node i - node j)	Mean duration (in days)	Standard deviation (in days)
1 - 2	6	1
1 - 3	9	2
2 - 3	2	0.5
2 - 4	8	0.5
3 - 4	7	1
3 - 5	8	1
4 - 5	4	1

52) The critical path of the project, based on the mean activity duration, is:

   a) $1 - 2 - 3 - 4 - 5$ b) $1 - 2 - 3 - 5$ c) $1 - 3 - 5$ d) $1 - 3 - 4 - 5$

53) Let Φ denote the cumulative distribution function of the standard normal random variable. The probability that all activities on the critical path, based on the mean activity duration, are completed in 22 days is:

   a) $\Phi^{-1}(0.333)$ b) $\Phi^{-1}(0.816)$ c) $\Phi^{-1}(1.664)$ d) $\Phi^{-1}(2.235)$

Statement for Linked Answer Questions 54 and 55:
In orthogonal turning of a bar of 100 mm diameter with a feed of 0.25 mm/rev, depth of cut of 4 mm, and cutting velocity of 90 m/min, it is observed that the main (tangential) cutting force is perpendicular to the friction force acting at the chip-tool interface. The main (tangential) cutting force is 1500 N.

54) The orthogonal rake angle of the cutting tool in degrees is:

   a) zero   b) 3.58   c) 5   d) 7.16

55) The normal force acting at the chip-tool interface in N is:

   a) 1000   b) 1500   c) 2000   d) 2500

General Aptitude (GA) Questions

56) Were you a bird, you .... in the sky.
   a) would fly
   b) shall fly
   c) should fly
   d) shall have flown

57) Choose the grammatically INCORRECT sentence:

   a) He is of Asian origin.   c) She is an European.
   b) They belonged to Africa.   d) They migrated from India to Australia.

58) Complete the sentence: Universalism is to particularism as diffuseness is to ....

   a) specificity   b) neutrality   c) generality   d) adaptation

59) What will be the maximum sum of $44, 42, 40, \ldots$?

a) 502   b) 504   c) 506   d) 500

60) Which one of the following options is the closest in meaning to the word given below?
Nadir

a) Highest   b) Lowest   c) Medium   d) Integration

Q.61 to Q.65 carry two marks each

61) A tourist covers half of his journey by train at 60 km/h, half of the remainder by bus at 30 km/h and the rest by cycle at 10 km/h. The average speed of the tourist in km/h during his entire journey is:

a) 36   b) 30   c) 24   d) 18

62) The current erection cost of a structure is Rs. 13,200. If the labour wages per day increase by 1/5 of the current wages and the working hours decrease by 1/24 of the current period, then the new cost of erection in Rs. is:

a) 16,500   b) 15,180   c) 11,000   d) 10,120

63) Out of all the 2-digit integers between 1 and 100, a 2-digit number has to be selected at random. What is the probability that the selected number is not divisible by 7?

a) 13/90   b) 12/90   c) 78/90   d) 77/90

64) After several defeats in wars, Robert Bruce went in exile and wanted to commit suicide. Just before committing suicide, he came across a spider attempting tirelessly to have its net. Time and again, the spider failed but that did not deter it from making attempts. Such attempts by the spider made Bruce curious. Thus, Bruce started observing the near-impossible goal of the spider to have the net. Ultimately, the spider succeeded in having its net despite several failures. Such act of the spider encouraged Bruce not to commit suicide. And then, Bruce went back again and won many a battle, and the rest is history.

Which one of the following assertions is best supported by the above information?

a) Failure is the pillar of success.
b) Honesty is the best policy.
c) Life begins and ends with adventures.
d) No adversity justifies giving up hope.

65) Find the sum of the expression $81 + 80 + 1 + \ldots + 4 + 3 + 1 + 3 + 2 + 1 + 2 + 1 + 1$

a) 7   c) 9
b) 8   d) 10