

Taming Complexity in Diabetes Stage Multiclass Classification: Benchmarking the Efficacy of K-Nearest Neighbors Against Optimized Regularized Logistic Regression

Gabriel Guillen

dept. of Statistics & Data Science

University of Central Florida

Orlando, United States of America

ga013701@ucf.edu

Abstract—This study addresses the challenge of multiclass classification in diabetes stages by benchmarking the predictive efficacy of *K*-Nearest Neighbors (KNN) against Regularized Logistic Regression. While investigating which of these contrasting modeling approaches is more competitive in simultaneously predicting a suite of diabetes-related predictors. The report details the performance of various regularization techniques (LASSO, ElasticNet, and Ridge) and evaluates model robustness, ultimately identifying the most recommendable model based on accuracy and F_1 score.

I. INTRODUCTION

This study compares two fundamental classification models, **K-Nearest Neighbors** (KNN) and **Logistic Regression**, for classifying diabetes stages. Using a large dataset of over one hundred thousand observations and twenty-plus predictors, the primary goal is to determine the most effective modeling approach for complex diabetes stages classification.

The comparison focuses specifically on evaluating the impact of different penalization techniques (such as (L_1) and (L_2) regularization) on Logistic Regression performance. Model efficacy was assessed using accuracy rates and the weighted F_1 metric.

A secondary but crucial focus of this work was also on feature selection and importance. Aimed to identify the feature subset that consistently proves most influential across the compared models for accurate diabetes stage classification.

This analysis provides an evidence-based recommendation for selecting the optimal model given the trade-off between predictive accuracy and feature interpretability.

A. Dataset Structure

The dataset [1] used in this analysis comprises 100,000 **unique patient records** ensuring privacy preservation designed for diabetes risk prediction but adapted here for classification. It features over 35 columns encompassing diverse data types, including numeric measurements (e.g. age, BMI,

glucose, HbA1c) and categorical indicators (e.g. gender, family history, smoking status).

The target variable for this multiclass (where $N > 2$ classes exist) analysis was **diabetes stage** (disease severity), defined by the following five classes:

- No Diabetes
- Pre-Diabetes
- Type 1 Diabetes
- Type 2 Diabetes
- Gestational Diabetes

The dataset exhibited significant **class imbalance**. Specifically, two classes dominated the distribution: Type 2 Diabetes accounted for 60% of the instances, and Pre-Diabetes accounted for 32%.

II. METHODS

A. Data Preparation

The initial dataset of 100,000 observations was preprocessed for the multiclass analysis, which targeted the **diabetes stage** (disease severity). Features that were not primary classification predictors, including `glucose_fasting`, `hba1c`, `diabetes_risk_score`, `diagnosed_diabetes`, `hypertension_history`, and `cardiovascular_history`, were excluded from the analysis.

Numeric features were standardized using **Standard Scaling** to achieve a zero mean ($\mu = 0$) and unit variance ($\sigma = 1$).

$$z = \frac{x - \mu}{\sigma}$$

This method ensures that all features contribute equally to the modeling process.

Categorical variables (gender, ethnicity, education level, income level, employment status, and smoking status) were converted into a binary numerical format using **One-Hot Encoding** (OHE), avoiding assumptions of ordinality.

The fully processed dataset was split into training and

66% L_2 regularization.

III. RESULTS

A. KNN Results

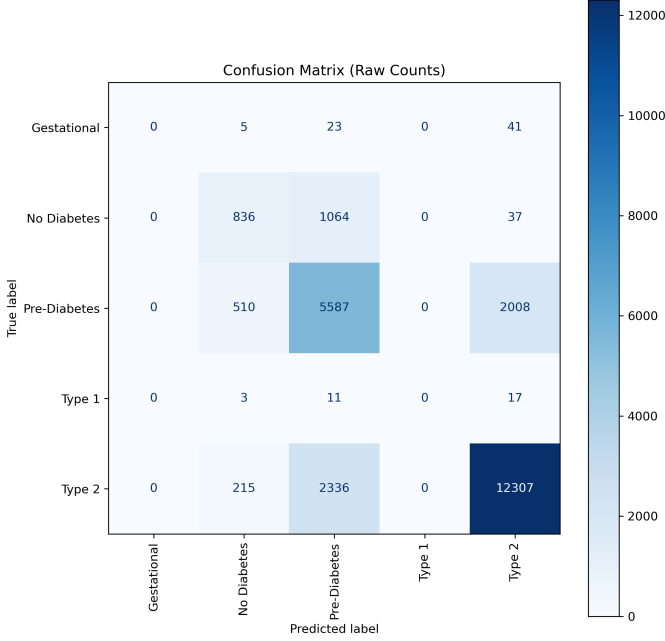


Fig. 1. KNN Confusion Matrix

1) *KNN Confusion Matrix*: As shown in Figure 1, the overall performance of the model reveals significant misclassification patterns across several classes. Most notably, **Gestational Diabetes** (69 true cases) and **Type 1 Diabetes** (31 true cases) were **completely misclassified**, with the majority of these cases being incorrectly labeled as **Type 2 Diabetes** (41 and 17 cases, respectively), suggesting these rarer classes are severely underrepresented or highly confused with the dominant Type 2 group.

Furthermore, the model exhibited large errors between the major classes: 1,064 true **No Diabetes** cases were misclassified as **Pre-Diabetes** (a significant Type I error), while 2,008 true **Pre-Diabetes** cases were misclassified as **Type 2** (suggesting an over-eagerness to assign the 'Type 2' label).

2) *KNN ROC Curve*: The **Receiver Operating Characteristic (ROC) curves** Figure 2 for the KNN model echo the patterns observed in the confusion matrix. The model demonstrates **excellent to very good** discriminative performance for the two most prevalent classes, achieving an **Area Under the Curve (AUC)** of 0.92 for the **No Diabetes** class—indicating it is best at distinguishing this class—and an **AUC of 0.89** for the **Type 2 Diabetes** class.

Performance remains **solid** for the **Pre-Diabetes** class with an **AUC of 0.83**. However, the model exhibits **poor to very poor** performance for the rarer classes, with the **Gestational**

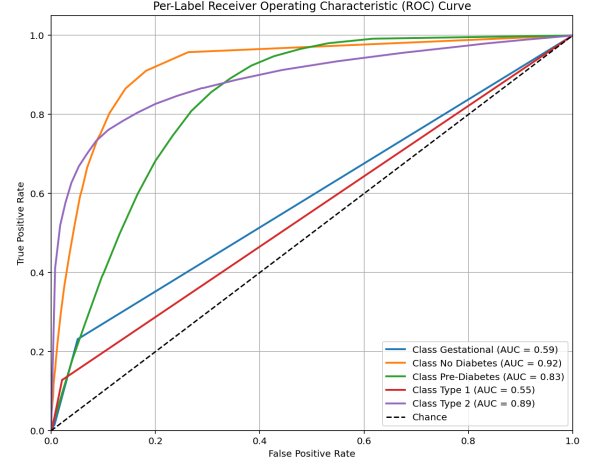


Fig. 2. KNN ROC Curve

Diabetes class yielding an **AUC of 0.59** (barely above random chance) and the **Type 1 Diabetes** class showing the weakest result with an **AUC of 0.55**, signifying a significant struggle to correctly classify these specific distinctions.

B. Logistic Regression with L_1 Results

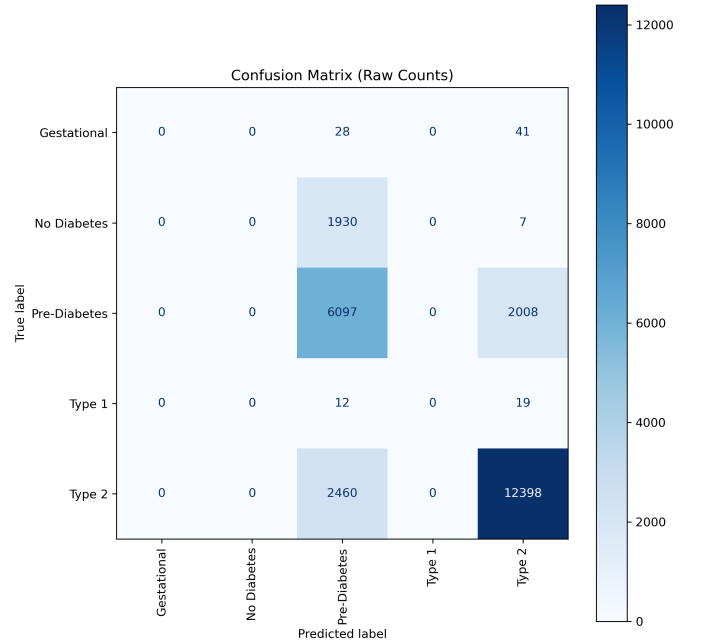


Fig. 3. Logistic/ L_1 Confusion Matrix

1) *Logistic/ L_1 Confusion Matrix*: The model demonstrates a significant bias in Figure 3, performing well only on the **Type 2** class (12,398 true positives) while being heavily skewed toward predicting either Pre-Diabetes or Type 2,

entirely missing the Gestational, No Diabetes, and Type 1 categories, which are never correctly predicted. Specifically, all **69** actual **Gestational** cases were misclassified (41 as Type 2, 28 as Pre-Diabetes), and none of the **31** actual **Type 1** cases were correctly identified (19 predicted as Type 2, 12 as Pre-Diabetes).

Furthermore, the model showed a critical failure in distinguishing non-diabetic individuals, as almost all **1,937** actual **No Diabetes** cases were incorrectly labeled as Pre-Diabetes (**1,930**). While **Pre-Diabetes** had the second-highest accuracy (**6,097** true positives), there is significant confusion between the two predicted classes, with **2,008** actual Pre-Diabetes cases mistakenly called Type 2, and **2,460** actual Type 2 cases mistakenly called Pre-Diabetes.

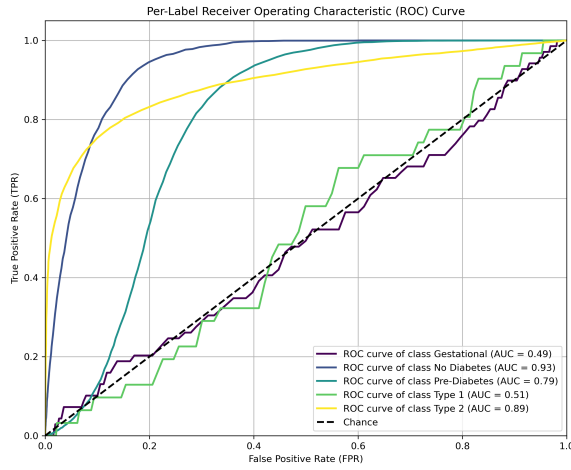


Fig. 4. **Logistic/L₁** ROC Curve

2) **Logistic/L₁ ROC Curve:** In Figure 3 the classification model demonstrates highly varied performance across the different diabetes classes based on the ROC analysis. The **No Diabetes** class, represented by the dark blue curve, achieves an **Excellent AUC of 0.93**, indicating high effectiveness in distinguishing it from other classes.

This is followed closely by **Type 2** (yellow curve) with a **Very Good AUC of 0.89**. Performance remains **Good/Acceptable** for **Pre-Diabetes** (teal/medium blue curve) with an **AUC of 0.79**. However, the model performs **Poorly/Near Chance** for **Type 1** (light green curve), with an AUC of only 0.51, suggesting a significant struggle. Performance is even worse for **Gestational** (purple/black curve) with an **AUC of 0.49**, which is considered worse than random guessing, implying systematic prediction errors for this specific class.

C. Logistic Regression with L₂ Results

1) **Logistic/L₂ Confusion Matrix:** The model demonstrates exceptional accuracy in identifying **Type 2 diabetes**, correctly classifying **13,411** out of **14,858** true cases as shown

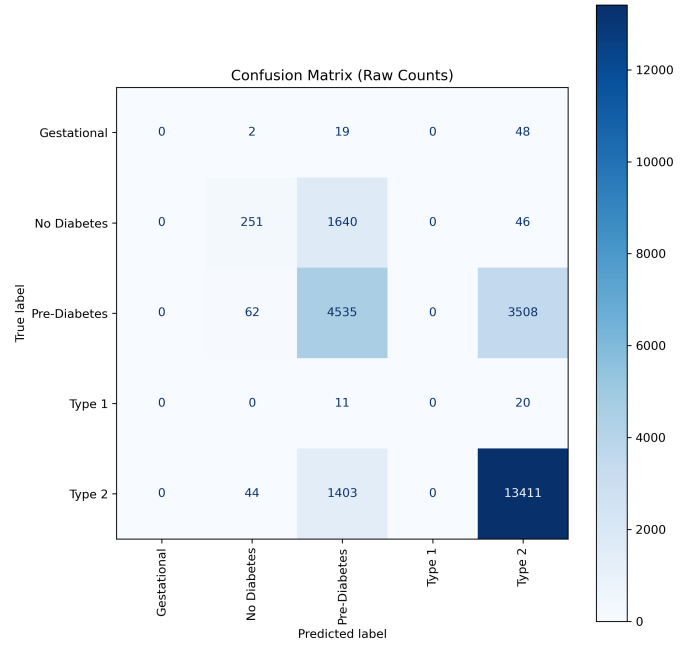


Fig. 5. **Logistic/L₂** Confusion Matrix

in Figure 5. However, it struggles significantly with other categories due in part to severe class imbalance, with **Type 2** (**14,858** samples) and **Pre-Diabetes** (**8,105** samples) being dominant, while **Gestational** (**69**) and **Type 1** (**31**) have very few samples. This imbalance likely contributes to the model's inability to correctly classify **Gestational** and **Type 1** diabetes, resulting in **zero correct predictions** for both.

Furthermore, high misclassification rates are observed because the model has two major "attractors": it frequently misclassifies other true classes as **Pre-Diabetes**, notably **1,640** cases of **No Diabetes** and **1,403** cases of **Type 2**, and it also frequently misclassifies other true classes as **Type 2**, especially **3,508** cases of **Pre-Diabetes**.

2) **Logistic/L₂ ROC Curve:** In Figure 6 The classification model demonstrated varied but generally strong performance across the five categories. The **No Diabetes** class (Dark Blue curve, AUC = 0.94) showed the highest performance, indicating the model is excellent at distinguishing this group from the others. Following closely, the **Type 2** class (Yellow curve, AUC = 0.90) also exhibited very good performance.

The classification of **Gestational** diabetes (Purple curve, AUC = 0.88) and **Type 1** diabetes (Light Green curve, AUC = 0.85) both showed good, solid performance. The class the model had the most difficulty distinguishing was **Pre-Diabetes** (Green/Teal curve, AUC = 0.82), which, although still a strong AUC value, was the lowest among the five classes.

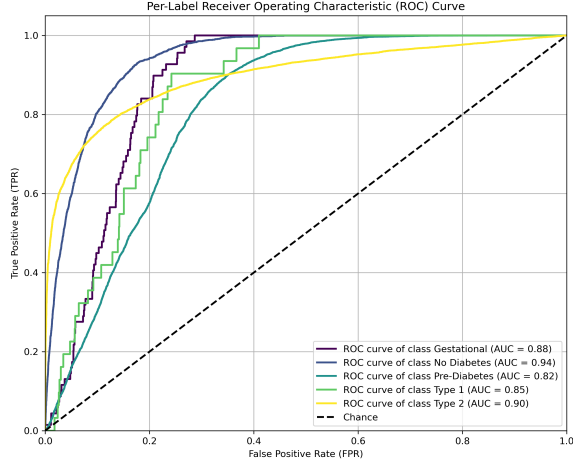


Fig. 6. Logistic/L₂ ROC Curve

D. Logistic Regression with ElasticNet Results

1) *Logistic/ElasticNet Confusion Matrix*: The model's classification performance shows significant variance across the classes: the interpretation for **Gestational diabetes** is **Very Poor**, as the model failed to correctly identify any cases, with the majority being classified as Type 2; similarly, for **Type 1** diabetes, performance is **Very Poor** because the model identified zero true cases, shown in Figure 7.

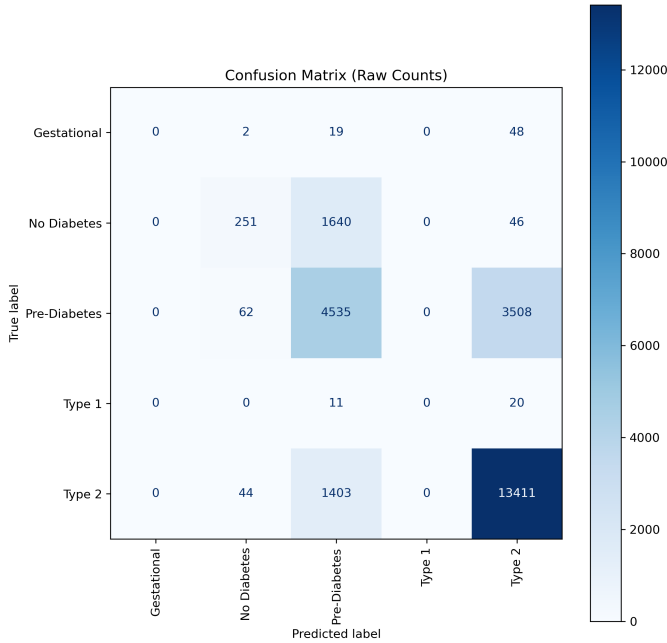


Fig. 7. Logistic/ElasticNet Confusion Matrix

Performance for **No Diabetes** is **Poor**, as most true “No Diabetes” instances were incorrectly labeled as “Pre-Diabetes”

(a significant false positive rate). The performance for **Pre-Diabetes** is **Moderate**, as the model correctly identified a large number, but a significant portion were misclassified as the more severe Type 2.

Finally, for **Type 2** diabetes, the performance is **Strong**, indicating the model is highly accurate at identifying true Type 2 cases.

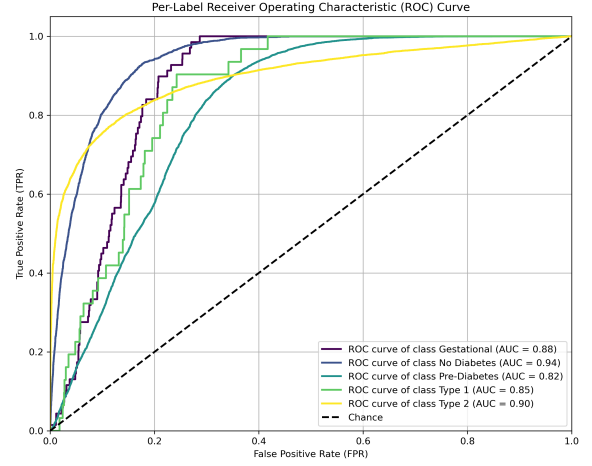


Fig. 8. Logistic/ElasticNet ROC Curve

2) *Logistic/ElasticNet ROC Curve*: Figure 8 evaluates the performance of a multi-class classification model, likely a **Logistic Regression** with **Elastic Net** regularization, across five distinct diabetes status classes by calculating the **Area Under the Curve (AUC)** for each class in a **one-vs-rest** manner. Identical to Figure 6.

Overall, the model demonstrates strong diagnostic capability, with all classes yielding AUC values significantly above the 0.50 chance level. Specifically, the model performs **excellently** in identifying the **No Diabetes** class (AUC = 0.94), followed closely by **Type 2** (AUC = 0.90) and **Gestational** (AUC = 0.88), indicating a very high effectiveness in separating these groups from the rest.

The performance is still **good** for **Type 1** (AUC = 0.85), but the model shows its lowest performance for the **Pre-Diabetes** class (AUC = 0.82), suggesting this class presents the greatest classification difficulty compared to the others.

IV. DISCUSSION

A. Models Performance

TABLE III
PERFORMANCE METRICS: LOGISTIC REGRESSION (L₁ AND L₂)

Metric	Logistic/L ₁	Logistic/L ₂
Best CV F_1 Weighted	0.7139	0.6995
Test F_1 Weighted Score	0.7146	0.7039
Overall Test Accuracy	0.7398	0.7279
Overall Error Rate	0.2602	0.2721

Type 1 stage diabetes.

The overall performance for all models was poor, with approximately one out of every four classifications being incorrect.

While Logistic Regression like **Logistic/ElasticNet** and **Logistic/L₂** yielded superior AUC scores (indicating better discriminatory power), the best overall test accuracy was achieved by **KNN (0.7492)**, closely followed by **Logistic/L₁ (0.7398)**, a finding consistent with the weighted F_1 metric.

The feature `glucose_postprandial` was identified as the most effective single predictor across all models for classification.

Based solely on the performance metrics presented, **the KNN model is the most recommendable choice** as its superior accuracy and weighted F_1 score outweigh the higher interpretability offered by the Logistic Regression models. Suggesting it has the best performance in the final classification task.

APPENDIX

APPENDIX A: SUPPLEMENTARY MATERIALS AND SOFTWARE USAGE

Source Code Repository

The source code, data, and detailed implementation scripts for this project are available on GitHub

(URL: https://github.com/gaguillen4384-dev/Data-Science/DataMining_1/Project_3).

Software Usage Acknowledgment

The text and documentation were edited and refined using Google Gemini.

REFERENCES

- [1] Kolipaka, Rakesh, & Digutla, Ranjith Kumar. (2025). **Diabetes Health Indicators Dataset**. Kaggle. Available at: <https://www.kaggle.com/dsv/13128284>. DOI: 10.34740/KAGGLE/DSV/13128284.