Module 3 — Loops and repeated computation


By Tanishka Gahlot


QUESTIONS

Module 3 — Loops and repeated computation


No.	Problem (click to open)	Platform	Difficulty
1	For Loop in C	HackerRank	Very Easy
2	1342 — Number of Steps to Reduce a Number to Zero	LeetCode	Easy
3	2169 — Count Operations to Obtain Zero	LeetCode	Easy
4	1523 — Count Odd Numbers in an Interval Range	LeetCode	Easy
5	2652 — Sum Multiples	LeetCode	Easy
6	Number Line Jumps	HackerRank	Easy–Moderate

Question 1 = https://www.hackerrank.com/challenges/for-loop-in-c/problem?isFullScreen=true

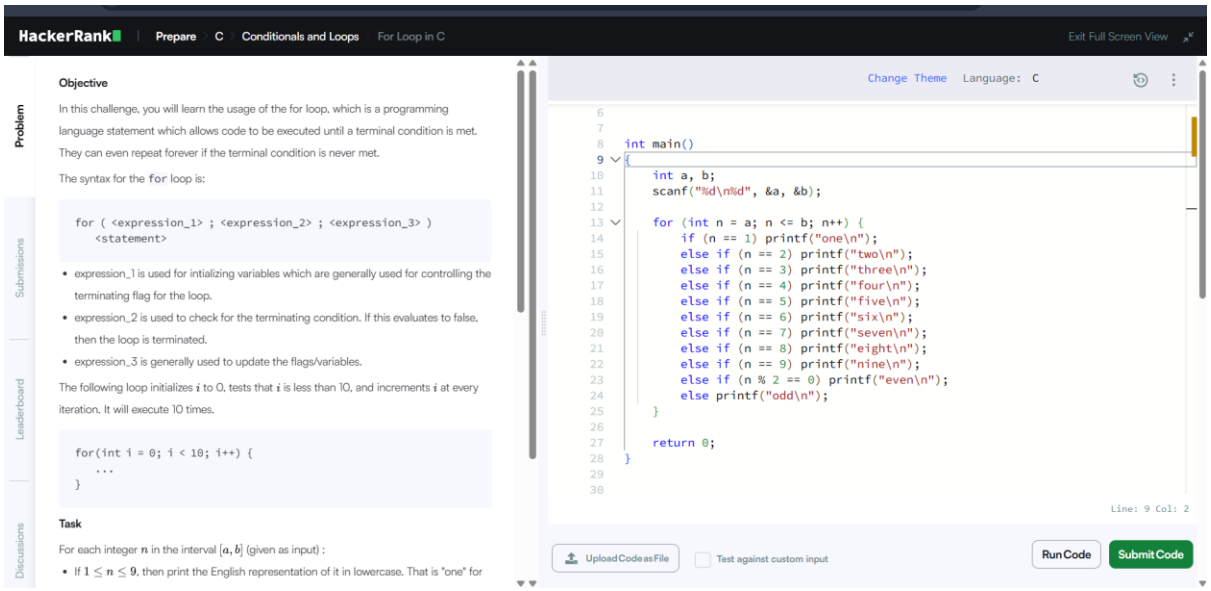


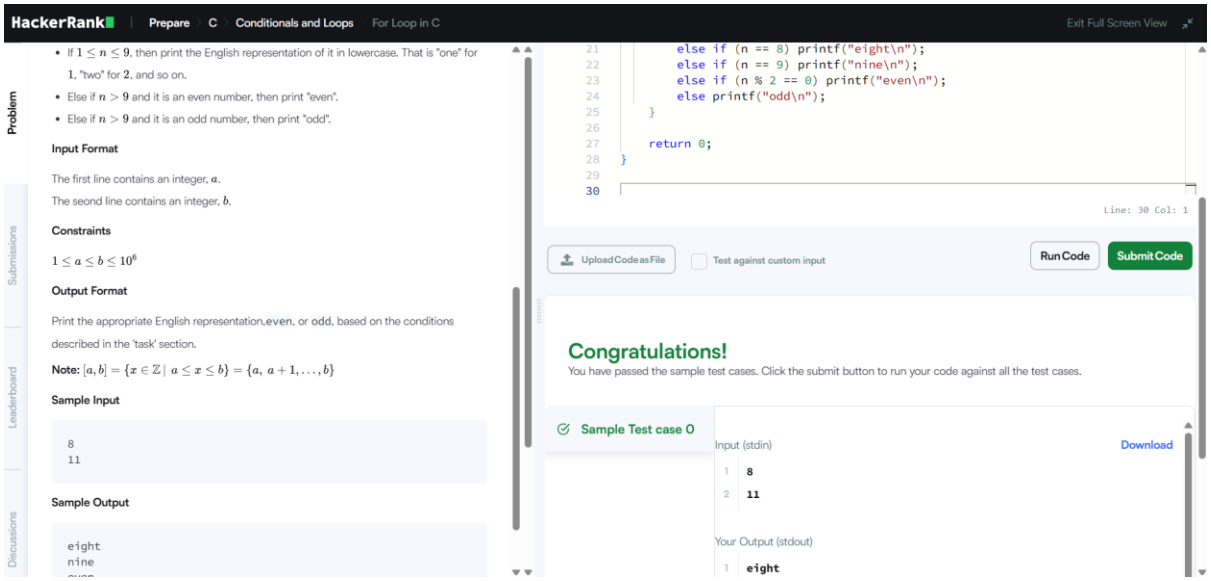


Question 2 = https://leetcode.com/problems/number-of-steps-to-reduce-a-number-to-zero/description/

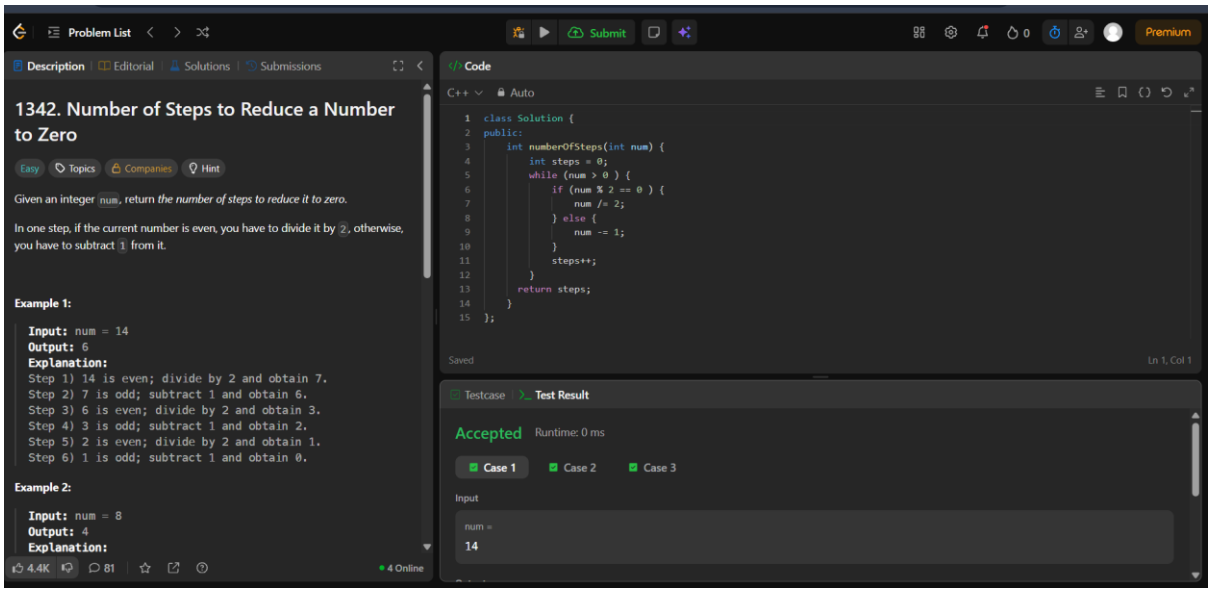


Question 3 = https://leetcode.com/problems/count-operations-to-obtain-zero/

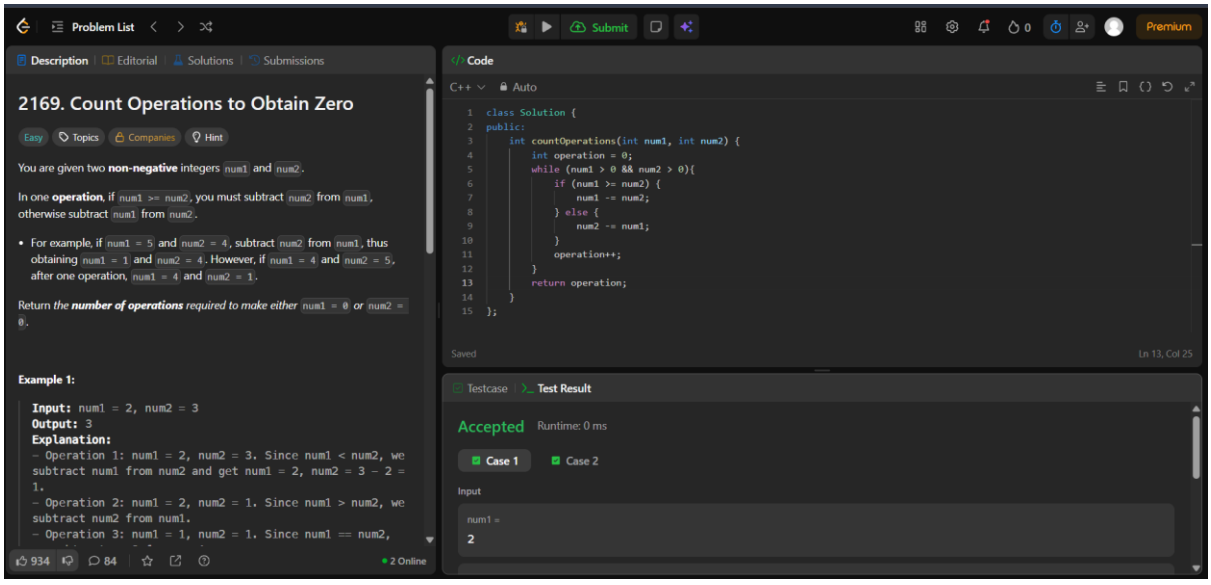

Question 4 = https://leetcode.com/problems/count-odd-numbers-in-an-interval-range/description/

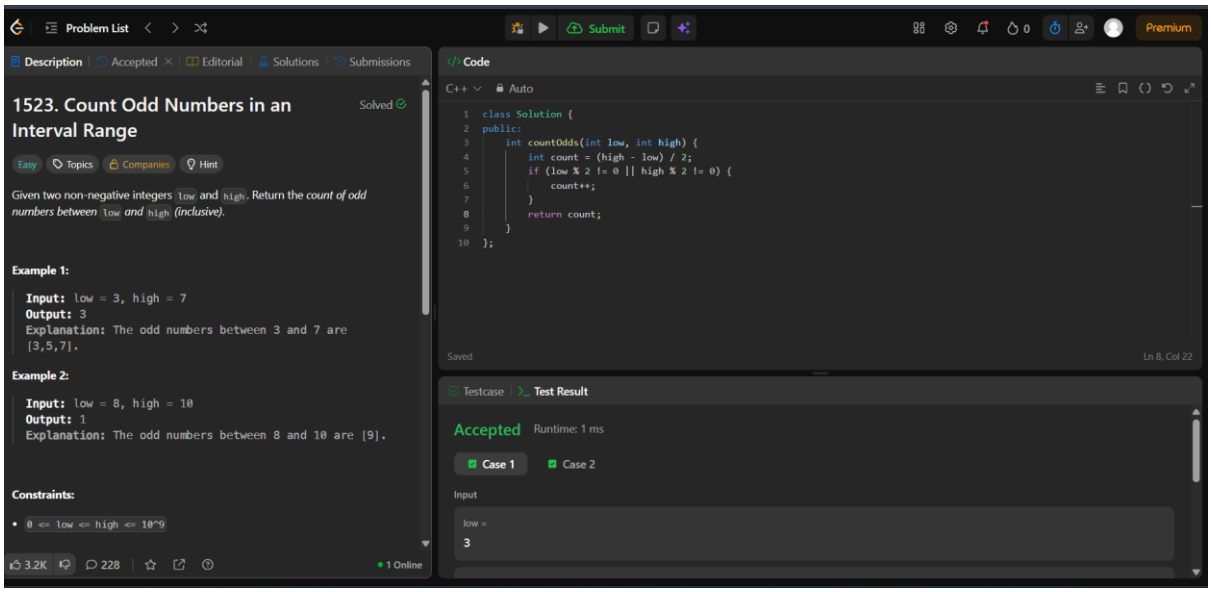



Question 5 = https://leetcode.com/problems/sum-multiples/description/

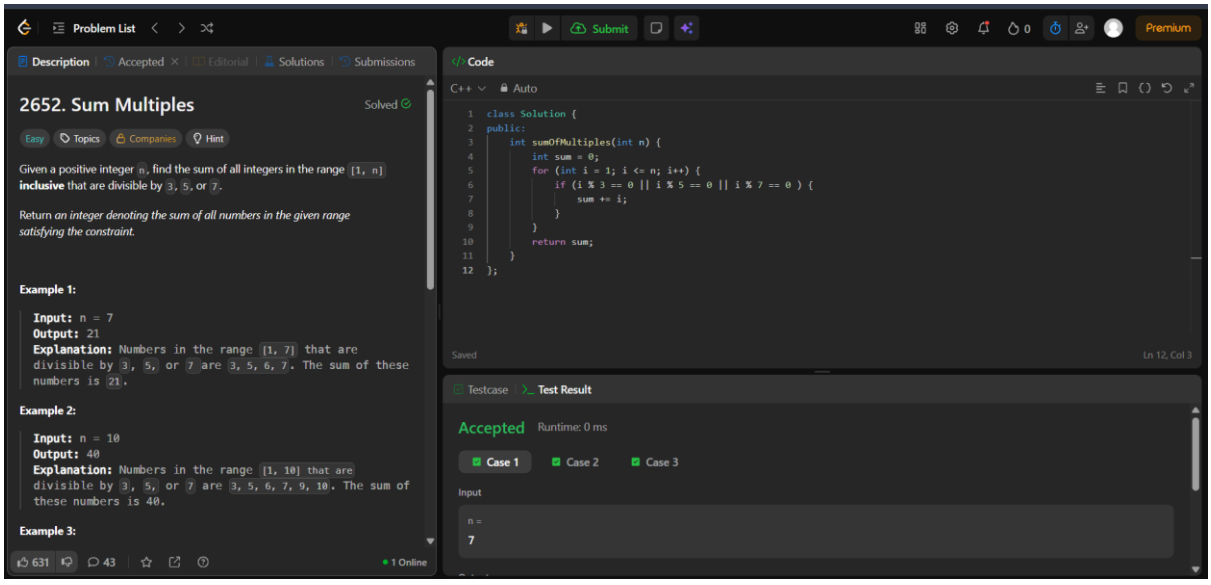

Question 6 =

https://www.hackerrank.com/challenges/kangaroo/problem?isFullScreen=true

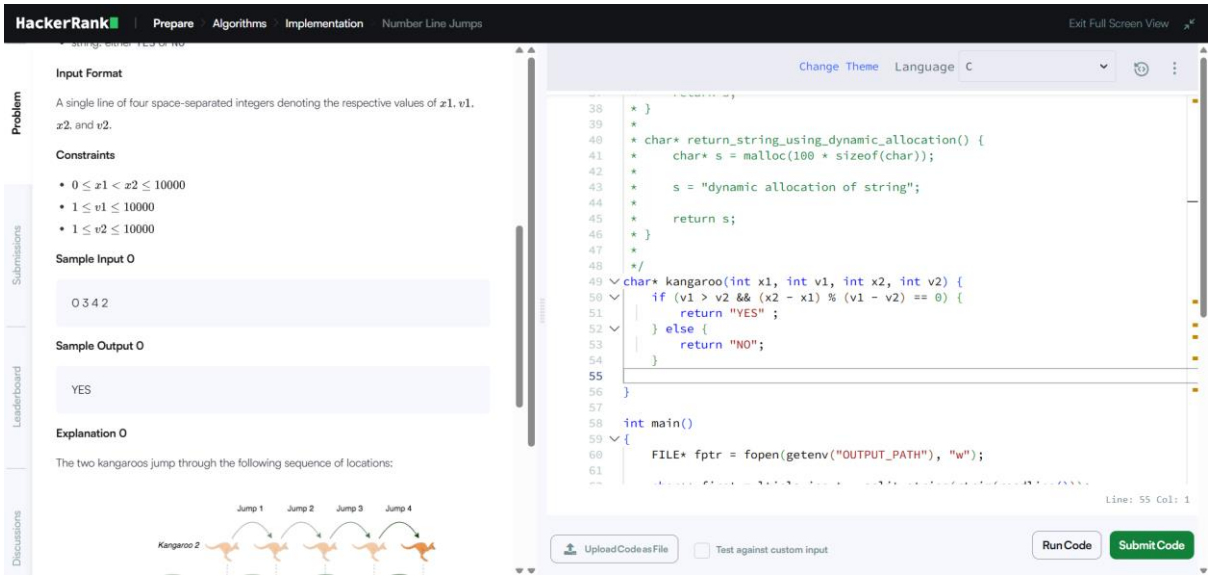
HackerRank
Prepare
Algorithms
Implementation
Number Line Jumps
Exit Full Screen View
Problem
Submissions
Leaderboard
Discussions
Input Format
A single line of four space-separated integers denoting the respective values of $x1$, $v1$, $x2$, and $v2$.
Constraints
$0 \leq x1 < x2 \leq 10000$
$1 \leq v1 \leq 10000$
$1 \leq v2 \leq 10000$
Sample Input 0
0 3 4 2
Sample Output 0
YES
Explanation 0
The two kangaroos jump through the following sequence of locations:
Jump 1
Jump 2
Jump 3
Jump 4
Kangaroo 2
Change Theme
Language C
* }
*
* char* return_string_using_dynamic_allocation() {
* char* s = malloc(100 * sizeof(char));
*
* s = "dynamic allocation of string";
*
* return s;
* }
*
*/
char* kangaroo(int x1, int v1, int x2, int v2) {
if (v1 > v2 && (x2 - x1) % (v1 - v2) == 0) {
return "YES" ;
} else {
return "NO";
}
}
int main()
{
FILE* fptr = fopen(getenv("OUTPUT_PATH"), "w");
Line: 55 Col: 1
Upload Code as File
Test against custom input
Run Code
Submit Code

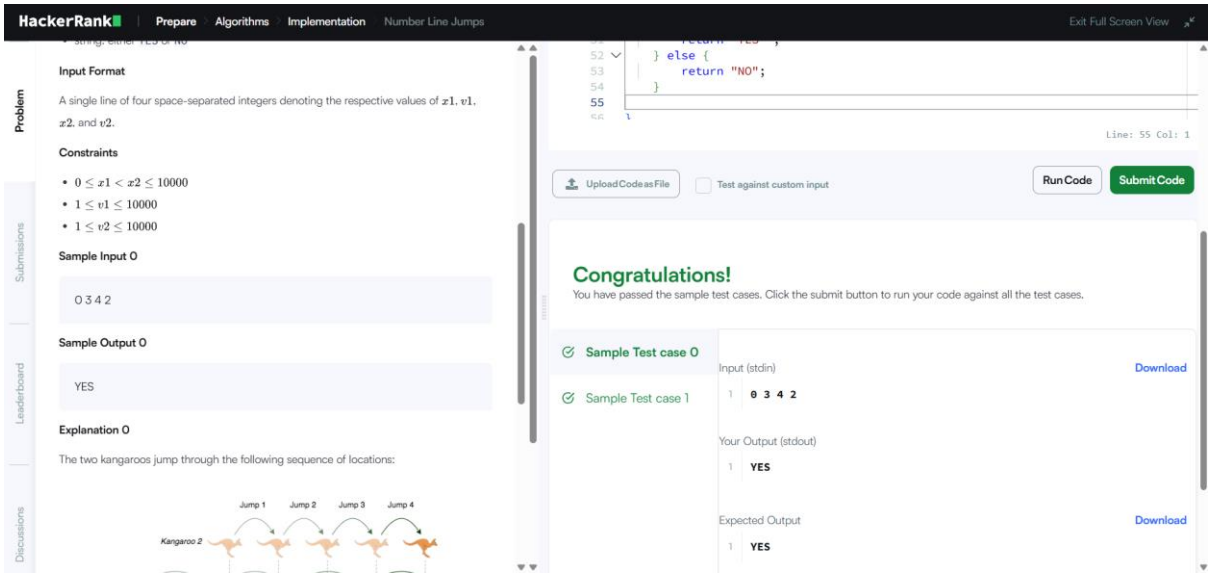
HackerRank
Prepare
Algorithms
Implementation
Number Line Jumps
Exit Full Screen View
Problem
Submissions
Leaderboard
Discussions
Input Format
A single line of four space-separated integers denoting the respective values of $x1$, $v1$, $x2$, and $v2$.
Constraints
$0 \leq x1 < x2 \leq 10000$
$1 \leq v1 \leq 10000$
$1 \leq v2 \leq 10000$
Sample Input 0
0 3 4 2
Sample Output 0
YES
Explanation 0
The two kangaroos jump through the following sequence of locations:
Jump 1
Jump 2
Jump 3
Jump 4
Kangaroo 2
} else {
return "NO";
}
}
Line: 55 Col: 1
Upload Code as File
Test against custom input
Run Code
Submit Code
Congratulations!
You have passed the sample test cases. Click the submit button to run your code against all the test cases.
Sample Test case 0
Sample Test case 1
Input (stdin)
Download
0 3 4 2
Your Output (stdout)
YES
Expected Output
Download
YES