John Romero Programming Proverbs

- John Romero, “The Early Days of Id Software - John Romero @ WeAreDevelopers Conference 2017”

PGE Predictive Game Engine

- purpose
- to provide a simple reference model for predictive collision detection between simple 2D objects
- as an educational experiment

Overview

- a game engine will simulate a 2D environment which understands and polygons, circles
- each circle and polygon can be fixed or unfixed
- each object may be given a mass, velocity and acceleration

Overview

- PGE predicts the time of the next collision
- and draws the world for each frame
- the game engine is a discrete event simulator
  - so an event is either a collision event or a draw frame event

Limitations

- the game engine does not model rotation of objects
- collision response has a fixed inelastic property
  - no provision to have a per object inelastic or elastic property
  - easy to do, just not done yet
- contact resolution code could be improved

Points of note

- designed to be easy to debug
- version 1 used a `macroObject` module which allows more complex objects to be created
- the 2D world is populated via `macroObjects`
- uses a fractional data type for the render and macroObjects
  - allows for much easier debugging

Structure

<table>
<tr><td colspan="3">Snooker (or other game application)</td></tr>
<tr><td>macroObjects</td><td>popWorld</td><td>Matrix3D</td></tr>
<tr><td colspan="2" rowspan="2">twoDsim</td><td>Fractions

Transform3D</td></tr>
<tr><td>Roots</td></tr>
<tr><td colspan="2">deviceGroff</td><td></td></tr>
</table>

Fractions

- `pge` is currently 20244 lines of code
  - `Fractions` accounts for 2973 lines of code

- nevertheless it provides good visual clues when debugging
  - much easier to spot 1/80 than 0.0125

- also knows about certain symbolic values: π, $\sqrt{2}$, $\sqrt{3}$, $\sqrt{6}$
  - symbolic numbers are only resolved once required, thus they might disappear if used together

Example of a debugging session with GDB and PGE

- let us assume there is a bug somewhere in the `macroObject_rotate` function

- an obvious way to solve this is to use `gdb` and single step the function, printing out the variable contents as they are created

Example of a debugging session with GDB and PGE

pge/c/macroObjects.c

```
macroObjects_Macro macroObjects_rotate (macroObjects_Macro m,
                                        Points_Point p, Fractions_Fract r)
{
  PolyMatrix3D_Matrix a;
  PolyMatrix3D_Matrix b;
  PolyMatrix3D_Matrix c;
  PolyMatrix3D_Matrix d;
  macroObjects_Macro n;
  /* a: translate point, p, to the origin.  */
  a = Transform3D_translate (Points_negatePoint (Points_dupPoint (p)));
  b = Transform3D_rotate (r);  /* b: rotate, r, radians.  */
  c = Transform3D_translate (p);  /* c: translate from origin to point, p.  */
  d = PolyMatrix3D_mult3 (a, b, c);  /* d: combine a, b and c transforms.  */
  n = macroObjects_initMacro ();
  n = foreachObject (n, m, d);   /* n: for every object in m transform using, d. */
  return n;
}
```

Example of a debugging session with GDB and PGE

```
$ make npn
$ gdb a.out
(gdb) break macroObjects_rotate
(gdb) run
Breakpoint 24, macroObjects_rotate (m=0x6797f0, p=..., r=0x697ef0) \
at macroObjects.mod:562
(gdb) next
(gdb) print dmat(a)
+-
| 1   0   0
| 0   1   0
| -.1/4   -.1/4   1
+- 1 = void
(gdb) next
```

Example of a debugging session with GDB and PGE

```
(gdb) print dmat(b)
+-
| cos((pi/2))  -1  0
| sin((pi/2))  cos((pi/2))  0
| 0  0  1
+- 2 = void
(gdb) next
(gdb) print dmat(c)
+-
| 1  0  0
| 0  1  0
| .1/4  .1/4  1
+- 3 = void
```

Example of a debugging session with GDB and PGE

```
(gdb) next
(gdb) print dmat(d)
+-
| ((1*((cos((pi/2))*1)+0))+((0*((sin((pi/2))*1)+((cos((pi/2))*0)+0)))+0)) \
  ((1*((cos((pi/2))*0)+-1))+((0*((sin((pi/2))*0)+((cos((pi/2))*1)+0)))+0)) \
  ((1*((cos((pi/2))*0)+0))+((0*((sin((pi/2))*0)+((cos((pi/2))*0)+0)))+0)) \
| ((0*((cos((pi/2))*1)+0))+((1*((sin((pi/2))*1)+((cos((pi/2))*0)+0)))+0)) \
 ((0*((cos((pi/2))*0)+-1))+((1*((sin((pi/2))*0)+((cos((pi/2))*1)+0)))+0)) \
 ((0*((cos((pi/2))*0)+0))+((1*((sin((pi/2))*0)+((cos((pi/2))*0)+0)))+0)) \
| ((-.1/4*((cos((pi/2))*1)+0))+((-.1/4*((sin((pi/2))*1)+((cos((pi/2))*0)+0)))+.1/4)) \
 ((-.1/4*((cos((pi/2))*0)+-1))+((-.1/4*((sin((pi/2))*0)+((cos((pi/2))*1)+0)))+.1/4)) \
 ((-.1/4*((cos((pi/2))*0)+0))+((-.1/4*((sin((pi/2))*0)+((cos((pi/2))*0)+0)))+1))
+- 4 = void
```

Example of a debugging session with GDB and PGE

```
(gdb) print PolyMatrix3D_eval(d)
4 = (POINTER TO RECORD ... END ) 0x6876e0
(gdb) print dmat(d)
+-
| 0   -1   0
| 1   0   0
| 0   .1/2   1
+- 15 = void
```

Performance testing of a game engine

- let us build and run snooker

- ```
  $ make snooker
  gm2 -pg -g -fiso -fextended-opaque -fonlylink snooker.mod
  $ ./a.out
  ```

- notice the `-pg` flag to gm2 (the same applies to gcc)
  ```

Performance testing of a game engine

- this flag turns on runtime profiling

- ```
$ gprof a.out
Flat profile:

Each sample counts as 0.01 seconds.
  %   cumulative   self   self   total
 time   seconds   seconds   calls   s/call   s/call name
 34.22   2.06   2.06   99486   0.00   0.00 initEntity
 30.15   3.88   1.82 132186249   0.00   0.00 Indexing_InBounds
 29.49   5.65   1.78 132183929   0.00   0.00 Indexing_GetIndice
  1.41   5.74   0.09   Indexing_DebugIndex
  1.08   5.80   0.07   2320   0.00   0.00 Indexing_PutIndice
  0.50   5.83   0.03   236365   0.00   0.00 unMarkEntity
```
```

Useful to profile version 1 of PGE

- version 1 was completely implemented in a 3rd generation language (Modula-2)
- we can profile all this code and optimize the hotspots
- as above the `InBounds` was optimized (removed) and this gave a 30% performance improvement
- version 1 did not link up to Pygame and the game had to be written in Modula-2 as well
- version 2 interacts with Pygame and has a Python interface

Structure of version 2 PGE

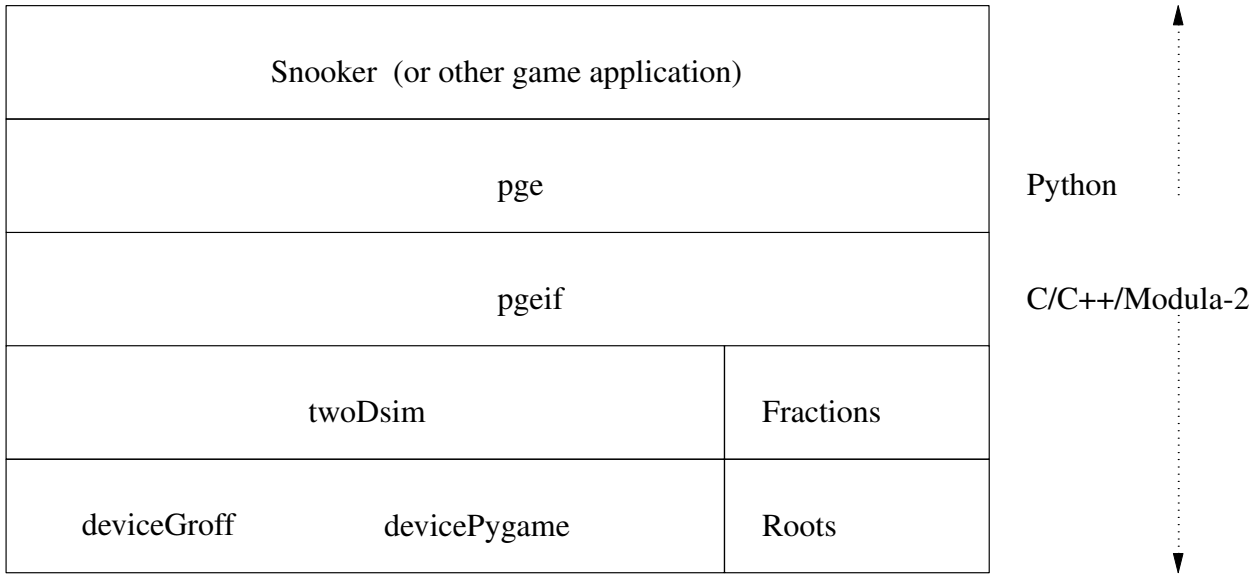

Conclusion to the construction of version 2 of PGE

- implemented in Modula-2, C, C++ and Python
- the Modula-2 code is translated into C or C++ code
  - the translated code conforms to GNU coding standards and is very neatly formatted
- the Python interface documentation ⟨`http://floppsie.comp.glam.ac.uk/Southwales/gaius/pge/homepage.html`⟩ is available on line

Obtaining and building pge for the coursework

- you can either obtain pge from the debian package - or from the git repository
  - I'd advise the git repository as it will contain very minor incremental improvements

```
$ cd
$ mkdir -p Sandpit
$ cd Sandpit
$ git clone https://github.com/gaiusm/pge
```

Building PGE

- you can build a local copy by:

```
$ cd
$ mkdir -p Sandpit
$ cd Sandpit
$ rm -rf build-pge
$ mkdir build-pge
$ cd build-pge
$ ../pge/configure --prefix=$HOME/opt --enable-langc
$ make
```

Testing your local copy of PGE

```
$ cd
$ cd Sandpit/build-pge
$ ./localrun.sh ../pge/examples/breakout/breakout.py
```