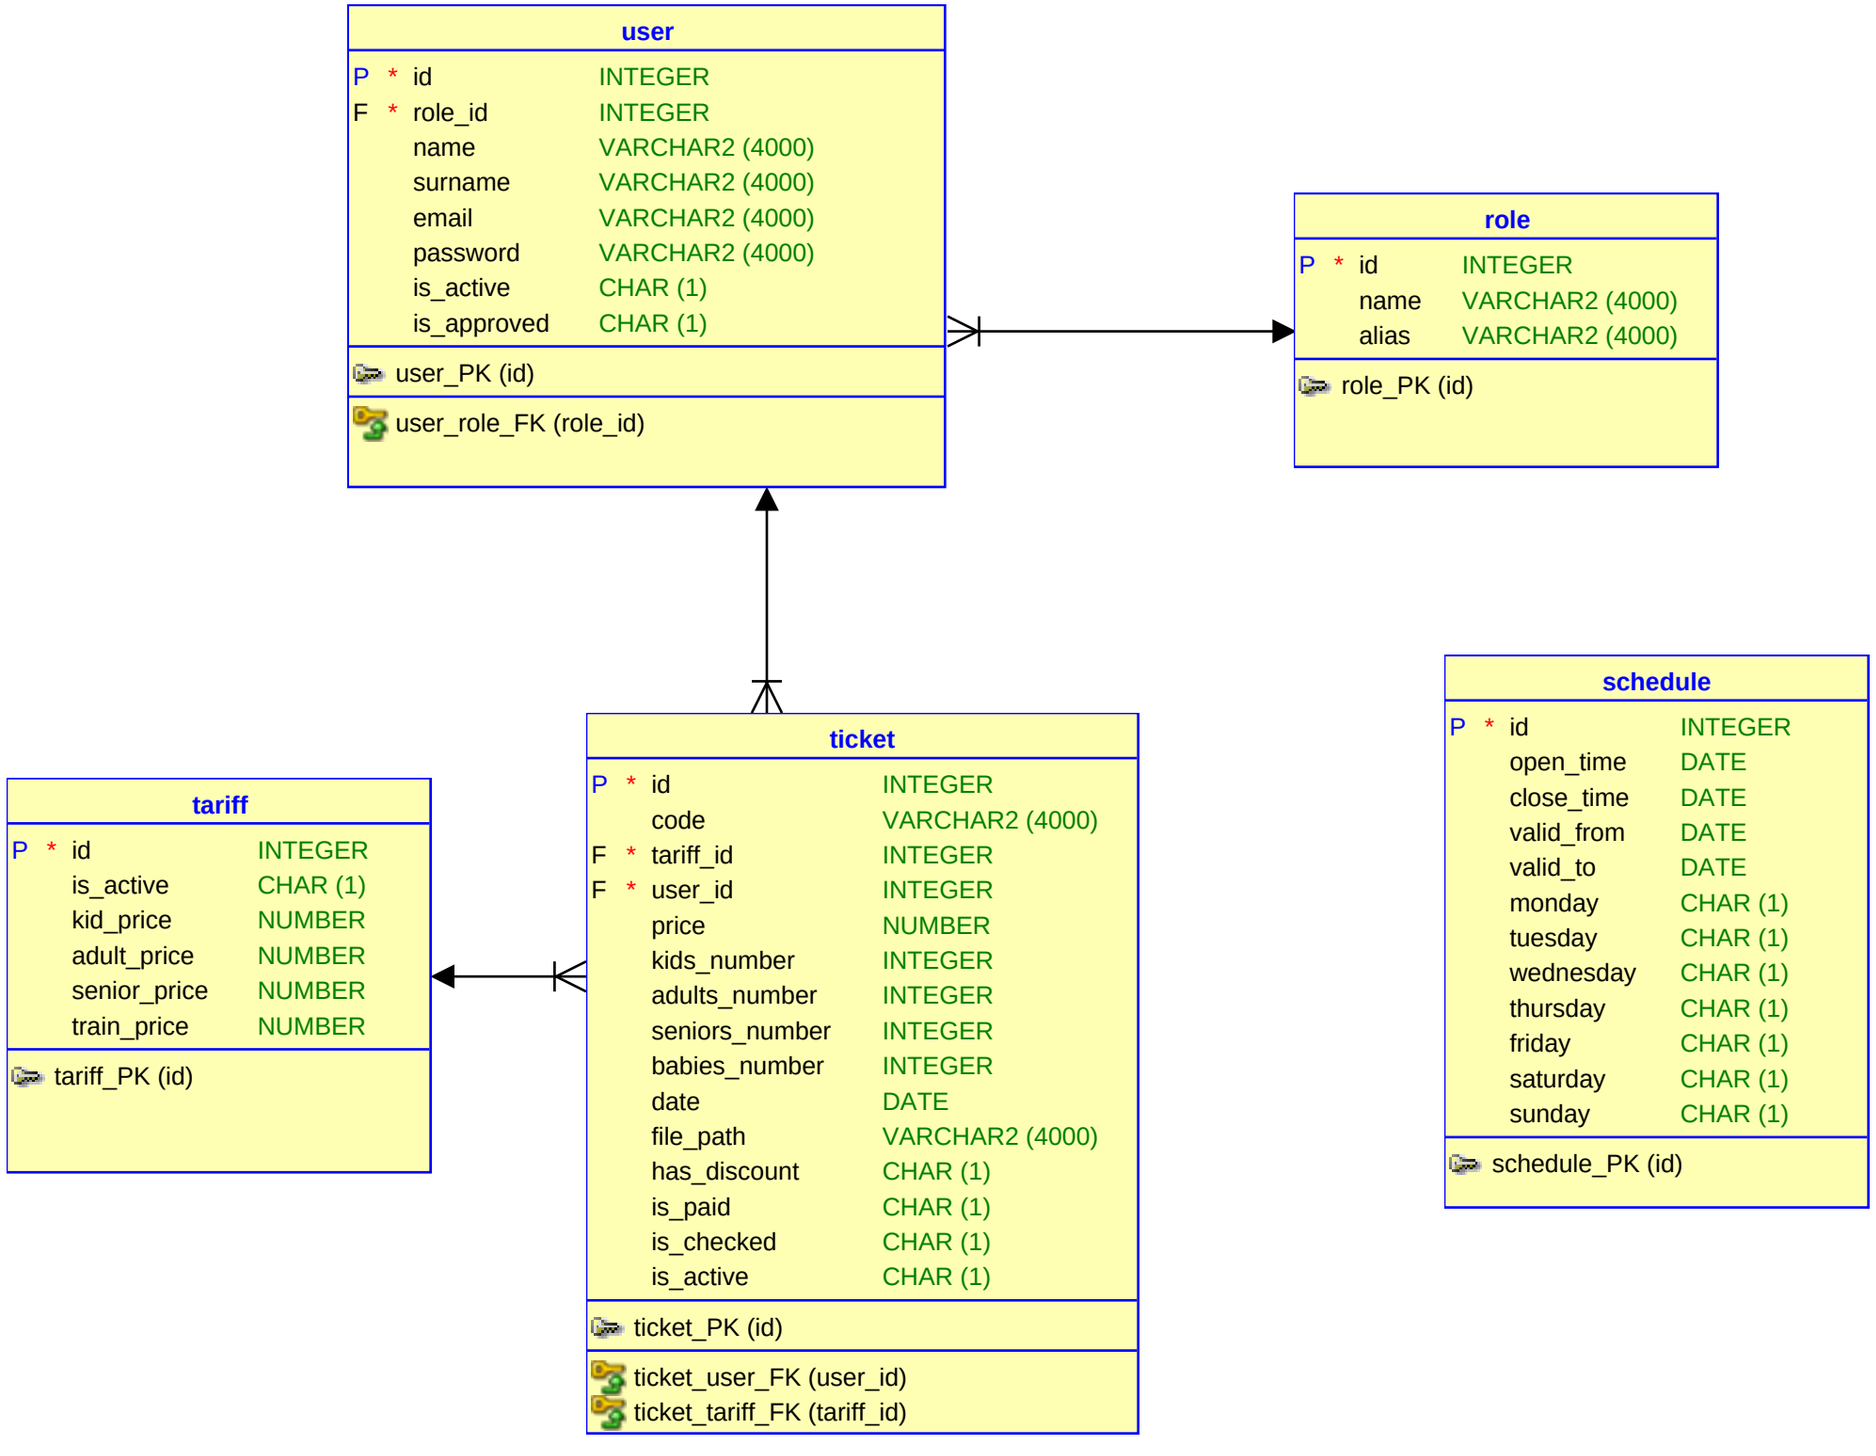
user
P * id INTEGER
F * role_id INTEGER
name VARCHAR2 (4000)
surname VARCHAR2 (4000)
email VARCHAR2 (4000)
password VARCHAR2 (4000)
is_active CHAR (1)
is_approved CHAR (1)
user_PK (id)
user_role_FK (role_id)
role
P * id INTEGER
name VARCHAR2 (4000)
alias VARCHAR2 (4000)
role_PK (id)
schedule
P * id INTEGER
open_time DATE
close_time DATE
valid_from DATE
valid_to DATE
monday CHAR (1)
tuesday CHAR (1)
wednesday CHAR (1)
thursday CHAR (1)
friday CHAR (1)
saturday CHAR (1)
sunday CHAR (1)
schedule_PK (id)
ticket
P * id INTEGER
code VARCHAR2 (4000)
F * tariff_id INTEGER
F * user_id INTEGER
price NUMBER
kids_number INTEGER
adults_number INTEGER
seniors_number INTEGER
babies_number INTEGER
date DATE
file_path VARCHAR2 (4000)
has_discount CHAR (1)
is_paid CHAR (1)
is_checked CHAR (1)
is_active CHAR (1)
ticket_PK (id)
ticket_user_FK (user_id)
ticket_tariff_FK (tariff_id)
tariff
P * id INTEGER
is_active CHAR (1)
kid_price NUMBER
adult_price NUMBER
senior_price NUMBER
train_price NUMBER
tariff_PK (id)