


R syntax

Exercise 1

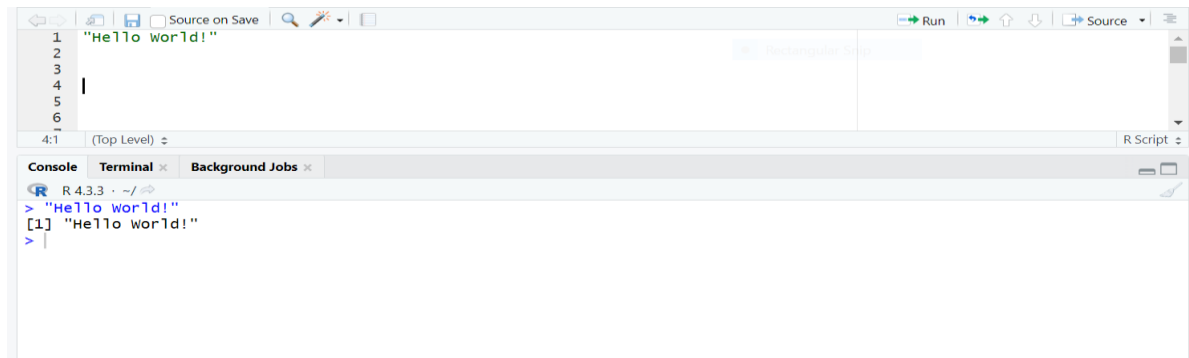


The screenshot shows the RStudio interface. The script editor at the top contains a single line of code: `"Hello world!"`. The console at the bottom shows the execution of this code, resulting in the output `[1] "Hello world!"`.

```
1 "Hello world!"
```

```
> "Hello world!"  
[1] "Hello world!"  
>
```

Exercise 2

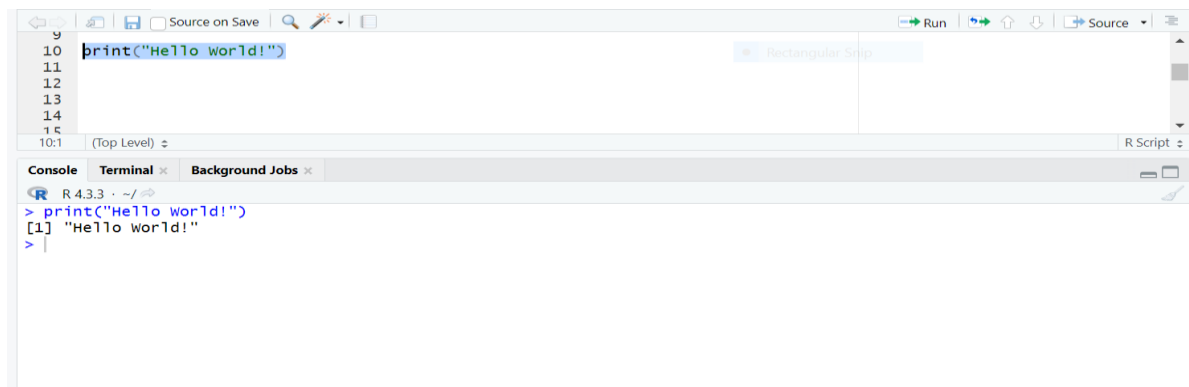


The screenshot shows the RStudio interface. The script editor at the top contains a single line of code: `print("Hello world!")`. The console at the bottom shows the execution of this code, resulting in the output `[1] "Hello world!"`.

```
9  
10 print("Hello world!")  
11  
12  
13  
14  
15
```

```
> print("Hello world!")  
[1] "Hello world!"  
>
```

Exercise 3

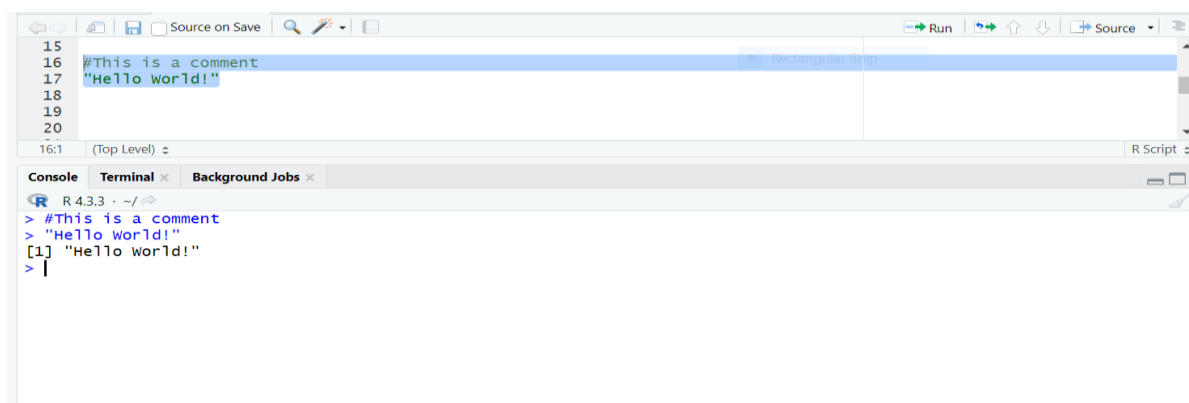


The screenshot shows the RStudio interface. The script editor at the top contains two lines of code: a comment `#This is a comment` followed by `"Hello world!"`. The console at the bottom shows the execution of these lines, resulting in the output `[1] "Hello world!"`.

```
15  
16 #This is a comment  
17 "Hello world!"  
18  
19  
20
```

```
> #This is a comment  
> "Hello world!"  
[1] "Hello world!"  
>
```

R Variables

Exercise 1

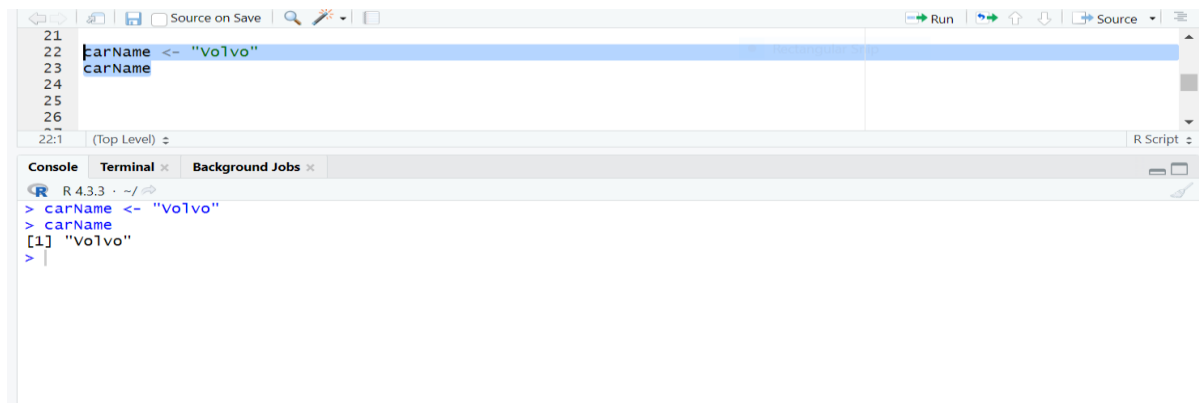


The screenshot shows the R Studio interface. The script editor at the top contains the following code:

```
21  
22 carName <- "Volvo"  
23 carName  
24  
25  
26
```

The console at the bottom shows the execution of the code:

```
R 4.3.3 ~/  
> carName <- "Volvo"  
> carName  
[1] "Volvo"  
> |
```

Exercise 2

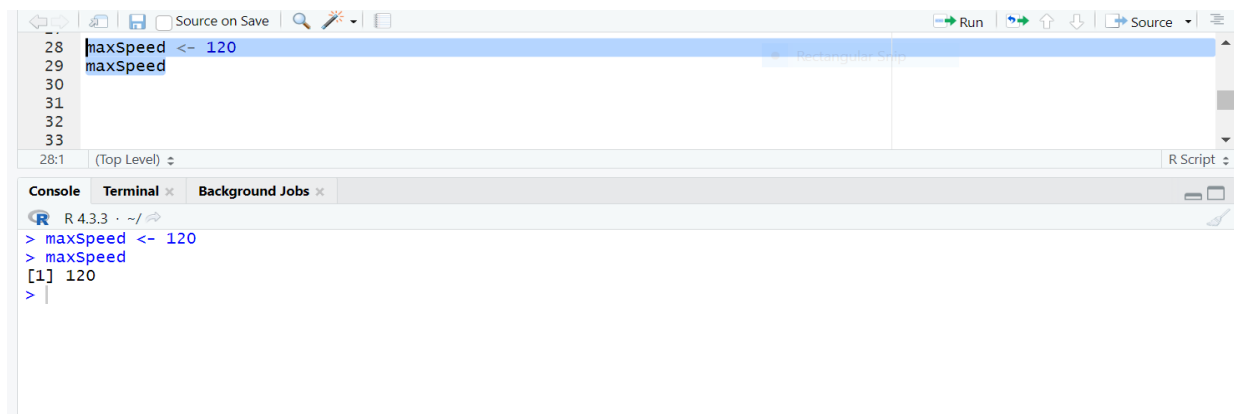


The screenshot shows the R Studio interface. The script editor at the top contains the following code:

```
28 maxSpeed <- 120  
29 maxSpeed  
30  
31  
32  
33
```

The console at the bottom shows the execution of the code:

```
R 4.3.3 ~/  
> maxSpeed <- 120  
> maxSpeed  
[1] 120  
> |
```

Exercise 3

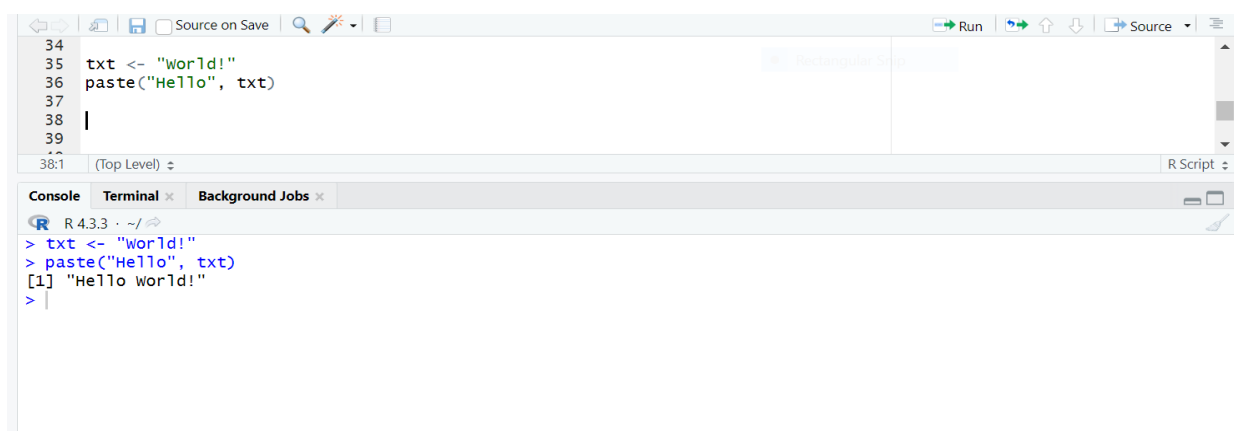


The screenshot shows the R Studio interface. The script editor at the top contains the following code:

```
34  
35 txt <- "World!"  
36 paste("Hello", txt)  
37  
38  
39
```

The console at the bottom shows the execution of the code:

```
R 4.3.3 ~/  
> txt <- "World!"  
> paste("Hello", txt)  
[1] "Hello world!"  
> |
```

Exercise 4

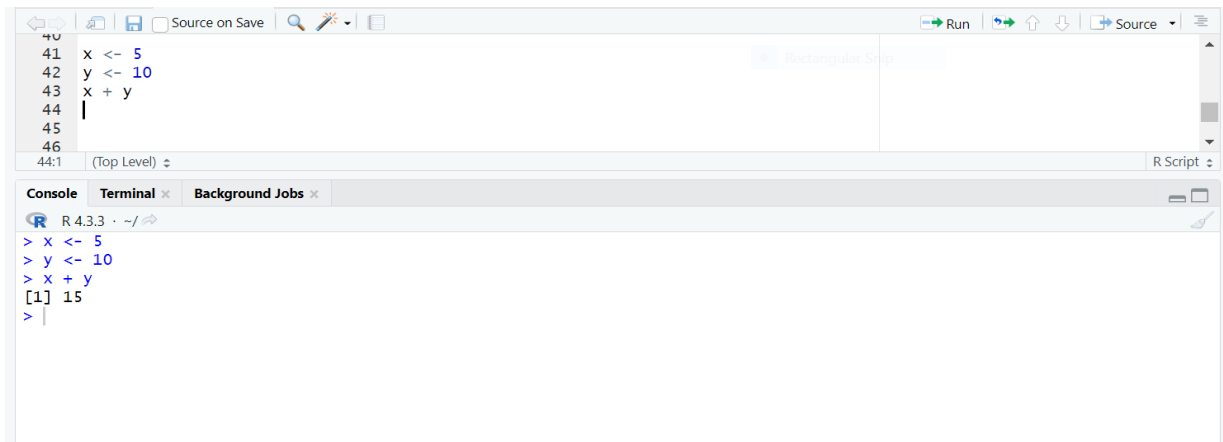


The screenshot shows the RStudio interface. The script editor on the left contains the following code:

```
40  
41 x <- 5  
42 y <- 10  
43 x + y  
44 |  
45  
46  
47 (Top Level)
```

The console on the right shows the output of the code:

```
R 4.3.3 ~/  
> x <- 5  
> y <- 10  
> x + y  
[1] 15  
> |
```

Exercise 5

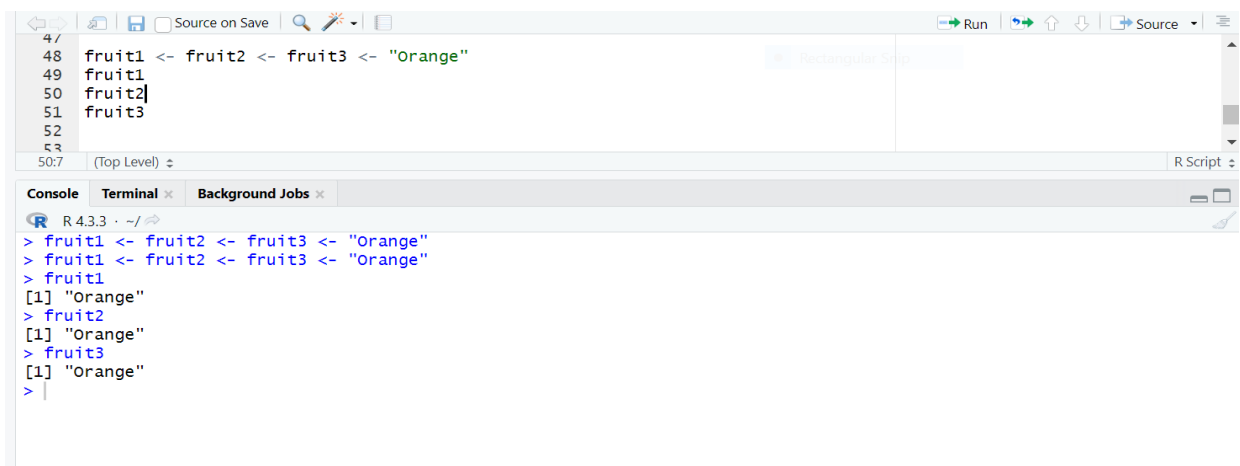

The screenshot shows the RStudio interface. The script editor on the left contains the following code:


```
47  
48 fruit1 <- fruit2 <- fruit3 <- "Orange"  
49 fruit1  
50 fruit2  
51 fruit3  
52  
53  
54 (Top Level)
```

The console on the right shows the output of the code:

```
R 4.3.3 ~/  
> fruit1 <- fruit2 <- fruit3 <- "Orange"  
> fruit1 <- fruit2 <- fruit3 <- "Orange"  
> fruit1  
[1] "Orange"  
> fruit2  
[1] "Orange"  
> fruit3  
[1] "Orange"  
> |
```

R Data Type

Exercise 1

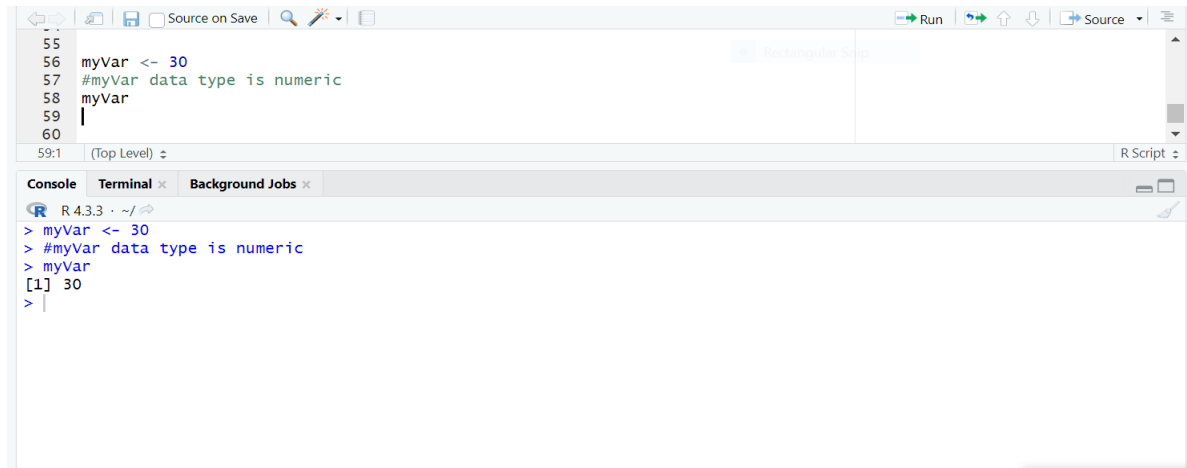


The screenshot shows the RStudio interface. The source editor contains the following R code:

```
55  
56 myVar <- 30  
57 #myVar data type is numeric  
58 myVar  
59 |  
60
```

The console output shows the execution of the code:

```
R 4.3.3 · ~/ |  
> myVar <- 30  
> #myVar data type is numeric  
> myVar  
[1] 30  
> |
```

Exercise 2

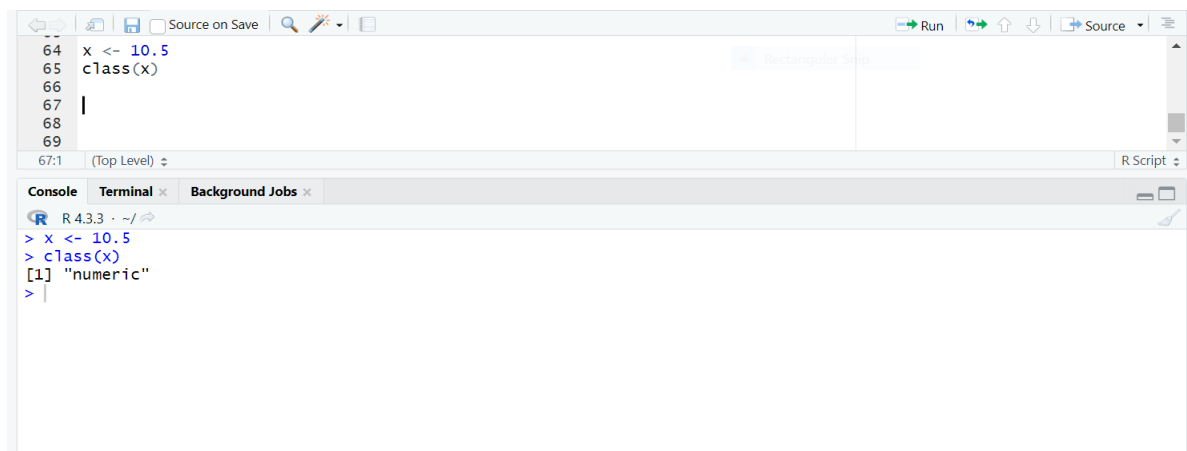

The screenshot shows the RStudio interface. The source editor contains the following R code:

```
64 x <- 10.5  
65 class(x)  
66  
67 |  
68  
69
```

The console output shows the execution of the code:

```
R 4.3.3 · ~/ |  
> x <- 10.5  
> class(x)  
[1] "numeric"  
> |
```