Administrator Guide

Everything the platform administrator does on PhysioGuidance — users, roles, courses, certificates, finance, points, compliance, NELC integration, monitoring, backups, templates, service status, and system settings.

PREPARED FOR

PhysioGuidance Administrators

DATE

2026-08-17

DASHBOARD URL

app.physioguidance.org/en/dashboard/admin

PHYSIOGUIDANCE

Riyadh · Saudi Arabia
me-central2 · GCP Cloud Run

Table of contents

1. How to read this guide
2. ADMIN and SUPER_ADMIN — the role split
3. The admin sidebar at a glance
4. Dashboard — the operational cockpit
    - 4.1 KPI cards
    - 4.2 Platform analytics widget
    - 4.3 Finance summary widget
    - 4.4 NELC compliance overview
    - 4.5 Recent points widget
    - 4.6 Alerts and activity sidebar
    - 4.7 Support snapshot, security snapshot and user management widgets
    - 4.8 Sidebar profile card
5. Users — the identity workbench
    - 5.1 The list and filters
    - 5.2 Creating a user
    - 5.3 Editing a user
    - 5.4 Suspend and reactivate
    - 5.5 Delete
    - 5.6 Resend invite
    - 5.7 Roles per user
    - 5.8 Trusted devices modal
    - 5.9 Export CSV
6. Role Requests — the trainer application queue
    - 6.1 List and status badges
    - 6.2 Applicant detail view
    - 6.3 Approve, reject, request more info
    - 6.4 Blocked national IDs
7. Support — the six-tab console
    - 7.1 Overview tab
    - 7.2 Tickets tab
    - 7.3 Supervisors tab
    - 7.4 Team Requests tab

- 7.5 Help Center tab
- 7.6 Settings tab
- 7.7 Macros, tag rules, audit trail and retention

8. Looped In — the admin's own inbox
9. Courses — full lifecycle authority
    - 9.1 Course list
    - 9.2 Course detail workspace
    - 9.3 Activation, deactivation and completion
    - 9.4 End, cancel and reschedule
    - 9.5 Edit, request changes, duplicate, assign instructor
    - 9.6 Delete with impact preview
    - 9.7 Enrolments — manual add and remove
    - 9.8 Modules and materials
    - 9.9 Reviews screen
    - 9.10 Assessment submissions screen
10. Certificates — the manual approval queue
    - 10.1 What certificates actually are
    - 10.2 Filters, search and manager picker
    - 10.3 Approve, reject, hold, revoke
    - 10.4 Batch operations
    - 10.5 Downloads and languages
    - 10.6 Issue new
    - 10.7 Audit fields
11. Points — the seven-tab loyalty engine
    - 11.1 Rules
    - 11.2 Config
    - 11.3 Courses (redemption enable)
    - 11.4 Rewards
    - 11.5 Grants
    - 11.6 Course Redemptions
    - 11.7 History
12. Finance — the eleven-tab treasury
    - 12.1 Overview
    - 12.2 Payments and force-status
    - 12.3 Invoices

    - 12.4 Refunds and force-approve
    - 12.5 Bank Transfers
    - 12.6 Discounts
    - 12.7 Reconciliation
    - 12.8 Escalations — a dedicated workspace
    - 12.9 Reports
    - 12.10 Audit Log
    - 12.11 Settings — refund policy, tax, VAT, gateways
13. Reports — five categories and scheduled exports
14. Compliance — NELC scorecards for courses and virtual classes
15. NELC Integration — the xAPI control panel
    - 15.1 LRS mode
    - 15.2 Config and stats
    - 15.3 Statement log
    - 15.4 Retry, test connection and manual triggers
16. Logs — audit, violations and alerts
17. Security — sessions, logins and suspicious IPs
18. Monitoring — services, jobs and infrastructure
19. Templates — email and WhatsApp copy
20. Settings — four tabs and eleven sub-tabs
    - 20.1 Platform > General
    - 20.2 Platform > Localization
    - 20.3 Security > Authentication
    - 20.4 Security > My Security
    - 20.5 Communications > Notifications
    - 20.6 System > Payments
    - 20.7 System > Integrations
    - 20.8 System > Backups
    - 20.9 System > Error Monitoring
    - 20.10 System > Service Status
    - 20.11 System > Maintenance
21. Roles & Permissions — the roles workbench
22. Frequently asked questions
23. Endpoints reference
24. Where to look next

1. How to read this guide

This guide describes every capability the administrator has today across the seventeen sidebar sections of the admin dashboard. Every action described is backed by a real API endpoint in production, in the me-central2 (Dammam) GCP region, on Cloud Run.

The guide is written to be read in two ways. Read it end to end once to build a full map of the admin surface. Then keep it beside you as a reference when a specific screen is open — every section is self-contained and can be consumed on its own.

Wherever a screen or a button is described, the underlying HTTP endpoint appears in `monospace` so the developer team or an auditor can trace the action back to the source. A consolidated endpoints reference appears at the end of the guide.


The tone is confident and instructional. Where a workflow is manual, that is called out plainly so no one assumes an automated behaviour that is not there. Certificates in particular are a manual approval workflow and are described that way throughout.

---

2. ADMIN and SUPER_ADMIN — the role split

Every capability described in this guide is available to both ADMIN and SUPER_ADMIN users. The admin dashboard sidebar labels the account as "Super Admin" for clarity, but the backend does not gate any admin dashboard endpoint on SUPER_ADMIN with one specific exception.

Only one action is SUPER_ADMIN exclusive: setting the NELC LRS mode. The endpoint `POST /admin/integrations/nelc/mode` is guarded to SUPER_ADMIN because switching the Learning Record Store between environments touches the accredited compliance pipeline. Every other endpoint gated `@Roles('ADMIN', 'SUPER_ADMIN')` is callable by both.

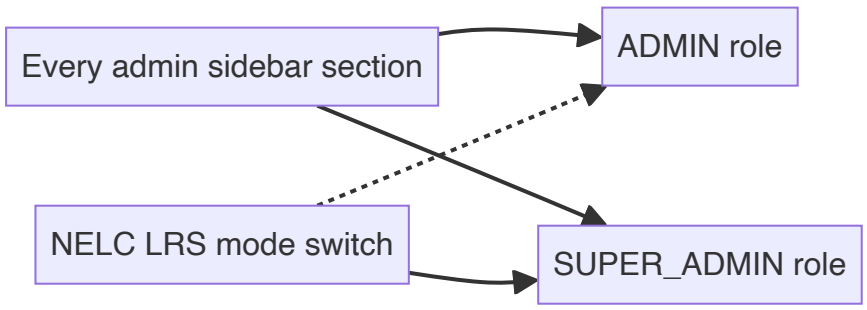

In practice this means the two roles are equivalent for daily operations. The distinction exists so a single account holder — typically the platform owner — can retain the authority to change the accredited LRS wiring, while daily admin work can be delegated without exposing that one lever.

---

3. The admin sidebar at a glance


The admin dashboard lives at `app.physioguidance.org/en/dashboard/admin`. The sidebar shows seventeen sections in this exact order:

#	Section	What lives here
1	**Dashboard**	KPIs, funnel, finance, NELC, points, alerts and activity
2	**Users**	Every user account with create, edit, roles and trusted devices
3	**Role Requests**	The trainer application queue with approve, reject and request-info
4	**Support**	Six tabs covering tickets, supervisors, help center, macros and audit
5	**Looped In**	The admin's own looped-in ticket inbox
6	**Courses**	Full course lifecycle with cancel, complete, reschedule, delete, duplicate
7	**Certificates**	The manual approval queue with hold, revoke and batch actions
8	**Points**	Seven tabs covering rules, rewards, grants, redemptions, history
9	**Finance**	Eleven tabs covering payments, refunds, escalations, audit and gateways
10	**Reports**	Five report categories plus scheduled exports
11	**Compliance**	NELC scorecards for courses and virtual classes
12	**NELC Integration**	The xAPI statement log, retry, LRS mode and manual triggers
13	**Logs**	Audit log, violations and admin alerts
14	**Security**	Sessions, failed logins, suspicious IPs
15	**Monitoring**	Services health, jobs, Cloud SQL, Redis, buckets, uptime
16	**Templates**	Email and WhatsApp templates by event and locale
17	**Settings**	Four tabs and eleven sub-tabs of platform configuration

A separate Roles & Permissions page exists at `/dashboard/admin/roles` and is described in section 21. It is not surfaced in the sidebar because the enforcement model in production today is at the role level via the `@Roles(...)` guards. The page and its endpoints are operational for building and editing role definitions.

4. Dashboard — the operational cockpit

The dashboard at `/dashboard/admin` is the landing page. It is composed of three KPI tiles, four analytical widgets, and a right rail with alerts and secondary widgets. Two dashboard endpoints back it: `GET /admin/stats/dashboard` for the tiles and analytical panels, and `GET /admin/notifications?limit=20` for the live alerts stream.

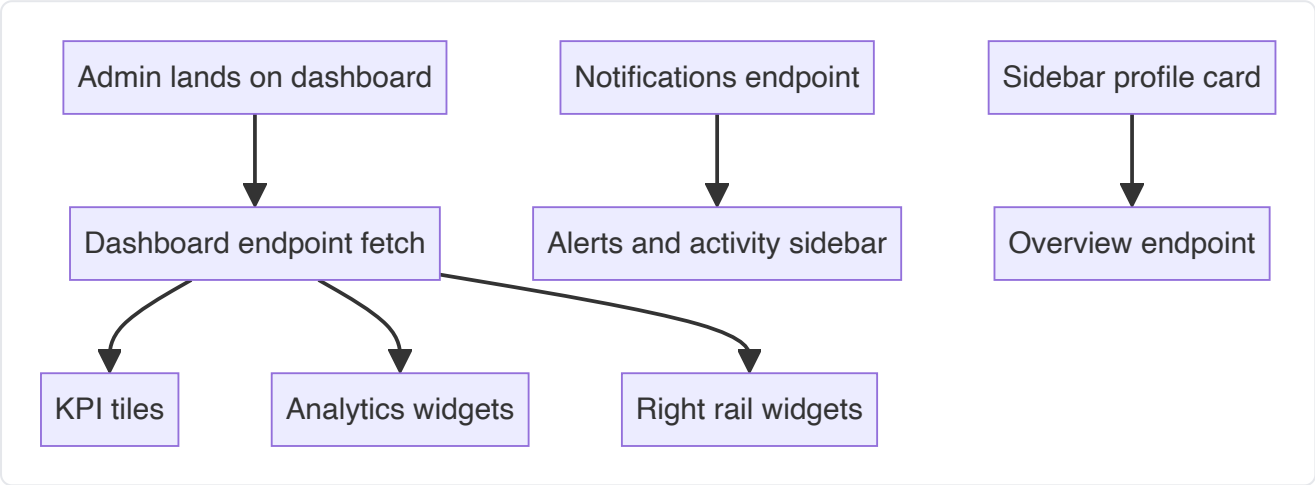

4.1 KPI cards

The dashboard shows exactly three KPI tiles at the top:

Tile	What it shows
Active Users	Total active users on the platform with a trend arrow versus the prior period
Revenue MTD	Gross revenue for the current calendar month with a trend arrow
Pending Applications	The count of role requests awaiting review. Clicking the tile navigates to `/role-requests`

NELC compliance percentage, certificate throughput, 2FA adoption, active session count and new-users over seven days all appear in downstream widgets rather than in the top KPI row. This keeps the top of the screen focused on the three metrics that require an admin decision.

4.2 Platform analytics widget

The `PlatformAnalyticsWidget` draws the platform funnel:

- Visitor to signup
- Signup to enrolment
- Enrolment to paid
- Paid to completion

Each stage shows the raw count and the conversion percentage into the next stage. This is the fastest way to see whether the acquisition or activation part of the business needs attention.

4.3 Finance summary widget

The `FinanceSummaryWidget` shows gross revenue, net revenue after refunds and fees, total refunds, and chargebacks for the current period. It breaks totals down per gateway so Moyasar, Tamara, Tabby and Bank Transfer are visible side by side. Any anomaly at gateway level flags itself immediately.

4.4 NELC compliance overview

The `NELCComplianceOverviewWidget` splits the catalog into three buckets — passed, in review, failed — with counts and percentages. This is the daily temperature check for accreditation health. Clicking through leads to the Compliance section (section 14).

4.5 Recent points widget

The `RecentPointsWidget` streams the most recent points transactions — grants, deductions, earn events, redemptions — so an admin can spot unusual movement without opening the Points section.

4.6 Alerts and activity sidebar

The `AlertsActivitySidebar` on the right rail combines two live streams. The alerts stream comes from `GET /admin/notifications` and shows admin notifications with an unread count. The activity stream shows the most recent audit events across the platform. Each item is timestamped and links to the relevant record.

4.7 Support snapshot, security snapshot and user management widgets

Three secondary widgets round out the right rail:

- **SupportSnapshotWidget** — open tickets, SLA breaches, unassigned queue depth.
- **SecuritySnapshotWidget** — active sessions, failed login count over the last window, and 2FA adoption percentage.
- **UserManagementWidget** — new users over the last seven days plus quick links to Users and Role Requests.

4.8 Sidebar profile card

The sidebar carries a small profile card that shows Users, Courses and Active-Today counts. It is served by `GET /admin/stats/overview` and refreshes independently of the main dashboard, so the card stays lightweight across every page.

---

5. Users — the identity workbench

The Users page at `/dashboard/admin/users` is where every user account on the platform is created, edited, suspended, deleted, or given a new role. It is the single source of truth for identity.

5.1 The list and filters

The list is served by `GET /auth/users`. Above the table is a search box that matches on name and email, a role filter, and a status filter.

The role filter enumerates every role in the system:

- **ADMIN**
- **MANAGER**
- **INSTRUCTOR**
- **TEACHING_ASSISTANT**
- **STUDENT**
- **FINANCE**
- **SUPPORT**

The status filter shows active, suspended and unverified.

Each row shows the user's name, primary email, active role, verification status and last-seen timestamp. Clicking any row opens a side panel with the full user detail and the action buttons described below.

5.2 Creating a user

The Create User button opens a form that posts to `POST /auth/users`. The form collects name, email, phone, active role and — if the role is SUPPORT — the sub-role and supervisor. On successful creation the new user is emailed a welcome and verification link.

5.3 Editing a user

Every field on a user record can be edited from the detail panel. The Save button issues `PATCH /auth/users/:id`. The most operational fields are:

- **activeRole** — swap the primary role for the account. The old role is preserved as an assigned role unless removed explicitly.
- **isVerified** — flip email verification on or off. Useful when a user cannot receive the verification email and has proven identity another way.
- **isActive** — suspend or reactivate the account. Suspended users cannot sign in and existing sessions are invalidated on the next request.

5.4 Suspend and reactivate

Suspending an account is a state flip on the same edit endpoint. Set `isActive` to false and the account is immediately suspended. Set it back to true to reactivate. There is no separate suspend endpoint; the state model keeps a single field authoritative.

5.5 Delete

The Delete User button issues `DELETE /auth/users/:id`. Deletion is protected behind a typed-title confirmation to prevent accidental removal. Related records are handled per PDPL rules — payments and audit logs are preserved, personal data is scrubbed.

5.6 Resend invite

The Resend Invite button posts to `POST /auth/users/:id/resend-invite`. This regenerates the invite email for a newly created user who has not yet completed sign-up. The endpoint is throttled to five sends per sixty seconds per target user, so accidental double clicks or a support agent trying twice in a row do not spam the inbox.

5.7 Roles per user

The Roles tab on the user detail panel lists every role currently assigned to the account. Two endpoints back the tab:

- `POST /auth/users/:id/roles` — assign an additional role. For SUPPORT this exposes the sub-role and supervisor picker slots so the account is placed in the correct support team.
- `DELETE /auth/users/:id/roles/:role` — remove a role. The active role cannot be removed; if the active role is the last one on the account, change the active role first.

5.8 Trusted devices modal

The Trusted Devices modal is opened from the user detail panel. It shows every remembered device for the user, with device fingerprint, last-used timestamp, IP and location.

Three actions are available:

- `GET /auth/users/:id/trusted-devices` — list.
- `DELETE /auth/users/:id/trusted-devices/:deviceId` — revoke a single device.
- `DELETE /auth/users/:id/trusted-devices` — revoke every device on the account.

Revoking any device also force-logs-out the user on that device. Revoking every device is the correct response to a suspected credential compromise.

5.9 Export CSV

The Export CSV button issues `GET /auth/users/export`. The download is UTF-8 with a byte order mark so Arabic names render correctly in Excel and Numbers. Every column visible in the table plus the assigned-roles array is included.

6. Role Requests — the trainer application queue

The Role Requests page at `/dashboard/admin/role-requests` is the review queue for every prospective trainer. The public-facing application lives on the marketing site and is described in the instructor guide. This section describes what the admin sees.

6.1 List and status badges

The list is served by `GET /role-requests`. Above the table are status count pills:

- **PENDING** — awaiting first review.
- **APPROVED** — approved; the applicant account exists.
- **REJECTED** — closed with a reason.
- **MORE_INFO** — sent back for the applicant to resubmit.


A search box matches on name, email and national ID. A status filter narrows the list. The sidebar badge on the Role Requests sidebar item shows the pending count so an admin can see queue depth from any page.

6.2 Applicant detail view

Clicking a row opens `/dashboard/admin/role-requests/:id`. The detail view shows the full applicant profile:

- Professional information — SCFHS number, specialty, years of experience.
- Uploaded documents — CV, SCFHS verification letter, qualification certificate, photo, bank details, national ID.
- Submission timeline — every state change with timestamp and actor.

Every uploaded document is inline-viewable. Bank details are masked by default with a click-to-reveal for auditability.

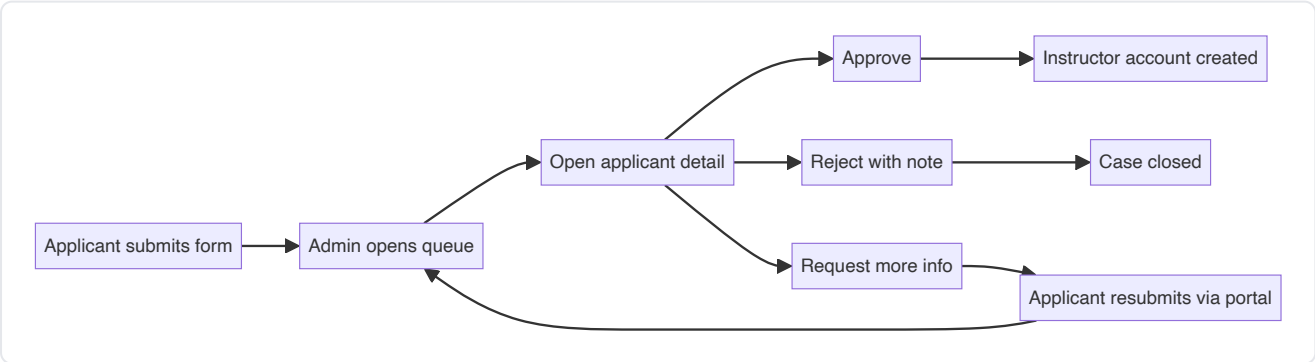

6.3 Approve, reject, request more info

Three actions live at the top of the detail view.

- **Approve** — `PATCH /role-requests/:id/approve`. Seeds a new user row from `role_requests.profileData` and emails the applicant a first-login link.
- **Reject with note** — `PATCH /role-requests/:id/reject`. A reason field is mandatory and is stored on the audit record and emailed to the applicant.
- **Request more info** — `PATCH /role-requests/:id/request-info`. Alongside the free-text note, the admin selects one or more structured missing-requirement codes. This lets the applicant see exactly which document to supply on resubmission.

The structured missing-requirement codes are:

Code	Meaning
CV_MISSING	Curriculum vitae not attached or unreadable
SCFHS_VERIFICATION	SCFHS verification letter absent or invalid
QUALIFICATION_DOC	Qualification certificate missing
PHOTO	Profile photo missing or does not meet the requirements
BANK_DETAILS	Bank details absent or partial
NATIONAL_ID	National ID copy missing or unreadable
OTHER	Any requirement not covered by a specific code, described in the note

6.4 Blocked national IDs

The Blocked National IDs panel at the bottom of the queue is the deny-list for prior rejections that should not be re-accepted. Four endpoints back the panel:

- `POST /role-requests/blocked-national-ids` — add an entry with a reason.
- `GET /role-requests/blocked-national-ids` — list every blocked entry.
- `DELETE /role-requests/blocked-national-ids/:nationalId` — remove an entry when the block is lifted.

Adding a national ID here rejects any subsequent trainer application from that ID with a clear message. Only ADMIN and SUPER_ADMIN can operate the panel.

---

7. Support — the six-tab console

The Support section at `/dashboard/admin/support` is the platform-wide help-desk console. It surfaces every ticket, every supervisor, every macro, and every help-center article in one place. It has six tabs.

7.1 Overview tab

The Overview tab is the health snapshot. Two endpoints feed it:

- `GET /tickets/admin/support-kpis` — total open tickets, SLA breach count, average first-response time, average resolution time, CSAT.
- `GET /tickets/admin/support-overview` — additional operational figures such as queue depth per category and the distribution of ticket age.

7.2 Tickets tab

The Tickets tab shows every ticket on the platform in one table, regardless of team or supervisor. Filters cover status, priority, category, tag and assignee. Clicking a row opens `/dashboard/admin/support/tickets/[id]`, which is the full ticket workspace with:

- The conversation thread including comments and internal notes.
- Attachments and evidence.
- Actions — put on hold, escalate, transfer to another agent, resolve, close, add or remove collaborators, apply a macro, add or remove tags.
- The audit trail for every status change on that ticket.

The Tickets tab is the admin's escape hatch when a ticket needs oversight beyond the assigned agent or supervisor.

7.3 Supervisors tab

The Supervisors tab lists every SUPPORT supervisor on the platform with performance figures for the last seven days, thirty days, or a custom range:

- Team size — number of agents reporting.
- Active tickets — currently open across the team.
- CSAT — customer satisfaction average.
- SLA breaches — count of tickets that missed SLA.

The tab is served by `GET /tickets/admin/supervisors`. A row click opens `/dashboard/admin/support/supervisors/[id]` with the full drilldown for that team.

Above the table sits the **OrphanAgentsBanner**. Any support agent whose supervisor is missing or removed is flagged here. Two endpoints back the banner:

- `GET /tickets/team/orphans` — list orphan agents.
- `POST /tickets/team/orphans/bulk-assign` — attach the orphan agents to a chosen supervisor in one action.

This keeps every agent inside a chain of responsibility.

7.4 Team Requests tab

The Team Requests tab is the approval queue for supervisor-level operations that require admin sign-off. The sidebar badge on the Support item shows the pending count from `GET /tickets/team/requests/pending-count`.

Three admin actions live here:

- **Decision** — `POST /tickets/team/requests/:id/decision`. Approve or reject a pending team request with a reason.
- **Reassign supervisor** — `POST /tickets/team/reassign`. Move an agent from one supervisor to another.
- **Delete member** — `DELETE /tickets/team/members/:agentId`. Remove an agent from a team; usually followed by role removal on the Users page.

7.5 Help Center tab

The Help Center tab reuses the `HelpCenterManager` component. It gives the admin full CRUD over knowledge-base categories and articles, plus an analytics view:

- Article search analytics — top search terms with hit count.
- Most-viewed articles ranked by views over the period.
- Low-engagement articles — high views with low positive feedback — flagged for revision.

This is where the public FAQ that students, instructors and course managers see is written and maintained.

7.6 Settings tab

The Settings tab is the configuration workbench for the help-desk itself:

- **Auto-Assignment** — the rules that route a new ticket to an agent.
- **Business Hours** — the calendar that drives SLA clocks. Only ADMIN and SUPER_ADMIN can write business hours. Supervisors and agents can read them but not edit them.
- **SLA Policies** — response and resolution targets per category and priority.
- **Ticket Categories** — the category tree with per-category defaults.

7.7 Macros, tag rules, audit trail and retention

Outside the six tabs, the Support section also exposes:

- **Macros** — canned responses and bulk actions with a title, body and optional side effects such as setting priority or tag.
- **Tag rules** — automatic tagging of tickets that match a rule.
- **Audit trail** — `GET /tickets/admin/audit-trail`. Every state change, every ownership transfer, every macro application.
- **Retention configuration** — how long resolved tickets are kept before archival.

---

8. Looped In — the admin's own inbox

The Looped In section at `/dashboard/admin/support/looped-in` is the admin's personal inbox of tickets they have been added to as a collaborator. It is backed by `GET /tickets/looped-in`.

This is separate from the main Tickets tab because an admin is usually a collaborator, not the owner. Looped In gives a focused list of exactly the tickets that were routed to the admin's attention — for example a policy call from a supervisor, or a compliance sign-off on a refund case.

---

9. Courses — full lifecycle authority


The Courses section at `/dashboard/admin/courses` is where the admin exercises full lifecycle authority over every course on the platform. Unlike managers who see only their own catalog, admins see every course. The workspace reuses `CourseManagerCourseDetailContent` with `role=admin`, which unlocks the additional actions described below.

9.1 Course list

The list view supports search across title, code and instructor, plus filters on delivery type, status, category and instructor. Bulk selection enables bulk feature-toggle and bulk deactivate. Each row shows the current lifecycle state and links straight to the detail workspace.

9.2 Course detail workspace

The detail workspace is the same one Course Managers use, with the admin-only actions surfaced at the top. Every panel — modules, materials, enrolments, reviews, assessment submissions, sessions, TAs — is fully editable.

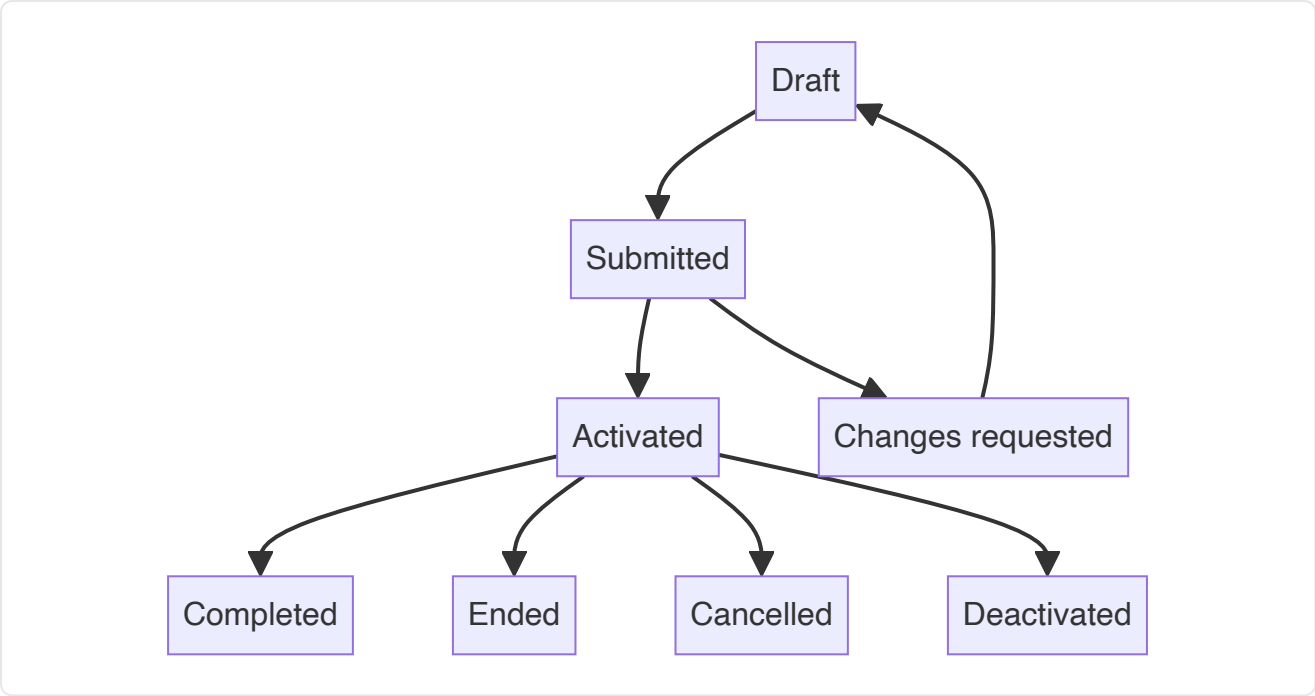

9.3 Activation, deactivation and completion

Three lifecycle actions govern the run-time of a course:

- **Activate** — `POST /courses/:id/activate`. Publishes a submitted course. Enrolment opens.
- **Deactivate** — `POST /courses/:id/deactivate`. Hides the course from the catalog without ending it.
- **Mark Completed** — `POST /courses/:id/complete`. Closes the course and releases certificates and CME hours for eligible students.

9.4 End, cancel and reschedule

Three lifecycle actions govern course termination and change:

- **End Course** — `POST /courses/:id/end`. A soft closure, with an optional reason.
- **Cancel Course** — `POST /courses/:id/cancel`. A mandatory reason is required. Enrolments are dropped and refunds are queued into the finance pipeline.
- **Reschedule** — `POST /courses/:id/reschedule`. Accepts a reason plus new start and end dates. Students are notified.

9.5 Edit, request changes, duplicate, assign instructor

Four editorial actions surface at the top of the detail workspace:

- **Edit** — `PATCH /courses/:id`. In-place edit of any field.
- **Request Changes** — `POST /courses/:id/request-changes`. Sends a submitted course back to the instructor with a note.
- **Duplicate** — `POST /courses/:id/duplicate`. Clones a course structure for a new cohort.

- **Assign instructor** — `PATCH /courses/:id/assign-instructor`. Change the primary instructor.

9.6 Delete with impact preview

Deleting a course is a two-step operation designed to prevent surprise data loss.

- **Delete-impact preview** — `GET /courses/:id/delete-impact`. Returns the counts of enrolments, sessions, materials, assessment submissions and certificates that will be affected.
- **Delete** — `DELETE /courses/:id`. Requires the admin to type the course title and provide a reason. Executes only after the confirmation.

The **Feature toggle** — `PATCH /courses/:id/feature` — pins or unpins a course on the marketing pages.

9.7 Enrolments — manual add and remove

The Enrolments panel lists every enrolled student for the course. Two admin operations sit above the list:

- **Manual-enroll** — add a student directly, useful for corporate placements or edge cases where checkout is not the right path.
- **Unenroll** — remove a student; the refund side of the equation is handled separately in Finance.

9.8 Modules and materials

The modules panel is fully editable from the admin view. The admin can add, reorder or remove modules; upload or replace materials; and edit metadata. This is the same interface described in the instructor and course manager guides, with admin authority over every course, not only assigned ones.

9.9 Reviews screen

The Reviews screen for a course exposes moderation for both course ratings and instructor ratings. The admin can approve, reject, publish or delete any rating. This is where inappropriate feedback is handled or an out-of-context review is removed after complaint.

9.10 Assessment submissions screen

The Assessment Submissions screen shows every attempt for every quiz and assignment in the course, with grades, item analysis and difficulty distribution. Three admin operations sit on each submission:

- **Flag** — `POST /assessments/:id/flag`. Mark a submission for further review, for example if plagiarism is suspected.
- **Override** — `POST /assessments/:id/override`. Change a grade with an audited reason.
- **Allow-retake** — `POST /assessments/:id/allow-retake`. Grant the student another attempt where policy permits.

---


10. Certificates — the manual approval queue

The Certificates section at `/dashboard/admin/certificates` is one of the most important pages in this guide, and one that is often misunderstood. This section makes the truth of the workflow explicit.

10.1 What certificates actually are

Certificates are a manual workflow. A student earns eligibility by completing a course, meeting attendance and grade thresholds, then requests a certificate. That request lands in a triage queue. An INSTRUCTOR, MANAGER or ADMIN reviews the request and decides whether to approve, reject, hold or revoke it. Only on approval is the PDF generated and released.

This is a deliberate design. Every certificate carries CME hours and can be presented to SCFHS, so the human sign-off is the accountability gate before the artefact exists.

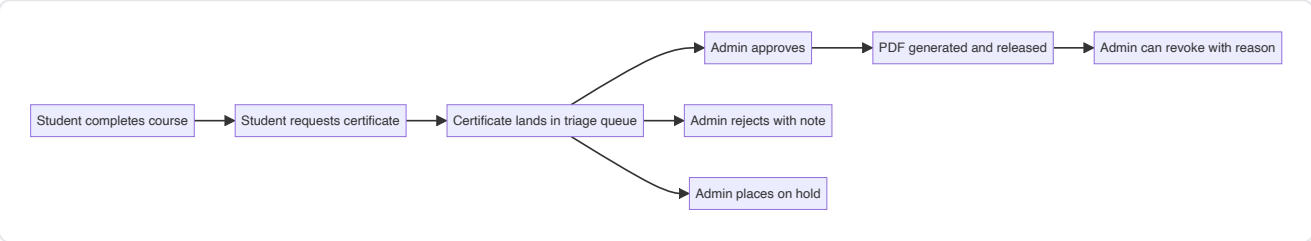

10.2 Filters, search and manager picker

The admin view of the queue adds three columns and one filter that a manager does not see:

- **Manager picker** — a filter served by `adminApi.getManagersList()` that scopes the queue to a chosen manager. Useful when triaging a specific team.
- **Server-side search** — matches across every manager's certificates, not just the current user's.
- **Approver name** — an extra audit column showing who approved a given cert.
- **Revoker and reason** — extra audit columns showing who revoked a cert and why.

Every other control on the queue behaves the same as the manager and instructor views.

10.3 Approve, reject, hold, revoke

Four per-certificate actions cover the lifecycle:

- **Approve** — `PATCH /certificates/:id/approve`. Generates the PDF and marks the certificate issued.
- **Reject with note** — `PATCH /certificates/:id/reject`. Closes the request with a reason.
- **Hold** — `PATCH /certificates/:id/hold`. Freezes the request pending investigation without rejecting outright.
- **Revoke with reason** — `PATCH /certificates/:id/revoke`. Withdraws an already-approved certificate. Only ADMIN and MANAGER can revoke.

10.4 Batch operations

Two batch endpoints handle bulk work when a cohort finishes together:

- **Batch approve or reject** — `POST /certificates/batch`. Take a set of ids and one decision.
- **Batch download ZIP** — `POST /certificates/batch-download`. Produces a single ZIP of the PDFs, useful for handing over to a corporate sponsor.

10.5 Downloads and languages

- **Download single** — `GET /certificates/:id/download?lang=en` or `?lang=ar`. Serves the English or Arabic version of the PDF.

Certificates are always issued in both languages. Whichever version is downloaded is served on demand from storage.

10.6 Issue new

The Issue New button opens a form that posts to `POST /certificates`. This creates a certificate request outside the normal student-driven flow. It is used when a corporate or offline programme needs a certificate produced manually for a verified attendee.

10.7 Audit fields

Every certificate row carries the full audit trail:

- `approver`, `approvedAt`
- `rejector`, `rejectedAt`, `rejectionReason`
- `revoker`, `revokedAt`, `revocationReason`

These fields are visible in the admin view and are exported with the audit log when SCFHS or a partner asks for evidence.

---

11. Points — the seven-tab loyalty engine

The Points section at `/dashboard/admin/points` runs the platform's loyalty engine. Points are earned by defined actions, redeemed for course unlocks and rewards, and administered here across seven tabs.

11.1 Rules

The Rules tab lists every earn rule with a per-rule toggle. Two endpoints back the tab:

- `GET /admin/points/rules` — list rules with earn amounts.
- `PATCH /admin/points/rules/:ruleKey` — enable or disable a single rule, or edit its earn amount.

11.2 Config

The Config tab holds the global economy dials:

- The SAR-per-point conversion rate.
- The minimum redemption threshold.
- The maximum redemption percentage of a course price.
- Point expiry policy.

Two endpoints back the tab: `GET /admin/points/config` and `PATCH /admin/points/config`. Changes take effect immediately.

11.3 Courses (redemption enable)

The Courses tab lists every course and marks which are redeemable with points. Actions:

- `GET /admin/points/courses` — list.
- `PATCH /admin/points/courses/:courseId` — enable and set the point price, or toggle.
- `DELETE /admin/points/courses/:courseId` — remove from the redeemable set.
- `POST /admin/points/courses/bulk-enable` — enable in bulk, useful when a new price tier is rolled out.
- `GET /admin/points/webinar-sessions` — the same view for webinar sessions.

11.4 Rewards

The Rewards tab is the catalog of physical and digital rewards students can redeem for. Full CRUD sits here:

- `GET/POST/PATCH/DELETE /admin/points/rewards[/:id]` — manage catalog entries.

Below the catalog is the redemption workbench:

- `GET /admin/points/redemptions` — list pending, in-progress and completed reward redemptions.
- `POST /admin/points/redemptions/:id/transition` — move a redemption through its status states, for example from queued to shipped to delivered.

11.5 Grants

The Grants tab lets the admin credit or debit a specific student's balance with a reason. Two endpoints:

- `GET /admin/points/users/search` — search students to pick the target account.
- `POST /admin/points/grant` — grant or deduct with a reason, which is stored on the ledger.

11.6 Course Redemptions

The Course Redemptions tab is the audit of every course unlock paid for with points. Filters on date, course and student. Two endpoints:

- `GET /admin/points/course-redemptions` — the paginated view.
- `GET /admin/points/course-redemptions/export.csv` — the export for offline analysis.

11.7 History

The History tab shows any user's balance and full ledger. Two endpoints:

- `GET /admin/points/users/:userId/balance` — current balance and lifetime totals.
- `GET /admin/points/users/:userId/transactions` — every earn, grant, deduct and redemption for that user.

---

12. Finance — the eleven-tab treasury

The Finance section at `/dashboard/admin/finance` is the treasury of the platform. The interface is composed of eleven tabs served by the `AdminFinanceShell`, which reuses the finance-dashboard components with `ActorRoleProvider role="admin"` so admin-only super-actions become visible on top of the FINANCE-role capabilities.

Every super-action described below requires a reason of at least five characters. The reason is recorded on the audit log and is retrievable per record for the lifetime of the platform.

12.1 Overview


The Overview tab is the top-down summary of the treasury: gross and net revenue, refunds and chargebacks, per-gateway breakdowns, sparklines by day and week. Everything on this tab is read-only; it is the launch pad for the deeper tabs.

12.2 Payments and force-status

The Payments tab is the paginated ledger of every payment attempt on the platform. Filters cover status, gateway, amount range, date, student and course.

Two super-actions live on each payment record:

- **Force payment status** — `POST /admin/finance/payments/:id/force-status`. Sets a payment to a target status when the gateway state and the platform state have drifted. Requires a reason.
- **Replay webhook** — `POST /admin/finance/payments/:id/replay-webhook`. Re-runs the webhook handler for a specific gateway callback, useful when a transient failure caused the original webhook to be missed.
- **Sync from gateway** — `POST /admin/finance/payments/:id/sync-from-gateway`. Fetches the current gateway state and reconciles the platform record to it.

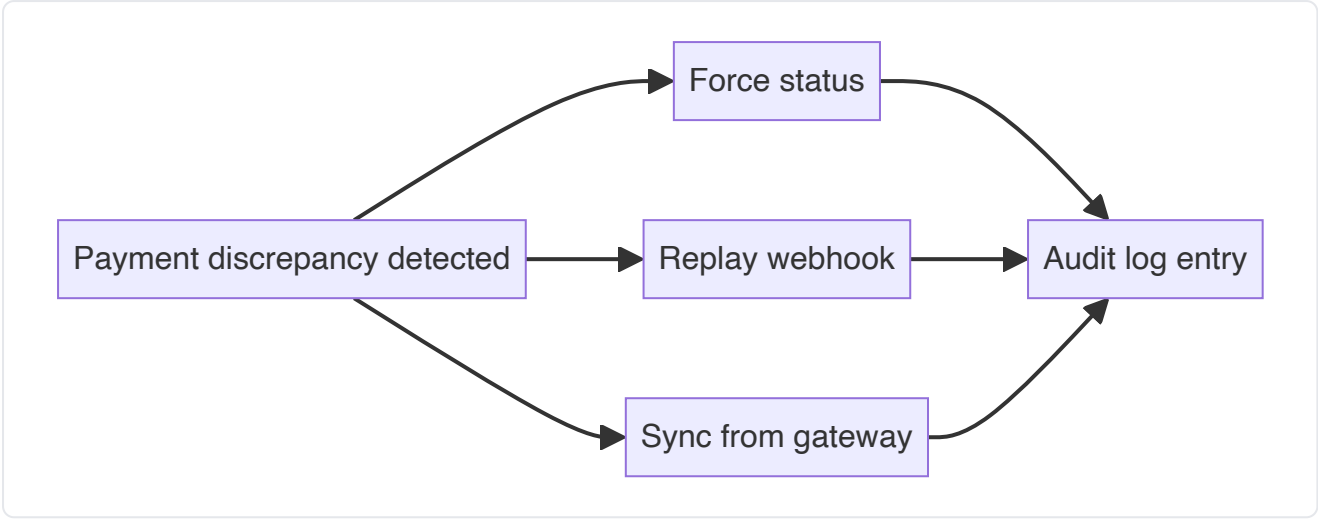

12.3 Invoices

The Invoices tab is the record of every invoice generated. Three super-actions:

- **Force cancel invoice** — `POST /admin/finance/invoices/:id/force-cancel`.
- **Resend invoice email** — `POST /admin/finance/invoices/:id/resend-email`.
- **Regenerate invoice PDF** — `POST /admin/finance/invoices/:id/regenerate-pdf`.

12.4 Refunds and force-approve

The Refunds tab shows every refund request across its lifecycle: requested, approved, processing, completed, failed, denied. FINANCE agents move refunds through the standard states.

One super-action is reserved for ADMIN and SUPER_ADMIN:

- **Force approve refund** — `POST /admin/finance/refunds/:id/force-approve`. Bypasses the standard lifecycle policy. The action is logged with the reason and stamped with `[ADMIN POLICY BYPASS]` on the audit record so downstream reporting and reviews surface it immediately.

12.5 Bank Transfers

The Bank Transfers tab handles the manual bank-transfer payment method. Admins can review submitted proofs, approve or reject, and mark payments as reconciled once the bank statement confirms the deposit.

12.6 Discounts

The Discounts tab is where coupons are created, edited and expired. Percentage or fixed-amount discounts, per-course or platform-wide, single-use or multi-use, with optional expiry and usage caps.


12.7 Reconciliation

The Reconciliation tab compares gateway settlements to platform records. Discrepancies are surfaced with a suggested next action — replay, force-status, or open an escalation.

12.8 Escalations — a dedicated workspace

Reconciliation escalations have a dedicated workspace at `/dashboard/admin/finance/escalations`, with a per-item view at `/dashboard/admin/finance/escalations/:id`.

Escalations are cases that FINANCE cannot close by themselves — usually because a manual enrollment or refund is needed, or because a supervisor call is required. The admin is the closer of last resort.

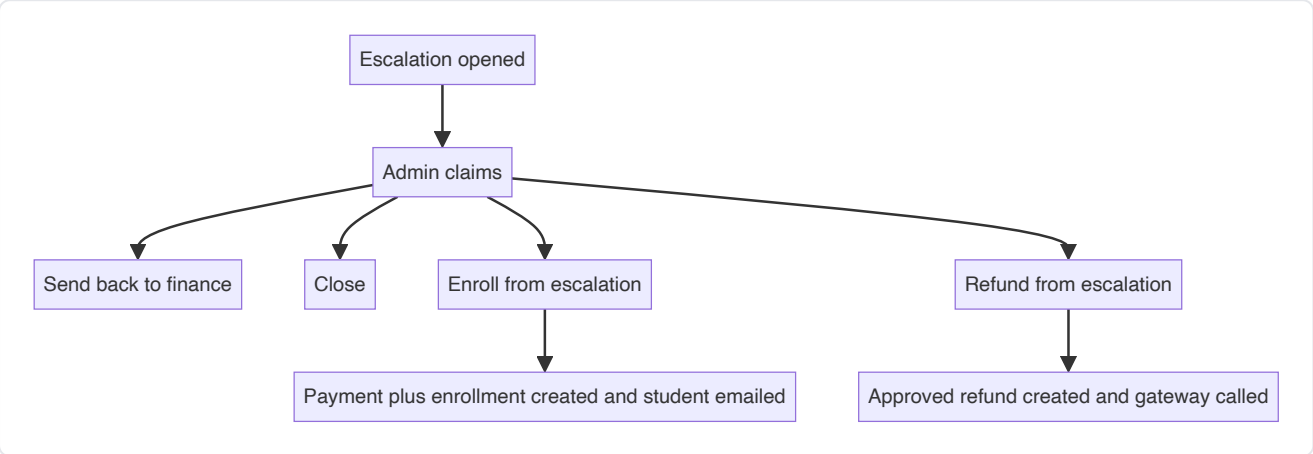

Five admin-only actions live on each escalation:

- **Claim** — `PATCH /escalations/:id/claim`. Takes ownership so no one else edits in parallel.
- **Send back** — `PATCH /escalations/:id/send-back`. Returns to finance with a note.
- **Close** — `PATCH /escalations/:id/close`. Closes the escalation with a resolution note.
- **Enroll from escalation** — `POST /escalations/:id/enroll`. Executes a manual enrollment in a single transaction: creates the payment record, creates the enrollment, and emails the student.
- **Refund from escalation** — `POST /escalations/:id/refund`. Creates an APPROVED refund and calls the gateway. If the gateway call fails, the refund stays APPROVED so retry is possible without losing the approval decision.

12.9 Reports

The Reports tab surfaces the financial report catalog and links to scheduled exports. Full report details are in section 13.

12.10 Audit Log

The Audit Log tab shows every finance-relevant audit event platform-wide. It is served by `GET /audit-logs/finance*`, which is the family of audit endpoints scoped to finance. Every super-action described above appears here with its reason and actor.

12.11 Settings — refund policy, tax, VAT, gateways

The Settings tab is a sub-tabbed workspace:

- **Refund Policy** — the platform's refund windows and eligibility rules.

- **Tax** — the tax model, including which categories are taxed.
- **VAT Treatments** — VAT treatments per invoice type.
- **Gateways** — runtime health per gateway, plus admin-only gateway operations:
  - Runtime status — `GET /admin/finance/gateways/runtime-status`.
  - Test each gateway — `POST /admin/finance/gateways/test`.
  - Refresh cache — `POST /admin/finance/gateways/refresh-cache`.

Gateway test uses the same credentials the platform uses at runtime and returns a live probe result, so a mis-configured secret is caught before it hits a customer transaction.

---

13. Reports — five categories and scheduled exports

The Reports section at `/dashboard/admin/reports` catalogs every report the platform can generate. Reports are organised into five categories:

Category	Reports available
Attendance	Attendance report served by `GET /instructor/reports/attendance`
CME/CPD	CME eligibility report served by `GET /instructor/reports/cme-eligibility`
Students	Enrollment, completion, satisfaction, gradebook
Registration	Webinar registrants, course catalog, instructor performance, NELC compliance
Financial	Revenue — ADMIN and MANAGER only

Every report can be downloaded as CSV, Excel or PDF. Column selection and filter presets are saved per user.

Scheduled reports let a report be run automatically and emailed. Four endpoints back the scheduler:

- `GET /instructor/reports/scheduled` — list the admin's scheduled reports.
- `POST /instructor/reports/scheduled` — create a new schedule.
- `PATCH /instructor/reports/scheduled/:id` — edit.
- `DELETE /instructor/reports/scheduled/:id` — remove.

Ad-hoc table exports use `POST /instructor/reports/export-table` and are available across most tables in the admin dashboard.

The endpoints reuse the `/instructor/reports` prefix because the underlying reporting engine is shared across INSTRUCTOR, TA, ADMIN and MANAGER. Access is gated on the caller's role, not on the URL prefix. The revenue report is the sole ADMIN and MANAGER only entry.

---

14. Compliance — NELC scorecards for courses and virtual classes

The Compliance section at `/dashboard/admin/compliance` is the accreditation dashboard. It has two tabs.

Courses compliance loads from `nelcComplianceApi.getAllCoursesCompliance()` and shows every course with a NELC compliance state. The KPI tiles at the top of the page show:

- Total courses in scope.
- Compliant count.
- In-review count.
- Failed count.
- Virtual-at-risk count — the number of virtual classes whose delivery data flags a compliance risk.

The table columns per course are pass/review/fail pill, delivery type filter, compliance score, and instructor. Clicking a row opens the `ComplianceScorecardDrawer`, which itemises every NELC rule check with its evidence and remediation guidance where applicable.

Virtual classes compliance loads from `nelcComplianceApi.getVirtualClassCompliance()` and shows the same treatment applied to live and virtual delivery — attendance, session duration, recording availability and other virtual-specific checks.

CSV export is available at the top of the page via `nelcComplianceApi.downloadCsvReport()`. The export is used both for internal review and for SCFHS partner submissions.

---

15. NELC Integration — the xAPI control panel

The NELC Integration section at `/dashboard/admin/integrations/nelc` is the largest single admin page — 72 KB of components — because it exposes the entire xAPI pipeline used to feed the accredited Learning Record Store. The backend is `xapi.admin.controller.ts` mounted at `/admin/integrations/nelc`.

15.1 LRS mode

The LRS mode is the environment switch for the Learning Record Store. Two endpoints:

- `GET /admin/integrations/nelc/mode` — read the current mode. Available to ADMIN and SUPER_ADMIN.
- `POST /admin/integrations/nelc/mode` — set the mode. **SUPER_ADMIN only.**

This is the single SUPER_ADMIN-only lever in the admin dashboard. It exists because switching the LRS environment reshapes the flow of accredited data and needs the highest level of authority.

15.2 Config and stats

Two read-only panels sit alongside the mode switch:

- **Config** — `GET /admin/integrations/nelc/config`. The current wiring: endpoint URL, key id (masked), timeout settings, retry policy.
- **Stats** — `GET /admin/integrations/nelc/stats`. Statement counts broken down by status (sent, pending, failed) and by verb (registered, initialized, watched, completed, attempted, rated, earned, progressed, attended, logged-in).

15.3 Statement log


The Statement Log is the full xAPI stream. Filters cover status and verb, matching the categories in the stats panel. Two endpoints:

- `GET /admin/integrations/nelc/log` — paginated list.
- `GET /admin/integrations/nelc/log/:id` — full statement detail with the raw JSON body.

15.4 Retry, test connection and manual triggers

Four actions live at the bottom of the panel:

- **Retry a failed statement** — `POST /admin/integrations/nelc/retry/:id`. Re-sends the statement.
- **Test connection** — `POST /admin/integrations/nelc/test-connection`. Runs a live handshake against the configured LRS.
- **Manual trigger joined** — `POST /admin/integrations/nelc/trigger/joined`. Fires a joined-event for a session, used to correct a missed live emission.
- **Manual trigger left** — `POST /admin/integrations/nelc/trigger/left`. The paired action for left-events.

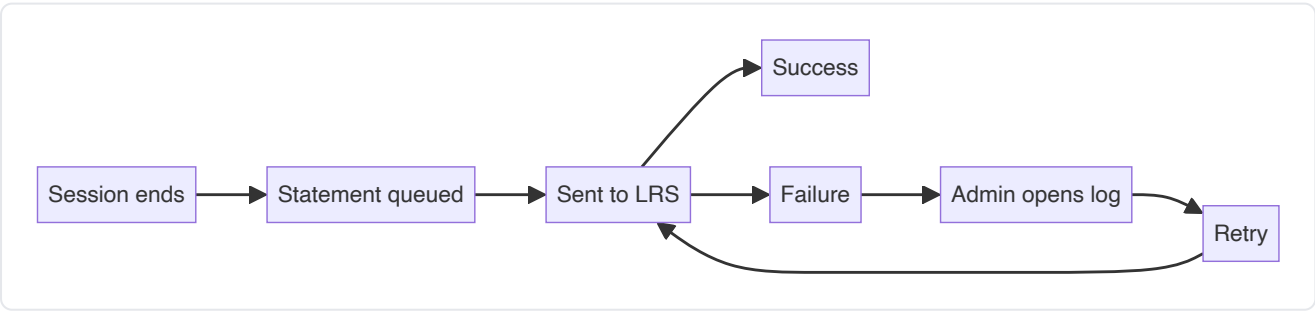

16. Logs — audit, violations and alerts

The Logs section at `/dashboard/admin/logs` has three tabs.

Audit tab is the general platform-wide audit log. Filters cover user, action, entity type and date range. Three endpoints back the tab:

- `GET /audit-logs/admin/list` — paginated list.
- `GET /audit-logs/admin/distinct` — distinct values for filter dropdowns.
- `GET /audit-logs/admin/export` — CSV export.

Violations tab is a curated subset of the NELC audit stream, restricted to the events that matter for compliance oversight:

- ComplianceCheckFailed
- EnrollmentLimitEnforced
- AttendanceUnverifiedConfirmed
- CertificateRevoked
- CourseChangesRequested

The data source is `GET /nelc-audit` with a client-side filter applied for the five event types above.

Alerts tab is the admin notification stream with an unread badge in the sidebar. Endpoints:

- `GET /admin/notifications` — list.
- `GET /admin/notifications/counts` — the badge count.
- `PATCH /admin/notifications/:id/read` — mark one as read.
- `POST /admin/notifications/mark-all-read` — mark every alert as read.

---

17. Security — sessions, logins and suspicious IPs

The Security section at `/dashboard/admin/security` has four tabs backed by the security family of endpoints.

Overview tab surfaces four KPIs from the security section of `GET /admin/stats/dashboard`:

- Failed logins over the current window.
- Total IPs currently blocked.
- Active user sessions across the platform.
- 2FA adoption percentage across active accounts.

Sessions tab shows every active session platform-wide, paginated, with a search box. It is served by `GET /admin/stats/security/sessions`. A per-row Revoke action opens a confirmation dialog and drops the session immediately.

Logins tab shows failed logins over the last twenty-four hours from `GET /admin/stats/security/failed-logins`, with user, IP, user-agent and reason columns.

IPs tab shows the suspicious IP list from `GET /admin/stats/security/suspicious-ips`, with a hit count and last-seen timestamp per IP.

---

18. Monitoring — services, jobs and infrastructure

The Monitoring section at `/dashboard/admin/monitoring` is the live-ops dashboard. It auto-refreshes every thirty seconds and includes an **Open in GCP** link that jumps to `console.cloud.google.com/monitoring/dashboards` for deeper investigation.

The page is split into four sections:

- **Services health** — `GET /admin/monitoring/services-health`. Per-service status, latency and error rate.
- **Uptime and jobs summary** — `GET /admin/monitoring/uptime` plus a jobs summary.
- **Background jobs table** — `GET /admin/monitoring/jobs-stats`. Per-queue depth, throughput, failure count.
- **Resource pressure** — three endpoints:
  - `GET /admin/monitoring/cloudsql` — Cloud SQL CPU, memory, connections.
  - `GET /admin/monitoring/redis` — Redis memory and command rate.
  - `GET /admin/monitoring/buckets` — Cloud Storage bucket sizes and operations.

When the admin's GCP scopes have not yet been granted, an IAM-grant-pending banner appears at the top of the page with the exact scopes required. The service data continues to work; only the deeper GCP-console links require the scope.

---


19. Templates — email and WhatsApp copy

The Templates section at `/dashboard/admin/templates` is the copy workbench for every automated message the platform sends. The per-template editor lives at `/dashboard/admin/templates/[eventKey]/[templateLocale]`. The backend is `templates.controller.ts` mounted at `/admin/templates`.

Categories covered:

- account
- applications
- enrollment
- sessions
- webinars
- certificates
- assessments
- content
- whatsapp

Locales covered: `en` and `ar`.

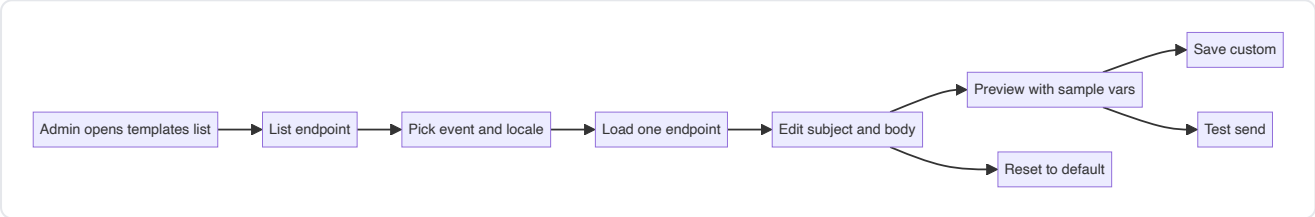

Five actions per template:

- **List** — `GET /admin/templates`. Every template with an "edited" badge to show which have been customised versus the shipped defaults.
- **Load one** — `GET /admin/templates/:eventKey/:locale`.
- **Save custom** — `PUT /admin/templates/:eventKey/:locale`.
- **Reset to default** — `DELETE /admin/templates/:eventKey/:locale`. The customisation is dropped and the platform-wide default takes over.
- **Test send** — `POST /admin/templates/:eventKey/:locale/test-send`. Sends the rendered message to an address chosen by the admin.

The editor has three fields — subject, HTML body and WhatsApp body — and a live preview with sample variables so the admin can see the final render before saving.

---

20. Settings — four tabs and eleven sub-tabs

The Settings section at `/dashboard/admin/settings` is the platform configuration workbench. It is organised as four main tabs, each with one or more sub-tabs. The backend is `admin-settings.controller.ts` at `/admin/settings`, exposing the pattern `GET /admin/settings/:category` and `PATCH /admin/settings/:category`.

The four main tabs are Platform, Security, Communications and System. The eleven sub-tabs are listed below in reading order.

20.1 Platform > General

The General sub-tab holds the platform's identity:

- Platform name in English and Arabic.
- Contact email.
- Support phone.
- Timezone.
- WhatsApp number, company name, greeting message and typical reply time.

20.2 Platform > Localization

The Localization sub-tab holds language and format settings:

- Default language — `en`, `ar`, or `auto` to follow the browser.
- Allowed languages — which languages the UI exposes at all.
- Date format — `DD-MM-YYYY`, `MM-DD-YYYY` or `YYYY-MM-DD`.
- Number system — western or arabic_indic.

20.3 Security > Authentication

The Authentication sub-tab is the platform-wide authentication policy:

- Session timeout in minutes.
- Refresh-token lifetime in days.
- Password policy — minimum length, require uppercase, require number, require special character.
- Lockout policy — attempt threshold before lock, lockout duration in minutes.

20.4 Security > My Security

The My Security sub-tab is the admin's own account security. Every action here operates only on the currently signed-in admin:

- Change password.
- Enable or disable 2FA.
- List the admin's own trusted devices and revoke any of them.
- Logout of every session for the admin's account.

20.5 Communications > Notifications

The Notifications sub-tab controls the outbound notification model:

- Channel toggles for email and WhatsApp.
- Per-category email switches covering applications, enrollment, sessions, webinars, certificates, assessments and content.

Disabling a category suppresses only the routine notifications; system-critical alerts continue to reach the platform owner.

20.6 System > Payments

The Payments sub-tab (39 KB of components) is the payment configuration workbench:

- Currency (SAR).
- Per-gateway configuration — Moyasar, Tamara (test and live), Tabby, Bank Transfer — with an enable toggle, secrets, and per-gateway metadata.
- Bilingual bank details.
- Invoice footer in English and Arabic.
- Auto-send receipt toggle.
- Webhook secret.

A **Test** button per gateway calls `adminFinanceApi.testGateway`, which performs a live handshake against the configured credentials and returns pass or fail with a reason.

20.7 System > Integrations

The Integrations sub-tab shows read-only health for every external integration the platform depends on:


- zoom, resend, mailFrom, recaptcha, piiEncryption, redis, openai, malwareScanner, cloudSqlBackup, moyasar, tamara, tabby, bankTransfer.

Two editable panels sit alongside the read-only checks:

- **MailSettingsCard** — edit the mail-from address.
- **ZoomIntegrationPanel** — expandable panel that reads and writes the Zoom OAuth configuration. Endpoints:
  - `GET /zoom/config` — current wiring.
  - `PUT /zoom/config` — update.
  - `GET /zoom/account-info` — account-level metadata.
  - `POST /zoom/config/test` — live probe.

20.8 System > Backups

The Backups sub-tab is the full backup and restore center. It uses the `/admin/backups` family of endpoints.

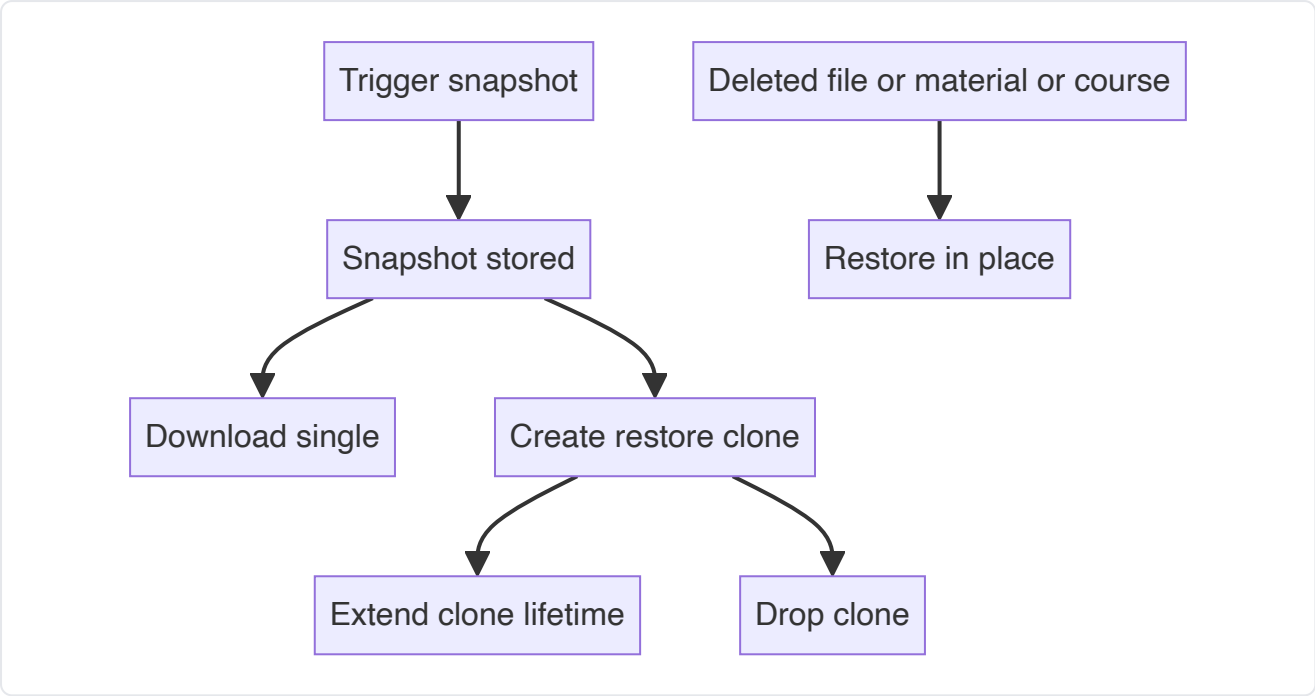

Key panels:

- **Overview and list** — `GET /admin/backups/overview` and `GET /admin/backups`.
- **Restore points list** — `GET /admin/backups/restore-points`.
- **Trigger snapshot** — `POST /admin/backups/snapshot`.
- **Export database** — `POST /admin/backups/export`.
- **Export files** — `POST /admin/backups/files`.
- **Download single** — `POST /admin/backups/:id/download`.
- **Audit log** — `GET /admin/backups/audit`.

Website Recovery panel handles website config revisions and rollback:

- `GET /admin/backups/website/config`
- `GET /admin/backups/website/revisions`
- `POST /admin/backups/website/rollback`

Restore History and Restore Sandbox panels cover the restore-clones lifecycle:

- `GET /admin/backups/restore-clones` — list active clones.
- `POST /admin/backups/restore-clones` — create a clone from a backup for validation or partial recovery.
- `POST /admin/backups/restore-clones/:id/extend` — extend clone lifetime.
- `POST /admin/backups/restore-clones/:id/drop` — tear it down when finished.

The restore model is deliberately restore-to-clone: the admin gets a full working copy of the platform at the backup point to validate against or extract data from, and the primary environment is never overwritten in place.

Deleted resource recovery panels cover soft-deleted files, materials and courses:

- Files — `GET /admin/backups/files/deleted`, `POST /admin/backups/files/restore`.
- Materials — `GET /admin/backups/materials/deleted`, `POST /admin/backups/materials/:id/restore`.
- Courses — `GET /admin/backups/courses/deleted`, `POST /admin/backups/courses/:id/restore`.

20.9 System > Error Monitoring

The Error Monitoring sub-tab surfaces the errors overview from `/admin/error-monitoring`:

- `GET /admin/error-monitoring/overview` — top-level counts and trends.
- `GET /admin/error-monitoring/top` — top issues by frequency.
- `GET /admin/error-monitoring/trend` — trend line for a chosen window.
- `GET /admin/error-monitoring/issue/:issueId` — the detail view for one issue.
- `POST /admin/error-monitoring/issue/:issueId/resolve` — close an issue.

20.10 System > Service Status

The Service Status sub-tab (49 KB of components) is the full control surface for the public status page. It covers:

- Components — CRUD plus manual override of a component's state.
- Incidents — CRUD.
- Per-incident updates — the timeline of status changes visible to the public.
- Post-mortem report — the write-up published after the incident closes.
- Incident-to-ticket linking — attach the driving support tickets to an incident record.
- Analytics — uptime, incident frequency and mean-time-to-resolve.
- CSV export.


Two additional sections sit inside this sub-tab:

- **ScheduledMaintenanceSection** — reads and writes maintenance windows via `/admin/maintenance/windows` — GET, POST, PATCH and DELETE.
- **StatusAnalyticsSection** — historical analytics for the public status page.

20.11 System > Maintenance

The Maintenance sub-tab is the global maintenance-mode toggle. Flipping it on takes the platform into a read-only or off-line state depending on the configured mode, and displays a bilingual message to every visitor.

Turning maintenance mode on requires a typed confirmation because the impact is platform-wide. The mode and message are persisted via `PATCH /admin/settings/maintenance`.



---

21. Roles & Permissions — the roles workbench

The Roles & Permissions page at `/dashboard/admin/roles` is the workbench where roles are defined, edited and given a permission matrix. The sidebar deliberately does not surface the entry today because the enforcement model in production is role-level via the `@Roles(...)` guards on every endpoint. The page and its endpoints are operational for maintaining role definitions.

The page supports:

- **Create role** — `POST /auth/roles`.
- **Edit role** — `PATCH /auth/roles/:id`.
- **Delete role** — `DELETE /auth/roles/:id`. The system roles — SUPER_ADMIN, ADMIN, MANAGER, INSTRUCTOR, STUDENT, FINANCE, SUPPORT — cannot be deleted, since the enforcement layer references them by name.
- **List roles** — `GET /auth/roles`.
- **Toggle permission matrix** — `PATCH /auth/roles/:id/permissions`. Toggle any category × operation (view, create, edit, delete) combination on or off.

The permission matrix is stored today and is expected to be woven into request-level enforcement in a future body of work. Until then, the safe treatment is: every capability described elsewhere in this guide is gated on the caller's role via the `@Roles(...)` guards, not on the matrix.

---

22. Frequently asked questions

1. Are certificates auto-issued when a student completes a course?

No. Certificates are a manual workflow. A student who becomes eligible submits a request; that request lands in a triage queue where an INSTRUCTOR, MANAGER or ADMIN reviews it and approves, rejects, holds or later revokes. The PDF is generated only on approval.

2. What is the difference between ADMIN and SUPER_ADMIN in daily use?

For daily operations they are the same. Every admin dashboard endpoint is callable by both roles. The single exception is the NELC LRS mode switch — `POST /admin/integrations/nelc/mode` — which is SUPER_ADMIN only.

3. Can I reset another user's password from the admin dashboard?

Password reset for an end user is handled through the standard self-service flow the user starts themselves. From the Users page, the closest admin tool is Resend Invite, which regenerates the initial invite email for a user who has not yet completed sign-up. Password change is available on My Security for the admin's own account.

4. How do I take a snapshot of the platform for compliance evidence?

Open Settings > System > Backups and use Trigger Snapshot. The snapshot appears in the list within a few minutes. From there Download Single gives a local copy, or Create Restore Clone spins up a working replica for validation.

5. What is the restore model? Can I restore in place?

The restore model is restore-to-clone. A backup is restored into a fresh clone environment where the admin validates or extracts what they need. The primary environment is never overwritten in place. This protects against operator error and makes rollback of the rollback possible.

6. What happens when a course is cancelled?

Cancellation with a mandatory reason drops the enrolments and queues refunds into the finance pipeline. Students are notified and the refunds appear in the Refunds tab for the FINANCE team to work through.

7. Where do I see every state change on a specific ticket?

Open the ticket workspace under Support > Tickets and scroll to the audit trail panel. For platform-wide ticket audit, use the Audit Trail control on the Support section — served by `GET /tickets/admin/audit-trail`.

8. How do I re-fire a webhook the gateway did not deliver first time?

Open Finance > Payments, find the payment, and use Replay Webhook. If the gateway state has diverged from the platform state, Sync From Gateway is the correct action.

9. How do I bypass the standard refund lifecycle?

Use Force Approve Refund on the Refunds tab. This is ADMIN and SUPER_ADMIN only. The reason is required and the action is tagged `[ADMIN POLICY BYPASS]` on the audit log.

10. How is the trainer application queue organised?

Open Role Requests. The queue shows PENDING, APPROVED, REJECTED and MORE_INFO status counts. Approve creates the instructor account; reject closes the request with a reason; request-more-info uses a structured code (CV_MISSING, SCFHS_VERIFICATION, QUALIFICATION_DOC, PHOTO, BANK_DETAILS, NATIONAL_ID, OTHER) so the applicant knows exactly what to supply.

11. Where do I add a national ID to the deny list?

At the bottom of the Role Requests page. Use POST to add, GET to review, DELETE to lift. New trainer applications matching a blocked ID are rejected automatically.

12. What is the difference between Logs > Violations and NELC Integration > Log?

Logs > Violations is a curated set of five NELC-audit event types, useful for oversight. NELC Integration > Log is the full xAPI statement stream, useful for troubleshooting a specific record and for the retry action.

13. What happens when I flip maintenance mode on?

The public site enters the configured maintenance state and shows the bilingual message the admin composed. The change is applied immediately after the confirmation. Flipping the toggle off restores public access.

14. How do I check whether a specific gateway is healthy right now?

Open Settings > System > Payments and press Test on the gateway. This runs a live handshake with the configured credentials. Finance > Settings > Gateways also exposes runtime status and a refresh-cache action.

15. Can I customise the emails a student receives?

Yes. Open Templates, choose the event key (for example the certificate-approved event) and locale, then edit subject and HTML body. Use Test Send to check the render before saving.

16. Where do I see failed logins for a specific user?

Open Security > Logins. Filter by user or IP to isolate the record. For live sessions, Security > Sessions lets the admin see and revoke sessions per user.

17. How do I grant a student a batch of points?

Open Points > Grants, search the student, choose grant or deduct, enter the amount and a reason. The transaction appears on the student's ledger immediately.

18. What is the audit trail for a certificate revocation?

The certificate record carries the revoker, revokedAt and revocationReason fields. These are visible in the Certificates queue in the admin view and are included in every certificate audit export.

19. What is the Looped In inbox for?

It is the admin's personal collaborator inbox for tickets. Whenever an admin is added as a collaborator on a ticket rather than the owner, that ticket appears in Looped In so the admin has a focused view of them.

20. How often does the Monitoring page refresh?

Every thirty seconds. The Open in GCP link takes the admin to the equivalent GCP monitoring dashboards for deeper investigation.

---

23. Endpoints reference

This appendix lists every admin backend endpoint referenced in the guide, grouped by dashboard section. Every endpoint is callable by ADMIN and SUPER_ADMIN unless otherwise noted.

Dashboard

Method	Path	Purpose
GET	/admin/stats/dashboard	KPIs and analytical widgets
GET	/admin/stats/overview	Sidebar profile card
GET	/admin/notifications	Alerts stream

Users

Method	Path	Purpose
GET	/auth/users	List users
POST	/auth/users	Create user
PATCH	/auth/users/:id	Edit user (activeRole, isVerified, isActive)
DELETE	/auth/users/:id	Delete user
GET	/auth/users/export	CSV export
POST	/auth/users/:id/resend-invite	Resend invite (throttled 5/60s)
POST	/auth/users/:id/roles	Assign role
DELETE	/auth/users/:id/roles/:role	Remove role
GET	/auth/users/:id/trusted-devices	List trusted devices
DELETE	/auth/users/:id/trusted-devices/:deviceId	Revoke one device
DELETE	/auth/users/:id/trusted-devices	Revoke every device

Role Requests

Method	Path	Purpose
GET	/role-requests	List with status counts
PATCH	/role-requests/:id/approve	Approve applicant
PATCH	/role-requests/:id/reject	Reject with reason
PATCH	/role-requests/:id/request-info	Request more info with codes
POST	/role-requests/blocked-national-ids	Add blocked national ID
GET	/role-requests/blocked-national-ids	List blocked national IDs
DELETE	/role-requests/blocked-national-ids/:nationalId	Remove blocked entry

Support

Method	Path	Purpose
GET	/tickets/admin/support-kpis	Support KPIs
GET	/tickets/admin/support-overview	Support overview
GET	/tickets/admin/supervisors	Supervisors performance
GET	/tickets/admin/audit-trail	Support-wide audit
GET	/tickets/team/orphans	Orphan agents list
POST	/tickets/team/orphans/bulk-assign	Attach orphans to a supervisor
GET	/tickets/team/requests/pending-count	Team requests badge
POST	/tickets/team/requests/:id/decision	Approve or reject team request
POST	/tickets/team/reassign	Reassign supervisor
DELETE	/tickets/team/members/:agentId	Remove team member
GET	/tickets/looped-in	Looped-in inbox

Courses

Method	Path	Purpose
POST	/courses/:id/activate	Activate course
POST	/courses/:id/deactivate	Deactivate course
POST	/courses/:id/complete	Mark completed
POST	/courses/:id/end	End course
POST	/courses/:id/cancel	Cancel with reason
POST	/courses/:id/reschedule	Reschedule with reason
PATCH	/courses/:id/feature	Feature toggle
PATCH	/courses/:id	Edit course
POST	/courses/:id/request-changes	Send back to instructor
GET	/courses/:id/delete-impact	Delete impact preview
DELETE	/courses/:id	Delete course
POST	/courses/:id/duplicate	Duplicate course
PATCH	/courses/:id/assign-instructor	Assign instructor
POST	/assessments/:id/flag	Flag submission
POST	/assessments/:id/override	Override grade
POST	/assessments/:id/allow-retake	Allow retake

Certificates

Method	Path	Purpose
PATCH	/certificates/:id/approve	Approve and generate PDF
PATCH	/certificates/:id/reject	Reject with note
PATCH	/certificates/:id/hold	Hold pending investigation
PATCH	/certificates/:id/revoke	Revoke with reason
POST	/certificates/batch	Batch approve or reject
POST	/certificates/batch-download	Batch download ZIP
GET	/certificates/:id/download	Download single with lang param
POST	/certificates	Issue new

Points

Method	Path	Purpose
GET	/admin/points/rules	List rules
PATCH	/admin/points/rules/:ruleKey	Toggle or edit rule
GET	/admin/points/config	Read economy dials
PATCH	/admin/points/config	Update economy dials
GET	/admin/points/courses	List redeemable courses
PATCH	/admin/points/courses/:courseId	Enable and price course
DELETE	/admin/points/courses/:courseId	Remove from redeemable set
POST	/admin/points/courses/bulk-enable	Bulk enable
GET	/admin/points/webinar-sessions	Redeemable webinar sessions
GET	/admin/points/rewards	List rewards catalog
POST	/admin/points/rewards	Create reward
PATCH	/admin/points/rewards/:id	Update reward
DELETE	/admin/points/rewards/:id	Remove reward
GET	/admin/points/redemptions	List reward redemptions
POST	/admin/points/redemptions/:id/transition	Transition redemption state
GET	/admin/points/users/search	Search students for grants
POST	/admin/points/grant	Grant or deduct with reason
GET	/admin/points/course-redemptions	List course redemptions
GET	/admin/points/course-redemptions/export.csv	CSV export
GET	/admin/points/users/:userId/balance	Balance and lifetime totals
GET	/admin/points/users/:userId/transactions	Full ledger

Finance

Method	Path	Purpose
GET	/admin/finance/gateways/runtime-status	Per-gateway health
POST	/admin/finance/gateways/test	Live handshake per gateway
POST	/admin/finance/gateways/refresh-cache	Refresh gateway cache
POST	/admin/finance/payments/:id/force-status	Force payment status
POST	/admin/finance/payments/:id/replay-webhook	Re-run webhook handler
POST	/admin/finance/payments/:id/sync-from-gateway	Reconcile from gateway
POST	/admin/finance/invoices/:id/force-cancel	Force cancel invoice
POST	/admin/finance/invoices/:id/resend-email	Resend invoice email
POST	/admin/finance/invoices/:id/regenerate-pdf	Regenerate invoice PDF
POST	/admin/finance/refunds/:id/force-approve	Force approve refund
PATCH	/escalations/:id/claim	Claim escalation
PATCH	/escalations/:id/send-back	Send back to finance
PATCH	/escalations/:id/close	Close escalation
POST	/escalations/:id/enroll	Manual enrollment from escalation
POST	/escalations/:id/refund	Refund from escalation
GET	/audit-logs/finance*	Finance audit family

Reports

Method	Path	Purpose
GET	/instructor/reports/attendance	Attendance report
GET	/instructor/reports/cme-eligibility	CME eligibility
GET	/instructor/reports/scheduled	List scheduled reports
POST	/instructor/reports/scheduled	Create schedule
PATCH	/instructor/reports/scheduled/:id	Edit schedule
DELETE	/instructor/reports/scheduled/:id	Remove schedule
POST	/instructor/reports/export-table	Ad-hoc table export

Compliance

Method	Path	Purpose
—	nelcComplianceApi.getAllCoursesCompliance	Courses compliance table
—	nelcComplianceApi.getVirtualClassCompliance	Virtual class compliance table
—	nelcComplianceApi.downloadCsvReport	Compliance CSV export

NELC Integration

Method	Path	Purpose
GET	/admin/integrations/nelc/mode	Read LRS mode
POST	/admin/integrations/nelc/mode	Set LRS mode (SUPER_ADMIN only)
GET	/admin/integrations/nelc/config	Current wiring
GET	/admin/integrations/nelc/stats	Counts by status and verb
GET	/admin/integrations/nelc/log	Statement log
GET	/admin/integrations/nelc/log/:id	Statement detail
POST	/admin/integrations/nelc/retry/:id	Retry failed statement
POST	/admin/integrations/nelc/test-connection	Live LRS handshake
POST	/admin/integrations/nelc/trigger/joined	Manual joined event
POST	/admin/integrations/nelc/trigger/left	Manual left event

Logs

Method	Path	Purpose
GET	/audit-logs/admin/list	General audit log
GET	/audit-logs/admin/distinct	Filter dropdown values
GET	/audit-logs/admin/export	CSV export
GET	/nelc-audit	NELC audit stream
GET	/admin/notifications/counts	Alerts unread count
PATCH	/admin/notifications/:id/read	Mark one read
POST	/admin/notifications/mark-all-read	Mark all read

Security

Method	Path	Purpose
GET	/admin/stats/security/sessions	Active sessions
GET	/admin/stats/security/failed-logins	Failed logins last 24h
GET	/admin/stats/security/suspicious-ips	Suspicious IPs

Monitoring

Method	Path	Purpose
GET	/admin/monitoring/services-health	Per-service health
GET	/admin/monitoring/jobs-stats	Background jobs
GET	/admin/monitoring/cloudsql	Cloud SQL pressure
GET	/admin/monitoring/redis	Redis pressure
GET	/admin/monitoring/buckets	Storage bucket usage
GET	/admin/monitoring/uptime	Uptime summary

Templates

Method	Path	Purpose
GET	/admin/templates	List templates
GET	/admin/templates/:eventKey/:locale	Load one
PUT	/admin/templates/:eventKey/:locale	Save custom
DELETE	/admin/templates/:eventKey/:locale	Reset to default
POST	/admin/templates/:eventKey/:locale/test-send	Test send

Settings

Method	Path	Purpose
GET	/admin/settings/:category	Read a settings category
PATCH	/admin/settings/:category	Update a settings category
PATCH	/admin/settings/maintenance	Toggle maintenance mode
GET	/admin/backups/overview	Backups overview
GET	/admin/backups	Backups list
GET	/admin/backups/restore-points	Restore points
POST	/admin/backups/snapshot	Trigger snapshot
POST	/admin/backups/export	Export database
POST	/admin/backups/files	Export files
POST	/admin/backups/:id/download	Download single
GET	/admin/backups/audit	Backups audit
GET	/admin/backups/website/config	Website config
GET	/admin/backups/website/revisions	Website revisions
POST	/admin/backups/website/rollback	Roll website config back
GET	/admin/backups/restore-clones	Restore clones list
POST	/admin/backups/restore-clones	Create restore clone
POST	/admin/backups/restore-clones/:id/extend	Extend clone
POST	/admin/backups/restore-clones/:id/drop	Drop clone
GET	/admin/backups/files/deleted	Deleted files
POST	/admin/backups/files/restore	Restore file
GET	/admin/backups/materials/deleted	Deleted materials
POST	/admin/backups/materials/:id/restore	Restore material
GET	/admin/backups/courses/deleted	Deleted courses
POST	/admin/backups/courses/:id/restore	Restore course
GET	/admin/error-monitoring/overview	Errors overview
GET	/admin/error-monitoring/top	Top issues
GET	/admin/error-monitoring/trend	Errors trend

Method	Path	Purpose
GET	/admin/error-monitoring/issue/:issueId	Issue detail
POST	/admin/error-monitoring/issue/:issueId/resolve	Resolve issue
GET	/admin/maintenance/windows	Scheduled maintenance windows
POST	/admin/maintenance/windows	Create window
PATCH	/admin/maintenance/windows/:id	Update window
DELETE	/admin/maintenance/windows/:id	Remove window
GET	/zoom/config	Zoom config
PUT	/zoom/config	Update Zoom config
GET	/zoom/account-info	Zoom account info
POST	/zoom/config/test	Test Zoom

Roles & Permissions

Method	Path	Purpose
GET	/auth/roles	List roles
POST	/auth/roles	Create role
PATCH	/auth/roles/:id	Edit role
DELETE	/auth/roles/:id	Delete role (non-system only)
PATCH	/auth/roles/:id/permissions	Toggle permission matrix

---

24. Where to look next

This guide describes the admin surface. The other guides in the handover set describe the surfaces that adjoining roles use every day. Read them in the order that matches the workflow at hand.

- **instructor-guide.md** — the trainer application flow, the instructor dashboard, course building, live sessions, and the certificate approval side from an instructor's perspective. Read this to understand what an instructor sees when the admin approves a role request or requests changes on a course.
- **course-manager-guide.md** — the manager's daily loops around course approval, material approval, sessions, instructors, reviews and certificates. Read this to understand where the manager's authority ends and the admin's begins.

- **finance-guide.md** — the FINANCE role's standard-lifecycle workflows for payments, invoices, refunds, bank transfers and reconciliation. Read this to see what happens on the finance side before an admin super-action is needed.
- **support-guide.md** — the SUPPORT role's workspace for tickets, macros, help center and team operations. Read this alongside sections 7 and 8 of this guide.
- **student-guide.md** — the end-user experience: sign-up, enrolment, learning, certificate request, points, refunds. Read this to see how the admin's decisions land in the student's inbox.