Support Guide

Everything the PhysioGuidance support team does — agents work their queue and reply, apply macros, loop in colleagues, transfer to another department, and export ticket archives. Supervisors manage the whole queue, run team, escalate, merge, and configure SLA/tags/macros.

PREPARED FOR

PhysioGuidance Support Team

DATE

2026-08-17

DASHBOARD URL

app.physioguidance.org/en/dashboard/support

PHYSIOGUIDANCE

Riyadh · Saudi Arabia
me-central2 · GCP Cloud Run

Table of contents

1. Who this role is for and the two sub-roles
2. Signing in and reading the sidebar
3. Dashboard landing — Agent
4. Dashboard landing — Supervisor
5. My Tickets
6. All Tickets (supervisor)
7. Ticket Detail — the workbench
8. Loop-in versus Assignee
9. Looped-In inbox
10. Alerts
11. Knowledge Base — browse, author, analyse
12. Team Management (supervisor)
13. Reports and CSAT (supervisor)
14. Settings — personal, routing, workspace
15. Trainer Applications (read-only)
16. Attachment scanning pipeline
17. What Support cannot do — the deliberate boundary
18. Frequently asked questions
19. Where to look next

1. Who this role is for and the two sub-roles

The Support role is the human face of PhysioGuidance for every student, instructor, applicant, and staff member who submits a ticket. Every Support user has one of two sub-roles, and the two work the queue very differently.

The sub-role is stored on the user record as `user.supportSubRole`. Its value is either `agent` or `supervisor`. Both sub-roles hold the `SUPPORT` platform role, so both pass the controller-level `@Roles('SUPPORT', 'ADMIN', 'SUPER_ADMIN')` gate; the service layer then reads `supportSubRole` to widen the supervisor's powers and restrict the agent to their own tickets. On the frontend, the `SupervisorOnlyGuard` component hides supervisor-only screens from agents, and `/dashboard/support/page.tsx` redirects each user to `/dashboard/support/agent` or `/dashboard/support/supervisor` on landing.

1.1 The agent

An agent works tickets. They see their own queue and the tickets on which they are looped in. They pick up work, reply publicly to the requester, leave internal notes for colleagues, apply macros, loop other departments in, transfer categories, resolve, and close. They cannot change assignee, priority, or SLA policy; they cannot flip a ticket to `on_hold` themselves; and they cannot see queue-wide analytics or edit workspace settings. When they need an on-hold pause, they raise a hold request and a supervisor decides.

1.2 The supervisor

A supervisor is an agent-with-authority. They see every ticket in the queue, reassign, change priority, put a ticket directly on hold, escalate, merge duplicates, decide hold requests, and run team management. They own the workspace: SLA policies, auto-assignment strategy, macros, categories, tags and tag-rules, retention. They see queue-wide analytics — SLA compliance, backlog, CSAT, NPS, macro usage, tag analytics, KB search analytics.

1.3 At a glance

Capability	Agent	Supervisor
Work own assigned tickets	Yes	Yes
See whole queue	No	Yes
Reassign tickets	No	Yes
Change priority	No	Yes
Flip to `on_hold` directly	No	Yes
Request hold	Yes	Not needed
Decide hold requests	No	Yes
Escalate a ticket	No	Yes
Merge duplicate tickets	No	Yes
Loop in a colleague	Yes	Yes
Transfer to another department	Yes	Yes
Apply a macro	Yes	Yes
Author or edit a macro	No	Yes
Manage categories, tags, tag rules	No	Yes
Edit SLA policy	No	Yes
Edit auto-assignment strategy	No	Yes
View queue-wide reports and CSAT	No	Yes
View KB search analytics	No	Yes
Manage a team	No	Yes
Edit business hours	No (admin owns this)	No (admin owns this)

The rest of this guide is organised so that each section describes what agents do and calls out the supervisor's extra powers where they exist.

---

2. Signing in and reading the sidebar

Log in at `/en/login` with the credentials issued during onboarding. The sidebar loads from `SupportSidebar.tsx` and shows a different set of items to each sub-role.

Agent sidebar: Dashboard, My Tickets, Knowledge Base, Trainer Applications, Looped In, Settings.

Supervisor sidebar: Dashboard, My Tickets, All Tickets, Knowledge Base, Trainer Applications, Looped In, Team, Alerts, Reports, Settings.

The supervisor's sidebar therefore adds four items: All Tickets, Team, Alerts, and Reports. Both sub-roles share Dashboard, My Tickets, Knowledge Base, Trainer Applications, Looped In, and Settings, but the underlying screens tailor themselves to the caller. A shared `SupportActiveIncidentsBar` sits above every screen so that any live platform incident is visible to everyone at all times.

Every list and dashboard refreshes on a 60-second timer. There is no need to hit the browser refresh button to see new work land.

---

3. Dashboard landing — Agent

The agent lands on `/dashboard/support/agent`. This is a personal cockpit built to answer three questions in the first ten seconds: what is on my plate, what am I about to breach, and who am I supposed to help next.

3.1 What the screen shows

- **My KPIs** — open tickets assigned to me, resolved this week, first-response time (FRT) median, and my personal CSAT score.
- **Next up** — the highest-priority, oldest un-replied ticket in my queue. One click opens it.
- **My queue snapshot** — a compact list of open assigned tickets ordered by SLA risk.
- **Active incidents bar** — mounted from `SupportActiveIncidentsBar` at the top of every Support screen.

3.2 What backs it

Widget	Endpoint
My tickets list	`GET /tickets?assigneeId=me`
Personal performance metrics	`GET /tickets/my-performance`
Incidents bar	`GET /tickets/active-incidents`

The dashboard polls every 60 seconds so the "Next up" ticket stays fresh even when the agent leaves the tab open.

3.3 Working from the dashboard

The intended flow is: read the KPI tiles, glance at incidents, click "Next up", work the ticket, come back. When the queue is quiet, use the slack to close out `resolved` tickets sitting past their auto-close window and to reply to any Looped-In threads waiting on you.

---

4. Dashboard landing — Supervisor

The supervisor lands on `/dashboard/support/supervisor`. This is a queue-wide cockpit.

4.1 What the screen shows

- **Queue KPIs** — total open, unassigned, breached, in-progress, on-hold, resolved-today, closed-today.
- **Priority breakdown** — counts by `high | medium | low`.
- **SLA compliance** — response and resolution SLA health across the queue.
- **Tickets board** — a kanban-style board by status with quick filters.
- **Active incidents** — the same shared incidents bar as the agent view.

4.2 What backs it

Widget	Endpoint
Queue-wide KPIs	`GET /tickets/kpis`
SLA breaches list	`GET /tickets/sla/breaches`
SLA backlog	`GET /tickets/sla/backlog`
Activity feed	`GET /tickets/activity`
Incidents bar	`GET /tickets/active-incidents`

Like the agent view, the supervisor dashboard refreshes every 60 seconds.

4.3 Working from the dashboard

Supervisors use this screen to spot pressure early: a rising SLA backlog, a spike in `new` unassigned tickets, a specific agent buried, an incident that just went live. Every KPI tile is a shortcut into a filtered `All Tickets` view. Clicking "unassigned" jumps you into the queue filtered to `assigneeId=null` so you can reassign in bulk fashion — one at a time, since Support ticket lists intentionally do not carry a bulk-action checkbox column.

---

5. My Tickets

`My Tickets` is the same screen for both sub-roles: a split-view of the tickets the caller owns. On the left is a filtered list, on the right is the current ticket in full detail.

5.1 Layout

- Left column: my open tickets, ordered by SLA risk by default.
- Right column: the selected ticket's detail (see §7).
- Inline reply composer at the bottom of the detail — public or internal — with attachments and macro picker.

5.2 Endpoint

`GET /tickets/my-tickets` — the service layer forces `assigneeId = <caller.id>`, so this endpoint is safe to call from either sub-role and never leaks other agents' work.

5.3 One at a time

There is no checkbox column and no bulk-action menu. Every reply, macro, tag change, and status change is applied to one ticket. This is deliberate: it keeps the audit trail clean and it prevents mass mis-replies.

---

6. All Tickets (supervisor)

`All Tickets` lives at `/dashboard/support/supervisor/tickets`. It is the supervisor's queue-wide view.

6.1 Filters

- Status tabs — `all | new | in_progress | on_hold | resolved | closed`.
- Priority — `high | medium | low`.
- Category — dropdown of active ticket categories.
- Tags — chip picker of active tags.
- Assignee — dropdown, including `unassigned`.
- Escalated-only toggle.
- Free-text search — matches subject, description, requester name, requester email.

6.2 Endpoint

`GET /tickets` with the query parameters `status, priority, category, assigneeId, search, tags, page, limit`. The service returns the whole queue to a supervisor caller.

6.3 One at a time, on purpose

Even in the supervisor's queue-wide list, there is no bulk-action checkbox column. Reassignments, priority changes, and status changes flow through the ticket detail. This keeps every action attributable, auditable, and rollback-friendly.

---

7. Ticket Detail — the workbench

`/dashboard/support/agent/tickets/[id]` and `/dashboard/support/supervisor/tickets/[id]` render the same underlying workbench. Almost every real support action happens here.

7.1 Ticket statuses

Status is enforced by a check constraint on the tickets table with exactly five values:


Status	Meaning
`new`	Just created, no agent has engaged yet.
`in_progress`	An agent is actively working the ticket.
`on_hold`	Paused, with a stored on-hold reason. Only transitions in from `in_progress`.
`resolved`	Agent believes the issue is fixed; CSAT survey queued.
`closed`	Terminal for the requester. Can still be reopened by staff.

7.2 On-hold reasons


When a ticket goes on hold, one reason from a closed enum is stored alongside it:

- `waiting for student response`
- `waiting for third party`
- `waiting for internal team`
- `pending investigation`
- `other`

Agents cannot flip a ticket directly to `on_hold`; they raise a hold request and a supervisor decides.

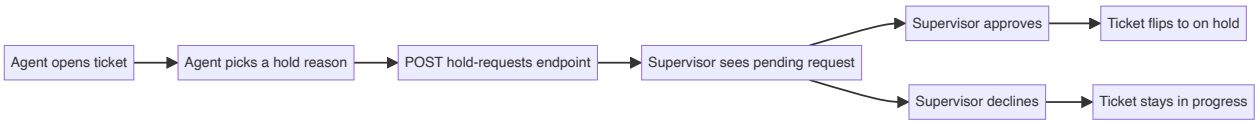

7.3 Legal status transitions

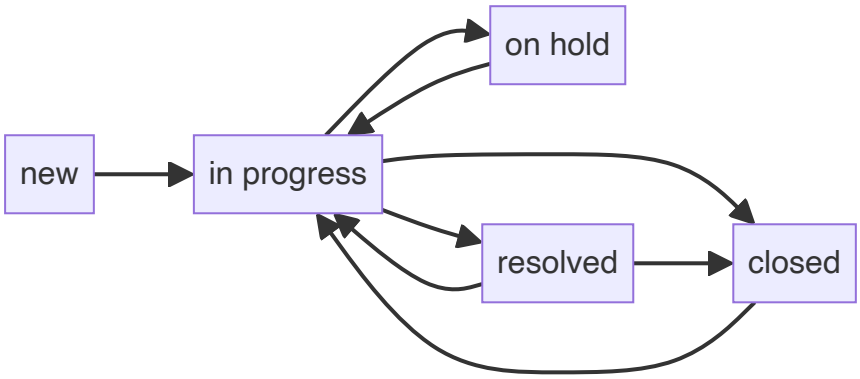

Any transition outside this graph is rejected by the service layer. Reopening a `resolved` or `closed` ticket sets it back to `in_progress` and cancels the pending CSAT email if one was queued.

7.4 Actions available to any Support user

These actions are available to agents on tickets they own and to supervisors on any ticket. Every action is audited.

Action	Backend
Post public reply	`POST /tickets/:id/comments` with body `{message, isInternal:false, attachments[]}` — up to 10 attachments per reply
Post internal note	Same endpoint with `isInternal:true` — visible to staff only
Apply macro	`POST /tickets/:id/apply-macro` with `{macroId, locale}` — expands the EN or AR body inline
Upload attachments	Client uploads via the storage endpoints, then sends the URL; each chip shows a scan-status badge
Delete an attachment	`DELETE /tickets/:id/attachments/:attachmentId`
Resolve the ticket	`POST /tickets/:id/resolve` — queues the CSAT email as a delayed task
Close the ticket	`POST /tickets/:id/close` — allowed from `resolved` via the UI
Reopen	`PATCH /tickets/:id` with `{status:'in_progress'}` — cancels any pending CSAT email
Request an on-hold (agent)	`POST /tickets/:id/hold-requests` with `{reason, description?}` — supervisor decides
Loop in a collaborator	`POST /tickets/:id/collaborators` with `{userId, department, message?, attachments?}`
Remove a collaborator	`DELETE /tickets/:id/collaborators/:userId` — agents can only remove rows they added
Transfer to another department	`POST /tickets/:id/transfer` — re-categorises, loops in a target-department member, posts a system message
Set or replace tags	`PATCH /tickets/:id/tags` with `{tagIds[]}`
Link or unlink an incident	via `TicketIncidentLinker` — auto-notifies the requester when the incident resolves
Export the ticket to CSV	`GET /tickets/:id/export`
Export a compliance archive	`GET /tickets/:id/export-archive` — ZIP with a SHA-256 manifest
Record an attachment download	`POST /tickets/:id/attachment-download` with `{attachmentUrl}` — writes an audit row


The **loop-in departments** available in the dropdown are: `course_manager`, `finance`, `admin`, `instructor`, `ta`, `supervisor`. Adding a collaborator with a message posts that message as an internal reply on the thread.

The **transfer** action re-categorises the ticket and loops in a member of the target department, but the assignee stays the same. Transfer is not a handoff.

7.5 Actions reserved to supervisors

Action	Backend
Reassign the ticket	`PATCH /tickets/:id` with `{assigneeId}`
Change priority	`PATCH /tickets/:id` with `{priority}`
Directly flip to `on_hold`	`PATCH /tickets/:id` with `{status:'on_hold', onHoldReason}` — agents get 403
Decide a hold request	`PATCH /tickets/:id/hold-requests/:requestId` with `{decision, note?}`
Manually escalate	`POST /tickets/:id/escalate` — sets a sticky escalation flag, records reason, optionally bumps priority, notifies assignee, supervisor, and admins
List merge candidates	`GET /tickets/:id/merge-candidates` — same requester, same category, still open
Merge into another ticket	`POST /tickets/:id/merge` with `{targetTicketId, note?}` — the source ticket keeps its audit row and its `merged_into_ticket_id` is set
View per-ticket audit log	`GET /tickets/:id/audit`
View attachment download log	`GET /tickets/:id/attachment-download-log`
View attachment version history	`GET /tickets/:id/attachment-history` — full upload and soft-delete timeline

Escalation is the supervisor's lever when a ticket needs cross-team attention or an executive nudge:

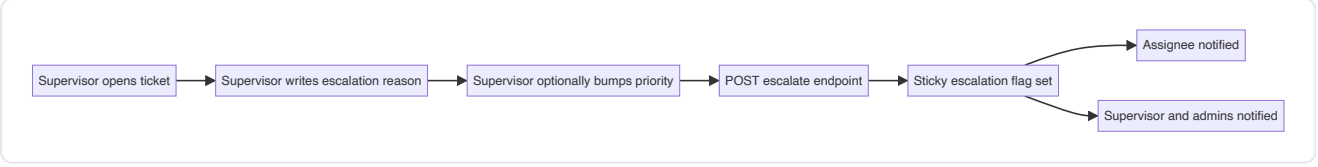


7.6 The right-rail context cards

The right rail is read-only for Support and it shows real-time context about the requester so that agents do not have to guess.

Card	Endpoint
Student snapshot	`GET /tickets/:id/student-context`
Student timeline	`GET /tickets/:id/student-timeline`
Certificate details	`GET /tickets/:id/certificate-details`
Trainer application	`GET /tickets/:id/trainer-application`
CSAT rating	Loaded from the ticket record once the survey is completed
Collaborators	Read-write for Support, read-only for looped-in collaborators
Collaborator chat	Internal-only side channel between the assignee and collaborators

The requester never sees the right rail, internal replies, collaborators, or the collaborator chat.

7.7 Working a ticket end to end



Auto-assignment runs on ticket creation when it is enabled (see §14.2). When it is disabled, or when it produces no eligible agent, the ticket lands `unassigned` and a supervisor picks it up manually.

---

8. Loop-in versus Assignee

Two very different concepts share the ticket detail screen and it matters that support staff read them clearly.

8.1 Assignee

Exactly one Support user owns the ticket at any time. The ownership is stored on `tickets.assignee_id`. Ownership is set by auto-assignment at intake or by a supervisor manually. When a supervisor reassigns, the previous assignee loses write access unless they are also a collaborator.


8.2 Collaborator (loop-in)

Many users from any department can be looped in on the ticket. The membership lives in `ticket_collaborators` with a unique constraint on `(ticket_id, user_id)` and soft-delete via `removed_at`. Collaborators see the ticket in their `Looped In` inbox and can reply on the internal channel. The requester never sees collaborators and never sees internal replies.

8.3 When to use which


Situation	Right action
The ticket is really a finance question and finance should own it end to end	Ask a supervisor to reassign, or transfer the category and let a supervisor reassign to a finance-savvy agent
The ticket is a support question but you need input from finance to write an accurate reply	Loop in a finance colleague
You want another agent to shadow how you handle this	Loop in the agent as a collaborator
The ticket should be worked by a different agent on your team	Ask your supervisor to reassign

8.4 Loop-in flow



8.5 Transfer to department

Transfer is a related but distinct action. It re-categorises the ticket, loops in a target-department member so the new team is aware, and posts a system message on the thread — but the assignee does not change.



---

9. Looped-In inbox

`/dashboard/support/agent/looped-in` and `/dashboard/support/supervisor/looped-in` render the shared `LoopedInTickets` component. The list is populated by `GET /tickets/looped-in?limit=`, which returns every ticket where the caller has an active row in `ticket_collaborators`.

For a Support user, the Looped-In inbox is read-only work-in-progress: a place to answer internal questions raised by other agents, drop notes, and post replies on the internal channel. Because collaborators do not own the ticket, they cannot reassign, change priority, or close from this view.

---

10. Alerts

10.1 Agent view

An agent opens `/dashboard/support/agent/alerts` and sees alerts scoped to their own assigned tickets: pending SLA response, pending SLA resolution, on-hold expiry warnings, and any escalation flags on their tickets.

10.2 Supervisor view

The supervisor opens `/dashboard/support/supervisor/alerts` and sees queue-wide SLA breaches and an audit-trail feed of what agents have been doing.

10.3 Endpoints

Data	Endpoint	Who can call
KPIs	`GET /tickets/kpis`	Both
SLA breaches	`GET /tickets/sla/breaches`	Both, scoped by role
Audit trail	`GET /tickets/audit-trail`	Supervisor only — agents receive 403

11. Knowledge Base — browse, author, analyse

The Support Knowledge Base lives at `/dashboard/support/agent/kb` and `/dashboard/support/supervisor/kb`. Both sub-roles browse it and both sub-roles can author articles and categories. Only the supervisor sees the analytics that live behind it.

11.1 Browse

The KnowledgeBaseContent component renders a public-facing view of articles by category.

Read	Endpoint
List articles	`GET /tickets/kb/articles`
Read one article	`GET /tickets/kb/articles/:id`
List categories	`GET /tickets/kb/categories`
Log a search	`POST /tickets/kb/searches` — publicly throttled

11.2 Author

Either sub-role can create, update, and delete articles and categories.

Write	Endpoint
Create article	`POST /tickets/kb/articles`
Update article	`PATCH /tickets/kb/articles/:id`
Delete article	`DELETE /tickets/kb/articles/:id`
Create category	`POST /tickets/kb/categories`
Update category	`PATCH /tickets/kb/categories/:id`
Delete category	`DELETE /tickets/kb/categories/:id`

Articles carry EN and AR bodies. When authoring, provide both if possible; the browsing surface picks the body that matches the reader's locale.

11.3 Supervisor-only analytics

The supervisor sees three additional analytics screens on KB.

Analytic	Endpoint
Search analytics — what students searched for	`GET /tickets/kb/search-analytics`
Most-viewed articles	`GET /tickets/kb/articles/analytics/most-viewed`
Low-engagement articles	`GET /tickets/kb/articles/analytics/low-engagement`

These three analytics feed the supervisor's editorial planning: what articles to write next, what to promote, what to retire or rewrite because engagement is falling.

---

12. Team Management (supervisor)

`/dashboard/support/supervisor/team` is the supervisor's roster screen. It is where the supervisor sees who is on their team, requests changes to team composition through admin, and pulls agents in from the platform pool.

12.1 Supervisor-facing endpoints

Action	Endpoint
List my team	`GET /tickets/team/my`
List agents I can request to add	`GET /tickets/team/available-agents`
Read one member's detail	`GET /tickets/team/members/:agentId`
Remove a member from my team	`DELETE /tickets/team/members/:agentId`
Request admin to add or create a member	`POST /tickets/team/requests` with `{kind:'add_existing' | 'add_new', …}`
See my pending requests	`GET /tickets/team/requests/mine`

12.2 What admin controls, not the supervisor

Decision endpoints and orphan-handling are gated to the `ADMIN` role. The supervisor raises the request; the admin decides.

Endpoint	Owner
`GET /tickets/team/requests`	Admin
`POST /tickets/team/requests/:id/decision`	Admin
`GET /tickets/team/orphans`	Admin
`POST /tickets/team/orphans/bulk-assign`	Admin
`POST /tickets/team/reassign`	Admin
`GET /tickets/team/active-supervisors`	Admin

12.3 The team-request flow

A supervisor drops a request that either pulls an existing SUPPORT agent onto their team (`add_existing`) or asks admin to create a brand-new agent account (`add_new`). Admin sees the request in their console, decides, and — on approval of an `add_new` — the new user is provisioned into `SUPPORT` with `supportSubRole = 'agent'` and lands on the supervisor's team. If a supervisor is removed or reassigned, the admin uses `orphans` and `bulk-assign` to re-parent orphaned agents.

---

13. Reports and CSAT (supervisor)

`/dashboard/support/supervisor/reports` is the supervisor's analytics hub. Everything here is queue-wide and read-only.

13.1 Operational reports

Report	Endpoint
Trend over time	`GET /tickets/reports/trend?dateFrom&dateTo&interval=day
Ticket volume	`GET /tickets/reports/volume`
Top issues	`GET /tickets/reports/issues`
SLA compliance	`GET /tickets/reports/sla-compliance`
Agent performance	`GET /tickets/reports/agent-performance`
CSAT comment stream	`GET /tickets/reports/csat-comments`
Export any of the above as CSV	`GET /tickets/reports/export?type=…`
Export as PDF	`GET /tickets/reports/export-pdf`

13.2 CSAT

Customer satisfaction is captured after resolution and rolled up into five endpoints.

Report	Endpoint
Overall summary	`GET /tickets/csat/summary`
Score by category	`GET /tickets/csat/by-category`
Score by agent	`GET /tickets/csat/by-agent`
Monthly trend	`GET /tickets/csat/monthly`
Low-rating surveys	`GET /tickets/csat/low-ratings?status=pending

Low-rating surveys are the follow-up work stream. The supervisor reviews each one, has the assignee reach out, and then marks the survey as followed up:

`POST /tickets/csat/:surveyId/follow-up` — supervisor or admin.

13.3 NPS

`GET /tickets/nps/summary` returns the Net Promoter Score for the queue, computed from CSAT respondents who also answered the NPS question.

14. Settings — personal, routing, workspace

`/dashboard/support/agent/settings` and `/dashboard/support/supervisor/settings` share the personal tabs and diverge on the workspace tabs.

14.1 Personal — both sub-roles

- **Profile** — name, avatar, contact info, language.
- **Security** — password change, two-factor enrolment.
- **Notifications** — `GET /tickets/settings/notification-prefs` and `PATCH /tickets/settings/notification-prefs`. Toggle categories of email and in-app notifications: new assignments, mentions, SLA warnings, incident updates, CSAT alerts.

14.2 Routing — supervisor only

SLA policies. One policy per priority.

Endpoint	Purpose
`GET /tickets/sla-policies`	Read every policy
`PUT /tickets/sla-policies/:priority`	Replace one policy — response SLA and resolution SLA fields

Auto-assignment. Controls how new tickets find an agent.

`GET /tickets/settings/auto-assignment` and `PATCH /tickets/settings/auto-assignment` with:

- `enabled` — turn auto-assignment on or off.
- `strategy` — `round_robin`, `least_loaded`, or `manual`.
- `respectBusinessHours` — outside hours, hold in the unassigned queue.
- `maxConcurrentPerAgent` — cap the queue depth an agent can be handed.

14.3 Workspace — supervisor only

Business Hours. Publicly readable so agents and clients can see the schedule, but writes are ADMIN-only. Supervisors read this tab; admin edits via `PATCH /tickets/settings/business-hours`.

Macros (templates). Any agent applies a macro on a ticket; only supervisor and admin author them.

Endpoint	Owner
`GET /tickets/macros`	Anyone in Support
`GET /tickets/macros/:id`	Anyone in Support
`POST /tickets/macros`	Supervisor / Admin
`PATCH /tickets/macros/:id`	Supervisor / Admin
`DELETE /tickets/macros/:id`	Supervisor / Admin
`GET /tickets/macros/usage-stats`	Supervisor / Admin

Macros carry locale-aware EN and AR bodies. When an agent applies a macro to a ticket, the ticket's requester locale drives which body is inserted, and any placeholders in the body (name, ticket ID, order reference) are expanded at insertion time.

Categories. Public read, supervisor/admin write.

Endpoint	Purpose
`GET /tickets/settings/ticket-categories`	Read every category
`POST /tickets/settings/ticket-categories`	Create
`PATCH /tickets/settings/ticket-categories/:id`	Update
`DELETE /tickets/settings/ticket-categories/:id`	Delete

Tags and tag rules. Tags are optional labels agents drop on tickets. Rules add tags automatically based on ticket content.

Endpoint	Purpose
`GET /tickets/tags`	List active and archived tags
`POST /tickets/tags`	Create tag
`PATCH /tickets/tags/:id`	Rename or recolour tag
`DELETE /tickets/tags/:id`	Delete a tag
`POST /tickets/tags/:id/archive`	Archive
`POST /tickets/tags/:id/unarchive`	Restore
`GET /tickets/tags/:id/rules`	List rules attached to a tag
`POST /tickets/tags/:id/rules`	Add a rule that auto-applies this tag
`PATCH /tickets/tag-rules/:ruleId`	Edit a rule
`DELETE /tickets/tag-rules/:ruleId`	Delete a rule
`GET /tickets/tags/analytics/summary`	Tag usage analytics

14.4 Retention — supervisor or admin

`GET /tickets/config/retention` and `PATCH /tickets/config/retention` set how long tickets and their attachments live before archival. This aligns with PDPL retention rules and is one of the settings routinely reviewed at compliance audits.

---

15. Trainer Applications (read-only)

Both sub-roles see `/dashboard/support/trainer-applications`. Support uses this screen to answer applicant questions and to add context to a ticket where the applicant has asked about their application.

15.1 Endpoints

Endpoint	Purpose
`GET /support/role-requests?status&search&page&limit`	List applications with filters
`GET /support/role-requests/:id`	Read one application
`GET /tickets/:id/trainer-application`	Inline the applicant's application on a ticket detail

15.2 Deliberate boundary

Support reads. Support cannot approve, reject, or request more info on a trainer application; those decisions are made by admin. If a ticket needs a decision, loop in a member of the `admin` department using the standard collaborator flow.

---

16. Attachment scanning pipeline

Every attachment travels through the shared malware-scanning pipeline. Support does not maintain its own scanner — the ticketing module reuses the platform storage service that also protects course materials, certificates, and instructor uploads.

16.1 The path



An upload lands in Google Cloud Storage in one of the buckets `physioguidance-private`, `physioguidance-public`, or `physioguidance-trainers`. An Eventarc trigger fires and invokes the scanner Cloud Run service. The scanner writes two pieces of custom metadata on the object: `malware-scan` set to `clean` or `infected`, and `malware-scan-at` set to the ISO timestamp of the scan. Infected objects are moved into the quarantine bucket and marked `quarantined`.

16.2 What Support sees

`storage.service.ts.getScanStatus()` returns `{status: 'clean' | 'pending' | 'quarantined', scannedAt}`. The support service function `support.service.ts.lookupScanStatusForUrl` is called for every attachment on a ticket and its result drives the badge on `AttachmentChip` in the UI.

Badge	Meaning	Download behaviour
Clean	Scanner completed with `clean`	Download proceeds
Pending	Scan not yet complete	Download call returns HTTP 425 (Too Early); refresh in a few seconds
Quarantined	Scanner flagged the file	Download call returns HTTP 403; file cannot be released to anyone

16.3 Deletion and version history

Anyone with edit rights on a ticket can soft-delete an attachment via `DELETE /tickets/:id/attachments/:attachmentId`. Supervisors and admins see the full version history and

download log via `GET /tickets/:id/attachment-history` and `GET /tickets/:id/attachment-download-log`. Every download by any staff member is recorded through `POST /tickets/:id/attachment-download`.

16.4 Local development

The local-storage development driver reports `clean` unconditionally. Any production incident that traces back to `clean` metadata coming from a request that did not go through Cloud Storage is a configuration bug, not a scanner bug.

---

17. What Support cannot do — the deliberate boundary

This section is a positive statement of scope. Every line here is a boundary that keeps the role focused and keeps sensitive controls with the correct owner.

17.1 Both agents and supervisors

- **No bulk actions on tickets.** There is no checkbox column on ticket lists. Every action is one ticket at a time to keep the audit trail attributable.
- **No filing a ticket on behalf of another user.** That capability lives at `POST /tickets/on-behalf` and is reserved to Instructor, Admin, and Super Admin.
- **No approval, rejection, or "request more info" on trainer applications.** Support reads applications and loops admin in when a decision is needed.
- **No access to `/dashboard/admin/*`.** The admin support console is its own screen owned by admin.
- **No write access to business hours.** Both sub-roles read the schedule; only admin edits `PATCH /tickets/settings/business-hours`.

17.2 Agents only

Plain agents defer these to their supervisor:

- Change assignee on a ticket.
- Change priority on a ticket.
- Flip a ticket directly to `on_hold` (agents raise a hold request instead).
- Decide a hold request.
- Manually escalate a ticket.
- Merge duplicate tickets.
- View the attachment download log or attachment version history.
- View the queue-wide audit trail.

- Read the analytics for macros, tags, or the Knowledge Base.
- Edit SLA policies or auto-assignment.
- Create, edit, or delete macros.
- Create, edit, or delete categories.
- Create, edit, delete, archive, or unarchive tags.
- Create, edit, or delete tag rules.
- Edit retention policy.
- Mark a low-CSAT survey as followed up.
- Manage a team roster.

If an agent needs one of these, the fastest path is to loop the supervisor in on the ticket (department `supervisor`) with a short note explaining what is needed.

---

18. Frequently asked questions

How do I know whether I am an agent or a supervisor?
The sidebar tells you. Agents see six items (Dashboard, My Tickets, Knowledge Base, Trainer Applications, Looped In, Settings). Supervisors see ten (add All Tickets, Team, Alerts, Reports). If you land at `/dashboard/support/agent` on login, you are an agent; `/dashboard/support/supervisor`, a supervisor.

A new ticket has been sitting unassigned for an hour. Who owns it?
The team collectively. If auto-assignment is enabled the system usually assigns it within seconds; if the strategy is `manual` or auto-assignment is off, a supervisor picks it up and either takes it or reassigns to an agent.

A student sent multiple tickets about the same issue. How do I handle it?
A supervisor can merge them: from the ticket detail, open the merge candidates panel, choose the target ticket, and merge. The source ticket keeps its audit row and its `merged_into_ticket_id` is set so the trail is intact. Agents ask their supervisor to run the merge.

Can I edit or delete a reply I sent by mistake?
Replies are immutable once sent. Post a follow-up reply correcting the mistake. The audit trail preserves the original.

I need to pause a ticket because we are waiting on the student. What do I do?
As an agent, raise a hold request from the ticket detail — pick a reason from the closed enum (usually `waiting for student response`) and optionally add a description. A supervisor approves it and the status flips to `on_hold`. Supervisors can flip the status directly without the approval step.

A ticket relates to a payment I cannot see the detail of.
Loop in a colleague from the `finance` department. They will see the ticket in their Looped In inbox and

can post on the internal channel while you own the reply to the student.

A student attached a file but I cannot download it.
Check the scan badge on the attachment chip. If it says Pending, the scanner has not finished yet — wait a few seconds and refresh. If it says Quarantined, the file was flagged and the download endpoint returns 403; ask the student to re-upload from a clean source.

Can I bulk-assign tickets to myself?
No. Every action is one ticket at a time. This is deliberate — it keeps the audit trail per-ticket and prevents mass mis-assignments.

How do I hand a ticket to another department?
Use Transfer. The category updates, a member of the target department is looped in, and a system message lands on the thread. The assignee does not change; if the whole ticket should belong to the other department, ask a supervisor to reassign after the transfer.

How do I apply a canned reply?
Open the reply composer, click the macro picker, choose a macro, and it expands the EN or AR body inline based on the ticket's locale. You can still edit the text before sending. Any agent can apply a macro; only supervisors and admins author them.

How do I flag a ticket as urgent?
Only a supervisor can change priority. Loop your supervisor in on the ticket with a short note asking for a priority bump, or use the manual escalation flow if you have supervisor rights.

I got a CSAT alert about a low rating. What now?
Open the low-ratings list under Reports → CSAT, pick the survey, read the comment, and reach out to the student (or ask the original assignee to). When the follow-up is done, mark it via the `follow-up` endpoint. That closes the loop.

A ticket was closed by mistake. Can it be reopened?
Yes. Support staff can reopen from the ticket detail — the status flips to `in_progress` and any pending CSAT email is cancelled.

How do I know if the malware scanner is behaving?
The AttachmentChip badge is the ground truth. If files are stuck on Pending across many tickets for more than a couple of minutes, raise an incident — the SupportActiveIncidentsBar exists precisely for this class of platform-wide event.

Where do I add a tag?
On the ticket detail, use the tag picker in the right rail. The tags you can pick from are the active tags configured by a supervisor in Settings → Workspace → Tags. Tags may also apply automatically if a matching tag rule fires on the ticket.

---

19. Where to look next

- **What the requester sees when they submit a ticket** → student-guide.md
- **How admin runs the support console at** `/dashboard/admin/support` → admin-guide.md
- **How instructors interact with support (as requesters)** → instructor-guide.md
- **How attachments are scanned and gated** → malware-unscanned-file-gate.md
- **Full ticket API surface** → api-reference.md
- **Regional and infrastructure context** → system-architecture.md