


COMPONENTS

TableFeelingsRaccoon Component

Description:
Displays the feelings array in a table view

Inputs:
feelings: Array<RaccoonFeeling>: Array of types RaccoonFeeling, used to display data

Event Triggers:
viewDetail<RaccoonFeeling> : Send the selected Feeling for view Details
selected<RaccoonFeeling> : Send the selected Feeling

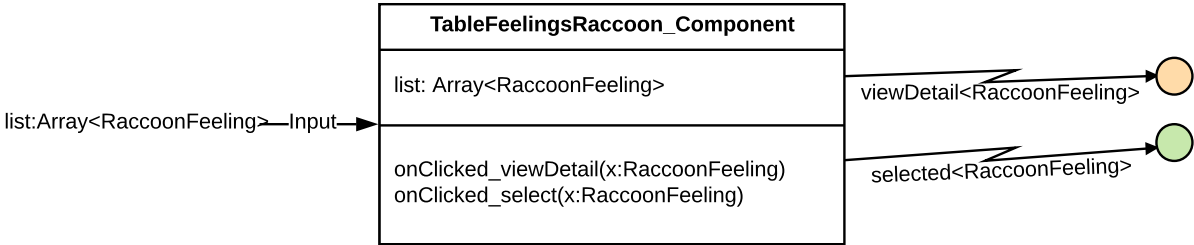


GridFeelingsRaccoon Component

Same as table view, but in a grid view

Description:
Displays the feelings array in a grid view,

Inputs:
Array<RaccoonFeeling>: Array of types Feelings, used to display data


Event Triggers:
viewDetail<RaccoonFeeling> : Send the selected Feeling for view Details
selected<RaccoonFeeling> : Send the selected Feeling

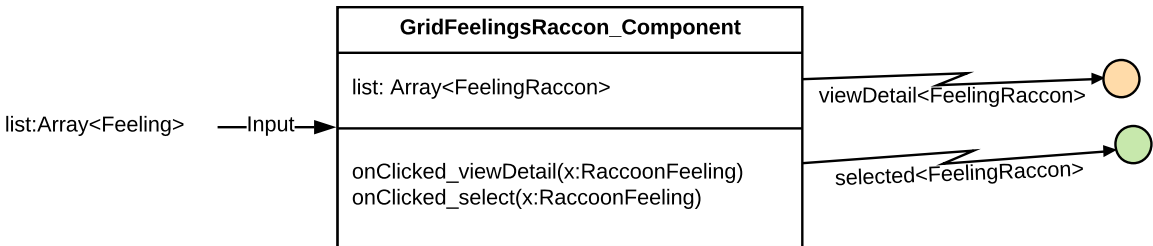

DialogDetailRaccoonFeeling Component

Description:
Displays the feeling selected in a dialog and shows its image


Event Suscriptions:
viewDetail<Feeling>:The selected feeling for view details

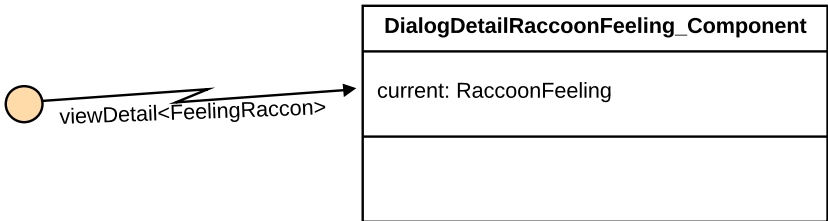

SelectedRaccoonFeeling Component

Description:
Displays the feeling selected

Event Suscriptions:
detail<RaccoonFeeling>:The selected feeling

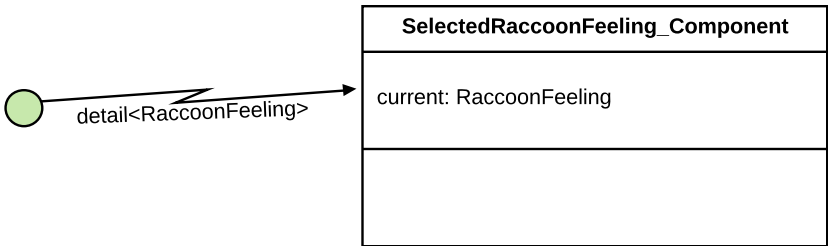



INTERFACES

| RaccoonFeeling |
|---|
| id:number desc:string imgUrl:string |
| |

Description:
Attributes representation for a Raccoon
feeling object.

SERVICES

| FeelingService |
|--|
| url_api:string url_getAll: string |
| getAll():Observable<Array<RaccoonFeeling>> |

| RaccoonFeelingObserver_Service |
|---|
|  viewDetail :Subject<RaccoonFeeling> |
|  selected :Subject<RaccoonFeeling> |
| |

FeelingService

url_api:string
Variable which contains url to API

url_getAll:string
Variable which contains url to API to get All Raccoon feelings

Event Suscriptions:
Array<RaccoonFeeling>: Array of types Feelings, used to display data

FeelingObserverService

Event Variables:
viewDetail :Subject<RaccoonFeeling> : Observer for view detail RaccoonFeeling
selected :Subject<RaccoonFeeling> : Observer for selected RaccoonFeeling