

Allure reports

04 June 2024 22:12


1. Make sure Java version 8 or above installed, and its directory is specified in the JAVA_HOME environment variable.
2. Go to [the latest Allure Report release on GitHub](#) and download the allure-*.zip or allure-*.tgz archive.
3. Uncompress the archive into the directory of your choice. Remember the path to its bin subdirectory. You will need this path in a future step.
4. Make sure that the allure command resolves to the allure file from your installation directory. There are various ways to do so, for example, via the Control Panel or by running a PowerShell script.

From <<https://allurereport.org/docs/install-for-windows/>>

5. Press **Win+R** and enter the command: sysdm.cpl to open the **System Properties** tool.
6. On the **Advanced** tab, click **Environment variables**.
7. In either the **User variables** or **System variables** list, double-click the Path variable to open the editing dialog. Note that editing the system variable requires administrator privileges and affects all users of the computer.
8. In the **Edit environment variable** dialog, click **New** to add a new line entry to the paths list. In the new line, specify the full path to the bin subdirectory from an earlier step, for example: D:\Tools\allure-2.29.0\bin.
9. If the list contains a path to a previously installed Allure version, delete it.
10. Click **OK** to save the changes.

From <<https://allurereport.org/docs/install-for-windows/>>

allure --version

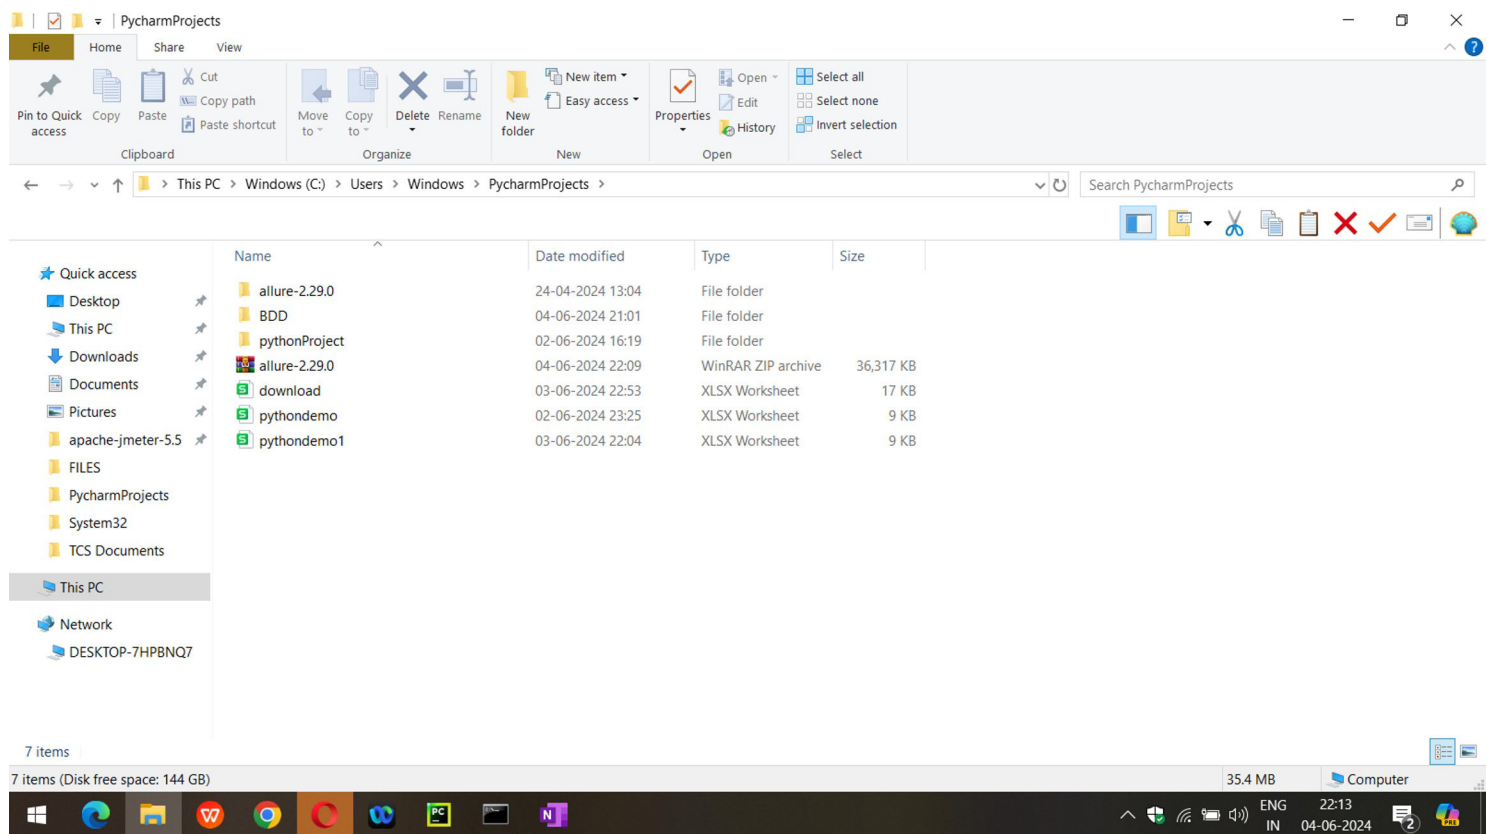

Add this path into environmental variables