

CONTENTS

Sr. No.	Particulars	Page No.
1	Approval Letter	5
2	Certificate of Originality	6
3	Guide Resume	7
4	Synopsis	11-40
5	Project Report	41-166
	• Introduction	42
	• Objective	43
	• Project Category	45
	• Software Requirements Specification(SRS)	50
	• Project Planning	52
	• Feasibility Study	55
	• Complete Structure	57
	• Table Details	61
	• List of Input Output	64
	• Modules Description	65
	• User Interface Design	67
	• Coding	84
	• Testing	155
	• Test Cases	162

	• Maintenance	163
	• Future Scope	165
	• Bibliography	166

SYNOPSIS

INTRODUCTION

The “**E-Ticketing**” for Indian Tourism is a web application developed using industry standards and methodologies. Development of automation systems as a part of the e-governance initiate finance and budgeting systems, and e ticketing solutions. It invites eligible System Integrators (SI) to indicate their interest in providing the services. Interested SIs must provide information indicating that they are qualified to perform the services (brochures, description of similar assignments, experience in similar conditions, availability of appropriate skills among staff, etc.). SIs may associate to enhance their qualifications.

It carries out elaborate Surveys of antiquarian remains in the country and protects monuments and sites. The Organization has a large work force comprising of trained archaeologists, conservators, epigraphist, architects and scientists for conducting archaeological research projects through its Circles, Museums, Excavation Branches, Prehistory Branch, Epigraphy Branches, Science Branch, Horticulture Branch, Building Survey Project, Temple Survey Projects and Underwater Archaeology Wing.

Key Features:

- ✦ Compelling design that showcases your products or services.
- ✦ Ease to users
- ✦ To automate the E-Tickets for monuments in India across the world
- ✦ To provide better secure transactional Web Application
- ✦ To integrate thermal Printer and Bank Gateways.
- ✦ To Speed up the process for time saving and to increase tourism in India
- ✦ To provide the Historical information to all user across the world
- ✦ User-friendly customer interface with search options.
- ✦ Web-based administration.
- ✦ Completely Customizable Design
- ✦ SEO Friendly Site Architecture
- ✦ Advanced Product Marketing

OBJECTIVES

E-ticketing for Indian Tourism is divided into Circles for the maintenance of ancient monuments, archaeological sites which remains of national importance. It carries out elaborate surveys of antiquarian remains in the country and protects monuments and sites. The Organization has a large work force comprising of trained archaeologists, conservators, epigraphist, architects and scientists for conducting archaeological research projects through its Circles, Museums, Excavation Branches, Prehistory Branch, Epigraphy Branches, Science Branch, Horticulture Branch, Building Survey Project, Temple Survey Projects and Underwater Archaeology Wing.

The Circles carry out archaeological fieldwork, research activities and implement various activities which include:

- Extensive survey of antiquarian remains in villages of India.
- Exploration of archaeological sites and documentation of sculptures.
- Reservation and day-to-day maintenance of protected monuments.
- Providing basic facilities at the monuments for tourists.
- Issuing of NOC for any sort of construction, additions and alterations to existing structures or
- New constructions within regulated area of the protected monuments.
- Issuing permission for filming, photography and cultural programs at the protected monuments.
- Organizing public awareness programs on various occasions like World

Heritage Day, World Heritage Week, Museum Day and other important occasions.

- Registration of antiquities and issuing non-antiquity certificates.
- Interaction with various universities and research institutions.

E-ticketing solutions, and Finance and Budgeting systems as the areas to be automated. These will eventually be integrated with other systems that are proposed to be set up.

PROJECT CATEGORY

The undergoing project falls under **Internet Technologies & RDBMS (Relational Database Management System)** category. Since the project is mainly responsible for creation of the website with the online database at backend.

- ❑ **Front End: - HTML5, CSS3**
- ❑ **Back end: - JSP with Servlet ,Java**
- ❑ **Database: - Oracle 11g**

Java:-

JAVA is one of the most widely used development tools on the market today. Java is a general-purpose, object-oriented programming language developed by Sun Microsystems of USA in 1991. Originally Oak by James Gosling, one of the inventors of the language, java was designed for the development of software for consumer electronics devices like TVs, VCRs toasters and such other electronic machines. This goal had a strong impact on the development team to make the language simple, portable and highly reliable.

JAVA FEATURES

- Compiled and Interpreted
- Platform-Independent and Portable
- Object –Oriented
- Robust and Secure
- Distributed
- Familiar, Simple and Small
- Multithreaded and Interactive
- High Performance
- Dynamic and Extensible

J2EE

J2EE has now been around for around four years. Over these years, it has replaced several proprietary and non-standard technologies as the preferred choice for building e-commerce and other web-based enterprise applications.

Today, J2EE is one of the two available alternatives for building e-commerce applications.

Java has triggered new programming models and technologies in different domains ranging from devices, through telephony applications, to the enterprise. At the same time, Java has acted as a catalyst in making certain technology domains take more robust and secure shapes. Java's enterprise computing platform, the **Java2 Platform, Enterprise Edition (J2EE)**, is one such domain.

JAVA SERVER PAGE(JSP)

Java Server Pages (JSP) are a technology defined by Sun Microsystems to create dynamic content on the Web. They are HTML documents that are interleaved with Java, which provide the dynamic content. JSP are a server-side application; they accept a request and generate a response. Generally the requests are made from a Web-Client, and the response is a generated HTML document that gets sent back to the Web client. Because of JSP are server side application they have access to the resources on the server such as Servlets, Java Bean, EJB (Enterprise Java Bean) and Databases.

JSP provide a way to embed components in a page, and to have them do their work to generate the page that is eventually sent for client. A JSP page is in fact an extension of Servlet Programming model. When a user requests a JSP page, in the web container compile the JSP page into a servlet. The web container then invokes the servlet and returns the resulting content to the web browser. JSP pages provide

powerful and dynamic page assembly mechanisms that benefits from the many advantages of the Java Platform.

Compared to Servlet, which are pure Java code, JSP page are merely text-based document until the web container compiles them into the corresponding servlets.

Benefits of JSP

1. They are automatically recompiled when necessary.
2. Because they exist in the ordinary Web Server document space, no special URL mapping is required to address them.
3. A JSP can be run on any application Server that supports JSP without any modification to the code.
4. The specification is written in a way that promotes integration with integrated development environment (IDE).
5. JSP use tags, which are similar to HTML XML, to insert dynamic content it is possible to add additional functionality to a JSP importing tag library. The tag library defines additional tags that can used to replace section of code.
6. When writing a JSP, it is easier to write the HTML code and then insert the Java code to create your dynamic content. So if you don't plan write the HTML, have you graphical artists work their magic to create beautiful page and then insert your java code to make the JSP dynamic.

Oracle 11g:

Oracle 11g expands on the automation and advisor framework of 10g, but also includes a wide range of performance and optimisation improvements.

Oracle 11g is a powerful tool for turning your enterprise data into a competitive advantage. Industry-leading support for enterprise data management, developer productivity, and business intelligence includes all the functionality customers expect from an enterprise-class database management system.

Oracle 11g also includes many New and improved capabilities to help make your IT staff more productive. Oracle 11g includes key enhancements to enterprise data management in the following areas:

- ❖ Manageability
- ❖ Availability
- ❖ Scalability
- ❖ Security

Manageability:-

SQL Management Objects (SMO) is a new set of programming objects that exposes all of the management functionality of the SQL Server database. In fact, Management Studio was built with SQL Management Objects. A **SQL management object** is a feature that stabilizes the execution plans of individual SQL statements. SQL profiles and SQL plan baselines are SQL management objects.

Availability:

Investments in high-availability technologies, additional backup and restore capabilities, and replication enhancements enable enterprises to build and deploy highly available applications. Innovative high-availability features such as database mirroring; failover clustering, database snapshots, and enhanced online operations will minimize downtime and help to ensure that critical enterprise systems remain accessible. This section reviews these enhancements in greater detail.

Database Mirroring

Database mirroring allows continuous streaming of the transaction log from a source server to a single destination server. In the event of a failure of the primary system, applications can immediately reconnect to the database on the secondary server. The secondary instance detects failure of the primary server within seconds and accepts database connections immediately.

Fast Recovery:

Oracle 11g improves the availability of Oracle 11g databases with a new and faster recovery option. Users can reconnect to a recovering database after the transaction log has been rolled forward. Earlier versions of Oracle 11g required users to wait until incomplete transactions had rolled back, even if the users did not need to access the affected parts of the database.

Security:

Oracle 11g makes significant enhancements to the security model of the database platform, with the intention of providing more precise and flexible control to enable tighter security of the data. Microsoft has made a considerable investment in a number of features to provide a high level of security.

SOFTWARE REQUIREMENTS SPECIFICATION

The software requirements specification is produced at the culmination of the analysis task. The function and performance allocated to software as part of system engineering are refined by establishing a complete information description, a detailed functional and behavioral description, an indication of performance requirements and design constraint, appropriate validation criteria and other data pertinent to requirements.

Software Requirement Specification is the stage to generate the requirements document that helps in providing technical specifications for developing the software.

TOOL/PLATFORM, LANGUAGES TO BE USED

Software and hardware specification as the name suggests, tells us about the various characteristics of the software and the hardware environment used i. e. the development

HARDWARE REQUIREMENTS:

Hardware is the term given to machinery itself and to various individual pieces of equipment. It refers to the physical devices of a computer system. Thus the input, storage, processing control and output devices are hardware.

Processor	:	Pentium-IV 1.7 GHz and Above
RAM	:	64MB-512 MB
HDD	:	20 GB – 160 GB
CD-ROM	:	52X
Monitor	:	14 inches Color Monitor
Keyboard	:	104 Keys Keyboards
Printer	:	HP Deskjet 2331

SOFTWARE REQUIREMENTS:

Software means a collection of program where the objective is to enhance the capabilities of the hardware machine. Software for the proposed system development is defined as follows:

Operating System	:	Windows 8 / Windows 7
Language /Technology	:	JSP,Java,Servlet
DBMS Used	:	Oracle 11g
Reporting Tools	:	HTML5,CSS3

PROJECT PLANNING

PERT CHART & GANTT CHART

A **PERT chart** is a project management tool used to schedule, organize, and coordinate tasks within a project. PERT stands for *Program Evaluation Review Technique*, a methodology developed by the U.S.


A PERT chart presents a graphic illustration of a project as a network diagram consisting of numbered *nodes* (either circles or rectangles) representing events, or milestones in the project linked by labelled *vectors* (directional lines) representing tasks in the project. The direction of the arrows on the lines indicates the sequence of tasks.

Gantt charts are a project control technique and it can be use for several purposes, including scheduling, budgeting and resources planning. A Gantt chart is a bar chart, with each bar is proportional to the length of time planned for the activity. The major identified Software Engineering Tasks at software project development are as follows:

- System Analysis
- System Design
- Software Development
- Software Testing
- Software Installation
- Software Documentation
- System Evaluation


The PERT Chart of the software development phase is also prepared. It is based on the different modules identified in the software.

PERT (PROGRAM EVALUATION & REVIEW TECHNIQUE) CHART

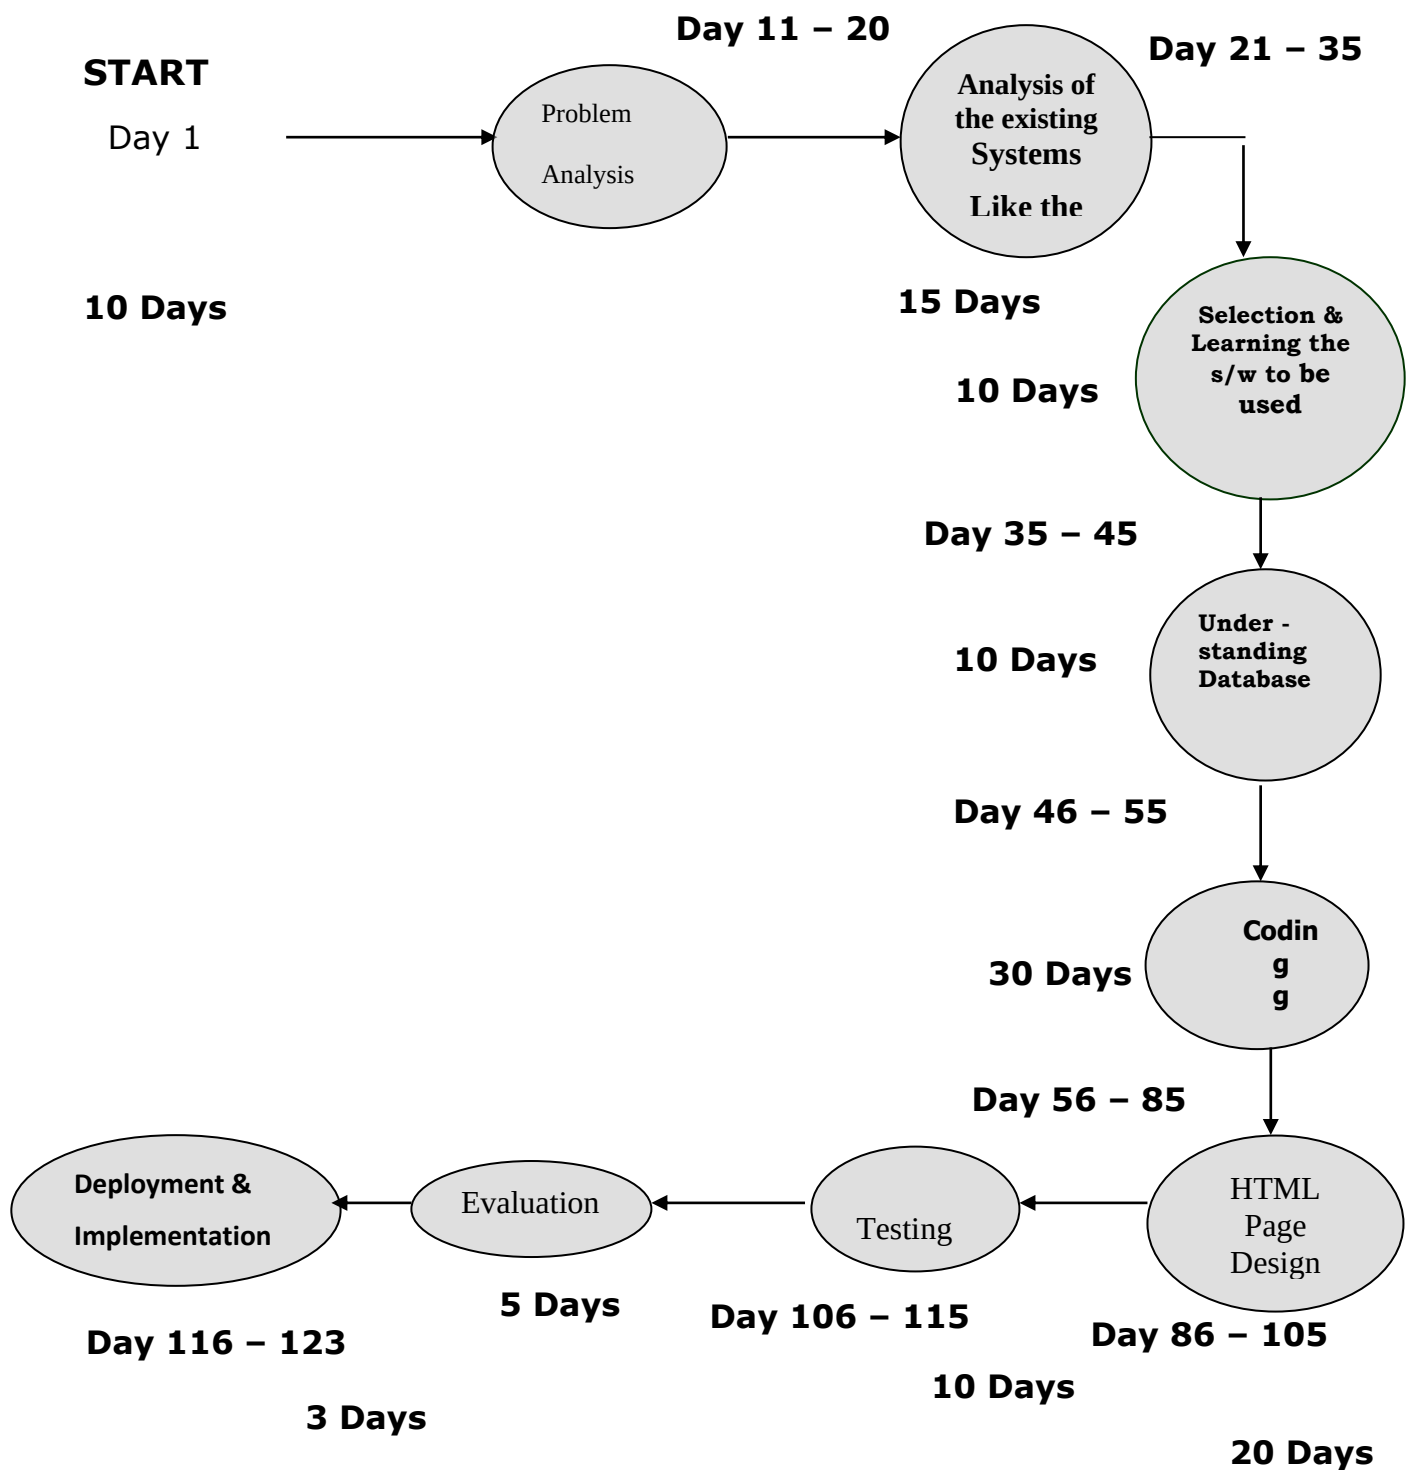

GANTT CHART

Gantt chart is a project scheduling technique. Progress can be represented easily in a Gantt chart, by coloring each milestone when completed. The project will start in the month of DEC and end after 4 months at the end of MAR.

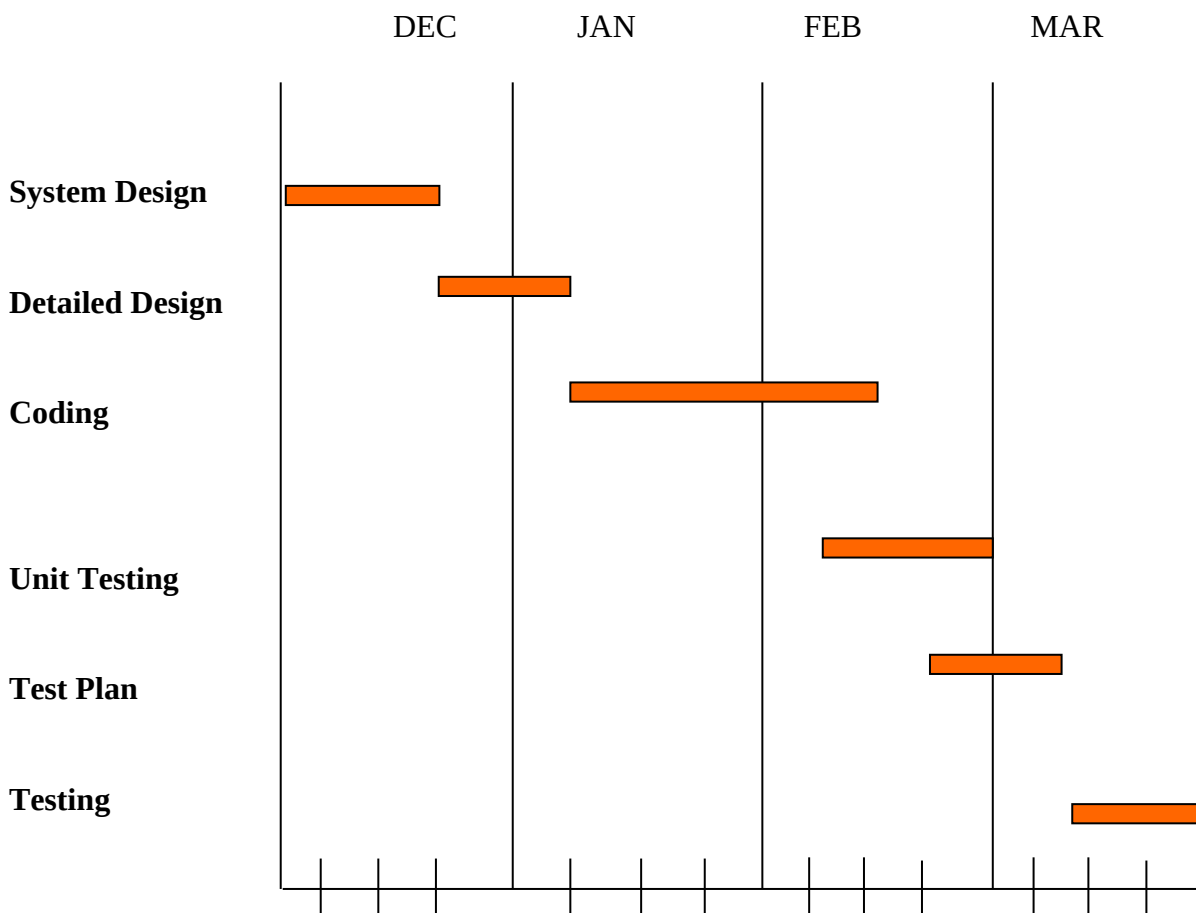

FEASIBILITY STUDY

A feasibility study is carried out to select the best system that meets performance requirements.

Feasibility is the determination of whether or not a project is worth doing. The process followed in making this determination is called a feasibility study. This type of study determines if a project can and should be taken.

Since the feasibility study may lead to the commitment of large resources, it becomes necessary that it should be conducted competently and that no fundamental errors of judgment are made.

Technical feasibility

This is concerned with specifying equipment and software that will successfully satisfy the user requirement. The technical needs of the system may include:

- The facility to produce outputs in a given time.
- Response time under certain conditions.
- Ability to process a certain volume of transaction at a particular speed.
- Facility to communicate data to distant location.

In examining technical feasibility, configuration of the system is given more importance than the actual make of hardware. The configuration should give the complete picture about the system's requirements.

The proposed system is technically feasible because of following reasons:

- The organization already has server-client setup so this system can run in organization.
- The organization does not require any new package in their computer system as it already has all the required software's.
- The organization is already working with the system made in dbase3 and has Knowledge about the processes, databases, and expected outputs.
- The proposed system is to be implemented using COM technology, the server Components are to be installed on server and client components on client. All the Clients will get response according to the application loaded on their terminals.

Operational Feasibility

It is mainly related to human organizational and political aspects. The points to be considered are:

- What changes will be brought with the system?
- What organizational structures are disturbed?
- What new skills will be required? Do the existing staff members have these skills? If not, can they be trained in due course of time?

Such considerations are likely to critically affect the nature and scope of the eventual recommendations. This feasibility study is carried out by a small group of people who are familiar with information system techniques, who understand the parts of the

business that are relevant to the project and are skilled in system analysis and design process.

The proposed system is operationally feasible because of following reasons:

- The organization is already working with the computerized system and has knowledge about functioning and databases.
- The interactivity of existing system is very poor as each command has to be written manually on the system and the proposed system is much faster.
- The proposed system is better in use and more user-friendly as it generates proper messages at run time.

Economic Feasibility

Economic analysis is the most frequently used technique for evaluating the effectiveness of a proposed system.

In this we determine the benefits and savings that are expected from a proposed system and compare them with costs. If benefits outweigh costs; a decision is taken to design and implement the system. This is an ongoing effort that improves in accuracy at each phase of the system life cycle.

The proposed system is financial feasible because of following reasons:

- The cost of system development is nil as a trainee student is developing it.
- The organization already has server-client setup so this system can run in organization so hardware investment is nil.
- The organization does not require any new package in their computer system as it already has all the required software's.
- The proposed system is economic, as it will reduce the time investment in running the daily transactions.
- The employees are already working with the old system so cost of learning to work with new system is very low.
- The system itself will be very much interactive and self-explanatory and also contains user manuals to assist operator.
 - No extra cost for salary of operational staff.

A COMPLETE STRUCTURE


(I) ANALYSIS (DFDs):

Context Level Data Flow Diagram:


The top-level diagram is often called a context diagram. It is also called 0 level data flow diagram. It contains a single process.

Data Flow Diagram Level-0(DFD-0)


A Context Level Diagram

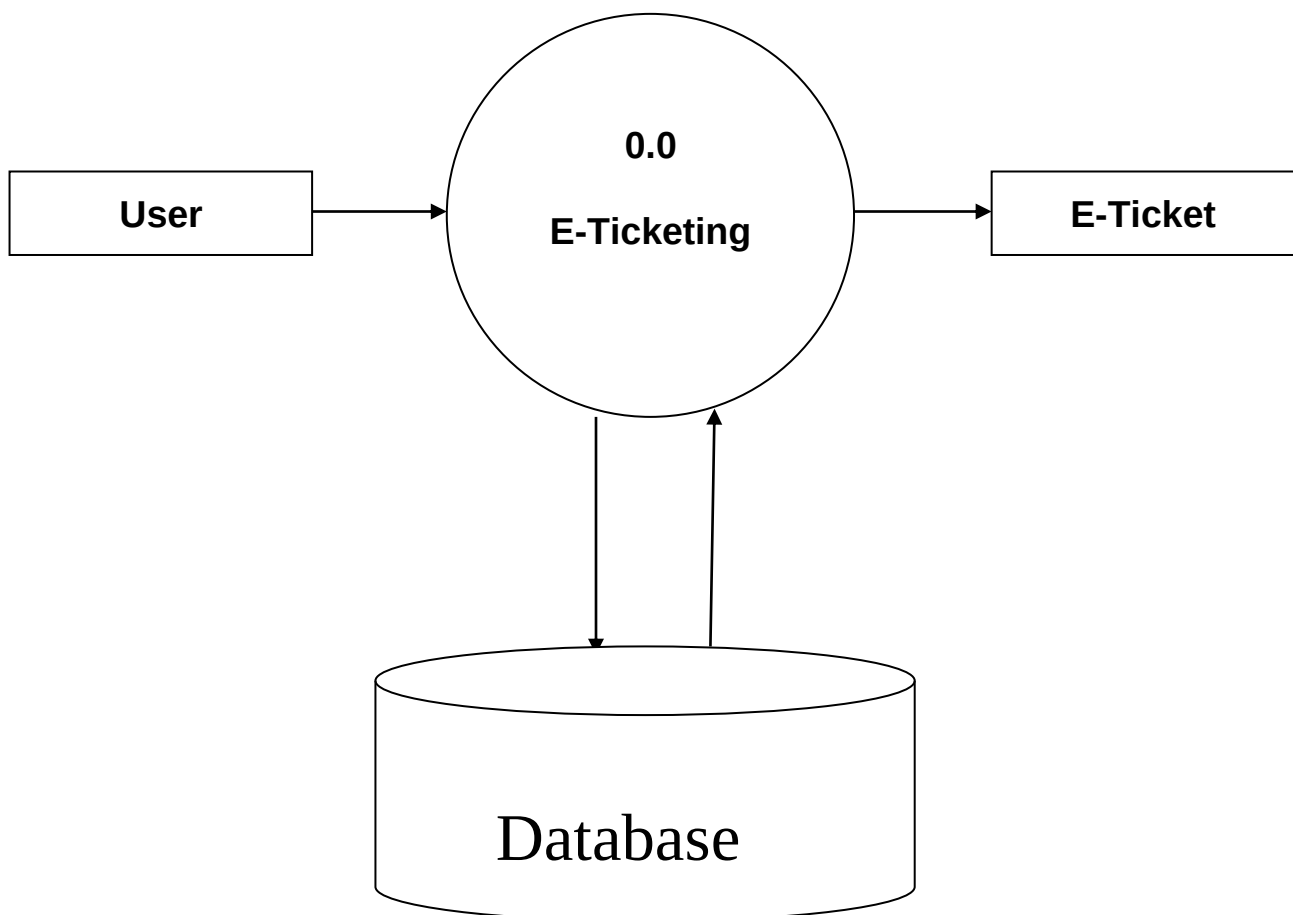

Data Flow Diagram Level-1(DFD-1)

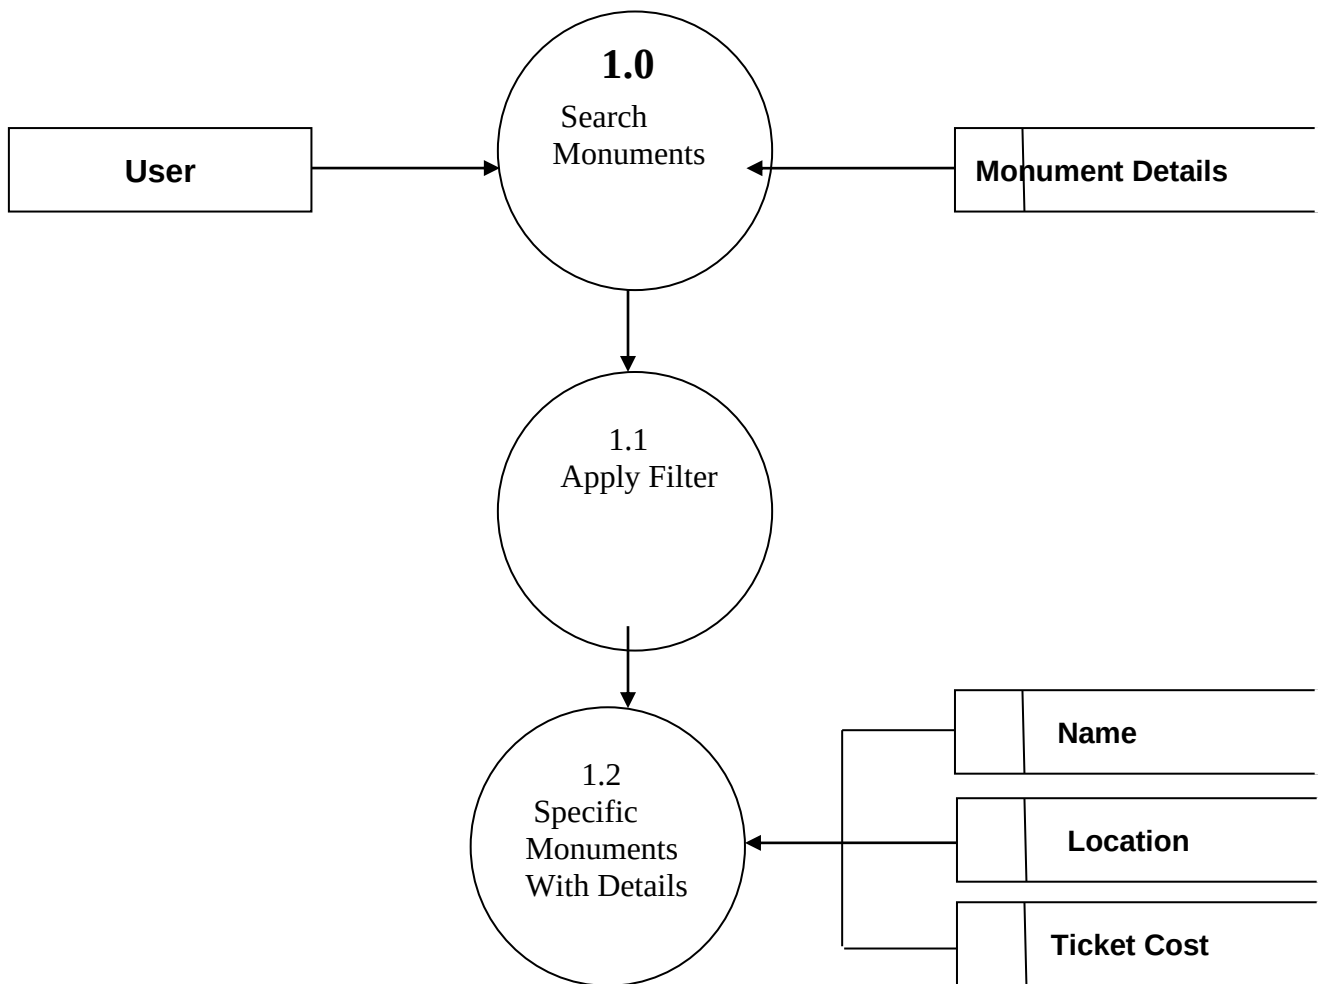

Data Flow Diagram Level-2(DFD-2)

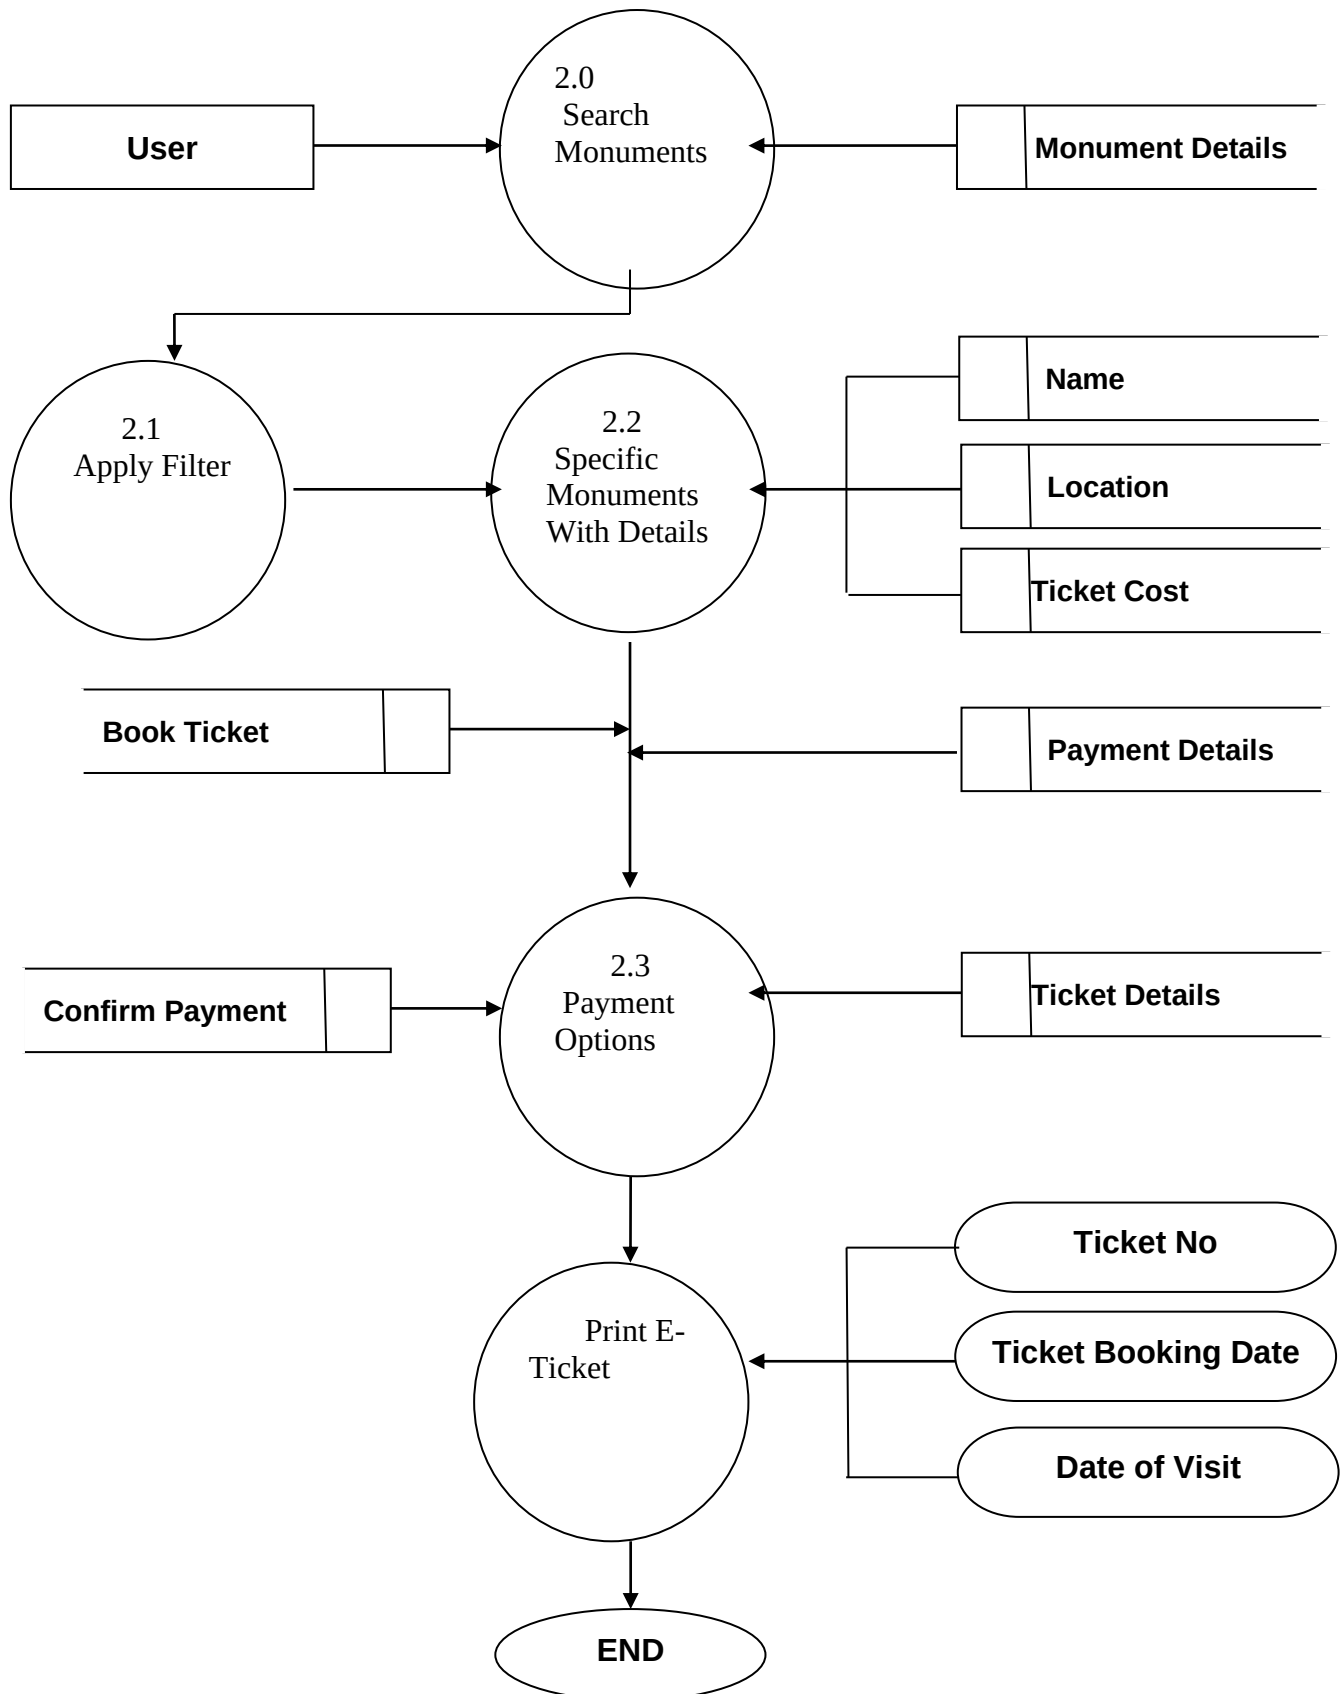

ER DIAGRAM

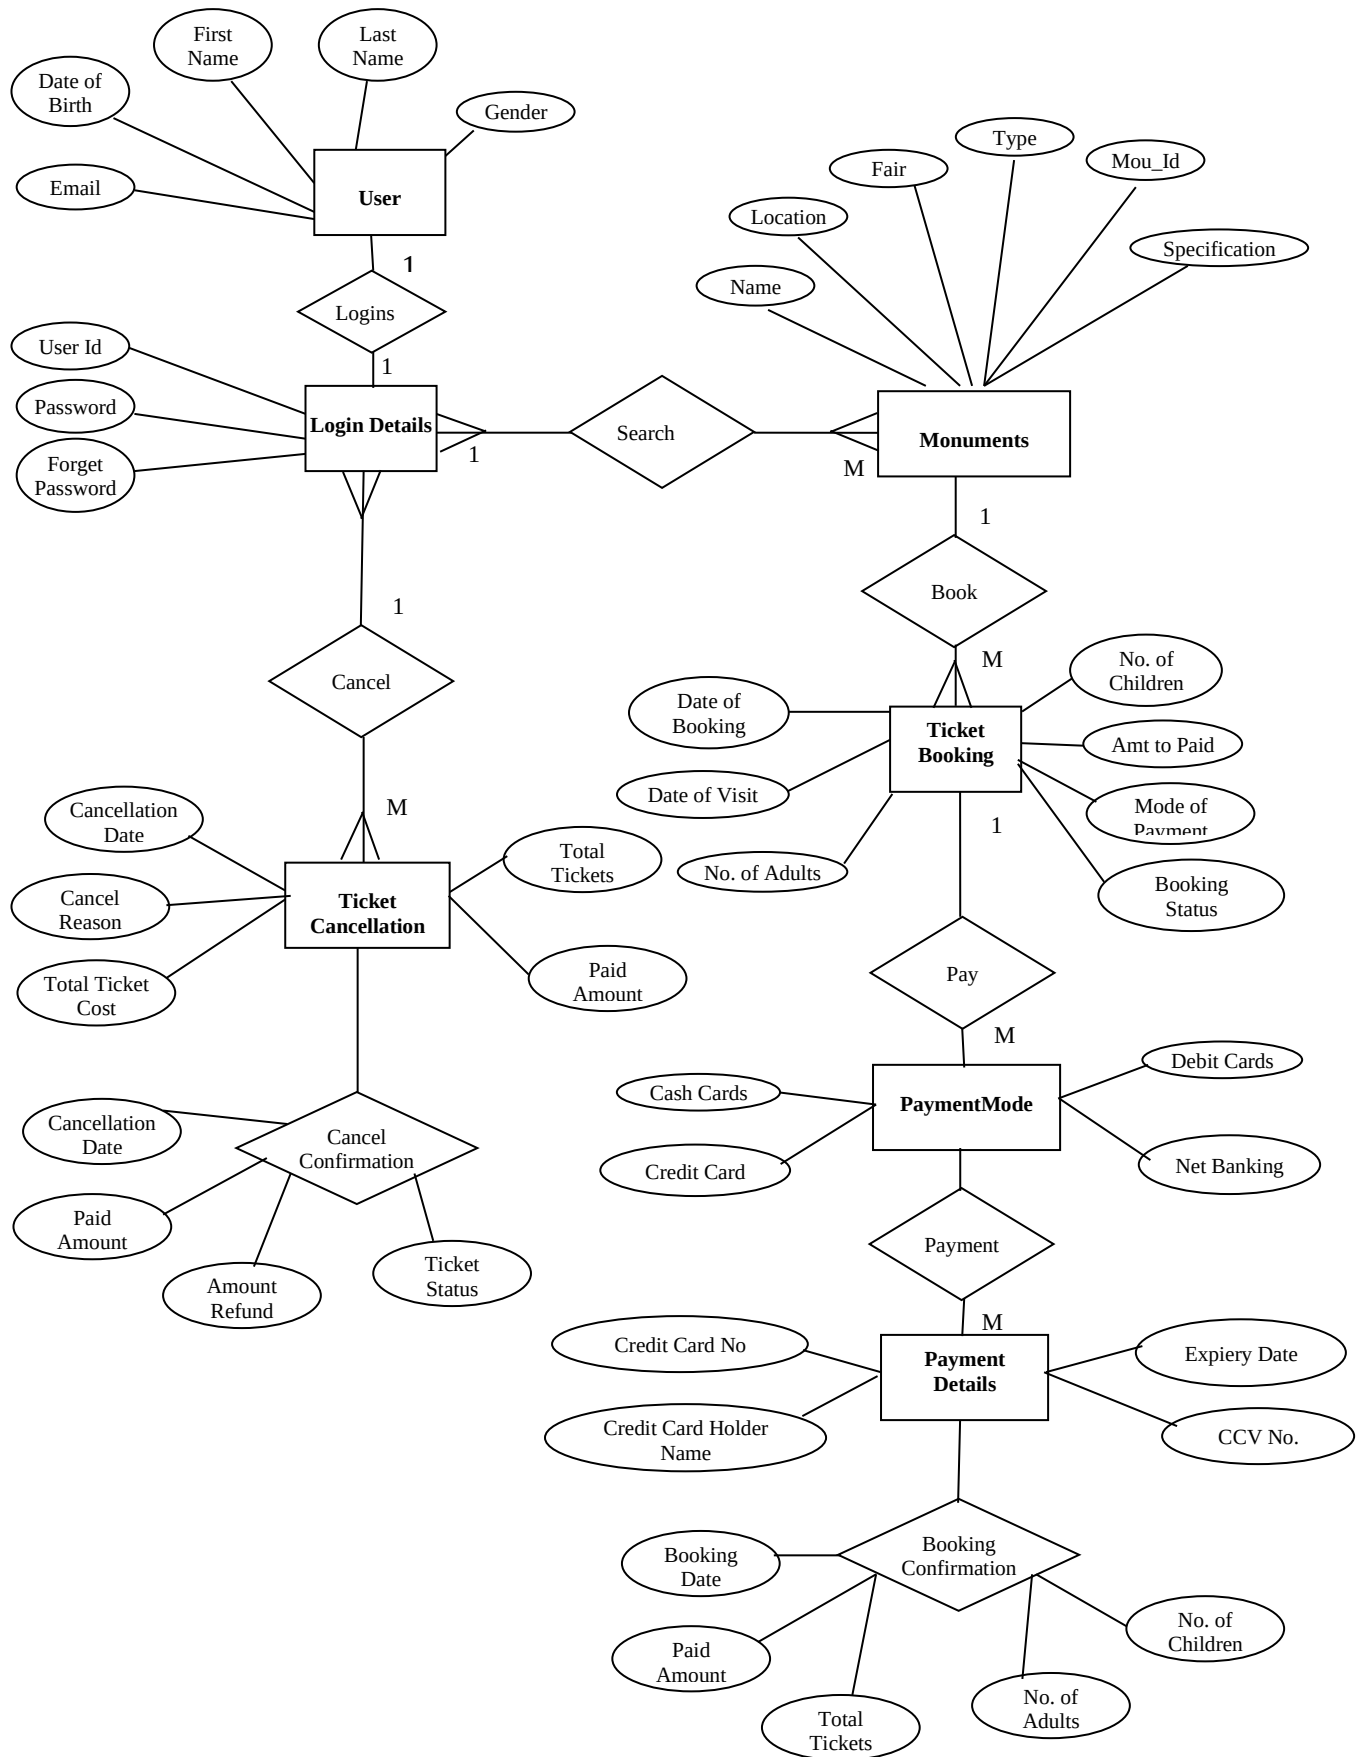


Table Details

1. User: This table contains the details of the users feeds information.

UserID-is the primary key

Table Name	User		
Field Name	Data type	Size	Constraints
Id	Number		Primary Key & Auto Increment
FirstName	Varchar2	30	Not null
LastName	Varchar2	30	Not null
Password	Varchar2	30	Not null
Gender	Varchar2	01	Not null
Email	Varchar2	20	Not null
Contact	Number		Not null
DOB	date		Not null

2. Monument : This Table contain the information about the Monument and its fare for foreign members and Indian .

Table Name	Monument		
Field Name	Data type	Size	Constraints
Mou_Id	Number		Primary Key & Auto Increment
Name	Varchar2	30	Not null
Location	Varchar2	30	Not null
Type	Varchar2	30	Not null
Fare	Varchar2	10	Not null
Specification	Varchar2	20	Not null
Contact	Number		Not null

3. TicketBooking : This includes all the details of the ticket holder being booked by the user for a particular monument.

TicketID is the Primary Key.

Table Name	Tour_booking_details		
Field Name	Data type	Size	Constraints
Booking_id	Number		Primary Key & Auto Increment
User_id	Number	11	Foreign key not null
Session_id	Varchar2	20	Not null
Child	Number	10	Not null
Adult	Number	10	Not null
Tour_date	Datetime		Not null
Departure_time	Varchar2	255	Not null
Total_amount	Float	11	Not null
Booking_remarks	Number		Not null
Status	Number	11	not null
cancel_request	Number	11	Not null
Contact_person_details	Varchar2		Not null
Terms	Varchar2		Not null
Booking_date	Datetime		Not null

4. BookingCancellation: This includes the details of cancellation of ticket being booked by the user earlier.

TicketCancellationID- is a primary key

Table Name	Monument		
Field Name	Data type	Size	Constraints
TicketCancelId	Number		Primary Key & Auto Increment
TicketId	Varchar2	30	Not null
UserId	Varchar2	30	Not null
CancelDate	Varchar2	30	Not null
DeductedAmount	Varchar2	10	Not null
RefundAmount	Varchar2	20	Not null

List of Input & Output

INPUT TO THE PROJECT

1. Historical PlacesBasic Details
2. Category and SubCategory Details
3. User Login Information
4. User Shipping and Billing Details

OUTPUT OF THE PROJECT

1. Listing of Places
2. Selection to visit places.
3. E-Ticket Printout
4. Different type of Shipping Methods
5. Mass mailing and Shipping Company Details

PROJECT MODULES

NUMBER OF MODULES AND DESCRIPTION:

Module 1: Home Module

This module contains Home page of this Web Application which describes the concept behind it. All links and references related to the Web application are available on the site including monuments, Login Page, Registration for new Client, Forget password FAQs, About Page etc.

Module 2: User Profile Module

This module contains user profile details. User's personal details, Planing Visit, Book Ticket, Print Ticket, Booked History etc available here.

Module 3: Change Password/Forgot Password Module

This module is used to change the Old entered password with newly entered password. User can change his/her password, by entering the Old password and new password and confirmation password. Click on the link "Forgot Your Password?" below the login form on your website, enter user name and press "Submit". Check incoming mails for "Lost Password" message from your website. If you do not get e-mail (has a member a real e-mail?), then you have to check the configuration of your e-mail module.

Module 4: User Ticket Booking

Any user who has registered himself on ASI can book his visit to monuments online. He can have his own choice of places to visit and can book ticket directly by paying ticket amount using online payment gateways.

Module 5: Booking Counter

This application is also designed for the staff of ASI who sits on the gate counter to distribute tickets. In this module, any authorized staff can login onto the application and issue ticket to the visitors directly by taking ticket price in cash. It will keep records of all visitors visited on daily basis.

Module 6: Booking Cancellation

This module helps the visitors to cancel their already booked tickets in case they change their plan to visit. It is a very easy and user-friendly process.

Module 7: Payment Transaction

It provides facilitation of transactions of Banking Gateways to save time. In order to streamline its processes and increase efficiency and effectiveness of services. The use of Thermal Printer and Bank Gateways (E-Transactions) plays a vital role in the effective running of the organization. Data are required to be acquired, digitized and maintained. Adequate processes exist, the planning, deployment and monitoring of funds remains a paper-based system, leading to inordinate delays in data collection, and decision making.

Module 8: Reports

Different types of reports can be generated which are required to the government including Day Summary, Reconciliation Report and E-Ticket.

Module 9: Admin- User Details

This module contains all information related to register user and guest user details. User personal details and his order-related information is available in this section. Admin can send the email and other alert to user.

**** Since the project is under study and creation. To accomplish all the purposes sub module and function may INCREASE and CHANGE.**

TESTING AND VALIDATION CHECKS

The approach of web app testing adopts the basic principle for all software testing and applies a strategy and tactics that have been recommended for object oriented system the following steps summarizes the approach:

1. **The content model for the web app is reviewed to uncover errors.**
This is like copyediting
2. **The design model for the web application as reviewed to uncover navigation error.** Use cases derived as part of the analyst activity, allow a web Engineer to exercise each usage scenario against the architectural and navigational design .these non executable test help uncover Error in navigation.
3. **Selected processing component and web page is unit tested.**
When web apps are considered, the concepts of the unit changes, each web page encapsulated in itself content navigation link as well As script, form and applet (processing element). It is not always possible or practical to test each of these characteristic individually.
4. **The architecture is constructed and integration tests are conducted.**The strategy for integration testing depend upon the architecture that has been chosen for the web application
5. **The assembled web application is tested for overall functionality and content Delivery.**Like conventional validation, the validation of web based systems and application focuses on user visible action and user recognizable output from the system. To assist in the derivation of validation tests the tester should draw upon use cases the use cases provides a scenario that has high likelihood of uncovering errors in user interaction requirement.
6. The web application is implemented in a variety of different environmental configuration and is tested for compatibility with each configuration.
7. **The web application is tested by controlled and monitored population of end user.**

Finally with the modular concept inside the application it is being also tested for

RELIABILITY:

The system reliability will be insured through data integrity rules built into the database at the backend and the system rules built into the front-end application. The system will take assurance from the user before making any changes permanent.

MAINTAINABILITY:

The system has been designed taking care of modularity. Faults in the system can be traced to modules and thus solve accordingly.

VALIDATION CHECKS (Security Mechanism)

This will be as such to maintain consistent and persistent information on the web when most of the time the project has to deal with uploads so a minor error will degrade the impression of the company. Login window is use for security purpose. Therefore, validation checks by software itself using the Jsp with Servlet and manual checks are also necessary as: -

1. Correct entry of data in the form.
2. Correct updating of question and with the most suitable answer etc

FUTURE SCOPE OF THE PROJECT:

The system is highly flexible one and is well efficient to make easy interactions with the client. The key focus is given on data security, as the project is online and will be transferred in network. The speed and accuracy will be maintained in a proper way.

This will be a user-friendly one and can successfully overcome strict and severe validation checks. The system will be a flexible one and changes whenever can be made easy. Using the facility and flexibility in J2EE and Oracle 11g, the software can be developed in a neat and simple manner there by reducing the operator's work.

Since the project is developed in **JSP as front-end** and **ORACLE 11g** as back-end it can be modified easily and used for a long period.

Following future scope of this project that can be added to this project:

- I will develop an App regarding my website.
- Some more features are to be added like Easy Payments Methods
- An Automatic Confirmation message will be sent to user phone.

BIBLIOGRAPHY

➤ BOOKS:

- The Complete Refence JSP -Phil Hanna
- The Complete Reference Java -Herbert Schildt
- IGNOU Blocks(MCS-024 and BCS-053) -Java & JSP Blocks
- IGNOU Blocks(MCS-023) -Oracle Blocks

➤ WEBSITES:

- <https://www.javatpoint.com/java-tutorial>
- <https://www.w3schools.com/html/default.asp>

END OF SYNOPSIS

PROJECT REPORT

INTRODUCTION

The “**E-Ticketing**” for Indian Tourism is a web application developed using industry standards and methodologies. Development of automation systems as a part of the e-governance initiate finance and budgeting systems, and e ticketing solutions. It invites eligible System Integrators (SI) to indicate their interest in providing the services. Interested SIs must provide information indicating that they are qualified to perform the services (brochures, description of similar assignments, experience in similar conditions, availability of appropriate skills among staff, etc.). SIs may associate to enhance their qualifications.

It carries out elaborate Surveys of antiquarian remains in the country and protects monuments and sites. The Organization has a large work force comprising of trained archaeologists, conservators, epigraphist, architects and scientists for conducting archaeological research projects through its Circles, Museums, Excavation Branches, Prehistory Branch, Epigraphy Branches, Science Branch, Horticulture Branch, Building Survey Project, Temple Survey Projects and Underwater Archaeology Wing.

Key Features:

- ✦ Compelling design that showcases your products or services.
- ✦ Ease to users
- ✦ To automate the E-Tickets for monuments in India across the world
- ✦ To provide better secure transactional Web Application
- ✦ To integrate thermal Printer and Bank Gateways.
- ✦ To Speed up the process for time saving and to increase tourism in India
- ✦ To provide the Historical information to all user across the world
- ✦ User-friendly customer interface with search options.
- ✦ Web-based administration.
- ✦ Completely Customizable Design
- ✦ SEO Friendly Site Architecture
- ✦ Advanced Product Marketing

OBJECTIVE

E-ticketing for Indian Tourism is divided into Circles for the maintenance of ancient monuments, archaeological sites which remains of national importance. It carries out elaborate surveys of antiquarian remains in the country and protects monuments and sites. The Organization has a large work force comprising of trained archaeologists, conservators, epigraphist, architects and scientists for conducting archaeological research projects through its Circles, Museums, Excavation Branches, Prehistory Branch, Epigraphy Branches, Science Branch, Horticulture Branch, Building Survey Project, Temple Survey Projects and Underwater Archaeology Wing.

The Circles carry out archaeological fieldwork, research activities and implement various activities which include:

- Extensive survey of antiquarian remains in villages of India.
- Exploration of archaeological sites and documentation of sculptures.
- Reservation and day-to-day maintenance of protected monuments.
- Providing basic facilities at the monuments for tourists.
- Issuing of NOC for any sort of construction, additions and alterations to existing structures or
- New constructions within regulated area of the protected monuments.
- Issuing permission for filming, photography and cultural programs at the protected monuments.
- Organizing public awareness programs on various occasions like World

Heritage Day, World Heritage Week, Museum Day and other important occasions.

- Registration of antiquities and issuing non-antiquity certificates.
- Interaction with various universities and research institutions.

E-ticketing solutions, and Finance and Budgeting systems as the areas to be automated. These will eventually be integrated with other systems that are proposed to be set up.

PROJECT CATEGORY

The undergoing project falls under **Internet Technologies & RDBMS (Relational Database Management System)** category. Since the project is mainly responsible for creation of the website with the online database at backend.

- ❑ **Front End: - HTML5, CSS3**
- ❑ **Back end: - JSP with Servlet ,Java**
- ❑ **Database: - Oracle 11g**

Java:-

JAVA is one of the most widely used development tools on the market today. Java is a general-purpose, object-oriented programming language developed by Sun Microsystems of USA in 1991. Originally Oak by James Gosling, one of the inventors of the language, java was designed for the development of software for consumer electronics devices like TVs, VCRs toasters and such other electronic machines. This goal had a strong impact on the development team to make the language simple, portable and highly reliable.

JAVA FEATURES

- Compiled and Interpreted
- Platform-Independent and Portable
- Object –Oriented
- Robust and Secure
- Distributed
- Familiar, Simple and Small
- Multithreaded and Interactive
- High Performance
- Dynamic and Extensible

J2EE

J2EE has now been around for around four years. Over these years, it has replaced several proprietary and non-standard technologies as the preferred choice for building e-commerce and other web-based enterprise applications.

Today, J2EE is one of the two available alternatives for building e-commerce applications.

Java has triggered new programming models and technologies in different domains ranging from devices, through telephony applications, to the enterprise. At the same time, Java has acted as a catalyst in making certain technology domains take more robust and secure shapes. Java's enterprise computing platform, the **Java2 Platform, Enterprise Edition (J2EE)**, is one such domain.

JAVA SERVER PAGE(JSP)

Java Server Pages (JSP) are a technology defined by Sun Microsystems to create dynamic content on the Web. They are HTML documents that are interleaved with Java, which provide the dynamic content. JSP are a server-side application; they accept a request and generate a response. Generally the requests are made from a Web-Client, and the response is a generated HTML document that gets sent back to the Web client. Because of JSP are server side application they have access to the resources on the server such as Servlets, Java Bean, EJB (Enterprise Java Bean) and Databases.

JSP provide a way to embed components in a page, and to have them do their work to generate the page that is eventually sent for client. A JSP page is in fact an extension of Servlet Programming model. When a user requests a JSP page, in the web container compile the JSP page into a servlet. The web container then invokes the servlet and returns the resulting content to the web browser. JSP pages provide

powerful and dynamic page assembly mechanisms that benefits from the many advantages of the Java Platform.

Compared to Servlet, which are pure Java code, JSP page are merely text-based document until the web container compiles them into the corresponding servlets.

Benefits of JSP

7. They are automatically recompiled when necessary.
8. Because they exist in the ordinary Web Server document space, no special URL mapping is required to address them.
9. A JSP can be run on any application Server that supports JSP without any modification to the code.
10. The specification is written in a way that promotes integration with integrated development environment (IDE).
11. JSP use tags, which are similar to HTML XML, to insert dynamic content it is possible to add additional functionality to a JSP importing tag library. The tag library defines additional tags that can used to replace section of code.
12. When writing a JSP, it is easier to write the HTML code and then insert the Java code to create your dynamic content. So if you don't plan write the HTML, have you graphical artists work their magic to create beautiful page and then insert your java code to make the JSP dynamic.

Oracle 11g:

Oracle 11g expands on the automation and advisor framework of 10g, but also includes a wide range of performance and optimisation improvements.

Oracle 11g is a powerful tool for turning your enterprise data into a competitive advantage. Industry-leading support for enterprise data management, developer productivity, and business intelligence includes all the functionality customers expect from an enterprise-class database management system.

Oracle 11g also includes many New and improved capabilities to help make your IT staff more productive. Oracle 11g includes key enhancements to enterprise data management in the following areas:

- ❖ Manageability
- ❖ Availability
- ❖ Scalability
- ❖ Security

Manageability:-

SQL Management Objects (SMO) is a new set of programming objects that exposes all of the management functionality of the SQL Server database. In fact, Management Studio was built with SQL Management Objects. A **SQL management object** is a feature that stabilizes the execution plans of individual SQL statements. SQL profiles and SQL plan baselines are SQL management objects.

Availability:

Investments in high-availability technologies, additional backup and restore capabilities, and replication enhancements enable enterprises to build and deploy highly available applications. Innovative high-availability features such as database mirroring; failover clustering, database snapshots, and enhanced online operations will minimize downtime and help to ensure that critical enterprise systems remain accessible. This section reviews these enhancements in greater detail.

Database Mirroring

Database mirroring allows continuous streaming of the transaction log from a source server to a single destination server. In the event of a failure of the primary system, applications can immediately reconnect to the database on the secondary server. The secondary instance detects failure of the primary server within seconds and accepts database connections immediately.

Fast Recovery:

Oracle 11g improves the availability of Oracle 11g databases with a new and faster recovery option. Users can reconnect to a recovering database after the transaction log has been rolled forward. Earlier versions of Oracle 11g required users to wait until incomplete transactions had rolled back, even if the users did not need to access the affected parts of the database.

Security:

Oracle 11g makes significant enhancements to the security model of the database platform, with the intention of providing more precise and flexible control to enable tighter security of the data. Microsoft has made a considerable investment in a number of features to provide a high level of security.

SOFTWARE REQUIREMENTS SPECIFICATION

The software requirements specification is produced at the culmination of the analysis task. The function and performance allocated to software as part of system engineering are refined by establishing a complete information description, a detailed functional and behavioral description, an indication of performance requirements and design constraint, appropriate validation criteria and other data pertinent to requirements.

Software Requirement Specification is the stage to generate the requirements document that helps in providing technical specifications for developing the software.

TOOL/PLATFORM, LANGUAGES TO BE USED

Software and hardware specification as the name suggests, tells us about the various characteristics of the software and the hardware environment used i. e. the development

HARDWARE REQUIREMENTS:

Hardware is the term given to machinery itself and to various individual pieces of equipment. It refers to the physical devices of a computer system. Thus the input, storage, processing control and output devices are hardware.

Processor	:	Pentium-IV 1.7 GHz and Above
RAM	:	64MB-512 MB
HDD	:	20 GB – 160 GB
CD-ROM	:	52X
Monitor	:	14 inches Color Monitor
Keyboard	:	104 Keys Keyboards
Printer	:	HP Deskjet 2331

SOFTWARE REQUIREMENTS:

Software means a collection of program where the objective is to enhance the capabilities of the hardware machine. Software for the proposed system development is defined as follows:

Operating System	:	Windows 8 / Windows 7
Language /Technology	:	JSP,Java,Servlet
DBMS Used	:	Oracle 11g
Reporting Tools	:	HTML5,CSS3

PROJECT PLANNING

PERT CHART & GANTT CHART

A **PERT chart** is a project management tool used to schedule, organize, and coordinate tasks within a project. PERT stands for *Program Evaluation Review Technique*, a methodology developed by the U.S.


A PERT chart presents a graphic illustration of a project as a network diagram consisting of numbered *nodes* (either circles or rectangles) representing events, or milestones in the project linked by labelled *vectors* (directional lines) representing tasks in the project. The direction of the arrows on the lines indicates the sequence of tasks.

Gantt charts are a project control technique and it can be use for several purposes, including scheduling, budgeting and resources planning. A Gantt chart is a bar chart, with each bar is proportional to the length of time planned for the activity. The major identified Software Engineering Tasks at software project development are as follows:

- System Analysis
- System Design
- Software Development
- Software Testing
- Software Installation
- Software Documentation
- System Evaluation


The PERT Chart of the software development phase is also prepared. It is based on the different modules identified in the software.

PERT (PROGRAM EVALUATION & REVIEW TECHNIQUE) CHART

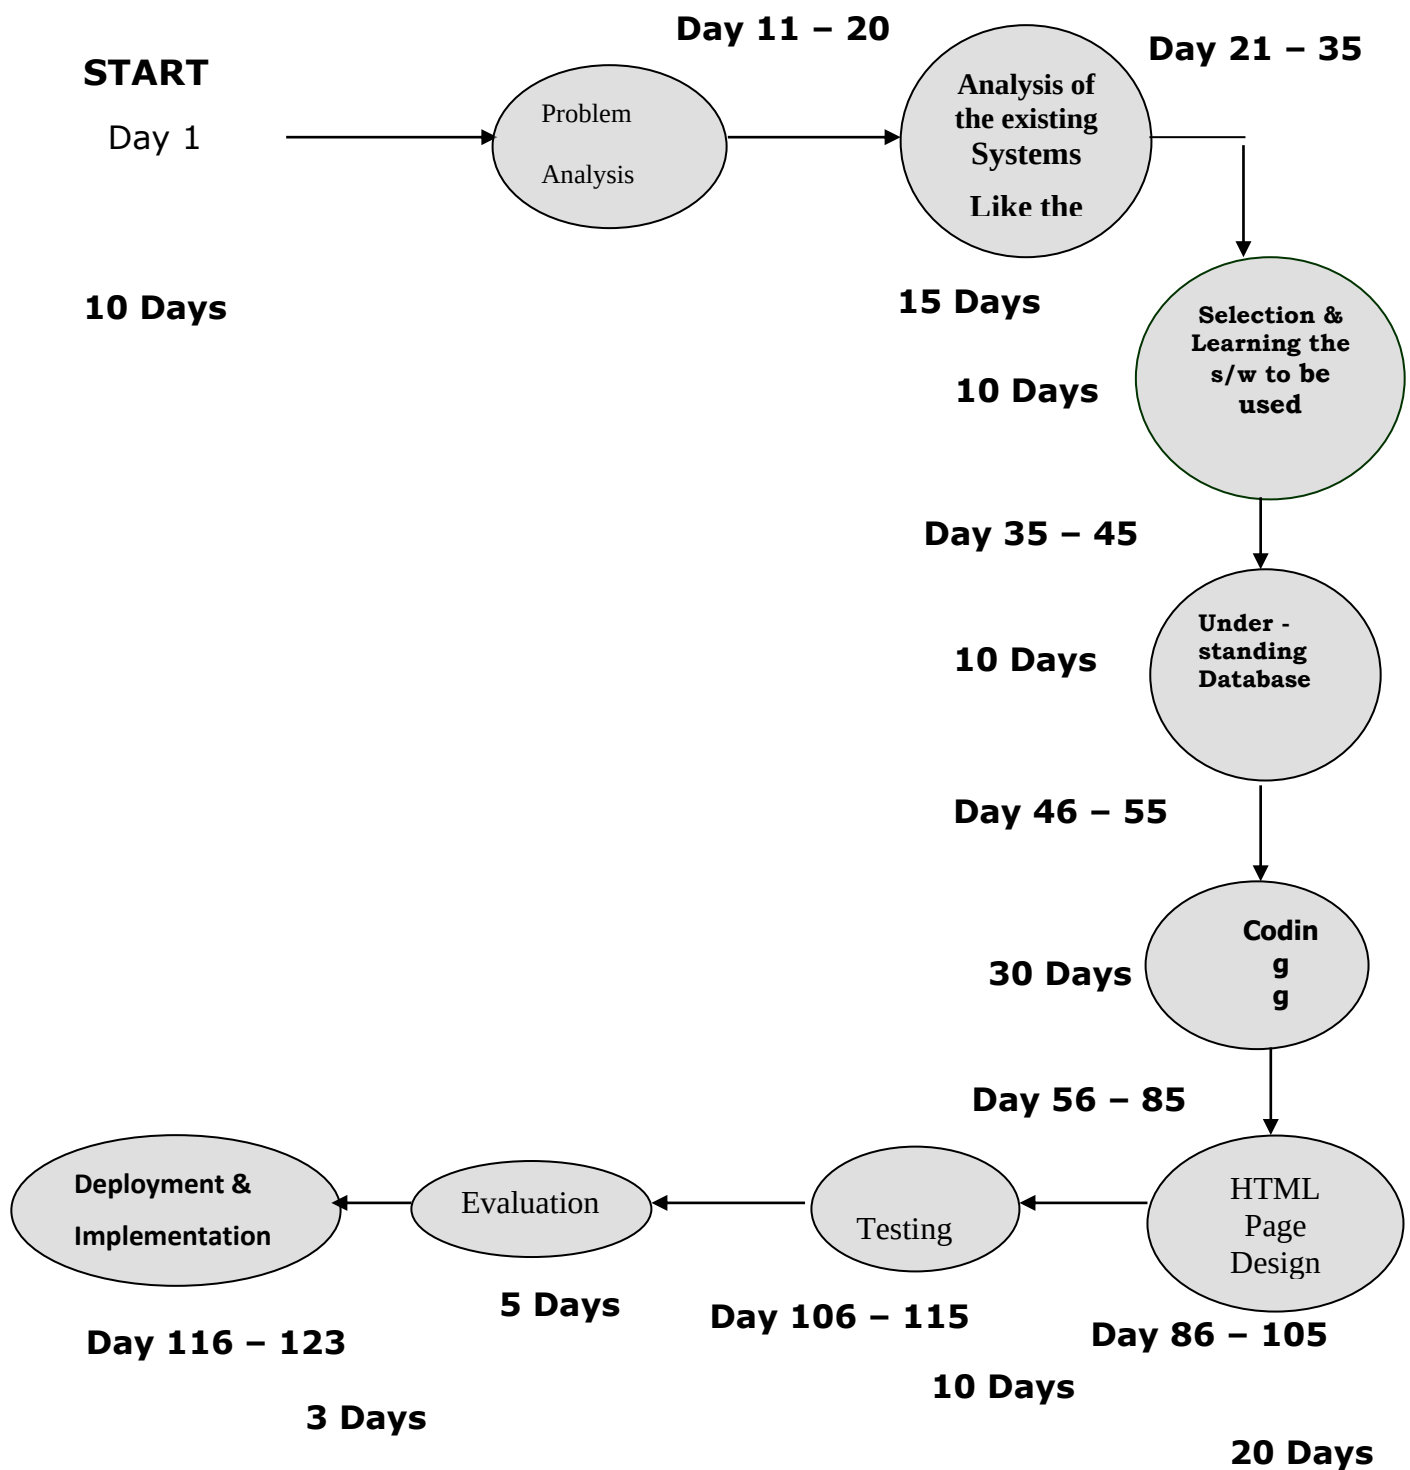

GANTT CHART

Gantt chart is a project scheduling technique. Progress can be represented easily in a Gantt chart, by coloring each milestone when completed. The project will start in the month of DEC and end after 4 months at the end of MAR.

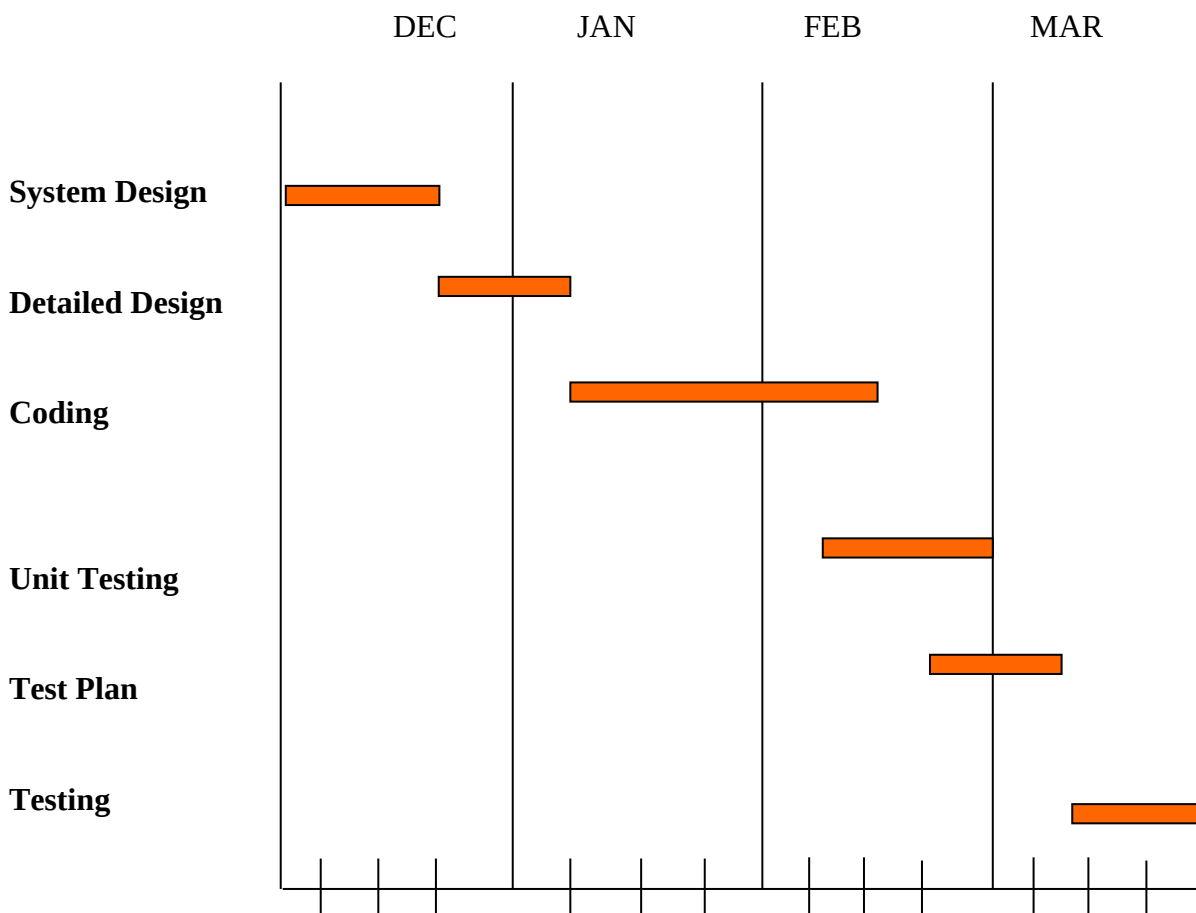

FEASIBILITY STUDY

A feasibility study is carried out to select the best system that meets performance requirements.

Feasibility is the determination of whether or not a project is worth doing. The process followed in making this determination is called a feasibility study. This type of study determines if a project can and should be taken.

Since the feasibility study may lead to the commitment of large resources, it becomes necessary that it should be conducted competently and that no fundamental errors of judgment are made.

Technical feasibility

This is concerned with specifying equipment and software that will successfully satisfy the user requirement. The technical needs of the system may include:

- The facility to produce outputs in a given time.
- Response time under certain conditions.
- Ability to process a certain volume of transaction at a particular speed.
- Facility to communicate data to distant location.

In examining technical feasibility, configuration of the system is given more importance than the actual make of hardware. The configuration should give the complete picture about the system's requirements.

The proposed system is technically feasible because of following reasons:

- The organization already has server-client setup so this system can run in organization.
- The organization does not require any new package in their computer system as it already has all the required software's.
- The organization is already working with the system made in dbase3 and has Knowledge about the processes, databases, and expected outputs.
- The proposed system is to be implemented using COM technology, the server Components are to be installed on server and client components on client. All the Clients will get response according to the application loaded on their terminals.

Operational Feasibility

It is mainly related to human organizational and political aspects. The points to be considered are:

- What changes will be brought with the system?
- What organizational structures are disturbed?
- What new skills will be required? Do the existing staff members have these skills? If not, can they be trained in due course of time?

Such considerations are likely to critically affect the nature and scope of the eventual recommendations. This feasibility study is carried out by a small group of people who are familiar with information system techniques, who understand the parts of the

business that are relevant to the project and are skilled in system analysis and design process.

The proposed system is operationally feasible because of following reasons:

- The organization is already working with the computerized system and has knowledge about functioning and databases.
- The interactivity of existing system is very poor as each command has to be written manually on the system and the proposed system is much faster.
- The proposed system is better in use and more user-friendly as it generates proper messages at run time.

Economic Feasibility

Economic analysis is the most frequently used technique for evaluating the effectiveness of a proposed system.

In this we determine the benefits and savings that are expected from a proposed system and compare them with costs. If benefits outweigh costs; a decision is taken to design and implement the system. This is an ongoing effort that improves in accuracy at each phase of the system life cycle.

The proposed system is financial feasible because of following reasons:

- The cost of system development is nil as a trainee student is developing it.
- The organization already has server-client setup so this system can run in organization so hardware investment is nil.
- The organization does not require any new package in their computer system as it already has all the required software's.
- The proposed system is economic, as it will reduce the time investment in running the daily transactions.
- The employees are already working with the old system so cost of learning to work with new system is very low.
- The system itself will be very much interactive and self-explanatory and also contains user manuals to assist operator.
 - No extra cost for salary of operational staff.

A COMPLETE STRUCTURE


(I) ANALYSIS (DFDs):

Context Level Data Flow Diagram:


The top-level diagram is often called a context diagram. It is also called 0 level data flow diagram. It contains a single process.

Data Flow Diagram Level-0(DFD-0)


A Context Level Diagram

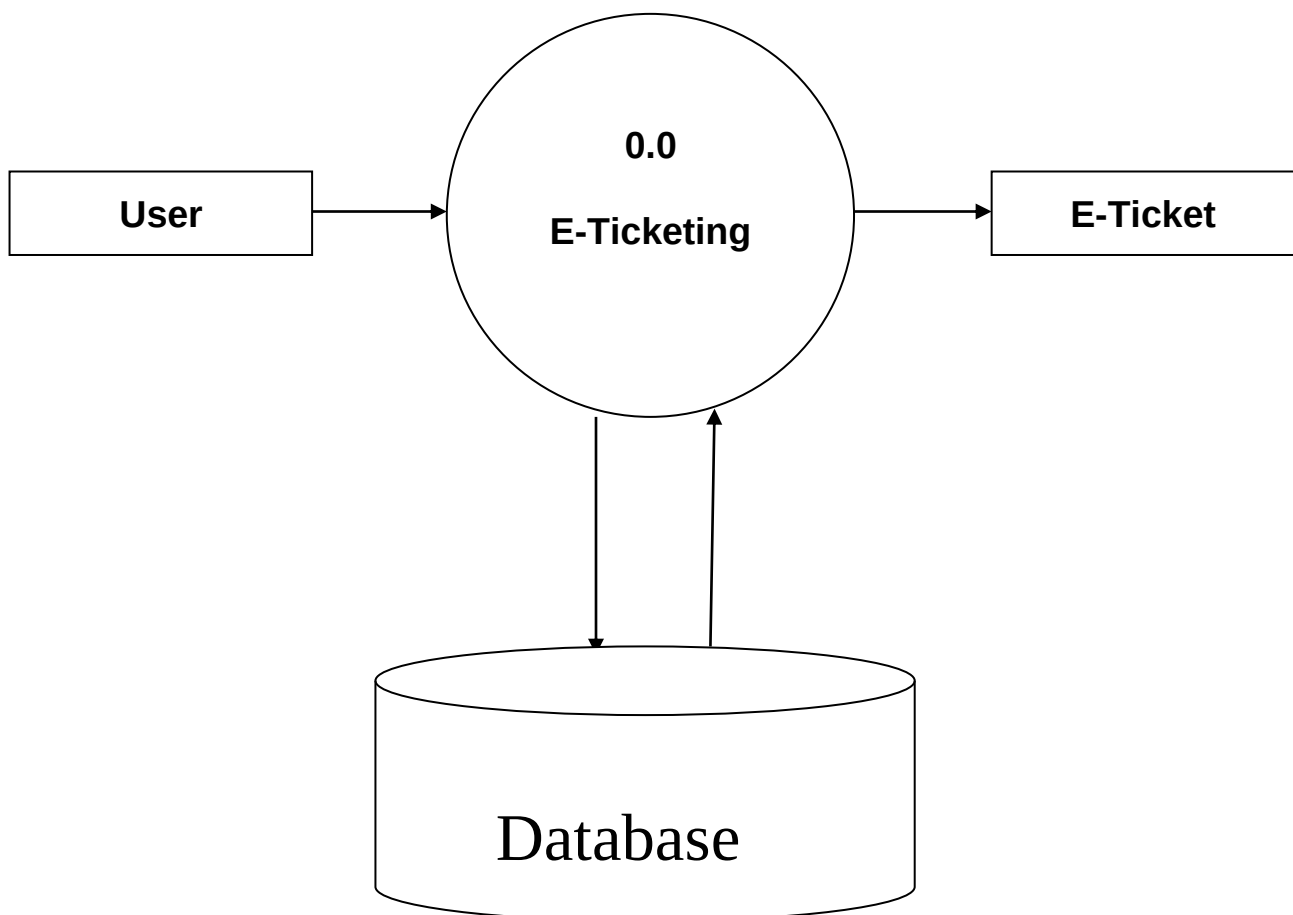

Data Flow Diagram Level-1(DFD-1)

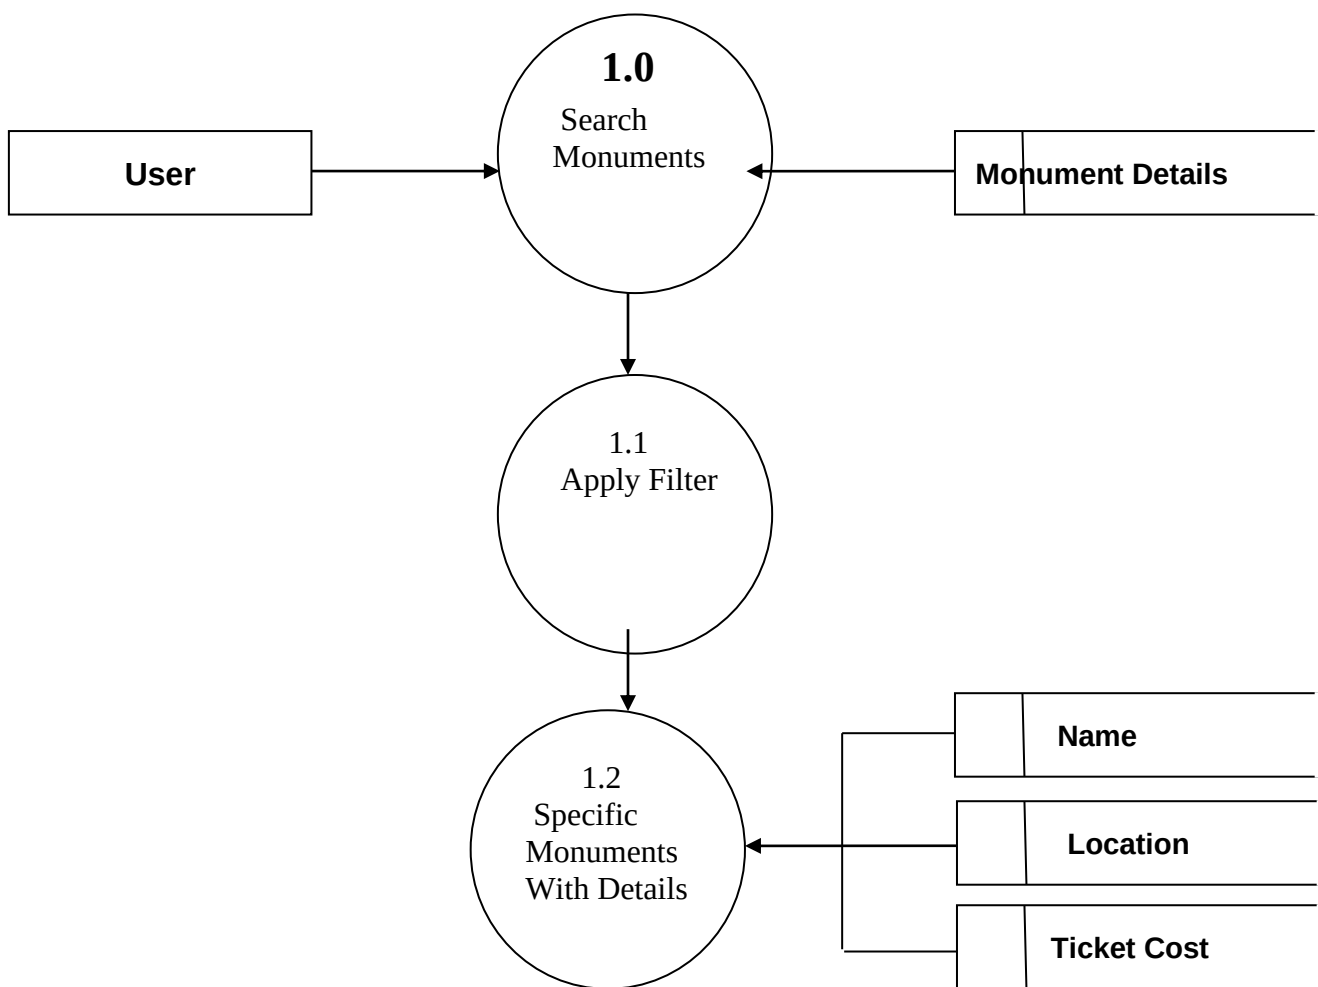

Data Flow Diagram Level-2(DFD-2)

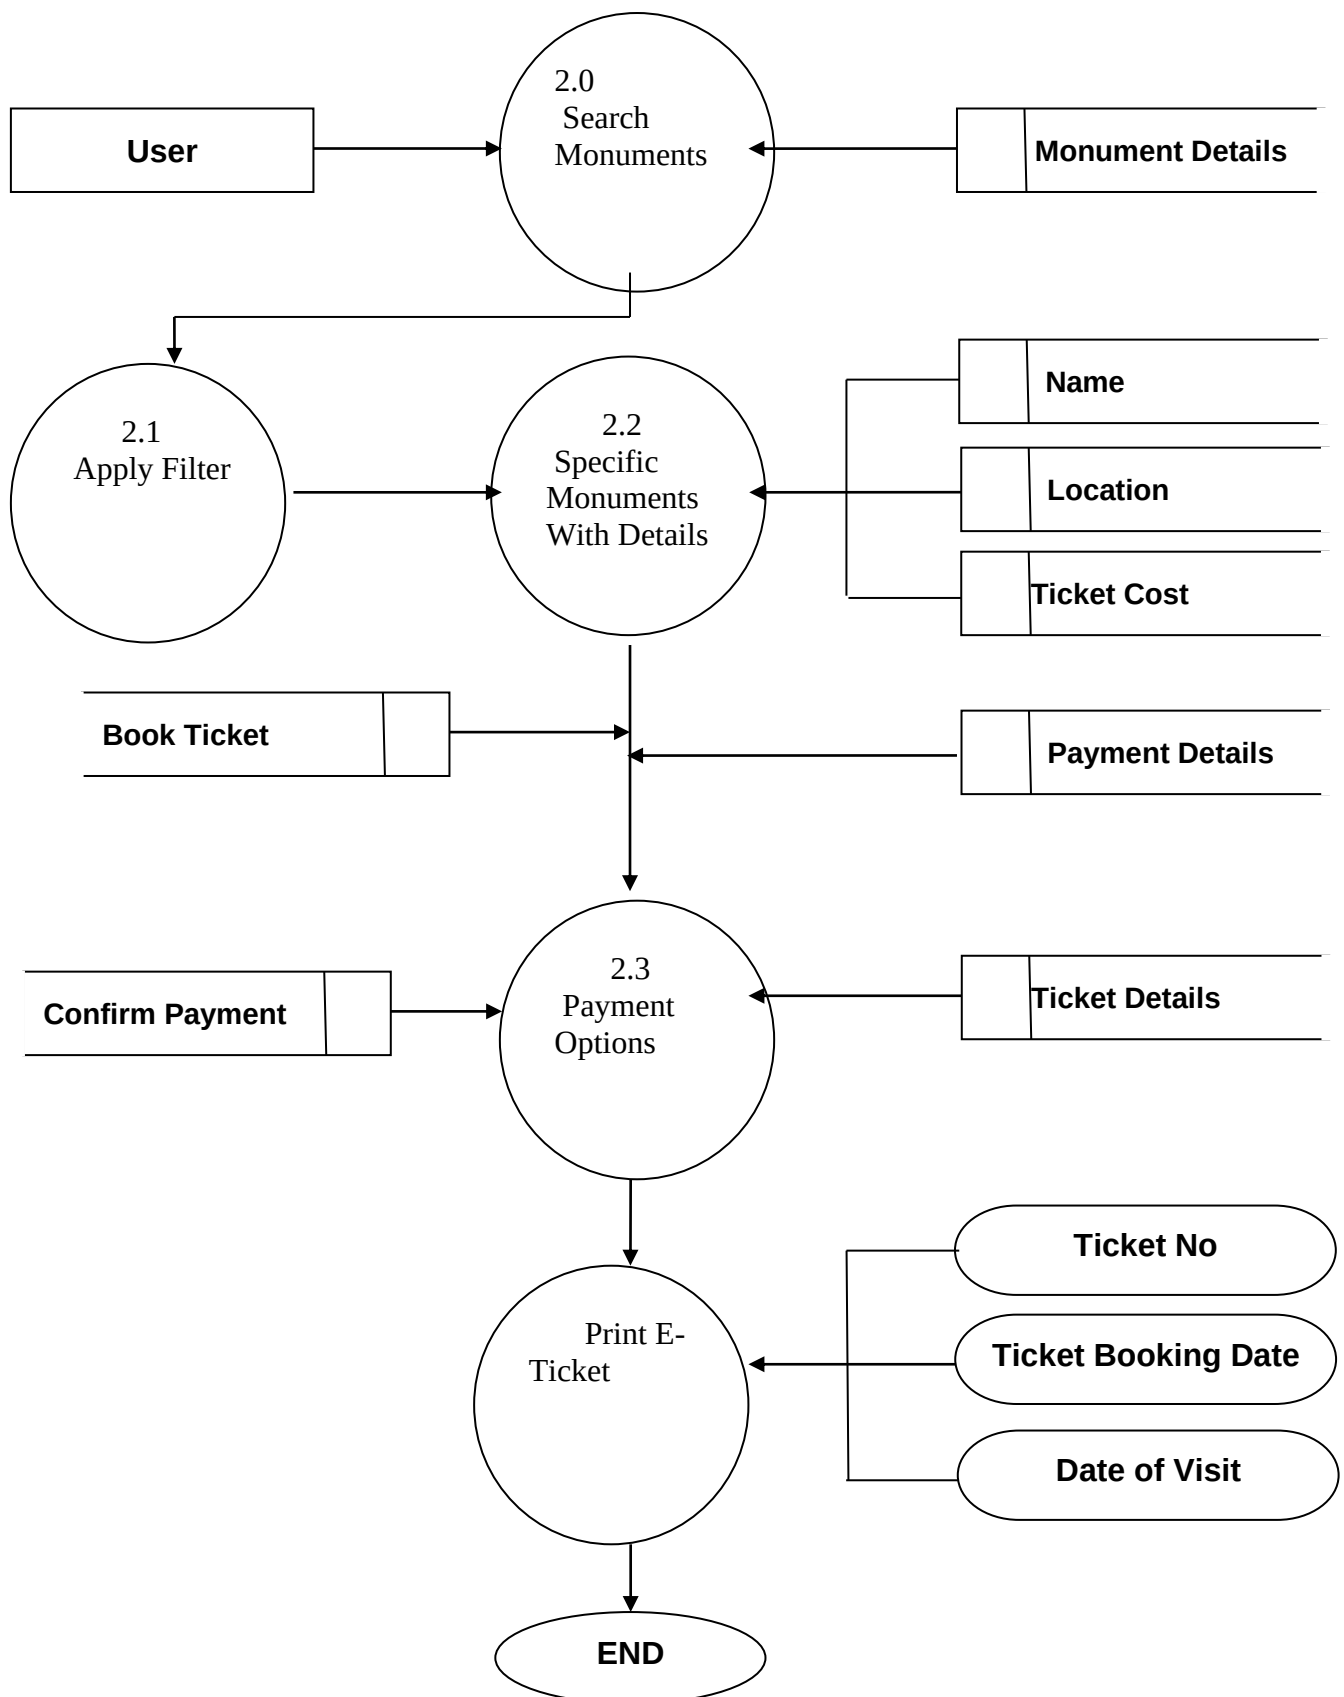

ER DIAGRAM

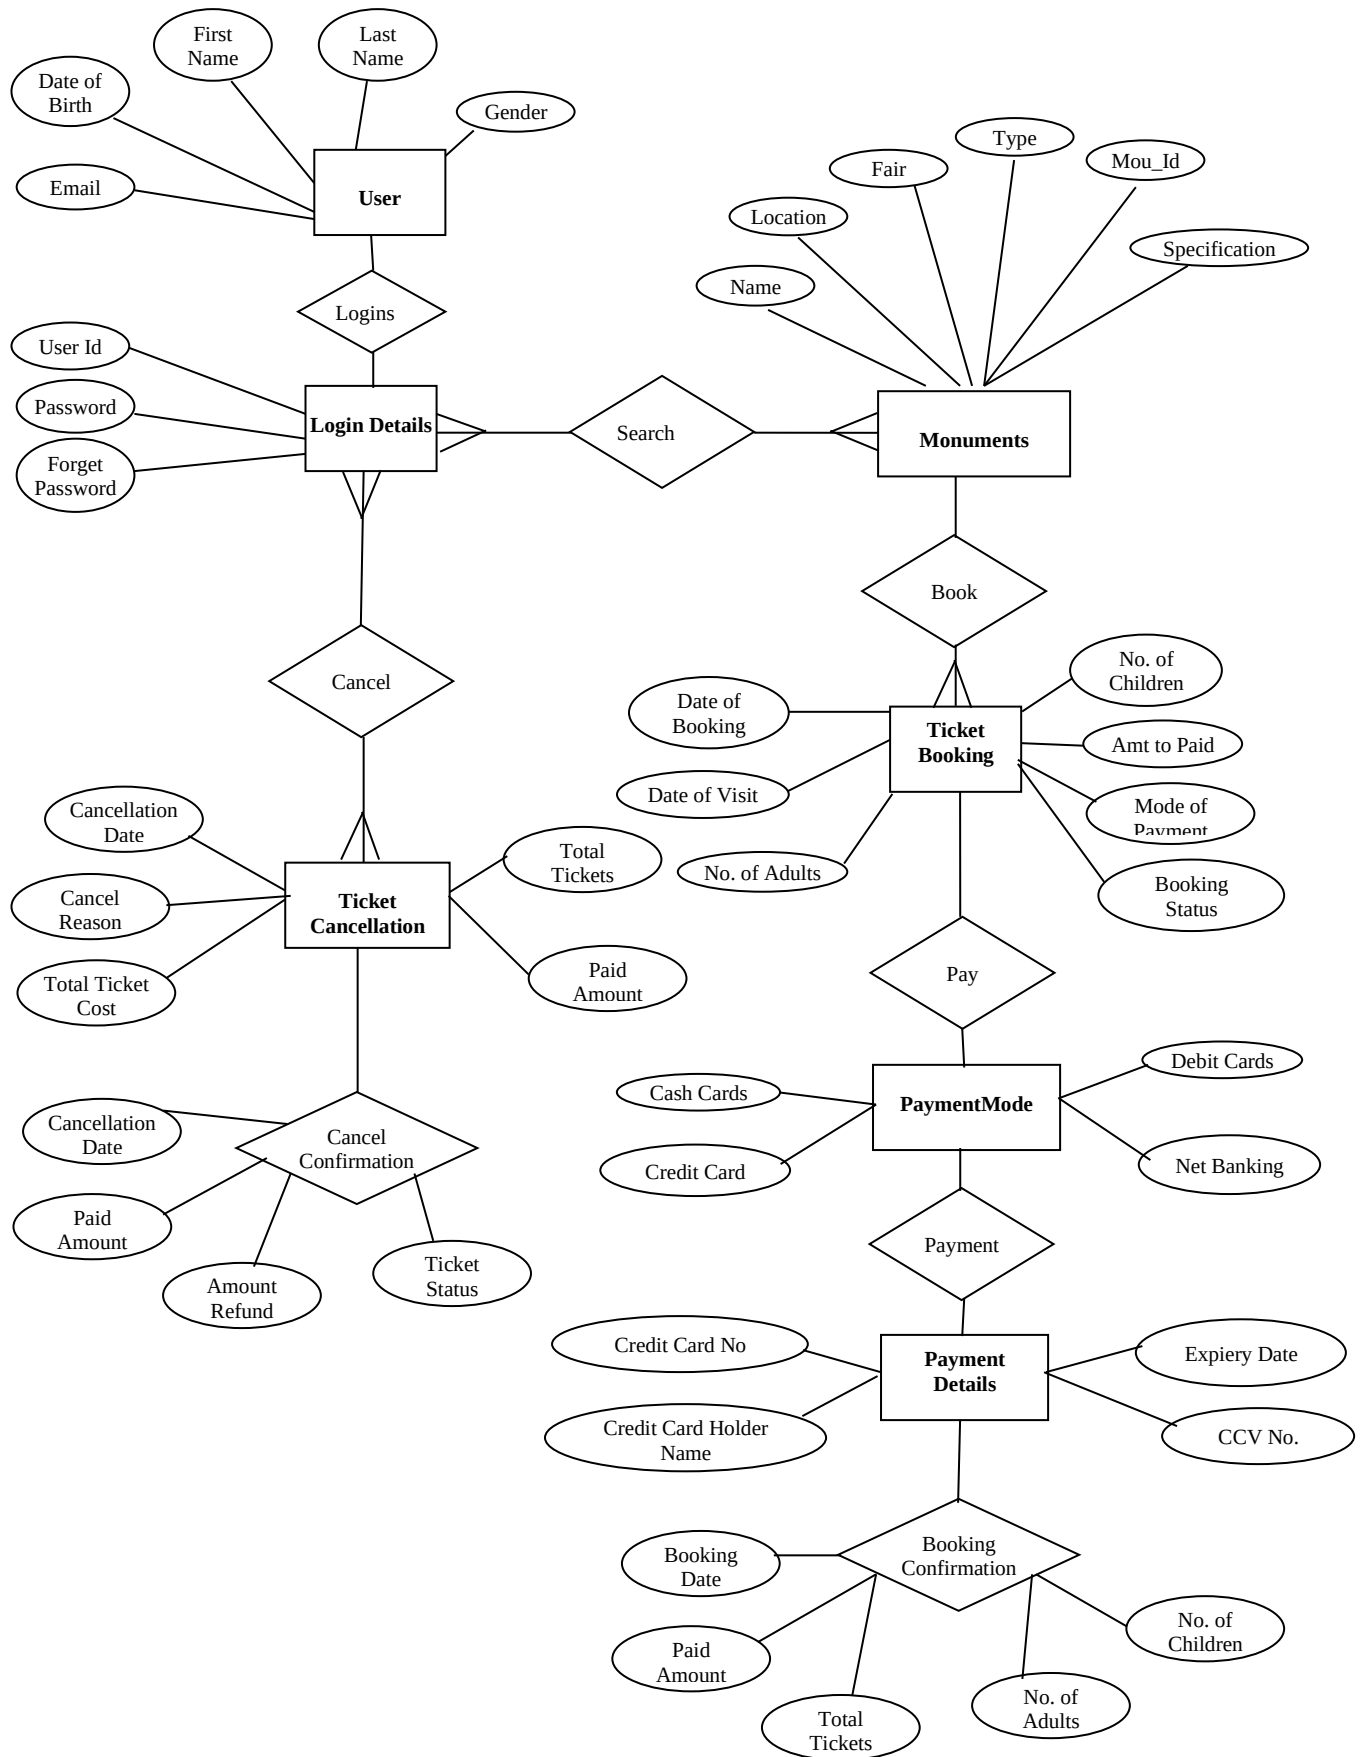


Table Details

User: This table contains the details of the users feeds information.

UserID-is the primary key

Table Name	User		
Field Name	Data type	Size	Constraints
Id	Number		Primary Key & Auto Increment
FirstName	Varchar2	30	Not null
LastName	Varchar2	30	Not null
Password	Varchar2	30	Not null
Gender	Varchar2	01	Not null
Email	Varchar2	20	Not null
Contact	Number		Not null
DOB	date		Not null

Monument : This Table contain the information about the Monument and its fare for foreign members and Indian .

Table Name	Monument		
Field Name	Data type	Size	Constraints
Mou_Id	Number		Primary Key & Auto Increment
Name	Varchar2	30	Not null
Location	Varchar2	30	Not null
Type	Varchar2	30	Not null
Fare	Varchar2	10	Not null
Specification	Varchar2	20	Not null
Contact	Number		Not null

TicketBooking :This include all the details of the ticket holder being booked by the user for a particular monument.

TicketID-is the Primary Key.

Table Name	Tour_booking_details		
Field Name	Data type	Size	Constraints
Booking_id	Number		Primary Key & Auto Increment
User_id	Number	11	Foreign key not null
Session_id	Varchar2	20	Not null
Child	Number	10	Not null
Adult	Number	10	Not null
Tour_date	Datetime		Not null
Departure_time	Varchar2	255	Not null
Total_amount	Float	11	Not null
Booking_remarks	Number		Not null
Status	Number	11	not null
cancel_request	Number	11	Not null
Contact_person_details	Varchar2		Not null
Terms	Varchar2		Not null
Booking_date	Datetime		Not null

BookingCancellation:This includes the details of cancellation of ticket being booked by the user earlier.

TicketCancellationID- is a primary key

Table Name	Monument		
Field Name	Data type	Size	Constraints
TicketCancelId	Number		Primary Key & Auto Increment
TicketId	Varchar2	30	Not null
UserId	Varchar2	30	Not null
CancelDate	Varchar2	30	Not null
DeductedAmount	Varchar2	10	Not null
RefundAmount	Varchar2	20	Not null

List of Input & Output

INPUT TO THE PROJECT

- Historical Places Basic Details
- Category and SubCategory Details
- User Login Information
- User Shipping and Billing Details

OUTPUT OF THE PROJECT

- Listing of Places
- Selection to visit places.
- E-Ticket Printout
- Different type of Shipping Methods
- Mass mailing and Shipping Company Details

PROJECT MODULES

NUMBER OF MODULES AND DESCRIPTION:

Module 1: Home Module

This module contains Home page of this Web Application which describes the concept behind it. All links and Reference related to the Web application are available on the site including monuments, Login Page, Registration for new Client, Forget password, FAQs, About Page etc.

Module 2: User Profile Module

This module contains user profile details. User's personal details, Planing Visit, Book Ticket, Print Ticket, Booked History etc available here.

Module 3: Change Password/Forgot Password Module

This module is used to change the Old entered password with newly entered password. User can change his/her password, by entering the Old password and new password and confirmation password. Click on the link "Forgot Your Password?" below the login form on your website, enter user name and press "Submit". Check incoming mails for "Lost Password" message from your website. If you do not get e-mail (has a member a real e-mail?), then you have to check the configuration of your e-mail module.

Module 4: User Ticket Booking

Any user who has registered himself on ASI can book his visit to monuments online. He can have his own choice of places to visit and can book ticket directly by paying ticket amount using online payment gateways.

Module 5: Booking Counter

This application is also designed for the staff of ASI who sits on the gate counter to distribute tickets. In this module, any authorized staff can login onto the application and issue ticket to the visitors directly by taking ticket price in cash. It will keep records of all visitors visited on daily basis.

Module 6: Booking Cancellation

This module helps the visitors to cancel their already booked tickets in case they change their plan to visit. It is a very easy and user-friendly process.

Module 7: Payment Transaction

It provides facilitation of transactions of Banking Gateways to save time. In order to streamline its processes and increase efficiency and effectiveness of services, the use of Thermal Printer and Bank Gateways (E-Transactions) plays a vital role in the effective running of the organization. Data are required to be acquired, digitized and maintained. Adequate processes exist, the planning, deployment and monitoring of funds remains a paper-based system, leading to inordinate delays in data collection, and decision making.

Module 8: Reports


Different types of reports can be generated which are required to the government including Day Summary, Reconciliation Report and E-Ticket.

Module 9: Admin- User Details


This module contains all information related to register user and guest user details. User personal details and his order-related information is available in this section. Admin can send the email and other alert to user.

USER INTERFACE DESIGN

HOME PAGE

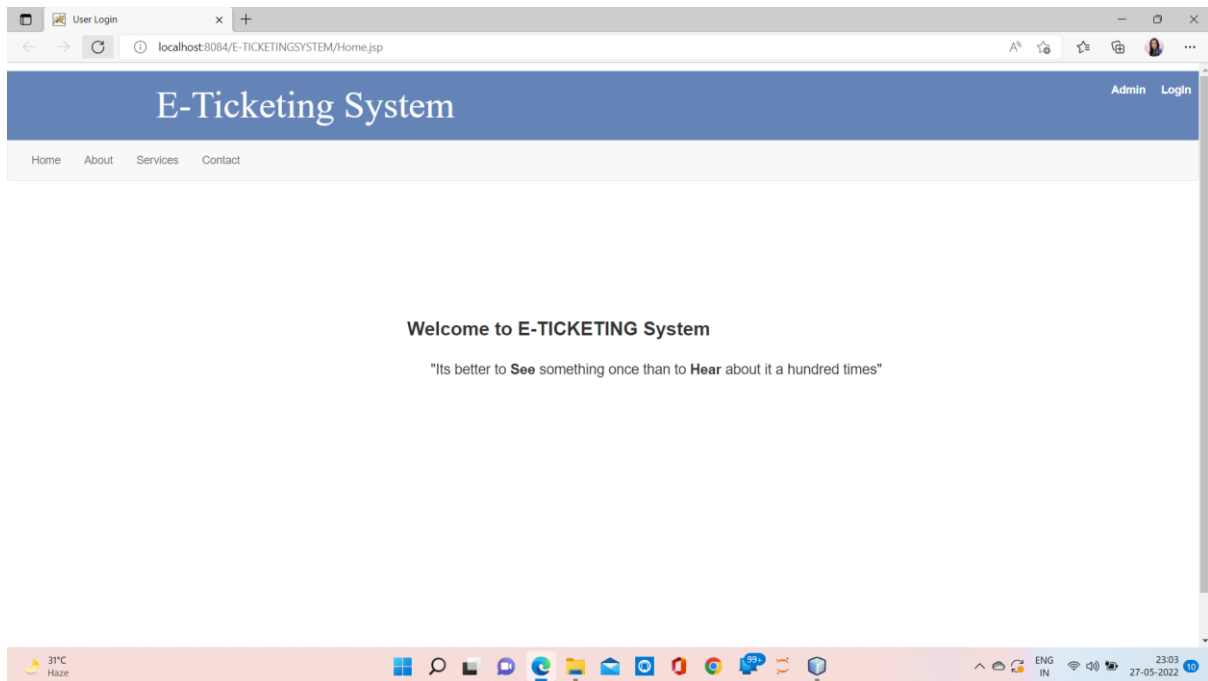

USER REGISTER PAGE

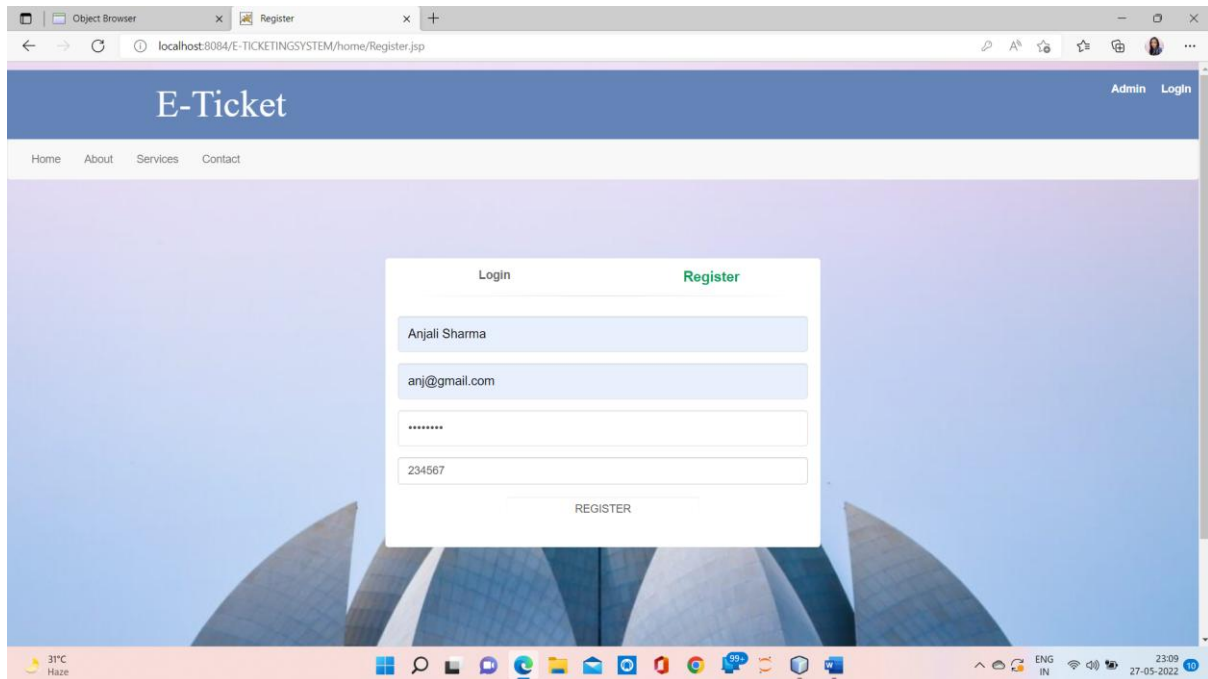

The screenshot shows a web browser window with the URL `localhost:8084/E-TICKETINGSYSTEM/home/Register.jsp`. The page has a blue header with the text "E-Ticket" and links for "Admin" and "Login". Below the header is a navigation bar with "Home", "About", "Services", and "Contact". The main content area features a registration form with a "Login" link and a "Register" link. The form contains the following fields: "Name" (pre-filled with "Anjali Sharma"), "Email" (pre-filled with "anj@gmail.com"), "Password" (masked with "*****"), and "Mobile" (pre-filled with "234567"). A "REGISTER" button is located at the bottom of the form. The background of the page shows a large image of the Taj Mahal.

Object Browser x Register x +

localhost:8084/E-TICKETINGSYSTEM/home/Register.jsp

E-Ticket Admin Login

Home About Services Contact

Login Register


Anjali Sharma

anj@gmail.com

234567

REGISTER

31°C Haze 23:09 27-05-2022

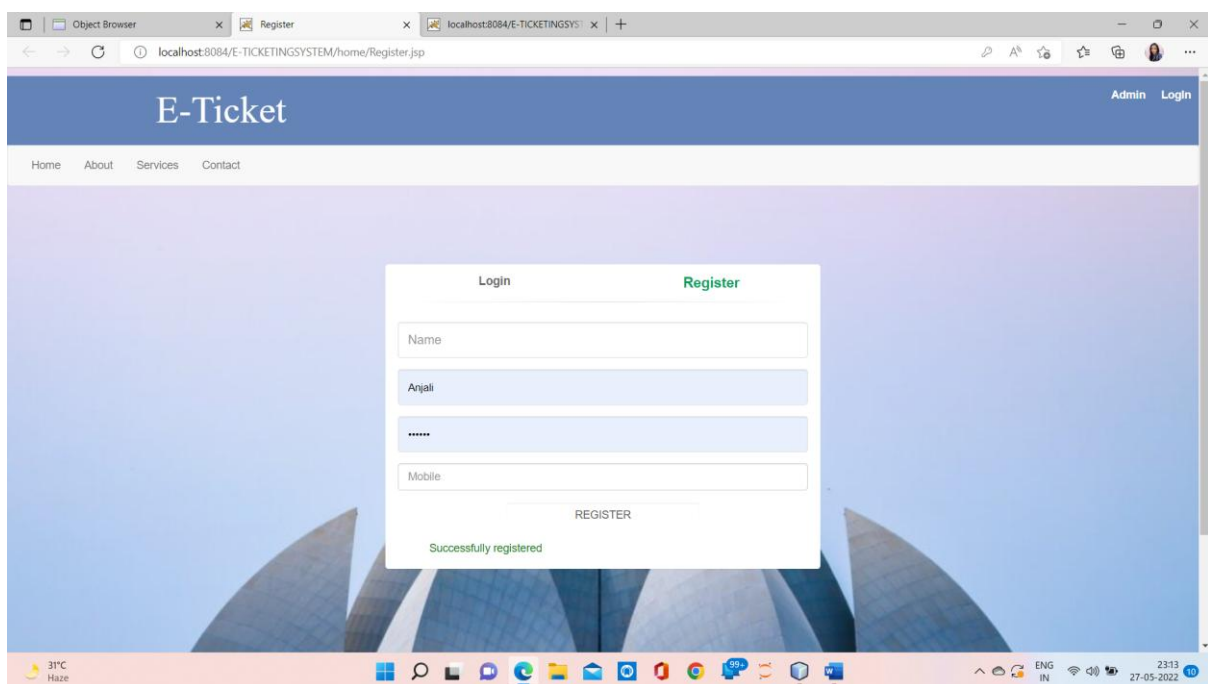

The screenshot shows the same web browser window as the previous one, but the registration form is now empty. The "Name" field is pre-filled with "Anjali", the "Email" field is pre-filled with "anj@gmail.com", the "Password" field is masked with "*****", and the "Mobile" field is pre-filled with "234567". A "REGISTER" button is located at the bottom of the form. Below the form, a green message "Successfully registered" is displayed. The background of the page shows a large image of the Taj Mahal.

Object Browser x Register x +

localhost:8084/E-TICKETINGSYSTEM/home/Register.jsp

E-Ticket Admin Login

Home About Services Contact

Login Register

Name

Anjali



Mobile

REGISTER

Successfully registered

31°C Haze 23:13 27-05-2022

USER LOGIN PAGE

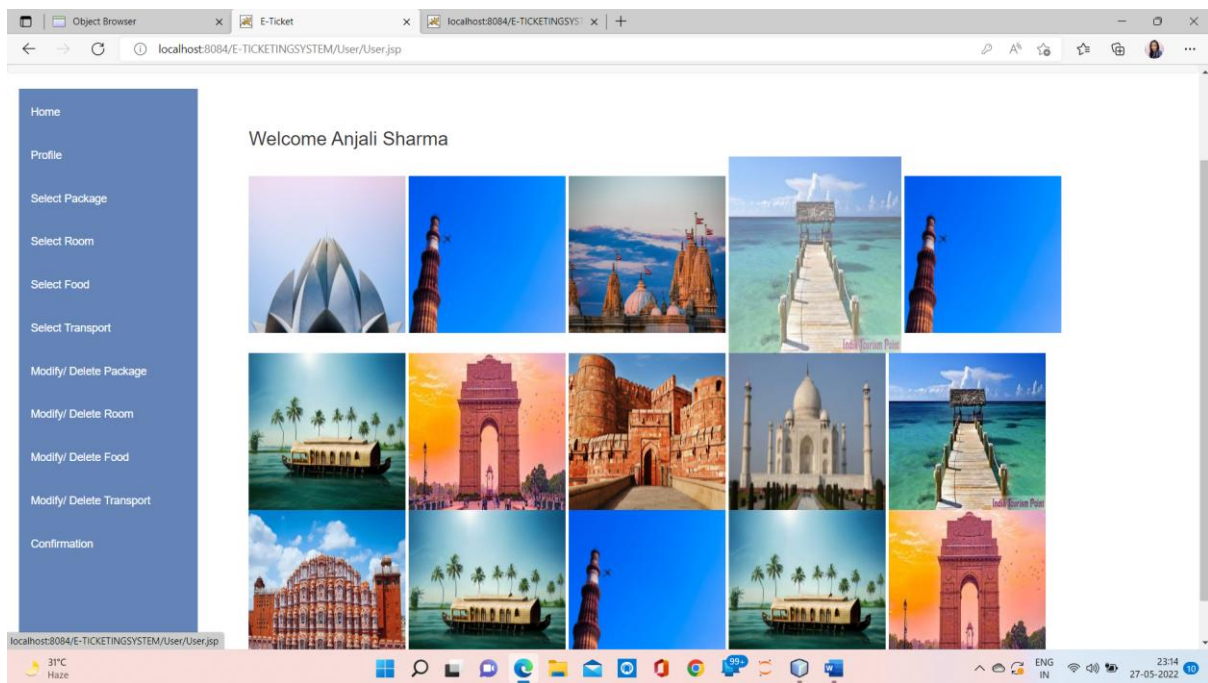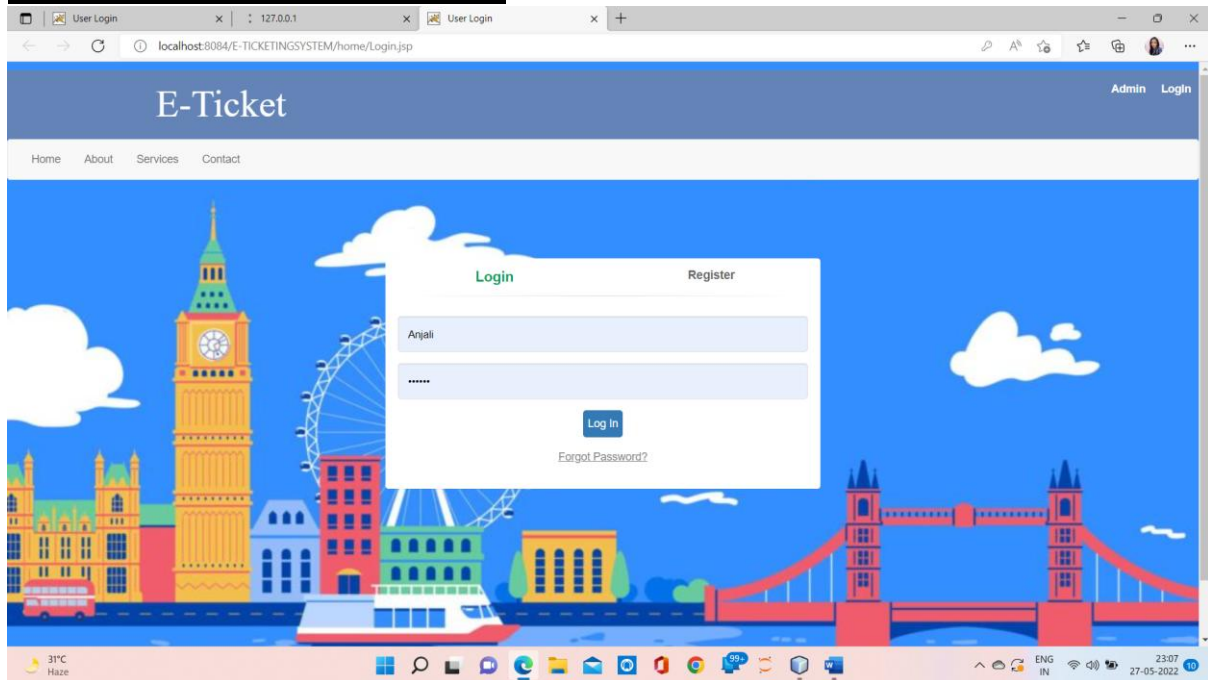


USER UPDATE PROFILE


The screenshot displays a web browser window with the following elements:

- Browser Tabs:** Object Browser, Update Profile, localhost:8084/E-TICKETINGSYS.
- Address Bar:** localhost:8084/E-TICKETINGSYSTEM/User/Profile.jsp
- Header:** E-Ticket (left), Hello anj@gmail.com Log Out (right).
- Message:** Welcome to E-Ticketing System
- Sidebar (Left):**
 - Home
 - Profile
 - Select Package
 - Select Room
 - Select Food
 - Select Transport
 - Modify/ Delete Package
 - Modify/ Delete Room
 - Modify/ Delete Food
 - Modify/ Delete Transport
- Main Content Area:**
 - Profile**
 - Name:**
 - Email ID:**
 - Mobile:**
 - Update** (button)
- Footer (Windows Taskbar):** 31°C Haze, system icons, 23:16, 27-05-2022.


SERVICES PAGE

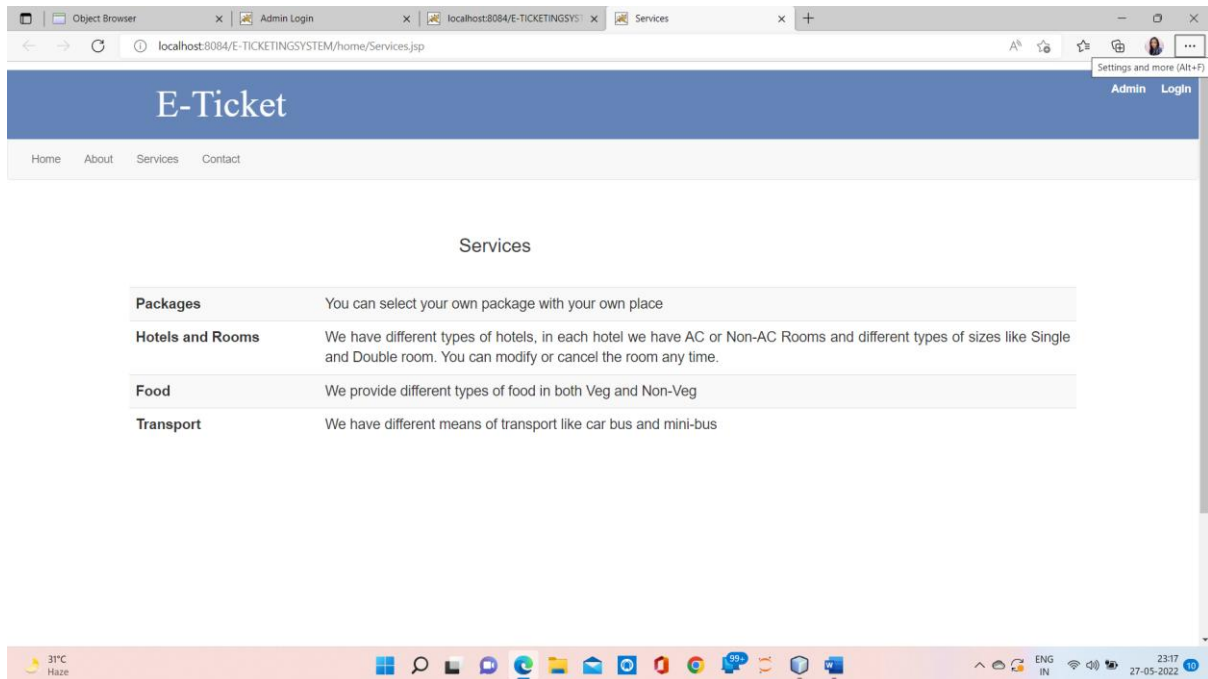

CONTACT PAGE


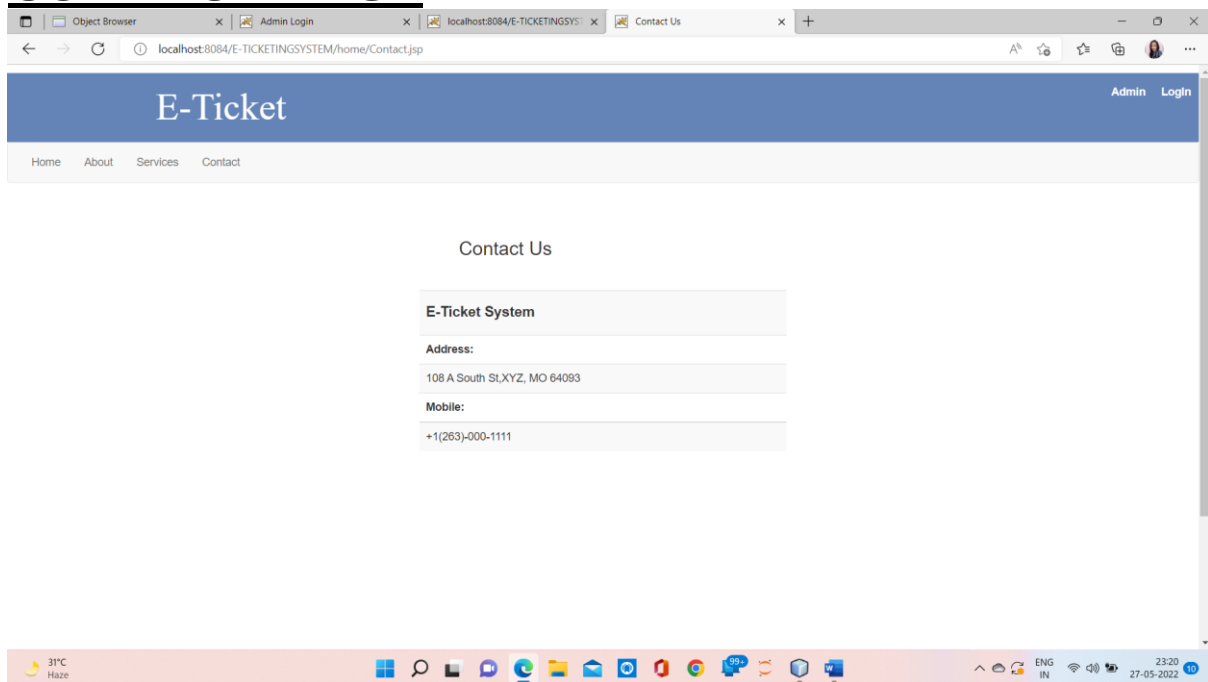


ABOUT US PAGE

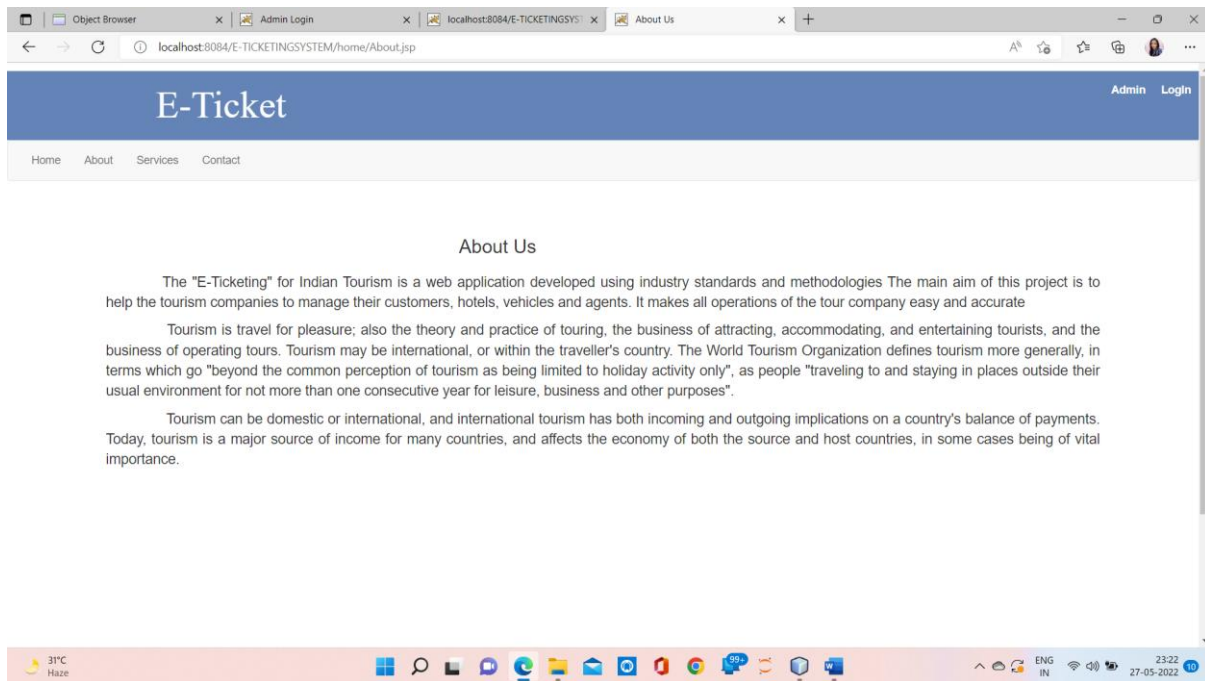

ADMIN SECTION

Admin Login

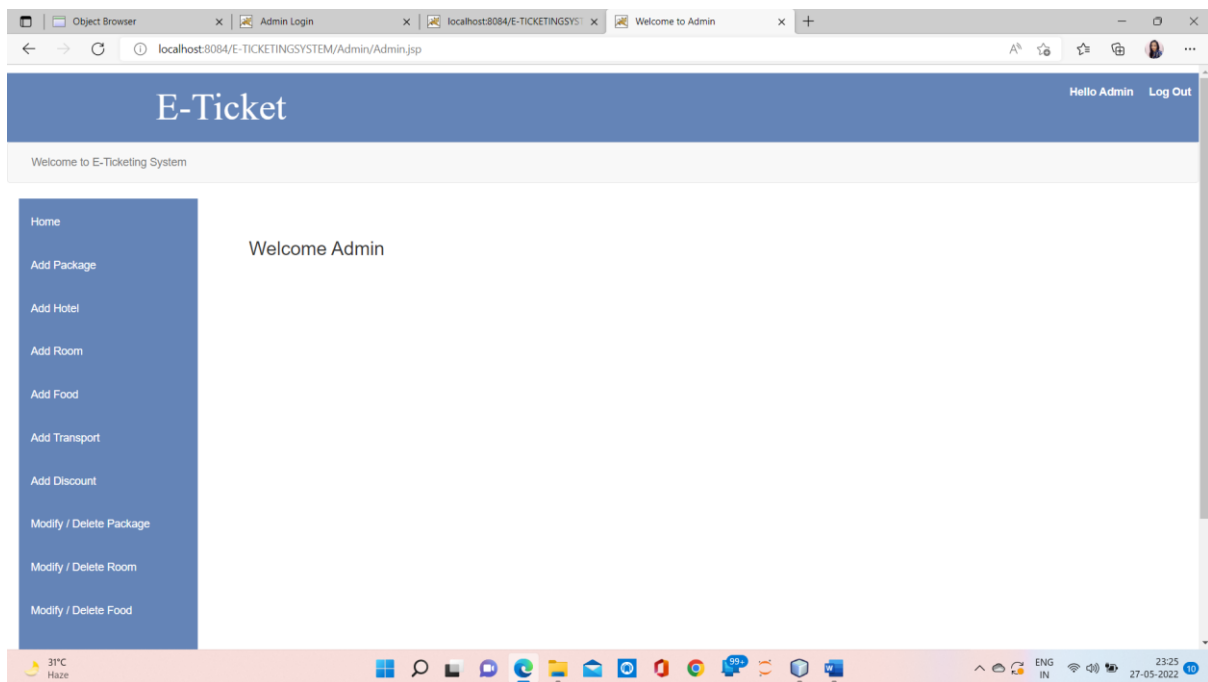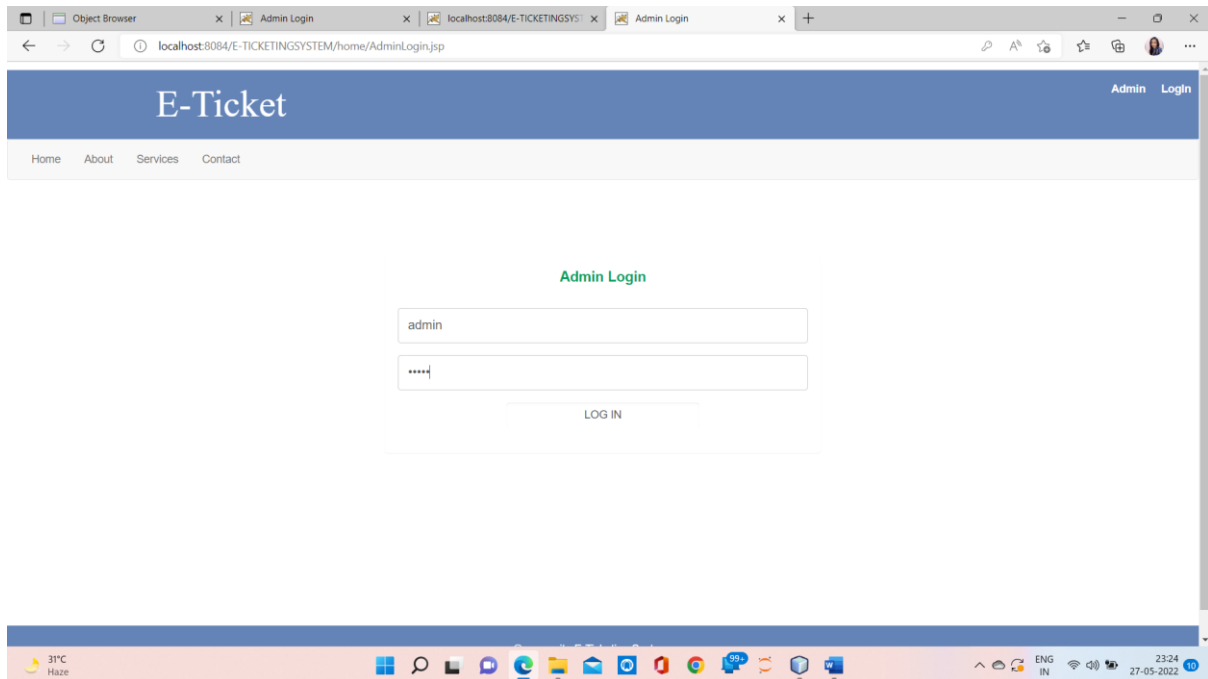

addPackage.jsp

The screenshot displays a web browser window with the URL `localhost:8084/E-TICKETINGSYSTEM/Admin/Package.jsp`. The page features a blue header with the text "E-Ticket" and a user greeting "Hello Admin" with a "Log Out" link. Below the header, a light gray bar says "Welcome to E-Ticketing System". A left sidebar contains a menu with options: Home, Add Package, Add Hotel, Add Room, Add Food, Add Transport, Add Discount, Modify / Delete Package, Modify / Delete Room, and Modify / Delete Food. The main content area is titled "Add Package" and contains a form with the following fields and values:

- Enter Package Name:
- Enter Package Place:
- Enter Number Of Days:
- Enter Cost:

An "Add Package" button is located at the bottom right of the form. The Windows taskbar at the bottom shows the date as 27-05-2022 and the time as 23:26.

View package page

The screenshot displays the 'Modify / Delete Package' page of an E-Ticketing System. The page features a sidebar with navigation options and a main content area with a table of packages.

Navigation Sidebar:


- Home
- Add Package
- Add Hotel
- Add Room
- Add Food
- Add Transport
- Add Discount
- Modify / Delete Package (Active)
- Modify / Delete Room
- Modify / Delete Food

Table: Modify / Delete Package

Package Name	Place	No of Days	Cost	Update	Delete
NI_Normal	North India	5	10000	Update	Delete
SI_Normal	South India	4	20000	Update	Delete
NI_Luxury	North India	3	20000	Update	Delete
NE_Normal	North East(Assam,Manipur,Darjeeling)	5	18000	Update	Delete
NE_Luxury	North East (Assam,Manipur,Darjeeling)	5	22000	Update	Delete

The browser window shows the URL: `localhost:8084/E-TICKETINGSYSTEM/Admin/ModifyPackage.jsp`. The top navigation bar includes 'E-Ticket' and 'Hello Admin Log Out'. The bottom status bar shows the system time as 23:30 on 27-05-2022.

addHotel.jsp

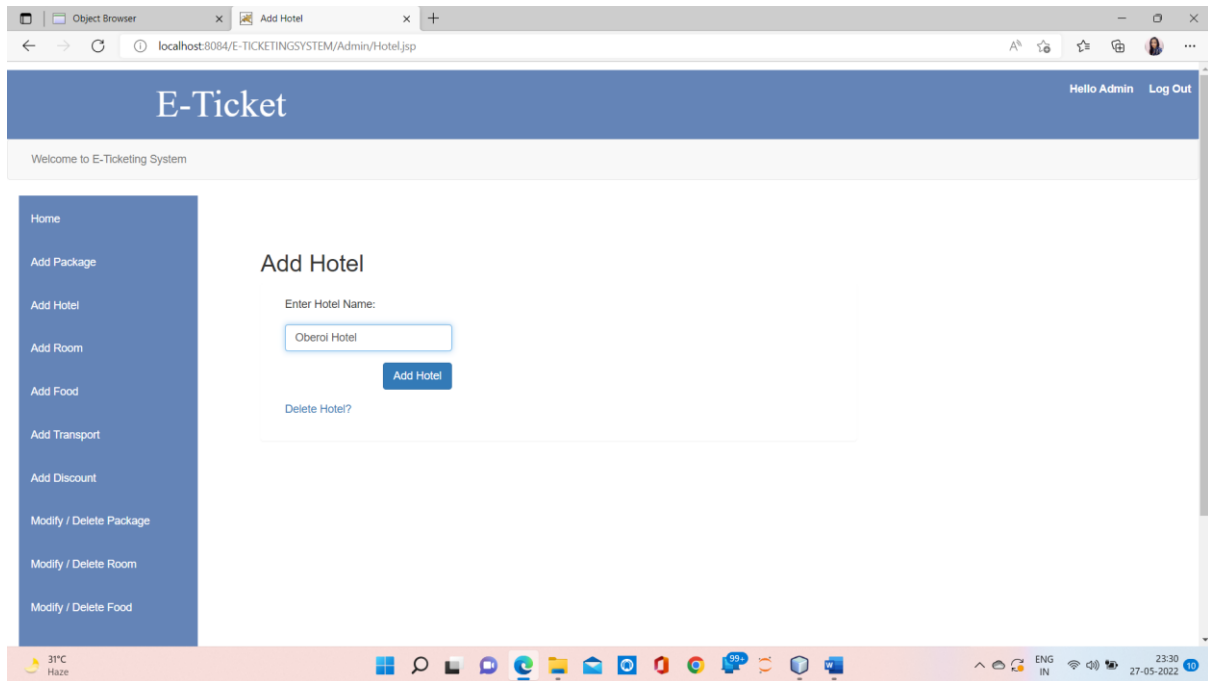

addRoom.jsp

Object Browser x Add Room x +

localhost:8084/E-TICKETINGSYSTEM/Admin/Room.jsp

Welcome to E-Ticketing System

[Home](#)
[Add Package](#)
[Add Hotel](#)
[Add Room](#)
[Add Food](#)
[Add Transport](#)
[Add Discount](#)
[Modify / Delete Package](#)
[Modify / Delete Room](#)
[Modify / Delete Food](#)
[Modify / Delete Transport](#)
[Modify / Delete Discount](#)

Add Room

Select Hotel:

Radisson Hotel

Select Room Type:

AC

Select Room Size:

Single

Enter Cost:

2000

Add Room

31°C Haze 23:39 27-05-2022

Object Browser x localhost:8084/E-TICKETINGSYS x +

localhost:8084/E-TICKETINGSYSTEM/AddRoomAction?hotelName=Radisson+Hotel&roomType=AC&roomSize=single&roomCost=2000

Room Added Successfully

31°C Haze 23:41 27-05-2022

View room page

Object Browser x Modify/ Delete Room x +

localhost:8084/E-TICKETINGSYSTEM/Admin/ModifyRoom.jsp

E-Ticket Hello Admin Log Out

Welcome to E-Ticketing System

Home

Add Package

Add Hotel

Add Room

Add Food

Add Transport

Add Discount

Modify / Delete Package

Modify / Delete Room

Modify / Delete Food


Modify / Delete Room

Hotel Name	Room Type	Room Size	Cost	Update	Delete
Radisson Hotel	AC	single	2000	Update	Delete
Radisson Hotel	Non-AC	double	2500	Update	Delete
Radisson Hotel	AC	double	3000	Update	Delete
Oberoi Hotel	AC	single	3000	Update	Delete

31°C Haze

ENG IN 23:45 27-05-2022

Discount page

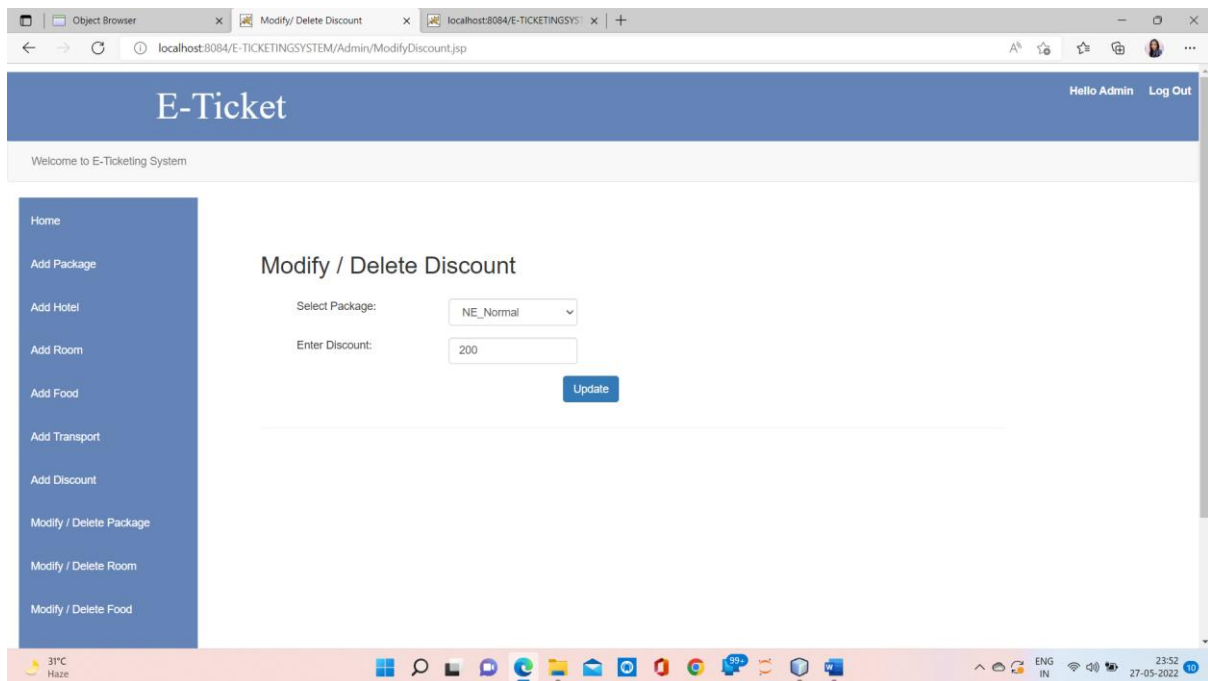

User panel---

Package.jsp

The screenshot shows a web browser window with the URL `localhost:8084/E-TICKETINGSYSTEM/User/Package.jsp`. The page has a blue header with the text "E-Ticket" and a user greeting "Hello anj@gmail.com" with a "Log Out" link. Below the header is a light gray bar with the text "Welcome to E-Ticketing System".

On the left side, there is a blue sidebar menu with the following items: Home, Profile, Select Package, Select Room, Select Food, Select Transport, Modify/ Delete Package, Modify/ Delete Room, Modify/ Delete Food, and Modify/ Delete Transport.

The main content area is titled "Book Package". It features a "Select Package:" label followed by a dropdown menu currently showing "select". Below this is a table with the following data:

Package Name	Place	No of Days	Cost	Book
NI_Normal	North India	10000	5	Book

The Windows taskbar at the bottom shows the system clock as 23:55 on 27-05-2022, with a temperature of 31°C and weather condition of Haze.

bookPackage.jsp

Object Browser x Modify/ Delete Discount x localhost:8084/E-TICKETINGSYS... x Book Package x +

localhost:8084/E-TICKETINGSYSTEM/User/BookPackage.jsp

E-Ticket

Hello anj@gmail.com Log Out

Welcome to E-Ticketing System

Home

Profile

Select Package

Select Room

Select Food

Select Transport

Modify/ Delete Package

Modify/ Delete Room

Modify/ Delete Food

Modify/ Delete Transport

Book Package

Package Name: NI_Normal

Package Place: North India

Number Of Days: 10000

Cost: 5

No Of Persons: 1

Total Cost: 5

Book Package

31°C Haze

27-05-2022 23:55

Room.jsp

Object Browser x Modify/ Delete Discount x localhost:8084/E-TICKETINGSYS x Book Room x

localhost:8084/E-TICKETINGSYSTEM/User/Room.jsp

E-Ticket

Hello anj@gmail.com Log Out

Welcome to E-Ticketing System

Home

Profile

Select Package

Select Room

Select Food

Select Transport

Modify/ Delete Package

Modify/ Delete Room

Modify/ Delete Food

Modify/ Delete Transport

Book Room

Select Hotel: select

Hotel Name	Room Type	Room Size	Cost	Book
Radisson Hotel	AC	single	2000	Book
Radisson Hotel	Non-AC	double	2500	Book
Radisson Hotel	AC	double	3000	Book

31°C Haze

23:57 27-05-2022

bookRoom.jsp

Object Browser x Modify/ Delete Discount x localhost:8084/E-TICKETINGSYS... x Book Room x

localhost:8084/E-TICKETINGSYSTEM/User/BookRoom.jsp

E-Ticket Hello anj@gmail.com Log Out

Welcome to E-Ticketing System

Home

Profile

Select Package

Select Room

Select Food

Select Transport

Modify/ Delete Package

Modify/ Delete Room

Modify/ Delete Food

Modify/ Delete Transport

Book Room

Select Package Name:

Select Place: Select

Hotel Name: Radisson Hotel

Room Type: Non-AC

Room Size: double

Cost: 2500

Select Date: 29-05-2022

Book Room

31°C Haze

27-05-2022 23:57

CODING:

Home.css

```
body{
    background-repeat: no-repeat;
    background-attachment: fixed;
    background-size: cover;

}
/* html {
    background-image: url(b.jpg) no-repeat center center fixed;
} */
#header{
    background-color:#6484b7;
    margin-top:0px;
    top:0px;
    padding-top:10px;
}

.navbar-default {
    background-color: #F8F8F8;
    border-color: #E7E7E7;
}
.navbar-default .navbar-nav > li > a:hover {
    background-color: #6484b7;
    color:#ffffff;
}
.top-nav ul li {
    float : right;
    padding:10px;
    padding-bottom:25px;
    list-style : none;
    background-color:#6484b7;
    border-radius:5px;
    padding-top:15px;

}

#title{
    font-family: AR BERKLEY;
    color:#ffffff;
}
```

```

.top-nav ul li a{
    color:#ffffff;
    font-weight: bold;

}
#footer {
    padding-top:5px;
    padding-bottom:5px;
    clear : both;
    text-align: center;
    color:white;
    background-color:#6484b7;
    margin-top:200px;
}
.panel-default{
    background-color: #F8F8F8;
    border-color: #F8F8F8;
}
#sec{
    width:90%;
    height:700px;
    background-color:white;
    margin-bottom:-180px;
    margin-left:5%;
}
#matter{
    padding-left:50px;
    padding-right:50px;
    padding-top:10px;
    font-size:18px;
    text-align: justify;
}

```

Login.css

```
#login{
    margin-top:100px;
}
.panel-login {
    border-color: #ccc;
    -webkit-box-shadow: 0px 2px 3px 0px rgba(0,0,0,0.2);
    -moz-box-shadow: 0px 2px 3px 0px rgba(0,0,0,0.2);
    box-shadow: 0px 2px 3px 0px rgba(0,0,0,0.2);
}
.panel-login>.panel-heading {
    color: #00415d;
    background-color: #fff;
    border-color: #fff;
    text-align:center;
}
.panel-login>.panel-heading a{
    text-decoration: none;
    color: #666;
    font-weight: bold;
    font-size: 15px;
    -webkit-transition: all 0.1s linear;
    -moz-transition: all 0.1s linear;
    transition: all 0.1s linear;
}
.panel-login>.panel-heading a.active{
    color: #029f5b;
    font-size: 18px;
}
.panel-login>.panel-heading hr{
    margin-top: 10px;
    margin-bottom: 0px;
    clear: both;
    border: 0;
    height: 1px;
    background-image: -webkit-linear-gradient(left,rgba(0, 0, 0, 0),rgba(0, 0, 0, 0.15),rgba(0, 0, 0, 0));
    background-image: -moz-linear-gradient(left,rgba(0,0,0,0),rgba(0,0,0,0.15),rgba(0,0,0,0));
    background-image: -ms-linear-gradient(left,rgba(0,0,0,0),rgba(0,0,0,0.15),rgba(0,0,0,0));
```

```

        background-image: -o-linear-
gradient(left,rgba(0,0,0,0),rgba(0,0,0,0.15),rgba(0,0,0,0));
    }
    .panel-login input[type="text"],.panel-login input[type="email"],.panel-login
input[type="password"] {
        height: 45px;
        border: 1px solid #ddd;
        font-size: 16px;
        -webkit-transition: all 0.1s linear;
        -moz-transition: all 0.1s linear;
        transition: all 0.1s linear;
    }
    .panel-login input:hover,
    .panel-login input:focus {
        outline:none;
        -webkit-box-shadow: none;
        -moz-box-shadow: none;
        box-shadow: none;
        border-color: #ccc;
    }

    .btn-login {
        background-color: #4286f4;
        outline: none;
        color: #fff;
        font-size: 14px;
        height: auto;
        font-weight: normal;
        padding: 14px 0;
        text-transform: uppercase;
        border-color: #59B2E6;
    }
    .btn-login:hover,
    .btn-login:focus {
        color: #fff;
        background-color: #53A3CD;
        border-color: #53A3CD;
    }
    .forgot-password {
        text-decoration: underline;
        color: #888;
    }

```

```

}
.forgot-password:hover,
.forgot-password:focus {
    text-decoration: underline;
    color: #666;
}

.btn-register {
    background-color: #1CB94E;
    outline: none;
    color: #fff;
    font-size: 14px;
    height: auto;
    font-weight: normal;
    padding: 14px 0;
    text-transform: uppercase;
    border-color: #1CB94A;
}
.btn-register:hover,
.btn-register:focus {
    color: #fff;
    background-color: #1CA347;
    border-color: #1CA347;
}

```

Aside.css

```

.aside{
    float:left;
    width:15%;
    /*background-color:#ffb900;*/
    background-color:#6484b7;
    height:700px;
    margin-right:1%;
    margin-left:1%;
    margin-bottom:1%;
}
.aside ul li {
    padding-top:5px;
}

```

```

color:#f2f2f2;
list-style-type:none;
width:100%
}
.aside ul li a{
    color:#ffffff;
}
.aside ul li a:hover {
    background-color: #F8F8F8;
    color:#000000;
    width:100%

}
.section{
    float:left;
    width:82%;
    background-color:#ffffff;
    height:700px;
    margin-bottom:1%;
}
.sectiondev{
    margin:50px;
}

```

HOME.JSP

```

<%@ page language="java" contentType="text/html; charset=ISO-8859-1"
    pageEncoding="ISO-8859-1"%>
<!DOCTYPE html PUBLIC "-//W3C//DTD HTML 4.01 Transitional//EN"
"http://www.w3.org/TR/html4/loose.dtd">
<html>
<head>
<link rel="stylesheet"
href="https://maxcdn.bootstrapcdn.com/bootstrap/3.3.7/css/bootstrap.min.css">

<link rel="stylesheet" type="text/css" href="home/Login.css">
<link rel="stylesheet" type="text/css" href="home/Home.css">

<!-- jQuery library -->
<script
src="https://ajax.googleapis.com/ajax/libs/jquery/3.1.1/jquery.min.js"></script>

```

```

<!-- Latest compiled JavaScript -->
<script
src="https://maxcdn.bootstrapcdn.com/bootstrap/3.3.7/js/bootstrap.min.js"></sc
ript>

<meta http-equiv="Content-Type" content="text/html; charset=ISO-8859-1">
<meta name="viewport" content="width=device-width, initial-scale=1">

<title>User Login</title>
</head>
<body>
<%@ include file ="Header.jsp" %>
<div style="padding:125px; padding-left:500px;">
<div style="font-size:25px; padding:10px; background-
color:rgba(255,255,255,0.5);">
<h3 style="padding-bottom:20px;"><b>Welcome to E-TICKETING
System</b></h3>
<h4 style="padding-left:30px;">"Its better to <b>See</b> something once than
to <b>Hear</b> about it a hundred times"</h4>

</div>
</div>
<%@ include file="Footer.jsp" %>
</body>
</html>

```

HEADER.JSP

```

<%@ page language="java" contentType="text/html; charset=ISO-8859-1"
    pageEncoding="ISO-8859-1"%>
<!DOCTYPE html PUBLIC "-//W3C//DTD HTML 4.01 Transitional//EN"
"http://www.w3.org/TR/html4/loose.dtd">
<html>
<head>
<link rel="stylesheet"
href="https://maxcdn.bootstrapcdn.com/bootstrap/3.3.7/css/bootstrap.min.css">

<link rel="stylesheet" type="text/css" href="Home.css">

<!-- jQuery library -->

```

```

<script
src="https://ajax.googleapis.com/ajax/libs/jquery/3.1.1/jquery.min.js"></script>

<!-- Latest compiled JavaScript -->
<script
src="https://maxcdn.bootstrapcdn.com/bootstrap/3.3.7/js/bootstrap.min.js"></sc
ript>

<meta http-equiv="Content-Type" content="text/html; charset=ISO-8859-1">
<meta name="viewport" content="width=device-width, initial-scale=1">

<title>Insert title here</title>
</head>
<body>
<header>
<nav class = "top-nav">
    <ul>
        <li><a href=" ../home/Login.jsp">Log Out</a></li>
        <li><a>Hello <%=session.getAttribute("email")
%></a></li>
    </ul>
</nav>
<!-- HEADER -->
    <div id="header">
        <div class="container">
            <div align="left">
                <font size="7">
                    <p id="title">E-Ticket</p>
                </font>
            </div>
        </div>
    </div>
</header>
<div id="navbar">
    <nav class="navbar navbar-default" role="navigation" >
        <div class="container-fluid">
            <ul class="nav navbar-nav">
                <li><a>Welcome to E-Ticketing System</a></li>
            </ul>
        </div>
    </nav>

```

```
</div>
</body>
</html>
```

Footer.jsp

```
<%@ page language="java" contentType="text/html; charset=ISO-8859-1"
    pageEncoding="ISO-8859-1"%>
<!DOCTYPE html PUBLIC "-//W3C//DTD HTML 4.01 Transitional//EN"
"http://www.w3.org/TR/html4/loose.dtd">
<html>
<head>
<link rel="stylesheet"
href="https://maxcdn.bootstrapcdn.com/bootstrap/3.3.7/css/bootstrap.min.css">

<link rel="stylesheet" type="text/css" href="Home.css">

<!-- jQuery library -->
<script
src="https://ajax.googleapis.com/ajax/libs/jquery/3.1.1/jquery.min.js"></script>

<!-- Latest compiled JavaScript -->
<script
src="https://maxcdn.bootstrapcdn.com/bootstrap/3.3.7/js/bootstrap.min.js"></sc
ript>

<meta http-equiv="Content-Type" content="text/html; charset=ISO-8859-1">
<meta name="viewport" content="width=device-width, initial-scale=1">

<title>Insert title here</title>
</head>
<body>
<footer>
    <div id="footer">
        <div>
            <div>
                <div class="panel-body" align="Center">&copy; copywrite E-
Ticketing System.com</div>
            </div>
```

```
        </div>
    </div>
</footer>
</body>
</html>
```

User panel

Login.jsp

```
<%@ page language="java" contentType="text/html; charset=ISO-8859-1"
    pageEncoding="ISO-8859-1"%>
<!DOCTYPE html>
<html>
<head>
<link rel="stylesheet"
href="https://maxcdn.bootstrapcdn.com/bootstrap/3.3.7/css/bootstrap.min.css">

<link rel="stylesheet" type="text/css" href="Login.css">
<link rel="stylesheet" type="text/css" href="Home.css">

<!-- jQuery library -->
<script
src="https://ajax.googleapis.com/ajax/libs/jquery/3.1.1/jquery.min.js"></script>

<!-- Latest compiled JavaScript -->
<script
src="https://maxcdn.bootstrapcdn.com/bootstrap/3.3.7/js/bootstrap.min.js"></script>

<meta http-equiv="Content-Type" content="text/html; charset=ISO-8859-1">
<meta name="viewport" content="width=device-width, initial-scale=1">

<script type="text/javascript"
src="https://ajax.googleapis.com/ajax/libs/jquery/2.1.3/jquery.min.js"></script>
<title>User Login</title>
</head>
<body style="background-image: url('../images/1.jpg')">
```

```

<script type="text/javascript">
$(document).ready(function(){
    $('#loginsubmit').click(function(){
        var name = $('#username').val();
        var pass = $('#password').val();
        $.ajax({
            type:'POST',
            data:{ email:name, password:pass},
            url:'../Login',
            success: function(result){
                var a = result;
                if(a.trim() == "valid"){
                    window.location.href = "../User/User.jsp";
                }else{
                    $('#validation').html(a);
                }
            }
        });
    });
});
</script>

```

```

<%@ include file ="Header.jsp" %>
<div id="login">
    <div class="container">
        <div class="row">
            <div class="col-md-6 col-md-offset-3">
                <div class="panel panel-login">
                    <div class="panel-heading">
                        <div class="row">
                            <div class="col-xs-6">
                                <a href="#" class="active"
id="login-form-link">Login</a>
                            </div>
                            <div class="col-xs-6">
                                <a href="Register.jsp"
id="register-form-link">Register</a>
                            </div>
                        </div>
                    </div>
                    <hr>
                </div>
            </div>
        </div>
    </div>

```

```

        <div class="panel-body">
            <div class="row">
                <div class="col-lg-12">
                    <form method="post"
id="login-form" role="form" style="display: block;">
                        <div class="form-group">
                            <input type="text"
name="email" id="username" tabindex="1" class="form-control"
placeholder="Email Id" required>
                        </div>
                        <div class="form-group">
                            <input
type="password" name="password" id="password" tabindex="2" class="form-
control" placeholder="Password" required="required">
                        </div>
                        <div class="form-group">
                            <div class="row">
                                <div
class="col-sm-6 col-sm-offset-3">
                                    <div
class="text-center">
                                        <input
type="button" name="login-submit" id="loginsubmit" tabindex="4" class="btn
btn-primary" value="Log In" style="padding-left:5px;padding-right:5px;">
                                    </div>
                                </div>
                            </div>
                        </div>
                    </div>
                </div>
            </div>
            <div class="col-lg-12">
                <div
class="text-center">
                    <a
href="Recover.jsp" tabindex="5" class="forgot-password">Forgot
Password?</a>
                </div>
            </div>
        </div>
    </div>

```



```

<script type="text/javascript"
src="https://ajax.googleapis.com/ajax/libs/jquery/2.1.3/jquery.min.js"></script>
<title>Register</title>
</head>
<body style="background-image: url('../images/2.jpg');">
<script type="text/javascript">
    function validation(){
        name = document.getElementById("name").value;
        email = document.getElementById("email").value;
        pass = document.getElementById("password").value;
        mobile = document.getElementById("mobile").value;

        if(name!=null&&email!=null&&mobile!=null&&pass!=null&&name!=""
&&email!=""&&mobile!=""&&pass!=""&&name.length>0&&email.length>0
&&mobile.length==10&&pass.length>0){
            return true;
        }else {
            document.getElementById("errormess").innerHTML =
            "Please enter valid details";
            return false;
        }
    }
</script>

<%@ include file ="Header.jsp" %>
<div id="login">
<div class="container">
    <div class="row">
        <div class="col-md-6 col-md-offset-3">
            <div class="panel panel-login">
                <div class="panel-heading">
                    <div class="row">
                        <div class="col-xs-6">
                            <a href="Login.jsp" id="login-
form-link">Login</a>
                        </div>
                        <div class="col-xs-6">

```

```

                                <a href="#" class="active"
id="register-form-link">Register</a>
                                </div>
                                </div>
                                <hr>
                                </div>
                                <div class="panel-body">
                                    <div class="row">
                                        <div class="col-lg-12">
                                            <form action=" ../Register"
onsubmit="return validation()" id="login-form" style="display: block;">
                                                <div class="form-group">
                                                    <input type="text"
name="name" id="name" tabindex="1" class="form-control"
placeholder="Name" >
                                                        </div>
                                                        <div class="form-group">
                                                            <input type="text"
name="email" id="email" tabindex="2" class="form-control"
placeholder="Email ID" >
                                                                </div>
                                                                <div class="form-group">
                                                                    <input
type="password" name="password" id="password" tabindex="3" class="form-
control" placeholder="Password" >
                                                                        </div>
                                                                        <div class="form-group">
                                                                            <input
type="number" name="mobile" id="mobile" tabindex="4" class="form-control"
placeholder="Mobile" >
                                                                                </div>
                                                                                <div class="form-group">
                                                                                    <div class="row">
                                                                                        <div
class="col-sm-6 col-sm-offset-3">
                                                                                            <input
type="submit" name="register" id="login-submit" tabindex="5" class="form-
control btn btn-login" value="Register">
                                                                                                </div>
                                                                                                </div>
                                                                                                </div>

```

```

class="errormess" style="color:red;margin-left:20px;"><%
if(session.getAttribute("errormess")!=null){%>

    <%=session.getAttribute("errormess")%>

    <%
session.setAttribute("errormess",null);}%>
    </span>
    <span id="SuccessMess"
class="SuccessMess" style="color:green;margin-left:20px;"><%
if(session.getAttribute("SuccessMess")!=null){%>

    <%=session.getAttribute("SuccessMess")%>

    <%
session.setAttribute("SuccessMess",null);}%>
    </span>
    </form>
    </div>
    </div>
    </div>
    </div>
    </div>
    </div>
    </div>
    <%@ include file="Footer.jsp" %>
</body>
</html>

```

Services.jsp

```

<%@ page language="java" contentType="text/html; charset=ISO-8859-1"
    pageEncoding="ISO-8859-1"%>
<!DOCTYPE html PUBLIC "-//W3C//DTD HTML 4.01 Transitional//EN"
"http://www.w3.org/TR/html4/loose.dtd">
<html>
<head>
<link rel="stylesheet"
href="https://maxcdn.bootstrapcdn.com/bootstrap/3.3.7/css/bootstrap.min.css">

<link rel="stylesheet" type="text/css" href="Home.css">

```

```

<!-- jQuery library -->
<script
src="https://ajax.googleapis.com/ajax/libs/jquery/3.1.1/jquery.min.js"></script>

<!-- Latest compiled JavaScript -->
<script
src="https://maxcdn.bootstrapcdn.com/bootstrap/3.3.7/js/bootstrap.min.js"></sc
ript>

<meta http-equiv="Content-Type" content="text/html; charset=ISO-8859-1">
<title>Services</title>
</head>
<body>
<%@ include file ="Header.jsp" %>
<div id="sec">
    <h3 style="padding-top:50px; padding-left:500px;">Services</h3>
    <div id="matter" style="padding:30px 80px;">
        <table class="table table-striped">
            <tr>
                <td><b>Packages</b></td>
                <td>You can select your own package with your own place</td>
            </tr>
            <tr>
                <td width="20%"><b>Hotels and Rooms</b></td>
                <td>We have different types of hotels, in each hotel we have AC or Non-
AC Rooms
                and different types of sizes like Single and Double room. You can modify
or cancel the room any time.
            </td>
            </tr>
            <tr>
                <td><b>Food</b></td>
                <td>
                We provide different types of food in both Veg and Non-Veg
            </td>
            </tr>
            <tr>
                <td><b>Transport</b></td>
                <td>We have different means of transport like car bus and mini-bus</td>
            </tr>

```

```

        </table>
    </div>
</div>
<%@ include file="Footer.jsp" %>
</body>
</html>

```

About.jsp

```

<%@ page language="java" contentType="text/html; charset=ISO-8859-1"
    pageEncoding="ISO-8859-1"%>
<!DOCTYPE html PUBLIC "-//W3C//DTD HTML 4.01 Transitional//EN"
"http://www.w3.org/TR/html4/loose.dtd">
<html>
<head>
<link rel="stylesheet" type="text/css" href="Home.css">

<meta http-equiv="Content-Type" content="text/html; charset=ISO-8859-1">
<title>About Us</title>
</head>
<body>
<%@ include file = "Header.jsp" %>
<div id="sec">
    <h3 style="padding-top:50px; padding-left:500px;">About Us</h3>
    <div id="matter">
        <p>&emsp;&emsp;&emsp;&emsp;&emsp;The "E-Ticketing" for Indian Tourism
is a web application developed using industry standards and methodologies
        The main aim of this project is to help the tourism companies to manage
their customers, hotels,
        vehicles and agents. It makes all operations of the tour company easy and
accurate
        </p>
        <p>&emsp;&emsp;&emsp;&emsp;&emsp;
        Tourism is travel for pleasure; also the theory and practice of touring, the
business of attracting, accommodating,
        and entertaining tourists, and the business of operating tours. Tourism may
be international, or within the
        traveller's country. The World Tourism Organization defines tourism more
generally, in terms which go "beyond the

```



```

<script
src="https://maxcdn.bootstrapcdn.com/bootstrap/3.3.7/js/bootstrap.min.js"></sc
ript>

<meta http-equiv="Content-Type" content="text/html; charset=ISO-8859-1">
<title>Contact Us</title>
</head>
<body>
<%@ include file ="Header.jsp" %>
<div id="sec">
    <h3 style="padding-top:50px; padding-left:500px;">Contact Us</h3>
    <div style="padding:30px 450px;">
        <table class="table table-striped">
            <tr>
                <td><h4><b>E-Ticket System</b></h4></td>
            </tr>
            <tr>
                <td><b>Address:</b></td>
            </tr>
            <tr>
                <td>108 A South St,XYZ, MO 64093</td>
            </tr>
            <tr>
                <td><b>Mobile:</b></td>
            </tr>
            <tr>
                <td>+1(263)-000-1111</td>
            </tr>
        </table>
    </div>
</div>
<%@ include file="Footer.jsp" %>
</body>
</html>

```

adminLogin.jsp

```
<%@ page language="java" contentType="text/html; charset=ISO-8859-1"
    pageEncoding="ISO-8859-1"%>
<!DOCTYPE html PUBLIC "-//W3C//DTD HTML 4.01 Transitional//EN"
"http://www.w3.org/TR/html4/loose.dtd">
<html>
<head>
<link rel="stylesheet"
href="https://maxcdn.bootstrapcdn.com/bootstrap/3.3.7/css/bootstrap.min.css">

<link rel="stylesheet" type="text/css" href="Login.css">
<link rel="stylesheet" type="text/css" href="Home.css">

<!-- jQuery library -->
<script
src="https://ajax.googleapis.com/ajax/libs/jquery/3.1.1/jquery.min.js"></script>

<!-- Latest compiled JavaScript -->
<script
src="https://maxcdn.bootstrapcdn.com/bootstrap/3.3.7/js/bootstrap.min.js"></sc
ript>

<meta http-equiv="Content-Type" content="text/html; charset=ISO-8859-1">
<meta name="viewport" content="width=device-width, initial-scale=1">

<script type="text/javascript"
src="https://ajax.googleapis.com/ajax/libs/jquery/2.1.3/jquery.min.js"></script>

<title>Admin Login</title>
</head>
<body>
<script type="text/javascript">
$(document).ready(function(){
    $('#button').click(function(){
        var name = $('#username').val();
        var pass = $('#password').val();
        $.ajax({
            type:'POST',
            data:{ email:name, password:pass},
            url:'../AdminLogin',
            success: function(result){
```

```

        if(result!= "invalid"){
            window.location.href = "../Admin/Admin.jsp";
        }else{
            $('#validation').html(result);}
    }
});
});
</script>
<%@ include file ="Header.jsp" %>
<div id="login">
<div class="container">
    <div class="row">
        <div class="col-md-6 col-md-offset-3">
            <div class="panel panel-login">
                <div class="panel-heading">
                    <div class="row">
                        <div class="col-xs-12">
                            <a class="active" >Admin
Login</a>
                        </div>
                    </div>
                </div>
                <div class="panel-body">
                    <div class="row">
                        <div class="col-lg-12">
                            <form action="../AdminLogin">
                                <div class="form-group">
                                    <input type="text"
name="email" id="username" tabindex="1" class="form-control"
placeholder="Email ID" required="true">
                                </div>
                                <div class="form-group">
                                    <input
type="password" name="password" id="password" tabindex="2" class="form-
control" placeholder="Password" required="true">
                                </div>
                                <div class="form-group">
                                    <div class="row">
                                        <div class="col-sm-
6 col-sm-offset-3">

```

```

<input
type="button" tabindex="3" id="button" class="form-control btn btn-login"
value="Log In">
</div>
</div>
</div>
<div
id="validation"></div>
</form>
</div>
</div>
</div>
</div>
</div>
</div>
<div>
<%@ include file="Footer.jsp" %>
</body>
</html>

```

Package.jsp

```
<%@ page language="java" contentType="text/html; charset=ISO-8859-1"
    pageEncoding="ISO-8859-1"%>
<%@ page import = "java.sql.*" %>
<!DOCTYPE html PUBLIC "-//W3C//DTD HTML 4.01 Transitional//EN"
"http://www.w3.org/TR/html4/loose.dtd">
<html>
<head>
<link rel="stylesheet"
href="https://maxcdn.bootstrapcdn.com/bootstrap/3.3.7/css/bootstrap.min.css">

<link rel="stylesheet" type="text/css" href="../home/Aside.css">
<link rel="stylesheet" type="text/css" href="../home/Home.css">

<!-- jQuery library -->
<script
src="https://ajax.googleapis.com/ajax/libs/jquery/3.1.1/jquery.min.js"></script>

<!-- Latest compiled JavaScript -->
<script
src="https://maxcdn.bootstrapcdn.com/bootstrap/3.3.7/js/bootstrap.min.js"></sc
ript>

<meta name="viewport" content="width=device-width, initial-scale=1">
<meta http-equiv="Content-Type" content="text/html; charset=ISO-8859-1">
<title>Book Package</title>
</head>
<body>
<script type="text/javascript">
$(document).ready(function(){
    $('#packagename').change(function(){
        var packagename=$('#packagename').find('option:selected').text();
        $('#packagetable').show();
        $.ajax({
            type:'POST',
            data:{ packagename:packagename},
            url:'../SelectPackage',
            success: function(result){
                window.location.href = "../User/Package.jsp";
            }
        });
    });
});
```

```

    });
});

</script>

<%@ include file ="Header.jsp" %>
<%@ include file ="Aside.jsp" %>
    <section class="section">
        <div class="sectiondev">
            <h3>Book Package</h3>
            <div class="col-sm-12">
                <div class="col-sm-4">
                    <div class="form-group">
                        <div class="text-right">
                            Select Package:
                        </div>
                    </div>
                </div>
            </div>
            <div class="col-sm-3">
                <div class="form-group">
                    <%
                        try {
                            Class.forName("oracle.jdbc.OracleDriver");

                            Connection
con=DriverManager.getConnection("jdbc:oracle:thin:@localhost:1521:XE","tourism","tourism");

                            PreparedStatement ps =
con.prepareStatement("select DISTINCT packagename from package");
                            ResultSet rs = ps.executeQuery();
                        }%>
                        <select name="packagename"
id="packagename" class="form-control">
                            <option value="select">select</option>
                            <%while(rs.next()){ %>
                                <option
value="<%=rs.getString(1)%>" ><%=rs.getString(1) %></option>
                                <%} %>
                            </select>
                            <%
                                }

```

```

        catch (Exception e) {
            e.printStackTrace();
        }%>
    </div>
</div>
</div>
<table class="table table-striped" id="packagetable">
    <thead>
        <tr>
            <th>Package Name</th>
            <th>Place</th>
            <th>No of Days</th>
            <th>Cost</th>
            <th>Book</th>
        </tr>
    </thead>
    <tbody>
        <%
            try{
                Connection
con=DriverManager.getConnection("jdbc:oracle:thin:@localhost:1521:XE","tourism","tourism");

                PreparedStatement ps =
con.prepareStatement("select * from package where
packagename='"+session.getAttribute("packagename1")+"'");
                session.setAttribute("packagename1",null);
                ResultSet rs = ps.executeQuery();
                while(rs.next()){ %>
                    <tr>
                        <td><%=rs.getString(2) %></td>
                        <td><%=rs.getString(3) %></td>
                        <td><%=rs.getString(5) %></td>
                        <td><%=rs.getString(4) %></td>
                        <td><a
href=" ../UpdatePackage?package=<%=rs.getString(2)
%>&place=<%=rs.getString(3)%>&type=book ">Book</a></td>
                    </tr>
                    <%} %>
                <%
            }
        catch (Exception e) {

```

```

                                e.printStackTrace();
                                }%>
                        </tbody>
    </table>
</div>
</section>
<%@ include file="../home/Footer.jsp" %>
</body>
</html>

```

BookPackage.jsp

```

<%@ page language="java" contentType="text/html; charset=ISO-8859-1"
    pageEncoding="ISO-8859-1"%>
<!DOCTYPE html PUBLIC "-//W3C//DTD HTML 4.01 Transitional//EN"
"http://www.w3.org/TR/html4/loose.dtd">
<html>
<head>
<link rel="stylesheet"
href="https://maxcdn.bootstrapcdn.com/bootstrap/3.3.7/css/bootstrap.min.css">

<link rel="stylesheet" type="text/css" href="../home/Aside.css">
<link rel="stylesheet" type="text/css" href="../home/Home.css">

<!-- jQuery library -->
<script
src="https://ajax.googleapis.com/ajax/libs/jquery/3.1.1/jquery.min.js"></script>

<!-- Latest compiled JavaScript -->
<script
src="https://maxcdn.bootstrapcdn.com/bootstrap/3.3.7/js/bootstrap.min.js"></sc
ript>
<meta name="viewport" content="width=device-width, initial-scale=1">

<meta http-equiv="Content-Type" content="text/html; charset=ISO-8859-1">
<title>Book Package</title>
</head>
<body>
<script type="text/javascript">
$(document).ready(function(){
    var persons = $('#noofPersons').val();

```

```

var cost = $('#packageCost').val();
var totalcost = cost* persons;
$('#totalcost').val(totalcost);

$('#noofPersons').change(function(){
    var persons = $('#noofPersons').val();
    var totalcost = cost* persons;
    $('#totalcost').val(totalcost);
});

$('#button').click(function(){
    var packagename = $('#package').val();
    var place = $('#place').val();
    var days = $('#days').val();
    var packageCost = $('#packageCost').val();
    var noofPersons = $('#noofPersons').val();
    var totalcost = $('#totalcost').val();
    $.ajax({
        type:'POST',
        data:{ packagename:packagename, place:place, days:days,
packageCost:packageCost,noofPersons:noofPersons,totalcost:totalcost},
        url:'../BookPackage',
        success: function(result){
            $('#validation').html(result);
        }
    });
});
});
</script>
<%@ include file ="Header.jsp" %>
<%@ include file ="Aside.jsp" %>
<section class="section">
    <div class="sectiondev">
        <div class="container">
            <h2>Book Package</h2>
            <div class="panel col-sm-12">
                <div class="panel-body">
                    <div class="row">
                        <div class="col-sm-8">
                            <form>
                                <div class="col-sm-8">

```

```

        <div class="col-sm-4">
            <div class="form-group">
                Package Name:
            </div>
        </div>
        <div class="col-sm-4">
            <div class="form-group">
                <input class="form-control"
type="text" value="<%=session.getAttribute("packageName") %>"
id="package" name="package" readonly>
            </div>
        </div>
    </div>
    <div class="col-sm-8">
        <div class="col-sm-4">
            <div class="form-group">
                Package Place:
            </div>
        </div>
        <div class="col-sm-4">
            <div class="form-group">
                <input class="form-control"
type="text" value="<%=session.getAttribute("placeName") %>" id="place"
name="place" readonly>
            </div>
        </div>
    </div>
    <div class="col-sm-8">
        <div class="col-sm-4">
            <div class="form-group">
                Number Of Days:
            </div>
        </div>
        <div class="col-sm-4">
            <div class="form-group">
                <input class="form-control"
type="text" value="<%=session.getAttribute("days") %>" id="days"
name="days" readonly>
            </div>
        </div>
    </div>

```

```

<div class="col-sm-8">
<div class="col-sm-4">
    <div class="form-group">
        Cost:
    </div>
</div>
<div class="col-sm-4">
<div class="form-group">
    <input class="form-control"
type="text" value="<%=session.getAttribute("cost") %>" id="packageCost"
name="packageCost" readonly>
</div>
</div>
</div>
<div class="col-sm-8">
<div class="col-sm-4">
    <div class="form-group">
        No Of Persons:
    </div>
</div>
<div class="col-sm-4">
<div class="form-group">
    <input class="form-control"
value="1" type="text" id="noofPersons" name="noofPersons" required>
</div>
</div>
</div>
<div class="col-sm-8">
<div class="col-sm-4">
    <div class="form-group">
        Total Cost:
    </div>
</div>
<div class="col-sm-4">
<div class="form-group">
    <input class="form-control"
type="text" id="totalcost" name="totalcost" readonly>
</div>
</div>
</div>
<div class="col-sm-8">

```



```

<!-- jQuery library -->
<script
src="https://ajax.googleapis.com/ajax/libs/jquery/3.1.1/jquery.min.js"></script>

<!-- Latest compiled JavaScript -->
<script
src="https://maxcdn.bootstrapcdn.com/bootstrap/3.3.7/js/bootstrap.min.js"></sc
ript>

<meta name="viewport" content="width=device-width, initial-scale=1">

<title>Book Room</title>
</head>
<body>
<script type="text/javascript">
$(document).ready(function(){
    $('#hotelName').change(function(){
        var hotelName = $('#hotelName').find('option:selected').text();
        $.ajax({
            type:'POST',
            data:{ hotelName:hotelName},
            url:'../SelectRoom',
            success: function(result){
                window.location.href = "../User/Room.jsp";
            }
        });
    });
});
</script>

<%@ include file ="Header.jsp" %>
<%@ include file ="Aside.jsp" %>
<section class="section">
    <div class="sectiondev">
        <h3>Book Room</h3>
        <div class="col-sm-12">
            <div class="col-sm-4">
                <div class="form-group">
                    <div class="text-right">
                        Select Hotel:

```

```

        </div>
    </div>
</div>
<div class="col-sm-3">
    <div class="form-group">
        <%
            try {
                Class.forName("oracle.jdbc.OracleDriver");

                Connection
con=DriverManager.getConnection("jdbc:oracle:thin:@localhost:1521:XE","tourism","tourism");

                PreparedStatement ps =
con.prepareStatement("select DISTINCT hotelName from hotel");
                ResultSet rs = ps.executeQuery();
            %>
            <select name="hotelName" id="hotelName"
class="form-control">

                <option value="select">select</option>
                <%while(rs.next()){ %>
                    <option
value="<%=rs.getString(1)%>" ><%=rs.getString(1) %></option>
                    <%} %>
                </select>
                <%
                }
            catch (Exception e) {
                e.printStackTrace();
            }%>
        </div>
    </div>
</div>
<table class="table table-striped">
    <thead>
        <tr>
            <th>Hotel Name</th>
            <th>Room Type</th>
            <th>Room Size</th>
            <th>Cost</th>
            <th>Book</th>
        </tr>
    </thead>

```

```

        </thead>
        <tbody>
            <%
                try { Connection
con=DriverManager.getConnection("jdbc:oracle:thin:@localhost:1521:XE","tourism","tourism");
                PreparedStatement ps =
con.prepareStatement("select * from room where
hotelName='"+session.getAttribute("hotelName")+"'");
                session.setAttribute("hotelName",null);
                ResultSet rs = ps.executeQuery();
                while(rs.next()){ %>
                    <tr>
                    <td><%=rs.getString(1) %></td>
                    <td><%=rs.getString(2) %></td>
                    <td><%=rs.getString(3) %></td>
                    <td><%=rs.getString(4) %></td>
                    <td><a
href=" ../UpdateRoom?hotelName=<%=rs.getString(1)
%>&roomType=<%=rs.getString(2)%>&roomSize=<%=rs.getString(3)%>&type=book ">Book</a></td>
                    </tr>
                    <%} %>
                <%
                }
                catch (Exception e) {
                    e.printStackTrace();
                }%>
            </tbody>
        </table>
    </div>
</section>
<%@ include file=" ../home/Footer.jsp" %>
</body>
</body>
</html>

```

BookRoom.jsp

```
<%@ page language="java" contentType="text/html; charset=ISO-8859-1"
    pageEncoding="ISO-8859-1"%>
<%@ page import="java.sql.*" %>
<!DOCTYPE html PUBLIC "-//W3C//DTD HTML 4.01 Transitional//EN"
"http://www.w3.org/TR/html4/loose.dtd">
<html>
<head>
<link rel="stylesheet"
href="https://maxcdn.bootstrapcdn.com/bootstrap/3.3.7/css/bootstrap.min.css">

<link rel="stylesheet" type="text/css" href="../home/Aside.css">
<link rel="stylesheet" type="text/css" href="../home/Home.css">

<!-- jQuery library -->
<script
src="https://ajax.googleapis.com/ajax/libs/jquery/3.1.1/jquery.min.js"></script>

<!-- Latest compiled JavaScript -->
<script
src="https://maxcdn.bootstrapcdn.com/bootstrap/3.3.7/js/bootstrap.min.js"></sc
ript>
<meta name="viewport" content="width=device-width, initial-scale=1">

<meta http-equiv="Content-Type" content="text/html; charset=ISO-8859-1">
<title>Book Room</title>
</head>
<body>
<script type="text/javascript">
$(document).ready(function(){
    $('#packagename').change(function(){
        var packagename=$('#packagename').find('option:selected').text();
        $('#packagetable').show();
        $.ajax({
            type:'POST',
            data:{ packagename:packagename},
            url:'../SelectPlace',
            success: function(result){
                $('#placebox').html(result);
            }
        });
    });
});
```

```

});

$('#button').click(function(){
    var hotelName = $('#hotelName').val();
    var roomType = $('#roomType').val();
    var roomSize = $('#roomSize').val();
    var roomCost = $('#roomCost').val();
    var roomDate = $('#roomDate').val();
    var packagename = $('#packagename').find('option:selected').text();
    var place = $('#placebox').find('option:selected').text();
    $.ajax({
        type:'POST',
        data:{
hotelName:hotelName,roomType:roomType,roomSize:roomSize,roomCost:roomCost,roomDate:roomDate, packagename:packagename, place:place},
        url:'../BookRoom',
        success: function(result){
            $('#validation').html(result);
        }
    });
});
});
</script>
<%@ include file ="Header.jsp" %>
<%@ include file ="Aside.jsp" %>
<section class="section">
    <div class="sectiondev">
        <div class="container">
            <h2>Book Room</h2>
            <div class="panel col-sm-8">
                <div class="panel-body">
                    <div class="row">
                        <div class="col-sm-12">
                            <form >
                                <div class="col-sm-12">
                                    <div class="col-sm-4">
                                        <div class="form-group">
                                            Select Package Name:
                                        </div>
                                    </div>
                                </div>
                            <div class="col-sm-4">

```

```

        <div class="form-group">
            <%
                try {

                    Class.forName("oracle.jdbc.OracleDriver");
                    Connection
con=DriverManager.getConnection("jdbc:oracle:thin:@localhost:1521:XE","tourism","tourism");
                    PreparedStatement ps = con.prepareStatement("select DISTINCT
packagename from bookpackage where
email='"+session.getAttribute("email")+"'");

                    ResultSet rs =

ps.executeQuery();

                    %>
                        <select
name="packagename" id="packagename" class="form-control">
                            <option
value="select">select</option>

                                <%while(rs.next()){ %>
                                    <option
value="<%=rs.getString(1)%>" ><%=rs.getString(1) %></option>
                                        <%} %>
                                    </select>
                                        <%
                                            }
                                        catch (Exception e) {
                                            e.printStackTrace();
                                        }%>
                                </div>
                                </div>
                                </div>
                                <div class="col-sm-12">
                                <div class="col-sm-4">
                                    <div class="form-group">
                                        Select Place:
                                        </div>
                                        </div>
                                        <div class="col-sm-4">
                                        <div class="form-group">
                                            <select id="placebox"
class="form-control">

```

```

value="select">Select</option>
                                </select>
                                </div>
                                </div>
                                </div>
                                <div class="col-sm-12">
                                <div class="col-sm-4">
                                    <div class="form-group">
                                    Hotel Name:
                                    </div>
                                    </div>
                                    <div class="col-sm-4">
                                    <div class="form-group">
                                        <input class="form-control"
value="<%=session.getAttribute("hotelName") %>" type="text"
id="hotelName" name="hotelName" readonly>
                                        </div>
                                        </div>
                                    </div>
                                <div class="col-sm-12">
                                <div class="col-sm-4">
                                    <div class="form-group">
                                    Room Type:
                                    </div>
                                    </div>
                                    <div class="col-sm-4">
                                    <div class="form-group">
                                        <input class="form-control"
value="<%=session.getAttribute("roomType") %>" type="text" id="roomType"
name="roomType" readonly>
                                        </div>
                                        </div>
                                    </div>
                                <div class="col-sm-12">
                                <div class="col-sm-4">
                                    <div class="form-group">
                                    Room Size:
                                    </div>
                                    </div>
                                    <div class="col-sm-4">

```

```

        <div class="form-group">
            <input class="form-control"
value="<%=session.getAttribute("roomSize") %>" type="text" id="roomSize"
name="roomSize" readonly>
        </div>
    </div>
</div>
<div class="col-sm-12">
    <div class="col-sm-4">
        <div class="form-group">
            Cost:
        </div>
    </div>
    <div class="col-sm-4">
        <div class="form-group">
            <input class="form-control"
type="text" value="<%=session.getAttribute("roomCost") %>" id="roomCost"
name="roomCost" readonly>
        </div>
    </div>
</div>
<div class="col-sm-12">
    <div class="col-sm-4">
        <div class="form-group">
            Select Date:
        </div>
    </div>
    <div class="col-sm-4">
        <div class="form-group">
            <input class="form-control"
type="Date" id="roomDate" name="roomDate" required="true">
        </div>
    </div>
</div>
<div class="col-sm-8">
    <div class="col-sm-4">
        <div class="form-group">
            <div class="text-right">
                <input type="button"
id="button" value="Book Room" class="btn btn-primary">
            </div>
        </div>
    </div>
</div>

```



```

<script
src="https://maxcdn.bootstrapcdn.com/bootstrap/3.3.7/js/bootstrap.min.js"></sc
ript>
<meta name="viewport" content="width=device-width, initial-scale=1">

<meta http-equiv="Content-Type" content="text/html; charset=ISO-8859-1">
<title>Modify/ Cancel Package</title>
</head>
<body>
<%@ include file ="Header.jsp" %>
<%@ include file ="Aside.jsp" %>
    <section class="section">
        <div class="sectiondev">
            <h2>Modify/ Cancel Package</h2>
            <table class="table table-striped">
                <thead>
                    <tr>
                        <th>Package Name</th>
                        <th>Place</th>
                        <th>No of Days</th>
                        <th>Cost</th>
                        <th>No of Persons</th>
                        <th>Total Cost</th>
                        <th>Modify</th>
                        <th>Cancel</th>
                    </tr>
                </thead>
                <tbody>
                    <%
                        try {
                            Class.forName("oracle.jdbc.OracleDriver");

                            Connection
con=DriverManager.getConnection("jdbc:oracle:thin:@localhost:1521:XE","tou
rism","tourism");

                            PreparedStatement ps =

con.prepareStatement("select
packagename,place,days,packageCost,noofPersons,totalCost from bookpackage
where email='"+session.getAttribute("email")+"'");
                            ResultSet rs = ps.executeQuery();

```

```

while(rs.next()){ %>
<tr>
<td><%=rs.getString(1) %></td>
<td><%=rs.getString(2) %></td>
<td><%=rs.getString(3) %></td>
<td><%=rs.getString(4) %></td>
<td><%=rs.getString(5) %></td>
<td><%=rs.getString(6) %></td>
<td><a
href=" ../ModifyPackage?package=<%=rs.getString(1)
%>&place=<%=rs.getString(2)%>">Modify</a></td>
<td><a
href=" ../CancelPackage?package=<%=rs.getString(1)
%>&place=<%=rs.getString(2)%>">Cancel</a></td>
</tr>
<%} %>
<%
}
catch (Exception e) {
out.println(e);
}%>
</tbody>
</table>

</div>
</section>
<%@ include file=" ../home/Footer.jsp" %>
</body>
</html>

```

```

modifyRoom.jsp
<%@ page language="java" contentType="text/html; charset=ISO-8859-1"
pageEncoding="ISO-8859-1"%>
<%@ page import="java.sql.*" %>
<!DOCTYPE html PUBLIC "-//W3C//DTD HTML 4.01 Transitional//EN"
"http://www.w3.org/TR/html4/loose.dtd">
<html>
<head>

```

```

<link rel="stylesheet"
href="https://maxcdn.bootstrapcdn.com/bootstrap/3.3.7/css/bootstrap.min.css">

<link rel="stylesheet" type="text/css" href="../home/Aside.css">
<link rel="stylesheet" type="text/css" href="../home/Home.css">

<!-- jQuery library -->
<script
src="https://ajax.googleapis.com/ajax/libs/jquery/3.1.1/jquery.min.js"></script>

<!-- Latest compiled JavaScript -->
<script
src="https://maxcdn.bootstrapcdn.com/bootstrap/3.3.7/js/bootstrap.min.js"></sc
ript>
<meta name="viewport" content="width=device-width, initial-scale=1">

<meta http-equiv="Content-Type" content="text/html; charset=ISO-8859-1">
<title>Modify/ Cancel Room</title>
</head>
<body>
<%@ include file ="Header.jsp" %>
<%@ include file ="Aside.jsp" %>
    <section class="section">
        <div class="sectiondev">
            <h2>Modify/ Cancel Room</h2>
            <table class="table table-striped">
                <thead>
                    <tr>
                        <th>Hotel Name</th>
                        <th>Room Type</th>
                        <th>Room Size</th>
                        <th>Cost</th>
                        <th>Date</th>
                        <th>Package</th>
                        <th>Place</th>
                        <th>Modify</th>
                        <th>Cancel</th>
                    </tr>
                </thead>
                <tbody>
                    <%

```

```

        try {
            Class.forName("com.mysql.jdbc.Driver");
            Connection con =
DriverManager.getConnection("jdbc:mysql://localhost:3306/tourism","root","ro
ot");

            PreparedStatement ps =
con.prepareStatement("select * from bookroom where
email='"+session.getAttribute("email")+"'");
            ResultSet rs = ps.executeQuery();

            while(rs.next()){ %>
                <tr>
                <td><%=rs.getString(1) %></td>
                <td><%=rs.getString(2) %></td>
                <td><%=rs.getString(3) %></td>
                <td><%=rs.getString(4) %></td>
                <td><%=rs.getString(5) %></td>
                <td><%=rs.getString(7) %></td>
                <td><%=rs.getString(8) %></td>
                <td><a
href=" ../ModifyRoom?hotelName=<%=rs.getString(1)
%>&roomType=<%=rs.getString(2)%>&roomSize=<%=rs.getString(3)%>&pa
ckagename=<%=rs.getString(7) %>&place=<%=rs.getString(8)
%>">Modify</a></td>

                <td><a
href=" ../CancelRoom?hotelName=<%=rs.getString(1)
%>&roomType=<%=rs.getString(2)%>&roomSize=<%=rs.getString(3)%>&pa
ckagename=<%=rs.getString(7) %>&place=<%=rs.getString(8)
%>">Cancel</a></td>

                </td></td>
            }
        } catch (Exception e) {
            e.printStackTrace();
        }
    }%>
</tbody>
</table>

</div>
</section>

```

```
<%@ include file="../home/Footer.jsp" %>
</body>
</html>
```

ADMIN PANEL

Admin.jsp

```
<%@ page language="java" contentType="text/html; charset=ISO-8859-1"
    pageEncoding="ISO-8859-1"%>
<!DOCTYPE html PUBLIC "-//W3C//DTD HTML 4.01 Transitional//EN"
"http://www.w3.org/TR/html4/loose.dtd">
<html>
<head>
<link rel="stylesheet"
href="https://maxcdn.bootstrapcdn.com/bootstrap/3.3.7/css/bootstrap.min.css">

<link rel="stylesheet" type="text/css" href="../home/Aside.css">
<link rel="stylesheet" type="text/css" href="../home/Home.css">

<!-- jQuery library -->
<script
src="https://ajax.googleapis.com/ajax/libs/jquery/3.1.1/jquery.min.js"></script>

<!-- Latest compiled JavaScript -->
<script
src="https://maxcdn.bootstrapcdn.com/bootstrap/3.3.7/js/bootstrap.min.js"></sc
ript>

<meta http-equiv="Content-Type" content="text/html; charset=ISO-8859-1">
<meta name="viewport" content="width=device-width, initial-scale=1">

<title>Welcome to Admin</title>
</head>
<body>
<%@ include file = "Header.jsp" %>
<%@ include file = "Aside.jsp" %>
    <section class="section">
```

```

        <div class="sectiondev">
        <h3>Welcome Admin</h3>
        </div>
    </section>
<%@ include file="../home/Footer.jsp" %>
</body>
</html>

```

Package.jsp

```

<%@ page language="java" contentType="text/html; charset=ISO-8859-1"
    pageEncoding="ISO-8859-1"%>
<!DOCTYPE html PUBLIC "-//W3C//DTD HTML 4.01 Transitional//EN"
"http://www.w3.org/TR/html4/loose.dtd">
<html>
<head>
<link rel="stylesheet"
href="https://maxcdn.bootstrapcdn.com/bootstrap/3.3.7/css/bootstrap.min.css">

<link rel="stylesheet" type="text/css" href="../home/Aside.css">
<link rel="stylesheet" type="text/css" href="../home/Home.css">

<!-- jQuery library -->
<script
src="https://ajax.googleapis.com/ajax/libs/jquery/3.1.1/jquery.min.js"></script>

<!-- Latest compiled JavaScript -->
<script
src="https://maxcdn.bootstrapcdn.com/bootstrap/3.3.7/js/bootstrap.min.js"></sc
ript>
<meta name="viewport" content="width=device-width, initial-scale=1">

<meta http-equiv="Content-Type" content="text/html; charset=ISO-8859-1">
<title>Add Package</title>
</head>
<body>
<script type="text/javascript">
$(document).ready(function(){
    $('#button').click(function(){
        var packagename = $('#package').val();
        var place = $('#place').val();
        var days = $('#days').val();

```

```

        var packageCost = $('#packageCost').val();
        $.ajax({
            type:'POST',
            data:{ packagename:packagename, place:place, days:days,
packageCost:packageCost},
            url:'../Package',
            success: function(result){
                $('#validation').html(result);
            }
        });
    });
</script>

```

```

<%@ include file ="Header.jsp" %>
<%@ include file ="Aside.jsp" %>
    <section class="section">
        <div class="sectiondev">
            <div class="container">
                <h2>Add Package</h2>
                <div class="panel col-sm-8">
                    <div class="panel-body">
                        <div class="row">
                            <div class="col-sm-4">
                                <form action="../AddPackageAction"
method="get">
                                    <div class="form-group">
                                        Enter Package Name:
                                    </div>
                                    <div class="form-group">
                                        <input class="form-control"
type="text" id="package" name="package" required="true">
                                    </div>
                                    <div class="form-group">
                                        Enter Package Place:
                                    </div>
                                    <div class="form-group">
                                        <input class="form-control"
type="text" id="place" name="place" required="true">
                                    </div>
                                <div class="form-group">

```

[illegible]

Discount.jsp

```
<%@ page language="java" contentType="text/html; charset=ISO-8859-1"
    pageEncoding="ISO-8859-1"%>
    <%@ page import="java.sql.*" %>
<!DOCTYPE html PUBLIC "-//W3C//DTD HTML 4.01 Transitional//EN"
"http://www.w3.org/TR/html4/loose.dtd">
<html>
<head>
<link rel="stylesheet"
href="https://maxcdn.bootstrapcdn.com/bootstrap/3.3.7/css/bootstrap.min.css">

<link rel="stylesheet" type="text/css" href="../home/Aside.css">
<link rel="stylesheet" type="text/css" href="../home/Home.css">

<!-- jQuery library -->
<script
src="https://ajax.googleapis.com/ajax/libs/jquery/3.1.1/jquery.min.js"></script>

<!-- Latest compiled JavaScript -->
<script
src="https://maxcdn.bootstrapcdn.com/bootstrap/3.3.7/js/bootstrap.min.js"></sc
ript>

<meta name="viewport" content="width=device-width, initial-scale=1">

<meta http-equiv="Content-Type" content="text/html; charset=ISO-8859-1">
<title>Add Discount</title>
</head>
<body>
<script type="text/javascript">
$(document).ready(function(){
    $('#addDiscount').click(function(){
        var packagename = $('#packagename').find('option:selected').text();
        var discount = $('#discount').val();
        $.ajax({
            type:'POST',
            data:{ packagename:packagename,discount:discount},
            url:'../Discount',
            success: function(result){
                $('#validation').html(result);
            }
        })
    })
})
```

```

    });
});
</script>
<%@ include file ="Header.jsp" %>
<%@ include file ="Aside.jsp" %>
<section class="section">
    <div class="sectiondev">
        <div class="container">
            <h2>Add Discount</h2>
            <div class="panel col-sm-10">
                <div class="panel-body">
                    <div class="row">
                        <form action="../Discount.java">
                            <div class="col-sm-8">
                                <div class="col-sm-4">
                                    <div class="form-group">
                                        Select Package:
                                    </div>
                                </div>
                                <div class="col-sm-4">
                                    <div class="form-group">
                                        <%
                                            try {

                                                Class.forName("oracle.jdbc.OracleDriver");
                                                Connection
con=DriverManager.getConnection("jdbc:oracle:thin:@localhost:1521:XE","tourism","tourism");

                                                PreparedStatement
ps = con.prepareStatement("select DISTINCT packagename from package");
                                                ResultSet rs =

                                                <%>
                                                <select
name="packagename" id=packagename class="form-control">

                                                <%while(rs.next()){ %>

                                                <option
value="<%=rs.getString(1)%>" ><%=rs.getString(1) %></option>

```

```

                                <%} %>
                            </select>
                            <%
                                }
                                catch (Exception e) {
                                    e.printStackTrace();
                                }
                                %>
                            </div>
                        </div>
                    </div>
                <div class="col-sm-8">
                    <div class="col-sm-4">
                        <div class="form-group">
                            <p id="label">Enter
Discount:</p>
                        </div>
                    </div>
                    <div class="col-sm-4">
                        <div class="form-group">
                            <input class="form-
control" type="text" id="discount" name="discount" required="true">
                        </div>
                    </div>
                </div>
                <div class="col-sm-8">
                    <div class="col-sm-8">
                        <div class="form-group">
                            <div class="text-right">
                                <input type="submit"
id="addDiscount" value="Add Discount" class="btn btn-primary">
                            </div>
                        </div>
                    </div>
                </div>
                <div class="col-sm-8">
                    <div id="validation"></div>
                </div>
            </form>
        </div>

```

```

        </div>
    </div>
</div>
</div>
</section>
<%@ include file="../home/Footer.jsp" %>
</body>
</html>

```

modifyDiscount.jsp

```

<%@ page language="java" contentType="text/html; charset=ISO-8859-1"
    pageEncoding="ISO-8859-1"%>
<%@ page import="java.sql.*" %>
<!DOCTYPE html PUBLIC "-//W3C//DTD HTML 4.01 Transitional//EN"
"http://www.w3.org/TR/html4/loose.dtd">
<html>
<head>
<link rel="stylesheet"
href="https://maxcdn.bootstrapcdn.com/bootstrap/3.3.7/css/bootstrap.min.css">

<link rel="stylesheet" type="text/css" href="../home/Aside.css">
<link rel="stylesheet" type="text/css" href="../home/Home.css">

<!-- jQuery library -->
<script
src="https://ajax.googleapis.com/ajax/libs/jquery/3.1.1/jquery.min.js"></script>

<!-- Latest compiled JavaScript -->
<script
src="https://maxcdn.bootstrapcdn.com/bootstrap/3.3.7/js/bootstrap.min.js"></sc
ript>

<meta name="viewport" content="width=device-width, initial-scale=1">

<meta http-equiv="Content-Type" content="text/html; charset=ISO-8859-1">
<title>Modify/ Delete Discount</title>
</head>
<body>
<script type="text/javascript">

```

```

$(document).ready(function(){
$('#discountfield').hide();
$('#update').hide();
$('#modify').click(function(){
    var packagename = $('#packagename').find('option:selected').text();
    var type="modify";
    $('#discountfield').show();
    $('#modify').hide();
    $('#delete').hide();
    $('#update').show();
    $.ajax({
        type:'POST',
        data:{ packagename:packagename,type:type},
        url:'../ModifyDiscount',
        success: function(result){
            $('#discount').val(result);
        }
    });
});
$('#update').click(function(){
    var packagename = $('#packagename').find('option:selected').text();
    var discount = $('#discount').val();
    var type="update";
    $.ajax({
        type:'POST',
        data:{ packagename:packagename,type:type,
discount:discount},
        url:'../ModifyDiscount',
        success: function(result){
            $('#validation').html(result);
        }
    });
});
$('#delete').click(function(){
    var packagename = $('#packagename').find('option:selected').text();
    var type="deleteDiscount";
    $.ajax({
        type:'POST',
        data:{packagename:packagename,type:type},
        url:'../ModifyDiscount',
        success: function(result){

```

```

        window.alert(result);
        window.location.href = "../Admin/ModifyDiscount.jsp";
    }
});
});
});
</script>
<%@ include file = "Header.jsp" %>
<%@ include file = "Aside.jsp" %>
<section class="section">
    <div class="sectiondev">
        <div class="container">
            <h2>Modify / Delete Discount</h2>
            <div class="panel col-sm-10">
                <div class="panel-body">
                    <div class="row">
                        <form>
                            <div class="col-sm-8">
                                <div class="col-sm-4">
                                    <div class="form-group">
                                        Select Package:
                                    </div>
                                </div>
                                <div class="col-sm-4">
                                    <div class="form-group">
                                        <%
                                            try {

                                                Class.forName("oracle.jdbc.OracleDriver");
                                                Connection
con=DriverManager.getConnection("jdbc:oracle:thin:@localhost:1521:XE","tourism","tourism");

                                                PreparedStatement
ps = con.prepareStatement("select packagename from discount");
                                                ResultSet rs =

                                                <%
                                                <select
name="packagename" id=packagename class="form-control">

```

```

        <%while(rs.next()){ %>
value="<%=rs.getString(1)%>" ><%=rs.getString(1) %></option>
        <option
        <%} %>
        </select>
        <%
        }
        catch (Exception e) {
            e.printStackTrace();
        }
        %>
    </div>
</div>
</div>
<div id="discountfield">
<div class="col-sm-8">
    <div class="col-sm-4">
        <div class="form-group">
            Enter Discount:
        </div>
    </div>
    <div class="col-sm-4">
        <div class="form-group">
            <input class="form-
control" type="text" id="discount" name="discount" required="true">
        </div>
    </div>
</div>
</div>
</div>
<div class="col-sm-8">
    <div class="col-sm-4">
        <div class="form-group">
            <div class="text-center">
                <input type="button"
id="modify" value="Modify" class="btn btn-primary">
            </div>
        </div>
    </div>
</div>
<div class="col-sm-3">

```

```

        <div class="form-group">
            <input type="button"
id="delete" value="Delete" class="btn btn-primary">
        </div>
    </div>
    <div class="col-sm-2">
        <div class="form-group">
            <div class="text-left">
                <input type="button"
id="update" value="Update" class="btn btn-primary">
            </div>
        </div>
    </div>
</div>
<div class="col-sm-8">
    <div id="validation"></div>
</div>
</form>
</div>
</div>
</div>
</div>
</div>
</section>
<%@ include file="../home/Footer.jsp" %>
</body>
</html>

```

modifyPackage.jsp

```

<%@ page language="java" contentType="text/html; charset=ISO-8859-1"
    pageEncoding="ISO-8859-1"%>
<%@ page import="java.sql.*" %>
<!DOCTYPE html PUBLIC "-//W3C//DTD HTML 4.01 Transitional//EN"
"http://www.w3.org/TR/html4/loose.dtd">
<html>
<head>
<link rel="stylesheet"
href="https://maxcdn.bootstrapcdn.com/bootstrap/3.3.7/css/bootstrap.min.css">

```

```

<link rel="stylesheet" type="text/css" href="../home/Aside.css">
<link rel="stylesheet" type="text/css" href="../home/Home.css">

<!-- jQuery library -->
<script
src="https://ajax.googleapis.com/ajax/libs/jquery/3.1.1/jquery.min.js"></script>

<!-- Latest compiled JavaScript -->
<script
src="https://maxcdn.bootstrapcdn.com/bootstrap/3.3.7/js/bootstrap.min.js"></script>
<meta name="viewport" content="width=device-width, initial-scale=1">

<meta http-equiv="Content-Type" content="text/html; charset=ISO-8859-1">
<title>Modify / Delete Package</title>
</head>
<body>
<%@ include file ="Header.jsp" %>
<%@ include file ="Aside.jsp" %>
    <section class="section">
        <div class="sectiondev">
            <h3>Modify / Delete Package</h3>
            <table class="table table-striped">
                <thead>
                    <tr>
                        <th>Package Name</th>
                        <th>Place</th>
                        <th>No of Days</th>
                        <th>Cost</th>
                        <th>Update</th>
                        <th>Delete</th>
                    </tr>
                </thead>
                <tbody>
                    <%
                        try {
                            Class.forName("oracle.jdbc.OracleDriver");
                            //we can use provider object properties because we statically
imported Provider object

```

```

        Connection
con=DriverManager.getConnection("jdbc:oracle:thin:@localhost:1521:XE","tourism","tourism");

        PreparedStatement ps =
con.prepareStatement("select * from package");
        ResultSet rs = ps.executeQuery();

        while(rs.next()){ %>
        <tr>
        <td><%=rs.getString(2) %></td>
        <td><%=rs.getString(3) %></td>
        <td><%=rs.getString(4) %></td>
        <td><%=rs.getString(5) %></td>
        <td><a
href=" ../UpdatePackage?package=<%=rs.getString(2)
%>&place=<%=rs.getString(3)%>&type=update ">Update</a></td>
        <td><a
href=" ../DeletePackage?package=<%=rs.getString(2)
%>&place=<%=rs.getString(3)%> ">Delete</a></td>
        </tr>
        <%} %>
        <%
        }
        catch (Exception e) {
            e.printStackTrace();
        }%>
        </tbody>
    </table>

    </div>
</section>
<%@ include file=" ../home/Footer.jsp" %>
</body>
</html>

```

Database connectivity coding:

ConnectionString.java

```
package connection;
import java.sql.*;

public class ConnectionString {
    static Connection con=null;

    static{
        try{
            Class.forName("oracle.jdbc.OracleDriver");

            con=DriverManager.getConnection("jdbc:oracle:thin:@localhost:1521:XE
", "tourism", "tourism");
        }catch(Exception e){
            e.printStackTrace();
        }
    }
    //returns already existing connection object
    public static Connection getCon(){
        return con;
    }
}
```

Login.java

```
import java.io.IOException;
import java.io.PrintWriter;
```

```
import javax.servlet.ServletException;
import javax.servlet.annotation.WebServlet;
import javax.servlet.http.HttpServlet;
import javax.servlet.http.HttpServletRequest;
import javax.servlet.http.HttpServletResponse;
import javax.servlet.http.HttpSession;
```

```
import connection.ConnectionString;
import java.sql.*;
```

```
/**
```

```
 * Servlet implementation class Login
```

```
 */
```

```
@WebServlet("/Login")
```

```
public class Login extends HttpServlet {
```

```
    private static final long serialVersionUID = 1L;
```

```
    /**
```

```
     * @see HttpServlet#doPost(HttpServletRequest request,
    HttpServletResponse
```

```
     *     response)
```

```
     */
```

```
    protected void doPost(HttpServletRequest request, HttpServletResponse
    response)
```

```
        throws ServletException, IOException {
```

```
        response.setContentType("text/plain");
```

```
        PrintWriter out = response.getWriter();
```

```
        String email = request.getParameter("email");
```

```
        String password = request.getParameter("password");
```

```
        try {
```

```
            Connection con = ConnectionString.getCon();// getting db
    connection
```

```
            PreparedStatement ps = con
```

```
                .prepareStatement("select name, email, mobile
    from register where email= ? and password = ?");
```

```
            ps.setString(1, email);
```

```

        ps.setString(2, password);
        ResultSet rs = ps.executeQuery();
        if (rs.next()) {
            String name = rs.getString(1);
            String emailid = rs.getString(2);
            String mobile = rs.getString(3);
            HttpSession session = request.getSession();
            session.setAttribute("name", name);
            session.setAttribute("email", emailid);
            session.setAttribute("mobile", mobile);
            out.println("valid");
        } else {
            out.println("Invalid Username or Password");
        }
    } catch (Exception e) {
        e.printStackTrace();
    }
}
}

```

Register.java

```

import java.io.IOException;
import java.io.PrintWriter;

import javax.servlet.ServletException;
import javax.servlet.annotation.WebServlet;
import javax.servlet.http.HttpServlet;
import javax.servlet.http.HttpServletRequest;
import javax.servlet.http.HttpServletResponse;
import javax.servlet.http.HttpSession;

import connection.ConnectionString;
import java.sql.*;
/**

```

```

* Servlet implementation class Register
*/
@WebServlet("/Register")
public class Register extends HttpServlet {
    private static final long serialVersionUID = 1L;

    /**
     * @see HttpServlet#doPost(HttpServletRequest request,
     HttpServletResponse response)
     */
    protected void doGet(HttpServletRequest request, HttpServletResponse
    response) throws ServletException, IOException {
        PrintWriter out = response.getWriter();
        String name = request.getParameter("name");
        String email = request.getParameter("email");
        String password = request.getParameter("password");
        String mobile = request.getParameter("mobile");
        HttpSession session = request.getSession();
        try{
            Connection con=ConnectionString.getCon();//getting db
            connection
            PreparedStatement p = con.prepareStatement("select email
            from register where email=?");
            p.setString(1, email);
            ResultSet rs = p.executeQuery();
            if(rs.next()){
                response.sendRedirect("home/Register.jsp");
                session.setAttribute("errormess","Username already
            existed, Please try another");
                out.println("Username already existed, Please try
            another");
            }else{
                PreparedStatement ps=con.prepareStatement("insert into
            register values(?,?,?,?)");//creating statment to run query
                ps.setString(1,name);
                ps.setString(2,email);
                ps.setString(3,password);
                ps.setString(4,mobile);
                ps.executeUpdate();
                session.setAttribute("SuccessMess","Successfully
            registered");
            }
        }
    }
}

```

```

        out.println("Successfully registered");
        response.sendRedirect("home/Register.jsp");
    }
} catch (Exception e) {
    e.printStackTrace();
}
}
}

```

AdminLogin.java

```

import java.io.IOException;
import java.io.PrintWriter;

import javax.servlet.ServletException;
import javax.servlet.annotation.WebServlet;
import javax.servlet.http.HttpServlet;
import javax.servlet.http.HttpServletRequest;
import javax.servlet.http.HttpServletResponse;

/**
 * Servlet implementation class AdminLogin
 */
@WebServlet("/AdminLogin")
public class AdminLogin extends HttpServlet {
    private static final long serialVersionUID = 1L;

    /**
     * @see HttpServlet#doPost(HttpServletRequest request,
     HttpServletResponse response)
     */
    protected void doPost(HttpServletRequest request, HttpServletResponse
    response) throws ServletException, IOException {
        PrintWriter out = response.getWriter();
        String email = request.getParameter("email");
        String password = request.getParameter("password");
    }
}

```

```

        if(email.equals("admin") && password.equals("admin")){

            out.print("valid");

        }else{
            out.print("invalid");
        }
    }
}

```

AddHotelAction.java

```

import java.io.IOException;
import java.io.PrintWriter;
import java.sql.Connection;
import java.sql.PreparedStatement;
import java.sql.ResultSet;

import javax.servlet.ServletException;
import javax.servlet.annotation.WebServlet;
import javax.servlet.http.HttpServlet;
import javax.servlet.http.HttpServletRequest;
import javax.servlet.http.HttpServletResponse;

import connection.ConnectionString;
import java.sql.*;
/**
 * Servlet implementation class Hotel
 */
@WebServlet("/AddHotelAction")
public class AddHotelAction extends HttpServlet {
    private static final long serialVersionUID = 1L;

    /**

```

```

        * @see HttpServlet#doPost(HttpServletRequest request,
HttpServletResponse response)
        */
        protected void doGet(HttpServletRequest request, HttpServletResponse
response) throws ServletException, IOException {
            String hotelName = request.getParameter("hotelName");
            PrintWriter out = response.getWriter();

            try{
                Connection con=ConnectionString.getCon();//getting db
connection
                PreparedStatement ps = con.prepareStatement("select * from
hotel where hotelName='"+hotelName+"'");
                ResultSet rs = ps.executeQuery();
                //out.println("first line "+ps);
                if(rs.next()){
                    out.println("<h1>"+ hotelName +" alredy exist. Please
enter another hotel</h1>");

                    }else if(hotelName.equals("")){
                        out.println("Invalid details");

                    }else{
                        PreparedStatement p = con.prepareStatement("insert
into hotel values(?)");
                        p.setString(1, hotelName);
                        p.executeUpdate();
                        out.print("<h1>Hotel name '"+hotelName+" Added
Successfully</h1>");
                    }

                } catch (Exception e) {
                    out.println(e);
                }
            }
        }
    }
}

```

AddPackageAction.java

```
//package adminServlet;
```

```
import java.io.IOException;
```

```
import java.io.PrintWriter;
```

```
import javax.servlet.ServletException;
```

```
import javax.servlet.annotation.WebServlet;
```

```
import javax.servlet.http.HttpServlet;
```

```
import javax.servlet.http.HttpServletRequest;
```

```
import javax.servlet.http.HttpServletResponse;
```

```
import connection.ConnectionString;
```

```
import java.sql.*;
```

```
/**
```

```
 * Servlet implementation class Package
```

```
 */
```

```
@WebServlet("/AddPackageAction")
```

```
public class AddPackageAction extends HttpServlet {
```

```
    private static final long serialVersionUID = 1L;
```

```
    /**
```

```
     * @see HttpServlet#doPost(HttpServletRequest request,  
    HttpServletResponse response)
```

```
     */
```

```
    protected void doGet(HttpServletRequest request, HttpServletResponse  
    response) throws ServletException, IOException {
```

```
        String packagename = request.getParameter("package");
```

```
        String place = request.getParameter("place");
```

```
        String days = request.getParameter("days");
```

```
        String packageCost = request.getParameter("packageCost");
```

```
        int i=1;
```

```
        PrintWriter out = response.getWriter();
```

```
        //out.println("HELLLLLLLL");
```

```
        try{
```

```
            Connection con=ConnectionString.getCon();//getting db  
connection
```

```
            PreparedStatement ps = con.prepareStatement("select  
packagename from package where packagename='"+packagename+"' and  
place='"+place+"'");
```

```
            ResultSet rs = ps.executeQuery();
```

```

        if(rs.next()){
            out.println("Package "+packagename +" with place
"+place+" already Exist. Please enter another package");
        }else
        if(packagename.equals("")||place.equals("")||days.equals("")||packageCost.equals
("")){
            out.println("Invalid details");

        }else{
            PreparedStatement p = con.prepareStatement("insert
into package values(?,?,?,?,?)");
            p.setInt(1,i);
            p.setString(2, packagename);
            p.setString(3, place);
            p.setString(4,days);
            p.setString(5, packageCost);
            p.executeUpdate();
            response.sendRedirect("Admin/Package.jsp");
            out.print("Package name "+packagename+" Added
Successfully");
        }

    } catch (Exception e) {
        //e.printStackTrace();
        out.println(e);
    }
}
}

```

AddRoomAction.java

```
package adminServlet;
```

```

import java.io.IOException;
import java.io.PrintWriter;
import java.sql.Connection;
import java.sql.PreparedStatement;

```

```

import java.sql.ResultSet;

import javax.servlet.ServletException;
import javax.servlet.annotation.WebServlet;
import javax.servlet.http.HttpServlet;
import javax.servlet.http.HttpServletRequest;
import javax.servlet.http.HttpServletResponse;

import connection.ConnectionString;

/**
 * Servlet implementation class Room
 */
@WebServlet("/AddRoomAction")
public class AddRoomAction extends HttpServlet {
    private static final long serialVersionUID = 1L;

    /**
     * @see HttpServlet#doPost(HttpServletRequest request,
     HttpServletResponse response)
     */
    protected void doGet(HttpServletRequest request, HttpServletResponse
    response) throws ServletException, IOException {
        String hotelName = request.getParameter("hotelName");
        String roomType = request.getParameter("roomType");
        String roomSize = request.getParameter("roomSize");
        String roomCost = request.getParameter("roomCost");
        PrintWriter out = response.getWriter();

        try{
            Connection con=ConnectionString.getCon();//getting db
            connection
                PreparedStatement ps = con.prepareStatement("select * from
            room where hotelName='"+hotelName+"' and roomType='"+roomType+"' and
            roomSize='"+roomSize+"'");
            ResultSet rs = ps.executeQuery();

            if(rs.next()){
                out.println("Room already exist. Please enter another
            Room");
            }
        }
    }
}

```

```

        }else
if(hotelName.equals("")||roomType.equals("")||roomSize.equals("")||roomCost.e
quals("")){
        out.println("Invalid details");

        }else{
        PreparedStatement p = con.prepareStatement("insert
into room values(?,?,?,?)");
        p.setString(1, hotelName);
        p.setString(2, roomType);
        p.setString(3, roomSize);
        p.setString(4, roomCost);
        p.executeUpdate();
        out.print("Room Added Successfully");
        }

    } catch (Exception e) {
        out.println(e);
    }
}
}

```

Discount.java

```
import java.io.IOException;
import java.io.PrintWriter;
import java.sql.Connection;
import java.sql.PreparedStatement;
import java.sql.ResultSet;

import javax.servlet.ServletException;
import javax.servlet.annotation.WebServlet;
import javax.servlet.http.HttpServlet;
import javax.servlet.http.HttpServletRequest;
import javax.servlet.http.HttpServletResponse;

import connection.ConnectionString;

/**
 * Servlet implementation class Discount
 */
@WebServlet("/Discount")
public class Discount extends HttpServlet {
    private static final long serialVersionUID = 1L;

    /**
     * @see HttpServlet#doPost(HttpServletRequest request,
     HttpServletResponse response)
     */
    protected void doGet(HttpServletRequest request, HttpServletResponse
    response) throws ServletException, IOException {
        String packagename = request.getParameter("packagename");
        String discount = request.getParameter("discount");
        PrintWriter out = response.getWriter();

        try{
            Connection con=ConnectionString.getCon();//getting db
            connection
            PreparedStatement ps = con.prepareStatement("select * from
            discount where packagename='"+packagename+"'");
            ResultSet rs = ps.executeQuery();
```

```

        if(rs.next()){
            out.println("Discount already exist.");

        }else if(packagename.equals("")||discount.equals("")){
            out.println("Invalid details");

        }else{
            PreparedStatement p = con.prepareStatement("insert
into discount values(?,?)");
            p.setString(1, packagename);
            p.setString(2, discount);
            p.executeUpdate();
            out.print("Discount Added Successfully");
        }

    } catch (Exception e) {
        e.printStackTrace();
    }
}
}

```

Testing

TESTING

Software testing is an investigation conducted to provide stakeholders with information about the quality of the product or service under test. Software testing can also provide an objective, independent view of the software to allow the business to appreciate and understand the risks of software implementation. Test techniques include, but are not limited to, the process of executing a program or application with the intent of finding software bugs (errors or other defects).

Software testing can be stated as the process of validating and verifying that a software program/application/product:

- 1) Meets the requirements that guided its design and development;
- 2) Works as expected; and
- 3) Can be implemented with the same characteristics.

Different software development models will focus the test effort at different points in the development process. Newer development models, such as Agile, often employ test driven development and place an increased portion of the testing in the hands of the developer, before it reaches a formal team of testers. In a more traditional model, most of the test execution occurs after the requirements have been defined and the coding process has been completed.

Test cases are devised with this purpose in mind. A test case is a set of data that the system will process as normal input. However, the data are created with the express intent of determining whether the system will process them correctly. For example, test cases for inventory handling should include situations in which it quantifies to be withdrawn from inventory exceed, equal and are less than the actual quantities on hand.

Each test case is designed with the intent of finding errors in the way the system will process it. There are two general strategies for testing software: Code testing and Specification tests. In code testing, the analyst develops those cases to execute every instructions and path in a program. Under specification testing, the analyst examines the program specifications and then writes test data to determine how the program operates under specific conditions. Regardless of which strategy the analyst follows, there are preferred practices to ensure that the testing is useful. The levels of tests and types of test data, combined with testing libraries, are important aspects of the actual test process.

Levels of Testing:

Systems are not designed as entire systems nor are they tested as single systems. The analyst must perform both unit and system testing.

Unit Testing:

In unit testing the analyst tests the programs making up a system. For this reason, unit testing is sometimes called program testing. Unit testing gives stress on the modules independently of one another, to find errors. This helps the tester in detecting errors in coding and logic that are contained within that module alone. The errors resulting from the interaction between modules are initially avoided. For example, a hotel information system consists of modules to handle reservations; guest checking and checkout; restaurant, room service and miscellaneous charges; convention activities; and accounts receivable billing. For each, it provides the ability to enter, modify or retrieve data and respond to different types of inquiries or print reports. The test cases needed for unit testing should exercise each condition and option.

Unit testing can be performed from the bottom up, starting with smallest and lowest-level modules and proceeding one at a time. For each module in bottom-up testing a short program is used to execute the module and provides the needed data, so that the module is asked to perform the way it will when embedded within the larger system.

System Testing:

The important and essential part of the system development phase, after designing and developing the software is system testing. We cannot say that every program or system design is perfect and because of lack of communication between the user and the designer, some error is there in the software development. The number and nature of errors in a newly designed system depend on some usual factors like communication between the user and the designer; the programmer's ability to generate a code that reflects exactly the systems specifications and the time frame for the design.

Theoretically, a newly designed system should have all the parts or sub-systems are in working order, but in reality, each sub-system works independently. This is the time to gather all the subsystem into one pool and test the whole system to determine whether it meets the user requirements. This is the last change to detect and correct errors before the system is installed for user acceptance testing. The purpose of system testing is to consider all the likely variations to which it will be subjected and then push the system to its limits.

Testing is an important function to the success of the system. System testing makes a logical assumption that if all the parts of the system are correct, the goal will be successfully activated. Another reason for

system testing is its utility as a user-oriented vehicle before implementation.

System testing consists of the following five steps:

- ❖ Program testing
- ❖ String testing
- ❖ System testing
- ❖ System documentation
- ❖ User acceptance testing

Program Testing:

A program represents the logical elements of a system. For a program to run satisfactorily, it must compile and test data correctly and tie in properly with other programs. It is the responsibility of a programmer to have an error free program. At the time of testing the system, there exist two types of errors that should be checked. These errors are syntax and logic. A syntax error is a program statement that violates one or more rules of the language in which it is written. An improperly defined field dimension or omitted key words are common syntax errors. These errors are shown through error messages generated by the computer. A logic error, on the other hand, deals with incorrect data fields out of range items, and invalid combinations. Since the logical errors are not detected by compiler, the programmer must examine the output carefully to detect them.

When a program is tested, the actual output is compared with the expected output. When there is a discrepancy, the sequence of the instructions, must be traced to determine the problem. The process is facilitated by breaking the program down into self-contained portions, each of which can be checked at certain key points.

String Testing:

Programs are invariably related to one another and interact in a total system. Each program is tested to see whether it conforms to related programs in the system. Each part of the system is tested against the entire module with both test and live data before the whole system is ready to be tested.

System Testing:

System testing is designed to uncover weaknesses that were not found in earlier tests. This includes forced system failure and validation of total system as it will be implemented by its user in the operational environment. Under this testing, generally we take low volumes of transactions based on live data. This volume is increased until the maximum level for each transaction type is reached. The total system is also tested for recovery and fallback after various major failures to ensure that no data are lost during the emergency. All this is done with the old system still in operation. When we see that the proposed system is successful in the test, the old system is discontinued.

System Documentation:

All design and test documentation should be well prepared and kept in the library for future reference. The library is the central location for maintenance of the new system.

User Acceptance Testing:

An acceptance test has the objective of selling the user on the validity and reliability of the system. It verifies that the system's procedures operate to system specifications and that the integrity of important data is maintained. Performance of an acceptance test is actually the user's show. User motivation is very important for the successful performance of the system. After that a comprehensive test report is prepared. This report shows the system's tolerance, performance range, error rate and accuracy.

Special Systems Tests:

There are other six tests which fall under special category. They are described below:

Peak Load Test: It determines whether the system will handle the volume of activities that occur when the system is at the peak of its processing demand. For example, test the system by activating all terminals at the same time.

Storage Testing: It determines the capacity of the system to store transaction data on a disk or in other files. For example, verify documentation statements that the system will store 10,000 records of 400 bytes length on a single flexible disk.

Performance Time Testing: it determines the length of time system used by the system to process transaction data. This test is conducted prior to implementation to determine how long it takes to get a response to an inquiry, make a backup copy of a file, or send a transmission and get a response.

Recovery Testing: This testing determines the ability of user to recover data or re-start system after failure. For example, load backup copy of data and resume processing without data or integrity loss.

Procedure Testing: It determines the clarity of documentation on operation and use of system by having users do exactly what manuals request. For example, powering down system at the end of week or responding to paper-out light on printer.

Human Factors Testing: It determines how users will use the system when processing data or preparing reports.

TEST CASES

S.no.	Test Cases	Actual Test Result	Expected test result	Result (pass or fail)
1.	Login: only registered user with a login Id and password can enter	Registered user is able to enter the website.	It will lead the users to their personal web page.	pass
2.	Entering the username	Error message not displayed. Numbers are accepted as a part of username	The user name will contain only letters. Otherwise, an error message will be displayed on the screen.	fail
3.	Entering the password	The password was entered as per the specifications. It was visible in the form of *	Password must be a combination of digits and letters. The password must be visible in the form of character, such as * or #	pass
4.	Checking the functionality of the sign out link	The session ends and the user is taken to the relevant page.	The sign out link will end the session of the user.	pass

MAINTENANCE

Once the software is delivered and developed, it enters the maintenance phase. After implementation systems need maintenance. Beyond monkey testing during Software development some errors may not appear. During its usage by the end-user with actual data certain errors may disclose.

Therefore some residual errors or bugs remain in the system that must be removed as they are discovered. Many of these surfaces only after the system have been in operation sometimes for a long time. These errors once discovered need to be removed on an urgent basis for the smooth running of the system, leading to the software getting changed. Though Maintenance is not a part of software development, it is an extremely important activity in the life of a software product.

Maintenance involves understanding the existing software (code and related documents), understanding the effects of change, making the changes-to both the code and documents-testing the new parts and retesting the old part.

For successful and smooth running of the system, maintenance is the prominent part of the project.

Any error, which hinders the functioning of any part of the project, may lead to bad impression of the developer.

There are major two types of errors: Compilation error and Runtime errors.

Compilation errors are errors during coding and are to be take care by the developer during development process.

Runtime errors are those which occur during running of the program. Whenever there is an occurrence of error an 'Error Window' opens in the middle of the screen displaying the type of error, Error Number and the Nearest Possible reason as to why the error has occurred. With the occurrence of this Error Window the operator (End-user) should note the type of error, the error number and the description of the error and should immediately report to the concerned Developer or Administrator. For example an error window which has appeared during the runtime process.

Now come to the role of the Maintenance Personals. After knowing the entire details from the end-user like where or at which screen does this error occurred or what type of data was feed by the user or the point of malfunctioning. Considering this error as the main reason for the malfunctioning the programmer now re-examines all the possible factors which act behind the particular screen where error has occurred.

After debugging the required error the programmer itself tests the same screen or process with dummy data. Only after getting completely satisfied with problem rectification the programmer compiles and runs the program.

FUTURE SCOPE OF THE PROJECT:

The system is highly flexible one and is well efficient to make easy interactions with the client. The key focus is given on data security, as the project is online and will be transferred in network. The speed and accuracy will be maintained in a proper way.

This will be a user-friendly one and can successfully overcome strict and severe validation checks. The system will be a flexible one and changes whenever can be made easy. Using the facility and flexibility in J2EE and Oracle 11g, the software can be developed in a neat and simple manner there by reducing the operator's work.

Since the project is developed in **JSP as front-end** and **ORACLE 11g** as back-end it can be modified easily and used for a long period.

Following future scope of this project that can be added to this project:

- I will develop an App regarding my website.
- Some more features are to be added like Easy Payments Methods
- An Automatic Confirmation message will be sent to user phone.

BIBLIOGRAPHY

➤ BOOKS:

- The Complete Refence JSP -Phil Hanna
- The Complete Reference Java -Herbert Schildt
- IGNOU Blocks(MCS-024 and BCS-053) -Java & JSP Blocks
- IGNOU Blocks(MCS-023) -Oracle Blocks

➤ WEBSITES:

- <https://www.javatpoint.com/java-tutorial>
- <https://www.w3schools.com/html/default.asp>

END OF REPORT
