




RAG: Theory to Production Apps

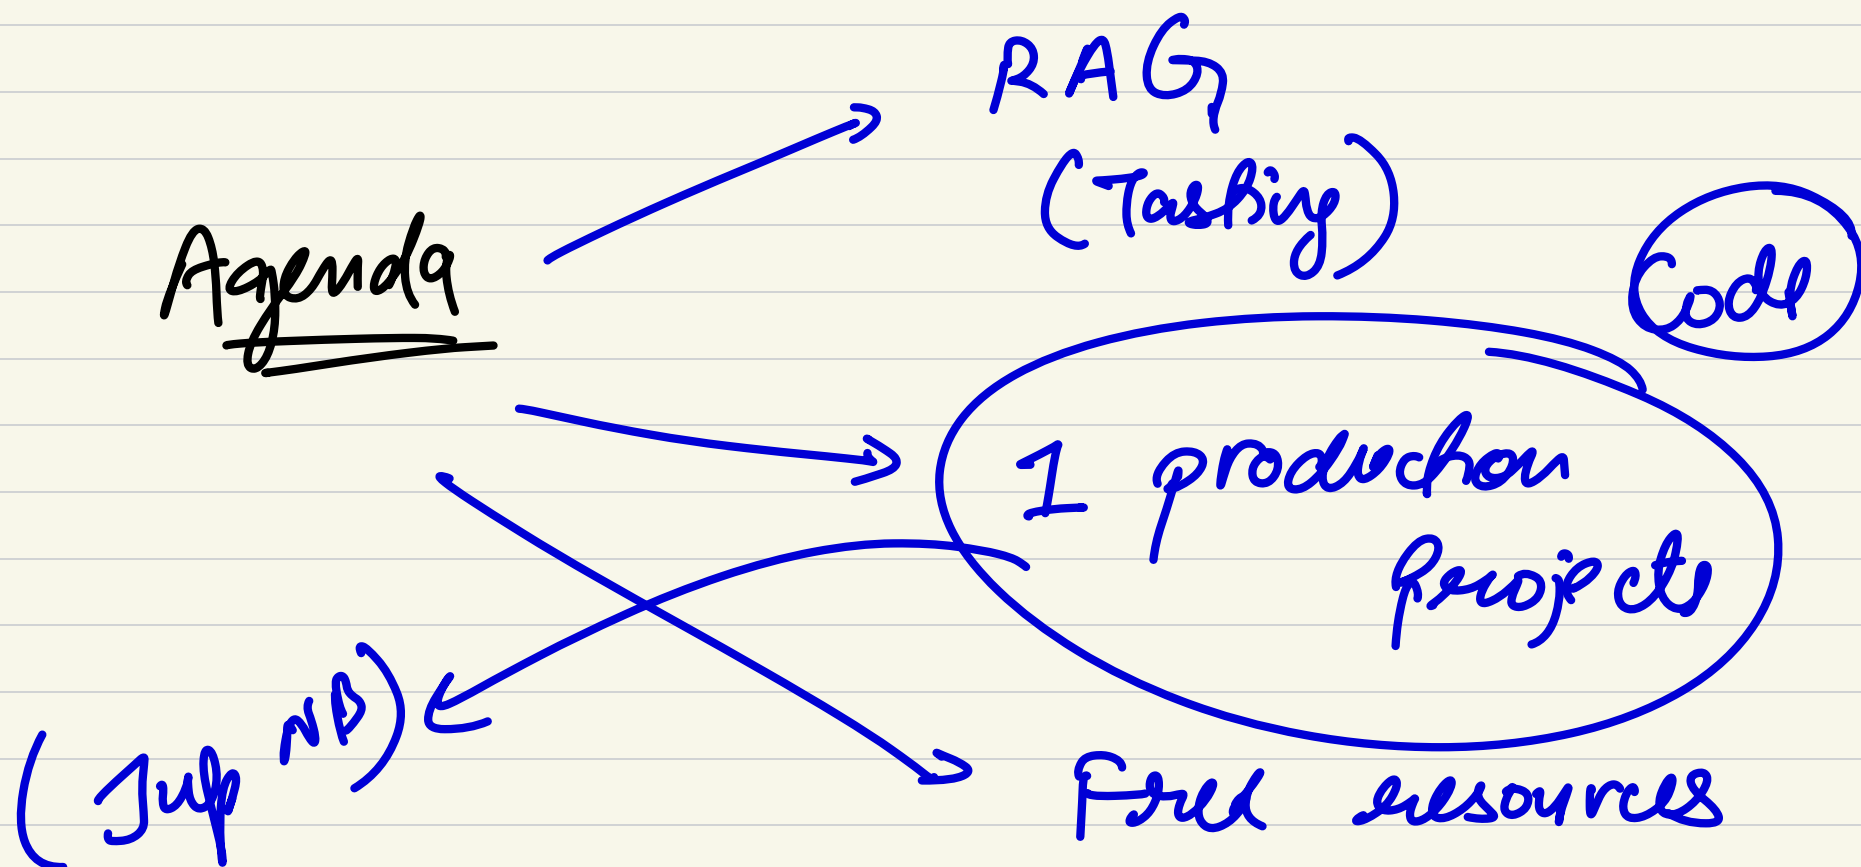

Normal LLM

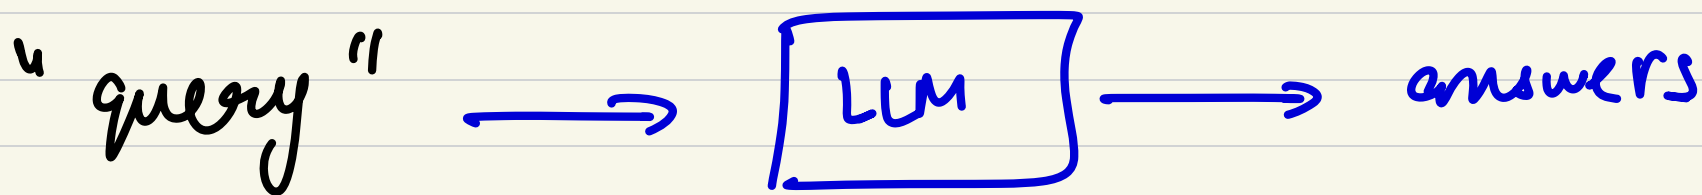


RAG system

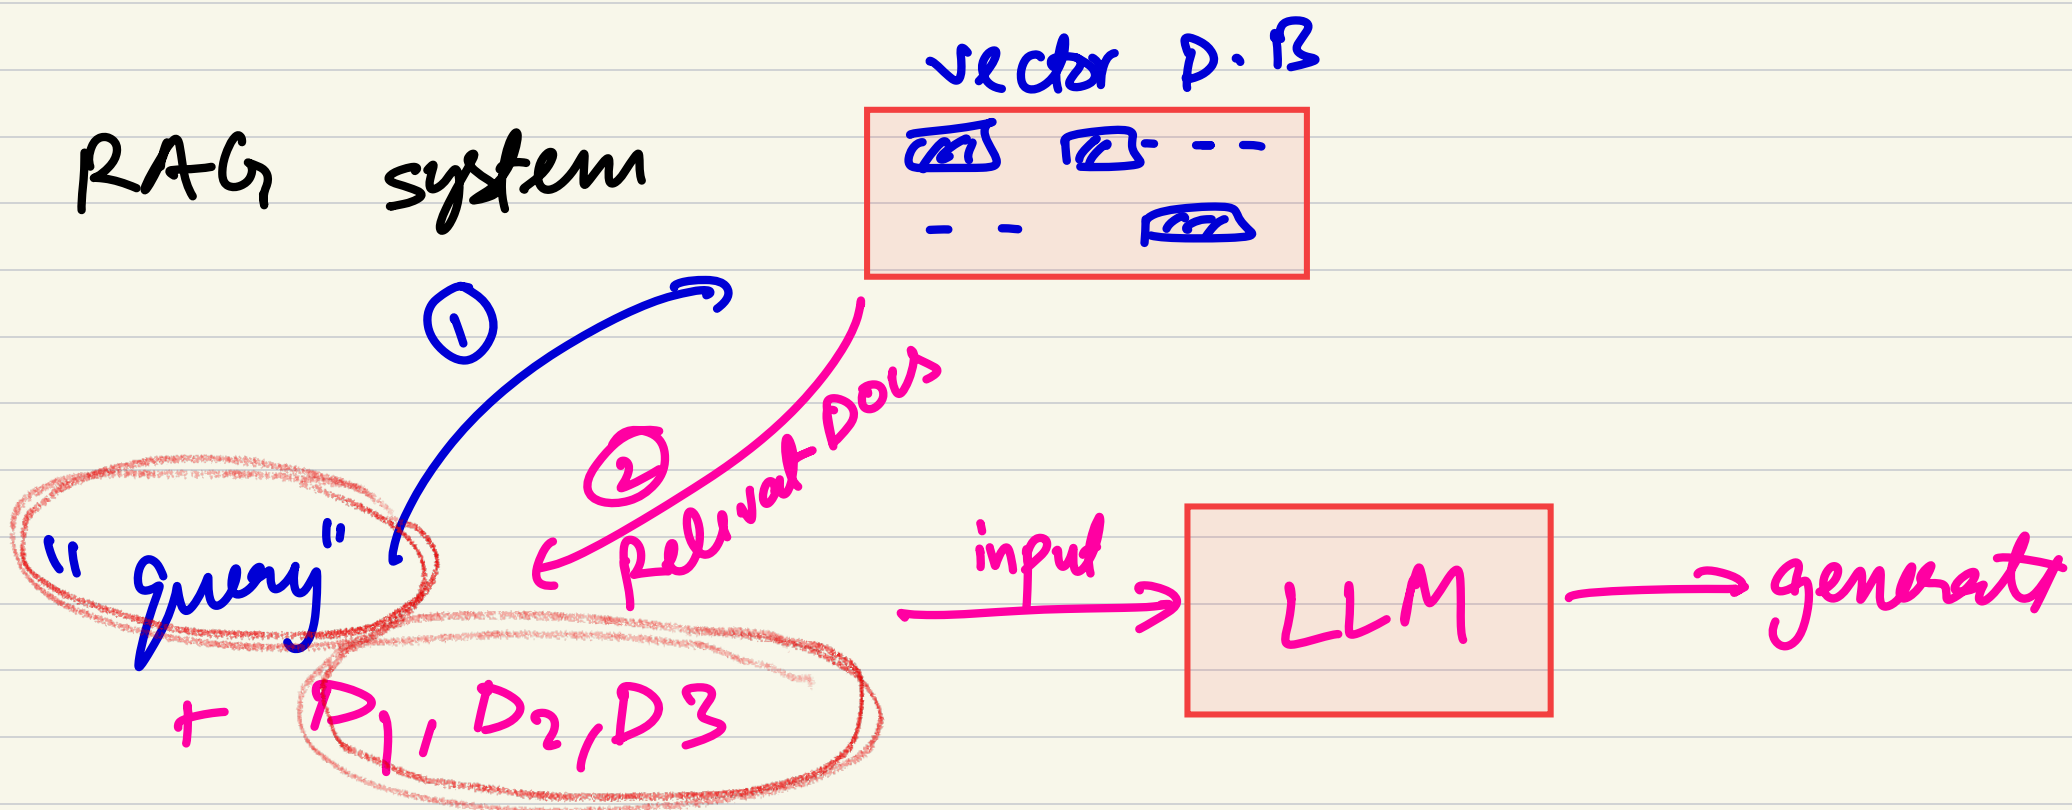

"query" → []

"what is AI" → [1.2, 2.3, 3.1, ...]

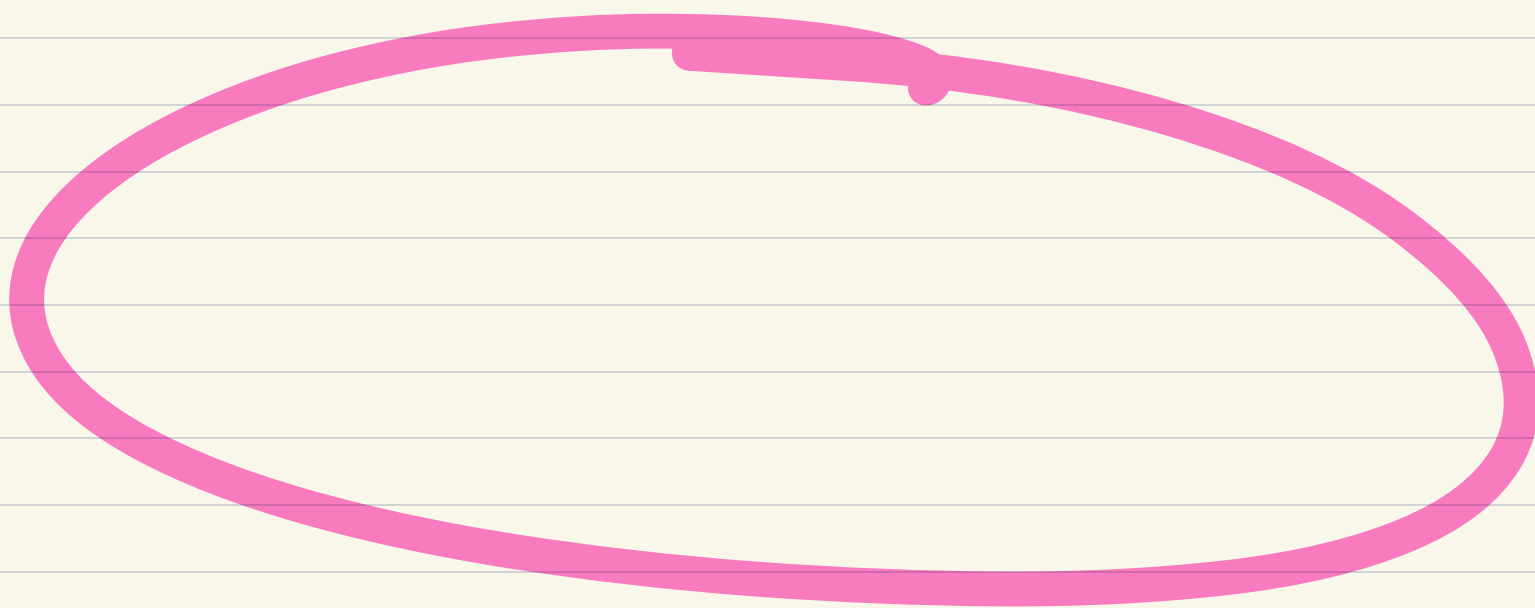

Free Resources

Scalable RAG

(System Design)

* (Free Notes)

1 cr
SP Job

AI Engineering

→ [validate invoice 19263]

Hybrid $\begin{cases} \text{Keyword} \\ + \\ \text{Semantic} \end{cases}$

$$q = [1, 2, 3] \quad \text{---} \quad v_2 \quad [0 \ 0 \ 1]$$

$$(q \cdot v_2) = \text{sim}(q, v_2) = \text{score} \quad v_3 \ [2 \ 1 \ 5]$$

$$(q \cdot v_1) = \text{sim}(q, v_1) = \text{score}$$

