

Random Forest and GBDT Algorithm on Donors_Chose dataset

```
In [0]: %matplotlib inline
import warnings
warnings.filterwarnings("ignore")
import sqlite3
import pandas as pd
import numpy as np
import nltk
import gc
gc.enable()
gc.DEBUG_SAVEALL
import string
import matplotlib.pyplot as plt
import seaborn as sns
from sklearn.feature_extraction.text import TfidfTransformer
from sklearn.feature_extraction.text import TfidfVectorizer

from sklearn.feature_extraction.text import CountVectorizer
from sklearn.metrics import confusion_matrix
from sklearn import metrics
from sklearn.metrics import roc_curve, auc
from nltk.stem.porter import PorterStemmer

import re
# Tutorial about Python regular expressions: https://pymotw.com/2/re/
import string
from nltk.corpus import stopwords
from nltk.stem import PorterStemmer
from nltk.stem.wordnet import WordNetLemmatizer

from gensim.models import Word2Vec
from gensim.models import KeyedVectors
import pickle

from tqdm import tqdm
import os
import math
# from plotly import plotly
# import plotly.offline as offline
# import plotly.graph_objs as go
# offline.init_notebook_mode()
from collections import Counter
gc.set_threshold(2, 1, 1)
```

```
In [0]: from google.colab import drive
drive.mount('/content/drive')
```

Go to this URL in a browser: https://accounts.google.com/o/oauth2/auth?client_id=947318989803-6bn6qk8qdgf4n4g3pfee6491hc0brc4i.apps.googleusercontent.com&redirect_uri=urn%3aietf%3awg%3aoauth%3a2.0%3aob&response_type=code&scope=email%20https%3a%2f%2fwww.googleapis.com%2fauth%2fdocs.test%20https%3a%2f%2fwww.googleapis.com%2fauth%2fdrive.photos.readonly%20https%3a%2f%2fwww.googleapis.com%2fauth%2fpeopleapi.readonly (https://accounts.google.com/o/oauth2/auth?client_id=947318989803-6bn6qk8qdgf4n4g3pfee6491hc0brc4i.apps.googleusercontent.com&redirect_uri=urn%3aietf%3awg%3aoauth%3a2.0%3aob&response_type=code&scope=email%20https%3a%2f%2fwww.googleapis.com%2fauth%2fdocs.test%20https%3a%2f%2fwww.googleapis.com%2fauth%2fdrive.photos.readonly%20https%3a%2f%2fwww.googleapis.com%2fauth%2fpeopleapi.readonly)

Enter your authorization code:

.....

Mounted at /content/drive

2.1 Loading Input Data

```
In [0]: # %load_ext memory_profiler
s=0
# We are taking samples of 0's and 1's and appending them to overcome memory error
project_data = pd.read_csv('/content/drive/My Drive/train_data.csv')
# project_data=project_data.dropna(how='any')
project_data_1 = project_data[project_data['project_is_approved'] == s+1]
project_data_0 = project_data[project_data['project_is_approved'] == s]
project_data=project_data.fillna("")
project_data_1=project_data_1.head(10000)
project_data_0=project_data_0.tail(10000)
project_data_1=project_data_1.append(project_data_0)
project_data=project_data_1
resource_data = pd.read_csv('/content/drive/My Drive/resources.csv')

#Sorting them by columns to spread the zeros and one's unevenly in the 'project_
project_data.sort_values(by=['project_essay_1'])
project_data.sort_values(by=['project_essay_2'], ascending=False)
project_data.sort_values(by=['project_essay_3'])
project_data.sort_values(by=['project_essay_4'], ascending=False)
project_data_1=None
project_data_0=None
```

```
In [0]: print("Number of data points in train data", project_data.shape)
print('-'*50)
print("The attributes of data :", project_data.columns.values)
```

Number of data points in train data (20000, 17)

The attributes of data : ['Unnamed: 0' 'id' 'teacher_id' 'teacher_prefix' 'school_state'
 'project_submitted_datetime' 'project_grade_category'
 'project_subject_categories' 'project_subject_subcategories'
 'project_title' 'project_essay_1' 'project_essay_2' 'project_essay_3'
 'project_essay_4' 'project_resource_summary'
 'teacher_number_of_previously_posted_projects' 'project_is_approved']

```
In [0]: print("Number of data points in resource data", resource_data.shape)
print(resource_data.columns.values)
resource_data.head(1)
# project_data.head(2)
```

Number of data points in resource data (1541272, 4)

['id' 'description' 'quantity' 'price']

```
Out[7]:
```

	id	description	quantity	price
0	p233245	LC652 - Lakeshore Double-Space Mobile Drying Rack	1	149.0

```
In [0]: y = project_data['project_is_approved'].values
X = project_data.drop(['project_is_approved'], axis=1)
X.head(1)
project_data=None
gc.collect()
gc.enable()
gc.DEBUG_SAVEALL
```

```
Out[8]: 32
```

2.2 Getting the Data Model Ready:Preprocessing and Vectorizing categorical features

2.2.1 Preprocessing:project_grade_category

```

In [0]: sub_categories = list(X['project_grade_category'].values)
# remove special characters from list of strings python: https://stackoverflow.co

# https://www.geeksforgeeks.org/removing-stop-words-nltk-python/
# https://stackoverflow.com/questions/23669024/how-to-strip-a-specific-word-from
# https://stackoverflow.com/questions/8270092/remove-all-whitespace-in-a-string-

sub_cat_list = []
for i in sub_categories:
    temp = ""
    # consider we have text like this "Math & Science, Warmth, Care & Hunger"
    for j in i.split(','): # it will split it in three parts ["Math & Science",
        if 'The' in j.split(): # this will split each of the category based on sp
            j=j.replace('The','') # if we have the words "The" we are going to re
        j = j.replace(' ', '') # we are placing all the ' '(space) with ''(empty,
        temp +=j.strip()+" "#" abc ".strip() will return "abc", remove the trail
        temp = temp.replace('&','_')
    sub_cat_list.append(temp.strip())
X['project_grade_category'] = sub_cat_list

```

```

In [0]: sub_categories=None
sub_cat_list=None
temp=None
i=None
j=None
categories=None
cat_list=None
temp=None
my_counter=None
word=None
cat_dict=None
gc.collect()
gc.enable()
gc.DEBUG_SAVEALL

```

Out[10]: 32

2.2.2 Preprocessing:project_subject_categories

```

In [0]: categories = list(X['project_subject_categories'].values)
# remove special characters from list of strings python: https://stackoverflow.co

# https://www.geeksforgeeks.org/removing-stop-words-nltk-python/
# https://stackoverflow.com/questions/23669024/how-to-strip-a-specific-word-from
# https://stackoverflow.com/questions/8270092/remove-all-whitespace-in-a-string-
cat_list = []
for i in categories:
    temp = ""
    # consider we have text like this "Math & Science, Warmth, Care & Hunger"
    for j in i.split(','): # it will split it in three parts ["Math & Science",
        if 'The' in j.split(): # this will split each of the category based on sp
            j=j.replace('The','') # if we have the words "The" we are going to re
        j = j.replace(' ', '') # we are placing all the ' '(space) with ''(empty)
        temp+=j.strip()+" " #" abc ".strip() will return "abc", remove the trail
        temp = temp.replace('&','_') # we are replacing the & value into
    cat_list.append(temp.strip())

X['clean_categories'] = cat_list
X.drop(['project_subject_categories'], axis=1, inplace=True)
X.head(2)

```

```

Out[11]:

```

	Unnamed: 0	id	teacher_id	teacher_prefix	school_state	project_sul
1	140945	p258326	897464ce9ddc600bcd1151f324dd63a	Mr.	FL	
3	45	p246581	f3cb9bffbba169bef1a77b243e620b60	Mrs.	KY	

2.2.3 Preprocessing:project_subject_subcategories

```

In [0]: sub_categories = list(X['project_subject_subcategories'].values)
# remove special characters from list of strings python: https://stackoverflow.co

# https://www.geeksforgeeks.org/removing-stop-words-nltk-python/
# https://stackoverflow.com/questions/23669024/how-to-strip-a-specific-word-from
# https://stackoverflow.com/questions/8270092/remove-all-whitespace-in-a-string-

sub_cat_list = []
for i in sub_categories:
    temp = ""
    # consider we have text like this "Math & Science, Warmth, Care & Hunger"
    for j in i.split(','): # it will split it in three parts ["Math & Science",
        if 'The' in j.split(): # this will split each of the category based on sp
            j=j.replace('The','') # if we have the words "The" we are going to re
        j = j.replace(' ', '') # we are placing all the ' '(space) with ''(empty,
        temp +=j.strip()+" "#" abc ".strip() will return "abc", remove the trail
        temp = temp.replace('&','_')
    sub_cat_list.append(temp.strip())

```

```

In [0]: X['clean_subcategories'] = sub_cat_list
X.drop(['project_subject_subcategories'], axis=1, inplace=True)
X.head(2)

```

Out[13]:

	Unnamed: 0	id	teacher_id	teacher_prefix	school_state	project_sul
1	140945	p258326	897464ce9ddc600bcd1151f324dd63a	Mr.	FL	
3	45	p246581	f3cb9bffba169bef1a77b243e620b60	Mrs.	KY	

2.2.4 New Column:digits in summary

```
In [0]: # Creating a new column 'digits_in_summary' which contains flags of 1 for /
# 'project_resource_summary' containing numeric specification in their requiremn
project_resource_summary = []
new=[]

project_resource_summary = list(X['project_resource_summary'].values)

for i in project_resource_summary:
    # consider we have text like this "Math & Science, Warmth, Care & Hunger"
    for j in i.split(' '):
        if j.isdigit():
            new.append(1)
            break
        else:
            continue
    else:
        new.append(0)

X['digits_in_summary']=new
```

```
In [0]: #To make best use of the memory we are setting the variable names to 'None' and p
project_resource_summary=None
new=None
new1=None
i=None
j=None
a=None

gc.collect()
gc.enable()
gc.DEBUG_SAVEALL
```

Out[15]: 32

2.2.5 Preprocessing:Text features (Project Essay's)

```
In [0]: # merge two column text dataframe:
X["essay"] = X["project_essay_1"].map(str) + \
            X["project_essay_2"].map(str) + \
            X["project_essay_3"].map(str) + \
            X["project_essay_4"].map(str)
```

```
In [0]: X = X.drop(['project_essay_1', 'project_essay_2', 'project_essay_3', 'project_ess
X.shape
```

Out[17]: (20000, 14)

2.2.6 Adding column Cost per project in dataset

```
In [0]: # https://stackoverflow.com/questions/22407798/how-to-reset-a-dataframes-indexes
price_data = resource_data.groupby('id').agg({'price':'sum', 'quantity':'sum'})
price_data.head(2)
type(price_data)
```

Out[18]: pandas.core.frame.DataFrame

```
In [0]: # join two dataframes in python:
X = pd.merge(X, price_data, on='id', how='left')
X.head(2)
```

Out[19]:

	Unnamed: 0	id	teacher_id	teacher_prefix	school_state	project_sul
0	140945	p258326	897464ce9ddc600bcd1151f324dd63a	Mr.	FL	
1	45	p246581	f3cb9bffbba169bef1a77b243e620b60	Mrs.	KY	

```
In [0]: #To make best use of the memory we are setting the variable names to 'None' and
resource_data=None
price_data=None
gc.collect()
gc.enable()
gc.DEBUG_SAVEALL
```

Out[20]: 32

2.2.7 Text Preprocessing:Essay Text


```
In [0]: # https://stackoverflow.com/a/47091490/4084039
import re

def decontracted(phrase):
    # specific
    phrase = re.sub(r"won't", "will not", phrase)
    phrase = re.sub(r"can't", "can not", phrase)

    # general
    phrase = re.sub(r"n't", " not", phrase)
    phrase = re.sub(r"'re", " are", phrase)
    phrase = re.sub(r"'s", " is", phrase)
    phrase = re.sub(r"'d", " would", phrase)
    phrase = re.sub(r"'ll", " will", phrase)
    phrase = re.sub(r"'t", " not", phrase)
    phrase = re.sub(r"'ve", " have", phrase)
    phrase = re.sub(r"'m", " am", phrase)
    return phrase
```

```
In [0]: sent = decontracted(X['essay'].values[99])
print(sent)
print("="*50)
```

What does \"The message in the music\" mean to you? To my kids, it means so much more! Music is not just for entertainment! My kids are learning how music can be used as a human rights tool! They are learning to express their feelings of the world around them in positive ways.\n\nMy kids are every stereotype you can think of: poor, underprivileged, rough, angry. Turn that same prism around and there is also joy, happiness, intelligence and creativity. They are learning to navigate the world around them and we are working on showing them how to use this energy in a positive way. Our piano lab is aging. We have 3 classes of 35 kids that are bursting at the gills, which is a great problem to have! BUT keyboards are beginning to have the keys break off making them unuseable. We also do not have enough keyboards for every student in class, even if you counted the slightly broken ones!\n\nWe are in desperate need of more keyboards for our labs to meet the needs of our students. A keyboard for each student in class will facilitate their love of music and help them grow and appreciate the world around them. We are down to 24 semi working keyboards and 35 kids in each piano class. These keyboards are needed sooner rather than later for our kids to have a successful year in class.nannan

=====

```
In [0]: # \r \n \t remove from string python: http://texthandler.com/info/remove-line-breaks
sent = sent.replace('\r', ' ')
sent = sent.replace('\n', ' ')
sent = sent.replace('\t', ' ')
print(sent)
```

What does The message in the music mean to you? To my kids, it means so much more! Music is not just for entertainment! My kids are learning how music can be used as a human rights tool! They are learning to express their feelings of the world around them in positive ways. My kids are every stereotype you can think of: poor, underprivileged, rough, angry. Turn that same prism around the re is also joy, happiness, intelligence and creativity. They are learning to navigate the world around them and we are working on showing them how to use this energy in a positive way. Our piano lab is aging. We have 3 classes of 35 kids that are bursting at the gills, which is a great problem to have! BUT keyboards are beginning to have the keys break off making them unuseable. We also do not have enough keyboards for every student in class, even if you counted the slightly broken ones! We are in desperate need of more keyboards for our labs to meet the needs of our students. A keyboard for each student in class will facilitate their love of music and help them grow and appreciate the world around them. We are down to 24 semi working keyboards and 35 kids in each piano class. These keyboards are needed sooner rather than later for our kids to have a successful year in class. nannan

```
In [0]: #remove spacial character: https://stackoverflow.com/a/5843547/4084039
sent = re.sub('[^A-Za-z0-9]+', ' ', sent)
print(sent)
```

What does The message in the music mean to you To my kids it means so much more Music is not just for entertainment My kids are learning how music can be used as a human rights tool They are learning to express their feelings of the world around them in positive ways My kids are every stereotype you can think of poor underprivileged rough angry Turn that same prism around there is also joy happiness intelligence and creativity They are learning to navigate the world around them and we are working on showing them how to use this energy in a positive way Our piano lab is aging We have 3 classes of 35 kids that are bursting at the gills which is a great problem to have BUT keyboards are beginning to have the keys break off making them unuseable We also do not have enough keyboards for every student in class even if you counted the slightly broken ones We are in desperate need of more keyboards for our labs to meet the needs of our students A keyboard for each student in class will facilitate their love of music and help them grow and appreciate the world around them We are down to 24 semi working keyboards and 35 kids in each piano class These keyboards are needed sooner rather than later for our kids to have a successful year in class nannan

```
In [0]: # https://gist.github.com/sebleier/554280
# we are removing the words from the stop words list: 'no', 'nor', 'not'
stopwords= ['i', 'me', 'my', 'myself', 'we', 'our', 'ours', 'ourselves', 'you', 'you'll', 'you'd', 'your', 'yours', 'yourself', 'yourselves', 'he', 'she', "she's", 'her', 'hers', 'herself', 'it', "it's", 'its', 'itself', 'theirs', 'themselves', 'what', 'which', 'who', 'whom', 'this', 'that', 'am', 'is', 'are', 'was', 'were', 'be', 'been', 'being', 'have', 'has', 'did', 'doing', 'a', 'an', 'the', 'and', 'but', 'if', 'or', 'because', 'at', 'by', 'for', 'with', 'about', 'against', 'between', 'into', 'through', 'above', 'below', 'to', 'from', 'up', 'down', 'in', 'out', 'on', 'off', 'then', 'once', 'here', 'there', 'when', 'where', 'why', 'how', 'all', 'most', 'other', 'some', 'such', 'only', 'own', 'same', 'so', 'than', 's', 't', 'can', 'will', 'just', 'don', "don't", 'should', "should've", 've', 'y', 'ain', 'aren', "aren't", 'couldn', "couldn't", 'didn', "didn't", 'hadn't', 'hasn', "hasn't", 'haven', "haven't", 'isn', "isn't", 'ma', "mustn't", 'needn', "needn't", 'shan', "shan't", 'shouldn', "shouldn't", 'won', "won't", 'wouldn', "wouldn't"]
```

```
In [0]: # Combining all the above statements
from tqdm import tqdm
preprocessed_essays = []
# tqdm is for printing the status bar
for sentence in tqdm(X['essay'].values):
    sent = decontracted(sentence)
    sent = sent.replace('\r', ' ')
    sent = sent.replace('\n', ' ')
    sent = sent.replace('\n', ' ')
    sent = re.sub('[^A-Za-z0-9]+', ' ', sent)
    # https://gist.github.com/sebleier/554280
    sent = ' '.join(e for e in sent.split() if e not in stopwords)
    preprocessed_essays.append(sent.lower().strip())
```

100%|██████████| 20000/20000 [00:11<00:00, 1671.72it/s]

```
In [0]: # after preprocessing

# X['essay'] = None
X['essay'] = preprocessed_essays

X.head(2)
```

```
Out[27]:
```

	Unnamed: 0	id	teacher_id	teacher_prefix	school_state	project_sul
	0	140945 p258326	897464ce9ddc600bcd1151f324dd63a	Mr.	FL	
	1	45 p246581	f3cb9bffbba169bef1a77b243e620b60	Mrs.	KY	

```
In [0]: # Combining all the above statemennts
from tqdm import tqdm
preprocessed_project_title = []
# tqdm is for printing the status bar
for sentence in tqdm(X['project_title'].values):
    sent = decontracted(sentence)
    sent = sent.replace('\r', ' ')
    sent = sent.replace('\\"', ' ')
    sent = sent.replace('\n', ' ')
    sent = re.sub('[^A-Za-z0-9]+', ' ', sent)
    # https://gist.github.com/sebleier/554280
    sent = ' '.join(e for e in sent.split() if e not in stopwords)
    preprocessed_project_title.append(sent.lower().strip())
```

```
100%|██████████| 20000/20000 [00:00<00:00, 33131.70it/s]
```

```
In [0]: preprocessed_project_title[4999]
# after preprocesing

# X['project_title'] = None
X['project_title'] = preprocessed_project_title

X.head(2)
```

```
Out[29]:
```

	Unnamed: 0	id	teacher_id	teacher_prefix	school_state	project_sul
0	140945	p258326	897464ce9ddc600bcd1151f324dd63a	Mr.	FL	
1	45	p246581	f3cb9bffba169bef1a77b243e620b60	Mrs.	KY	

2.2.8 Splitting the data into Train and Test

```
In [0]: # train test split(67:33)
from sklearn.model_selection import train_test_split
X_train, X_test, y_train, y_test = train_test_split(X, y, test_size=0.33, stratify=y)
# X_train, X_cv, y_train, y_cv = train_test_split(X_train, y_train, test_size=0.33, stratify=y_train)
X=None
gc.collect()
```

```
Out[30]: 11
```

2.2.9 Response Coding Categorical data:

```

In [0]: def res_code(X_tr,y_tr,cc,cc_0,cc_1):
    #We are concatenating train data and its classes to create a base table while
    df=pd.DataFrame(X_tr,columns=[cc]) #Train data
    df1=pd.DataFrame(y_tr,columns=['y']) #Train class
    df.reset_index(drop=True, inplace=True)
    df1.reset_index(drop=True, inplace=True)
    df_row = df.assign(y=df1) #concatenating of the train and train class
    # df_row.to_csv('file2.csv')
    #=====*****=====
    #To create response table for the given category
    group_data = df_row.groupby([cc]).count() #We groupby with respect to the cat
    df_row['id'] = df_row[cc].str.cat(df_row['y'].values.astype(str)) #We concat
    group_data1 = df_row.groupby(['id'])['y'].count() #We are obtaining the count
    group_data1=group_data1.to_frame() #Converting to dataframe
    #=====*****=====
    #We have two tables group_data which holds the category count and group_data1
    df_row = pd.merge(df_row,group_data, on=cc, how='left') #On the base data we
    df_row = pd.merge(df_row,group_data1,on='id', how='left') #On the base data we
    #=====*****=====
    #Final Response table creation wrt class 0 and class 0
    df_row_1 = df_row[df_row['y_x']==1] #Breaking the table wrt class 1
    df_row_0 = df_row[df_row['y_x']==0] #Breaking the table wrt class 0
    df_row_0[cc_0]=df_row_0['y']/df_row_0['y_y'] #We are taking the percentage of
    df_row_1[cc_1]=df_row_1['y']/df_row_1['y_y'] #We are taking the percentage of
    df_row_0=df_row_0.drop(['y_x', 'id','y_y','y'], axis=1) #Dropping unwanted columns
    df_row_1=df_row_1.drop(['y_x', 'id','y_y','y'], axis=1) #Dropping unwanted columns
    df_row=df_row.drop(['y_x', 'id','y_y','y'], axis=1) #Dropping unwanted columns
    #=====*****=====
    df_row_0=df_row_0.drop_duplicates() #Dropping the duplicates
    df_row_1=df_row_1.drop_duplicates() #Dropping the duplicates
    X_tr = pd.merge(X_tr,df_row_1, on=cc, how='left') #Merging the class 1 percentages
    X_tr = pd.merge(X_tr,df_row_0, on=cc, how='left') #Merging the class 0 percentages
    X_tr[cc_0]=round((X_tr[cc_0])*100,2) #We are multiplying the percentage and 100
    X_tr[cc_1]=round((X_tr[cc_1])*100,2) #We are multiplying the percentage and 100
    X_tr=X_tr.drop([cc], axis=1) #We are dropping the category column
    X_tra=X_tr
    return X_tra

```

```
In [0]: # Response Coding Categorical data: clean_subcategories(Project subject category)
CC='clean_categories'
CC_0='St_0_cl_cat'
CC_1='St_1_cl_cat'

X_train=res_code(X_train,y_train,CC,CC_0,CC_1)
X_test=res_code(X_test,y_test,CC,CC_0,CC_1)

# Response Coding Categorical data: clean_subcategories(Project subject subcategory)
CC = 'clean_subcategories'
CC_0='St_0_sub_cat'
CC_1='St_1_sub_cat'
X_train=res_code(X_train,y_train,CC,CC_0,CC_1)
X_test=res_code(X_test,y_test,CC,CC_0,CC_1)

# Response Coding Categorical data:(school_state)
CC = 'school_state'
CC_0='St_0_sc_st'
CC_1='St_1_sc_st'
X_train=res_code(X_train,y_train,CC,CC_0,CC_1)
X_test=res_code(X_test,y_test,CC,CC_0,CC_1)

# Response Coding Categorical data: (project_grade_category)
CC = 'project_grade_category'
CC_0='St_0_pgc'
CC_1='St_1_pgc'
X_train=res_code(X_train,y_train,CC,CC_0,CC_1)
X_test=res_code(X_test,y_test,CC,CC_0,CC_1)

# Response Coding Categorical data: (project_grade_category)
CC = 'teacher_prefix'
CC_0='St_0_tp'
CC_1='St_1_tp'
X_train=res_code(X_train,y_train,CC,CC_0,CC_1)
X_test=res_code(X_test,y_test,CC,CC_0,CC_1)
# X_train.to_csv('train_cc.csv')
# X_test.to_csv('test_cc.csv')
```

```
In [0]: X_train = X_train.fillna(0)
X_test = X_test.fillna(0)
X_train.head(3)
```

Out[33]:

	Unnamed: 0	id	teacher_id	project_submitted_datetime	project_title
0	31112	p007096	64972ed7a628ea702c4d94718d6c94e5	9/16/2016 22:04	project creations at oh m
1	96103	p043613	5832aaf8f511ad06b4a65eaaa072e7c7	12/20/2016 20:09	buildin foreve reader
2	135075	p145470	8448b4ab04a2f5e3c09bc95bb8717a5d	3/8/2017 14:09	gc chromebook

2.3 Make Data Model Ready: Vectorizing Numerical features

2.3.1 Vectorizing Numerical features--Price


```
In [0]: from sklearn.preprocessing import Normalizer
from sklearn.preprocessing import StandardScaler
normalizer = StandardScaler() #Normalizer()
# normalizer_test = Normalizer()
# normalizer.fit(X_train['price'].values)
# this will rise an error Expected 2D array, got 1D array instead:
# array=[105.22 215.96 96.01 ... 368.98 80.53 709.67].
# Reshape your data either using
# array.reshape(-1, 1) if your data has a single feature
# array.reshape(1, -1) if it contains a single sample.
normalizer.fit(X_train['price'].values.reshape(-1,1))
# normalizer_test.fit(X_test['price'].values.reshape(1,-1))

X_train_price_norm = normalizer.transform(X_train['price'].values.reshape(-1,1))
# X_cv_price_norm = normalizer.transform(X_cv['price'].values.reshape(-1,1))
X_test_price_norm = normalizer.transform(X_test['price'].values.reshape(-1,1))

# X_train_price_norm=np.reshape(X_train_price_norm,(1,-1))
# X_test_price_norm=np.reshape(X_test_price_norm,(1,-1))

print("After vectorizations")

# np.reshape(X_train_price_norm,
print(X_train_price_norm.shape, y_train.shape)
# print(X_cv_price_norm.shape, y_cv.shape)
print(X_test_price_norm.shape, y_test.shape)
print("=*100)
```

After vectorizations

(13400, 1) (13400,)

(6600, 1) (6600,)

=====

=====

2.3.2 Vectorizing Numerical features-- teacher_number_of_previously_posted_projects

```
In [0]: from sklearn.preprocessing import Normalizer
normalizer_train = StandardScaler() #Normalizer()
normalizer_test = StandardScaler() #Normalizer()
# normalizer.fit(X_train['teacher_number_of_previously_posted_projects'].values)
# this will rise an error Expected 2D array, got 1D array instead:
# array=[105.22 215.96 96.01 ... 368.98 80.53 709.67].
# Reshape your data either using
# array.reshape(-1, 1) if your data has a single feature
# array.reshape(1, -1) if it contains a single sample.
normalizer.fit(X_train['teacher_number_of_previously_posted_projects'].values.re

X_train_teacher_number_of_previously_posted_projects_norm = normalizer.transform
# X_cv_teacher_number_of_previously_posted_projects_norm = normalizer.transform(
X_test_teacher_number_of_previously_posted_projects_norm = normalizer.transform(

# X_train_teacher_number_of_previously_posted_projects_norm=np.reshape(X_train_te
# X_test_teacher_number_of_previously_posted_projects_norm=np.reshape(X_test_tea

print("After vectorizations")
print(X_train_teacher_number_of_previously_posted_projects_norm.shape, y_train.sh
# print(X_cv_teacher_number_of_previously_posted_projects_norm.shape, y_cv.shape,
print(X_test_teacher_number_of_previously_posted_projects_norm.shape, y_test.shap
print("=*100)
```

```
After vectorizations
(13400, 1) (13400,)
(6600, 1) (6600,)
```

```
=====
=====
```

2.3.3 Vectorizing Numerical features--digits_in_summary

```
In [0]: X_train['digits_in_summary'].fillna(X_train['digits_in_summary'].mean(), inplace=
# X_cv['digits_in_summary'].fillna(X_cv['digits_in_summary'].mean(), inplace=True
X_test['digits_in_summary'].fillna(X_test['digits_in_summary'].mean(), inplace=Tr
```

```
In [0]: from sklearn.preprocessing import Normalizer
normalizer_train = StandardScaler() #Normalizer()
normalizer_test = StandardScaler() #Normalizer()
# normalizer.fit(X_train['digits_in_summary'].values)
# this will rise an error Expected 2D array, got 1D array instead:
# array=[105.22 215.96 96.01 ... 368.98 80.53 709.67].
# Reshape your data either using
# array.reshape(-1, 1) if your data has a single feature
# array.reshape(1, -1) if it contains a single sample.
normalizer.fit(X_train['digits_in_summary'].values.reshape(-1,1))

X_train_digits_in_summary_norm = normalizer.transform(X_train['digits_in_summary'].values.reshape(-1,1))
# X_cv_digits_in_summary_norm = normalizer.transform(X_cv['digits_in_summary'].values.reshape(-1,1))
X_test_digits_in_summary_norm = normalizer.transform(X_test['digits_in_summary'].values.reshape(-1,1))

# X_train_digits_in_summary_norm=np.reshape(X_train_digits_in_summary_norm,(1,-1))
# X_test_digits_in_summary_norm=np.reshape(X_test_digits_in_summary_norm,(1,-1))

print("After vectorizations")
print(X_train_digits_in_summary_norm.shape, y_train.shape)
# print(X_cv_digits_in_summary_norm.shape, y_cv.shape)
print(X_test_digits_in_summary_norm.shape, y_test.shape)
print("=*100")
```

After vectorizations

(13400, 1) (13400,)

(6600, 1) (6600,)

=====

2.4 Make Data Model Ready: Vectorizing Essay and Project_title feature into BOW & TFIDF

Vectorizing Text data

2.4.1 Bag of words:Essays

```

In [0]: print(X_train.shape, y_train.shape)
        # print(X_cv.shape, y_cv.shape)
        print(X_test.shape, y_test.shape)

        print("="*100)

        # We are considering only the words which appeared in at least 10 documents(rows

vectorizer = CountVectorizer(min_df=10,ngram_range=(2,2), max_features=5000)
vectorizer.fit(X_train['essay'].values) # fit has to happen only on train data

# we use the fitted Countvectorizer to convert the text to vector
X_train_essay_bow = vectorizer.transform(X_train['essay'].values)
# X_cv_essay_bow = vectorizer.transform(X_cv['essay'].values)
X_test_essay_bow = vectorizer.transform(X_test['essay'].values)

print("After vectorizations")
print(X_train_essay_bow.shape, y_train.shape)
# print(X_cv_essay_bow.shape, y_cv.shape)
print(X_test_essay_bow.shape, y_test.shape)
print("="*100)

```

```
(13400, 21) (13400,)
```

```
(6600, 21) (6600,)
```

```

=====
=====
After vectorizations
(13400, 5000) (13400,)
(6600, 5000) (6600,)
=====
=====

```

2.4.2 Bag of words:Project Title

In [0]:

```

print(X_train.shape, y_train.shape)
# print(X_cv.shape, y_cv.shape)
print(X_test.shape, y_test.shape)

print("="*100)

vectorizer = CountVectorizer(min_df=10, ngram_range=(2,2), max_features=5000)
vectorizer.fit(X_train['project_title'].values) # fit has to happen only on train

# we use the fitted Countvectorizer to convert the text to vector
X_train_project_title_bow = vectorizer.transform(X_train['project_title'].values)
# X_cv_project_title_bow = vectorizer.transform(X_cv['project_title'].values)
X_test_project_title_bow = vectorizer.transform(X_test['project_title'].values)

print("After vectorizations")
print(X_train_project_title_bow.shape, y_train.shape)
# print(X_cv_project_title_bow.shape, y_cv.shape)
print(X_test_project_title_bow.shape, y_test.shape)

print("="*100)

```

```

(13400, 21) (13400,)
(6600, 21) (6600,)

```

```

=====

```

```

=====

```

```

After vectorizations

```

```

(13400, 313) (13400,)
(6600, 313) (6600,)

```

```

=====

```

```

=====

```

2.4.3 Converting Columns into array before merging into hstack

```
In [0]: X_train_St_0_cl_cat = X_train['St_0_cl_cat'].values.reshape(-1,1)
X_train_St_1_cl_cat = X_train['St_1_cl_cat'].values.reshape(-1,1)

X_train_St_0_sub_cat = X_train['St_0_sub_cat'].values.reshape(-1,1)
X_train_St_1_sub_cat = X_train['St_1_sub_cat'].values.reshape(-1,1)

X_train_St_0_sc_st = X_train['St_0_sc_st'].values.reshape(-1,1)
X_train_St_1_sc_st = X_train['St_1_sc_st'].values.reshape(-1,1)

X_train_St_0_pgc = X_train['St_0_pgc'].values.reshape(-1,1)
X_train_St_1_pgc = X_train['St_1_pgc'].values.reshape(-1,1)

X_train_St_0_tp = X_train['St_0_tp'].values.reshape(-1,1)
X_train_St_1_tp = X_train['St_1_tp'].values.reshape(-1,1)

# =====*****=====

X_test_St_0_cl_cat = X_test['St_0_cl_cat'].values.reshape(-1,1)
X_test_St_1_cl_cat = X_test['St_1_cl_cat'].values.reshape(-1,1)

X_test_St_0_sub_cat = X_test['St_0_sub_cat'].values.reshape(-1,1)
X_test_St_1_sub_cat = X_test['St_1_sub_cat'].values.reshape(-1,1)

X_test_St_0_sc_st = X_test['St_0_sc_st'].values.reshape(-1,1)
X_test_St_1_sc_st = X_test['St_1_sc_st'].values.reshape(-1,1)

X_test_St_0_pgc = X_test['St_0_pgc'].values.reshape(-1,1)
X_test_St_1_pgc = X_test['St_1_pgc'].values.reshape(-1,1)

X_test_St_0_tp = X_test['St_0_tp'].values.reshape(-1,1)
X_test_St_1_tp = X_test['St_1_tp'].values.reshape(-1,1)
```

```
In [0]: from scipy.sparse import hstack
# with the same hstack function we are concatenating a sparse matrix and a dense
X_BOW_TRAIN = hstack((X_train_digits_in_summary_norm,X_train_teacher_number_of_projects_norm))
X_BOW_TRAIN=X_BOW_TRAIN.todense()
X_BOW_TRAIN=np.array(X_BOW_TRAIN)

# X_BOW_cv = hstack((X_cv_project_title_bow,X_cv_essay_bow ,X_cv_digits_in_summary_norm))
# X_BOW_cv=X_BOW_cv.todense()
# X_BOW_cv=np.array(X_BOW_cv)

X_BOW_test = hstack((X_test_digits_in_summary_norm,X_test_teacher_number_of_projects_norm))
X_BOW_test=X_BOW_test.todense()
X_BOW_test=np.array(X_BOW_test)

# X_train_project_title_bow=None
# X_train_essay_bow =None

# X_test_project_title_bow=None
# X_test_essay_bow =None
```

```
In [0]: print(X_train_digits_in_summary_norm.shape)
print(X_train_teacher_number_of_previously_posted_projects_norm.shape)
print(X_train_price_norm.shape)
print(X_train_project_title_bow.shape)
print(X_train_essay_bow.shape)
print(X_train_St_0_cl_cat.shape)
print(X_train_St_1_cl_cat.shape)
print(X_train_St_0_sub_cat.shape)
print(X_train_St_1_sub_cat.shape)
print(X_train_St_0_sc_st.shape)
print(X_train_St_1_sc_st.shape)
print(X_train_St_0_pgc.shape)
print(X_train_St_1_pgc.shape)
print(X_train_St_0_tp.shape)
print(X_train_St_1_tp.shape)
```

```
(13400, 1)
(13400, 1)
(13400, 1)
(13400, 313)
(13400, 5000)
(13400, 1)
(13400, 1)
(13400, 1)
(13400, 1)
(13400, 1)
(13400, 1)
(13400, 1)
(13400, 1)
(13400, 1)
(13400, 1)
(13400, 1)
(13400, 1)
```

2.7 AVG_W2V

2.7.1 Using Pretrained Models: Avg W2V-Essays

```
In [0]: # train test split
from sklearn.model_selection import train_test_split

avg_w2v_vectors_essay_train_, avg_w2v_vectors_essay_test_, y_train, y_test = tra

# avg_w2v_vectors_essay_train, avg_w2v_vectors_essay_cv, y_train, y_cv = train_te
```

```
In [0]: # stronging variables into pickle files python: http://www.jessicayung.com/how-to
# make sure you have the glove_vectors file
import pickle
with open('/content/drive/My Drive/glove_vectors', 'rb') as f:
    model_ = pickle.load(f)
    glove_words = set(model_.keys())
```

```
In [0]: # average Word2Vec
# compute average word2vec for each review.
from tqdm import tqdm
# sentence=[]
avg_w2v_vectors_essay_train = []; # the avg-w2v for each sentence/review is store
for sentence in tqdm(avg_w2v_vectors_essay_train_): # for each review/sentence
    vector = np.zeros(300) # as word vectors are of zero length
    cnt_words = 0; # num of words with a valid vector in the sentence/review
    for word in sentence.split(): # for each word in a review/sentence
        if word in glove_words:
            vector += model_[word]
            cnt_words += 1
    if cnt_words != 0:
        vector /= cnt_words
    avg_w2v_vectors_essay_train.append(vector)

print(len(avg_w2v_vectors_essay_train))
print(len(avg_w2v_vectors_essay_train[0]))
```

100%|██████████| 13400/13400 [00:04<00:00, 3013.82it/s]

13400

300


```
In [0]: # average Word2Vec
# compute average word2vec for each review.
from tqdm import tqdm
avg_w2v_vectors_essay_test = []; # the avg-w2v for each sentence/review is stored
for sentence in tqdm(avg_w2v_vectors_essay_test_): # for each review/sentence
    vector = np.zeros(300) # as word vectors are of zero length
    cnt_words = 0; # num of words with a valid vector in the sentence/review
    for word in sentence.split(): # for each word in a review/sentence
        if word in glove_words:
            vector += model_[word]
            cnt_words += 1
    if cnt_words != 0:
        vector /= cnt_words
    avg_w2v_vectors_essay_test.append(vector)

print(len(avg_w2v_vectors_essay_test))
print(len(avg_w2v_vectors_essay_test[0]))
```

100%|██████████| 6600/6600 [00:02<00:00, 2929.26it/s]

6600

300

```
In [0]: # # We are considering only the words which appeared in at least 10 documents(row)
# vectorizer = CountVectorizer(min_df=10,max_features=1000)
# project_essay_avg_w2v = vectorizer.fit_transform(avg_w2v_vectors_essay)
# print("Shape of matrix after one hot encoding ",project_essay_avg_w2v.shape)

import scipy
avg_w2v_vectors_essay_train=scipy.sparse.csr_matrix(avg_w2v_vectors_essay_train)
# type(avg_w2v_vectors_essay)

import scipy
avg_w2v_vectors_essay_test=scipy.sparse.csr_matrix(avg_w2v_vectors_essay_test)
# type(avg_w2v_vectors_essay_test)
```

2.7.2 Using Pretrained Models: AVG W2V on project_title

```
In [0]: # train test split
from sklearn.model_selection import train_test_split

avg_w2v_vectors_Pro_title_train_, avg_w2v_vectors_Pro_title_test_, y_train, y_test = train_test_split(
    avg_w2v_vectors_Pro_title, y_Pro_title, test_size=0.2, random_state=42)

# avg_w2v_vectors_Pro_title_train, avg_w2v_vectors_Pro_title_cv, y_train, y_cv =
```

```
In [0]: # S = ["abc def pqr", "def def def abc", "pqr pqr def"]
tfidf_model = TfidfVectorizer()
tfidf_model.fit(avg_w2v_vectors_Pro_title_train_)
# we are converting a dictionary with word as a key, and the idf as a value
dictionary = dict(zip(tfidf_model.get_feature_names(), list(tfidf_model.idf_)))
tfidf_words = set(tfidf_model.get_feature_names())
```

```
In [0]: # average Word2Vec
# compute average word2vec for each review.
avg_w2v_vectors_Pro_title_train = []; # the avg-w2v for each sentence/review is s
for sentence in tqdm(avg_w2v_vectors_Pro_title_train_): # for each review/sentence
    vector = np.zeros(300) # as word vectors are of zero length
    cnt_words = 0; # num of words with a valid vector in the sentence/review
    for word in sentence.split(): # for each word in a review/sentence
        if word in glove_words:
            vector += model_[word]
            cnt_words += 1
    if cnt_words != 0:
        vector /= cnt_words
    avg_w2v_vectors_Pro_title_train.append(vector)

print(len(avg_w2v_vectors_Pro_title_train))
print(len(avg_w2v_vectors_Pro_title_train[0]))
```

100%|██████████| 13400/13400 [00:00<00:00, 57885.12it/s]

13400

300

```
In [0]: # average Word2Vec
# compute average word2vec for each review.
avg_w2v_vectors_Pro_title_test = []; # the avg-w2v for each sentence/review is s
for sentence in tqdm(avg_w2v_vectors_Pro_title_test_): # for each review/sentence
    vector = np.zeros(300) # as word vectors are of zero length
    cnt_words = 0; # num of words with a valid vector in the sentence/review
    for word in sentence.split(): # for each word in a review/sentence
        if word in glove_words:
            vector += model_[word]
            cnt_words += 1
    if cnt_words != 0:
        vector /= cnt_words
    avg_w2v_vectors_Pro_title_test.append(vector)

print(len(avg_w2v_vectors_Pro_title_test))
print(len(avg_w2v_vectors_Pro_title_test[0]))
```

100%|██████████| 6600/6600 [00:00<00:00, 63768.33it/s]

6600

300

```
In [0]: import scipy
avg_w2v_vectors_Pro_title_train=scipy.sparse.csr_matrix(avg_w2v_vectors_Pro_title_train)
type(avg_w2v_vectors_Pro_title_train)

import scipy
avg_w2v_vectors_Pro_title_test=scipy.sparse.csr_matrix(avg_w2v_vectors_Pro_title_test)
type(avg_w2v_vectors_Pro_title_test)

# import scipy
# avg_w2v_vectors_Pro_title_cv=scipy.sparse.csr_matrix(avg_w2v_vectors_Pro_title_cv)
# type(avg_w2v_vectors_Pro_title_cv)
```

Out[52]: scipy.sparse.csr.csr_matrix

```
In [0]: X_avg_w2v_train = hstack(( avg_w2v_vectors_Pro_title_train,avg_w2v_vectors_essay_train))
X_avg_w2v_train=X_avg_w2v_train.todense()
X_avg_w2v_train=np.array(X_avg_w2v_train)

# X_avg_w2v_cv = hstack(( avg_w2v_vectors_Pro_title_cv,avg_w2v_vectors_essay_cv))
# X_avg_w2v_cv=X_avg_w2v_cv.todense()
# X_avg_w2v_cv=np.array(X_avg_w2v_cv)

X_avg_w2v_test = hstack(( avg_w2v_vectors_Pro_title_test,avg_w2v_vectors_essay_test))
X_avg_w2v_test=X_avg_w2v_test.todense()
X_avg_w2v_test=np.array(X_avg_w2v_test)

avg_w2v_vectors_Pro_title_train=None
avg_w2v_vectors_essay_train=None

avg_w2v_vectors_Pro_title_test=None
avg_w2v_vectors_essay_test=None
```

2.7.3 Applying Random Forest on AVG_W2V , SET 3


2.5.1 Applying Random Forest GridSearchCV on Train data to obtain the best C

```
In [0]: from sklearn.metrics import roc_auc_score
import matplotlib.pyplot as plt
from sklearn.model_selection import train_test_split
from sklearn.model_selection import GridSearchCV
from sklearn.model_selection import cross_val_score
# from sklearn.multioutput import MultiOutputClassifier
# from sklearn.datasets import make_multilabel_classification
from sklearn.tree import DecisionTreeClassifier
from sklearn.ensemble import RandomForestClassifier

Gt1 = RandomForestClassifier(class_weight='balanced',min_samples_split=5)
parameters = {'n_estimators': [5,10,20,25,30,40,45], 'max_depth':[2, 3, 4, 5, 7,
clf1 = GridSearchCV(Gt1, parameters, cv=2, scoring='roc_auc',return_train_score=
se1 = clf1.fit(X_avg_w2v_train, y_train)

import seaborn as sns; sns.set()
max_scores1 = pd.DataFrame(clf1.cv_results_).groupby(['param_max_depth','param_n_
fig, ax = plt.subplots(1,2, figsize=(20,6))
sns.heatmap(max_scores1.mean_train_score, annot = True, fmt='.4g', ax=ax[0])
sns.heatmap(max_scores1.mean_test_score, annot = True, fmt='.4g', ax=ax[1])
ax[0].set_title('Train Set')
ax[1].set_title('CV Set')
plt.show()

# clf1.cv_results_.keys()
```

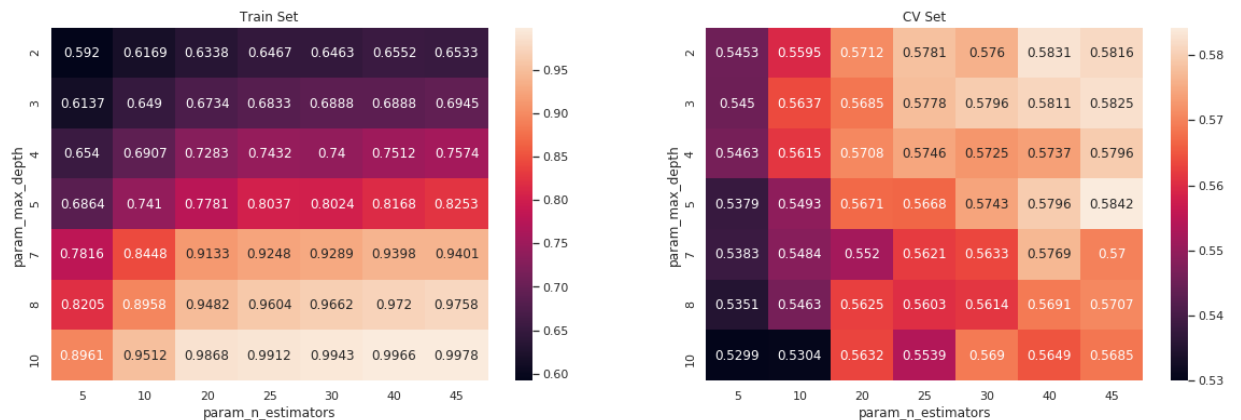

```
In [0]: #Best Estimator and Best tune parameters
print(clf1.best_estimator_)
#Mean cross-validated score of the best_estimator
print(clf1.score(X_avg_w2v_train,y_train))
print(clf1.score(X_avg_w2v_test,y_test))
```

```
RandomForestClassifier(bootstrap=True, ccp_alpha=0.0, class_weight='balanced',
                        criterion='gini', max_depth=5, max_features='auto',
                        max_leaf_nodes=None, max_samples=None,
                        min_impurity_decrease=0.0, min_impurity_split=None,
                        min_samples_leaf=1, min_samples_split=5,
                        min_weight_fraction_leaf=0.0, n_estimators=45,
                        n_jobs=None, oob_score=False, random_state=None,
                        verbose=0, warm_start=False)
```

```
0.7379111717531744
```


```
0.5858878787878787
```

```
In [0]: best_tune_parameters=[{'n_estimators':[45], 'max_depth':[5] } ]
```

2.5.2 Receiver Operating Characteristic- (AVG_W2V)


```
In [0]: # https://scikitlearn.org/stable/modules/generated/sklearn.metrics.roc_curve.html
from sklearn.metrics import roc_curve, auc
from sklearn.tree import DecisionTreeClassifier
from sklearn.metrics import roc_curve, auc

clf11= RandomForestClassifier(class_weight = 'balanced',max_depth=5,n_estimators=100)
# clfV1=DecisionTreeClassifier (class_weight = 'balanced',max_depth=10,min_samples_leaf=10)
clf11.fit(X_avg_w2v_train, y_train)
# for visulation
# clfV1.fit(X_Tfidf_train, y_train)
#https://scikitlearn.org/stable/modules/generated/sklearn.linear_model.SGDClassifier.html
y_train_pred1 = clf11.predict_proba(X_avg_w2v_train)[:,1]
y_test_pred1 = clf11.predict_proba(X_avg_w2v_test)[:,1]
train_fpr1, train_tpr1, tr_thresholds1 = roc_curve(y_train, y_train_pred1)
test_fpr1, test_tpr1, te_thresholds1 = roc_curve(y_test, y_test_pred1)
plt.plot(train_fpr1, train_tpr1, label="train AUC =" +str(auc(train_fpr1, train_tpr1)))
plt.plot(test_fpr1, test_tpr1, label="test AUC =" +str(auc(test_fpr1, test_tpr1)))
plt.legend()
plt.xlabel("False Positive Rate")
plt.ylabel("True Positive Rate")
plt.title("ERROR PLOTS")
plt.grid(True)
plt.show()
```

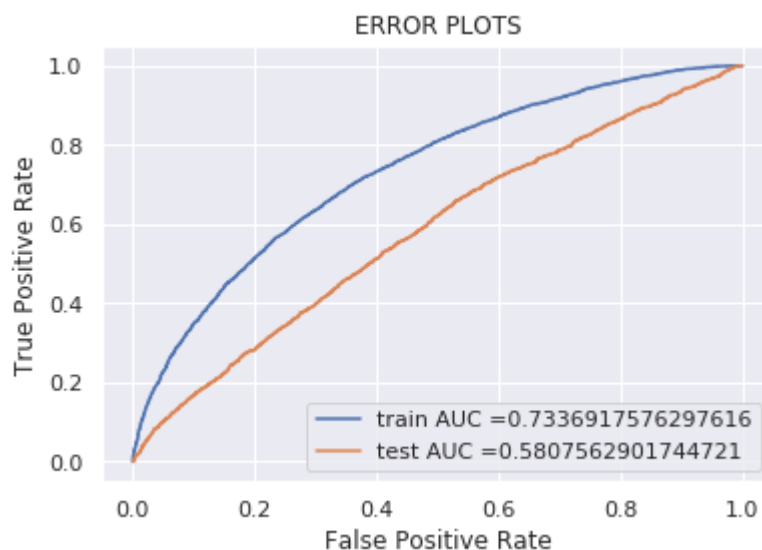


2.5.3 Confusion matrix- AVG_W2V

```
In [0]: # https://stackoverflow.com/questions/35572000/how-can-i-plot-a-confusion-matrix
#function to get heatmap confusion matrix
def get_confusion_matrix(clf,X_te,y_test):
    y_pred = clf.predict(X_te)
    df_cm = pd.DataFrame(confusion_matrix(y_test, y_pred), index=['Actual NO','Actual YES'], columns=['Predicted NO','Predicted YES'])
    sns.heatmap(df_cm, annot=True,annot_kws={"size": 16}, fmt='g')
# %%time
get_confusion_matrix(clf11,X_avg_w2v_test,y_test)
```

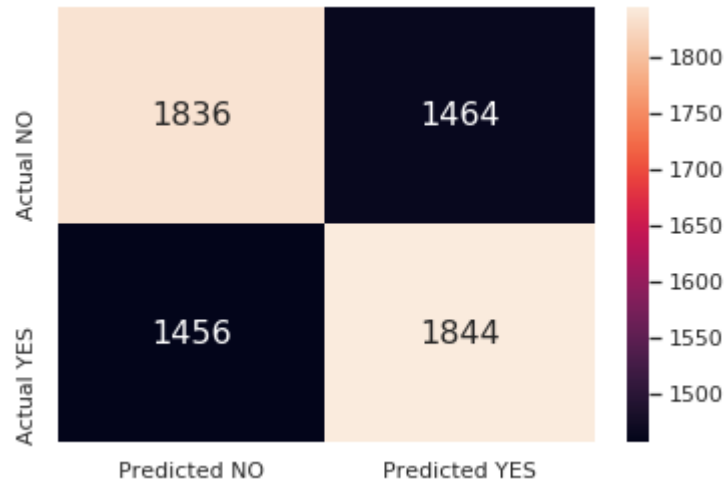

```
In [0]: # https://stackoverflow.com/questions/35572000/how-can-i-plot-a-confusion-matrix
#function to get heatmap confusion matrix
def get_confusion_matrix(clf,X_te,y_test):
    y_pred = clf.predict(X_te)
    df_cm = pd.DataFrame(confusion_matrix(y_test, y_pred), index = ['Actual NO','Actual YES'], columns = ['Predicted NO','Predicted YES'])
    sns.heatmap(df_cm, annot=True,annot_kws={"size": 16}, fmt='g')
# %%time
get_confusion_matrix(clf11,X_avg_w2v_train,y_train)
```

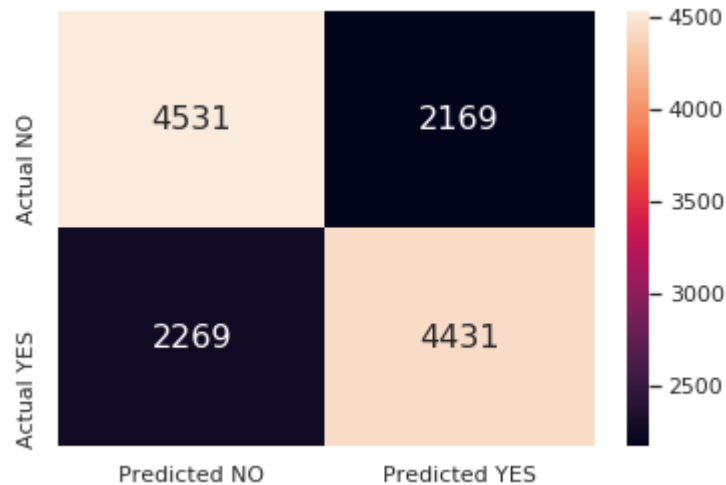

Selecting the Best features from the model

```
In [0]: # from sklearn.feature_selection import SelectFromModel
# from sklearn.linear_model import LogisticRegression
# from sklearn.linear_model import SGDClassifier

# selector = SelectFromModel(estimator=SGDClassifier(max_depth=None,class_weight='balanced'))
# selector.estimator_.coef_
# selector.threshold_
# selector.get_support()
```

```
In [0]: x=X_avg_w2v_train
x1=X_avg_w2v_test
X_avg_w2v_train=None
X_avg_w2v_test=None
gc.collect()
# X_Tfidf_train.shape
# X_Tfidf_test.shape
```

Out[60]: 3693


2.5.4 Applying GBDT & GridSearchCV on Train data to obtain the best C


```
In [0]: from sklearn.metrics import roc_auc_score
import matplotlib.pyplot as plt
from sklearn.model_selection import train_test_split
from sklearn.model_selection import GridSearchCV
from sklearn.model_selection import cross_val_score
from sklearn.tree import DecisionTreeClassifier
from sklearn.ensemble import GradientBoostingClassifier
from sklearn.model_selection import RandomizedSearchCV

Gt1 = GradientBoostingClassifier(min_samples_split=15)
parameters = {'n_estimators': [5,10,20,40,60,80,100,150,200], 'max_depth': [2,3,4,5,6,7,8,11]}
clf1 = RandomizedSearchCV(Gt1, parameters, cv=2, scoring='roc_auc', return_train_score=True)
sel = clf1.fit(x, y_train)

import seaborn as sns; sns.set()
max_scores1 = pd.DataFrame(clf1.cv_results_).groupby(['param_max_depth', 'param_n_estimators'])
fig, ax = plt.subplots(1,2, figsize=(20,6))
sns.heatmap(max_scores1.mean_train_score, annot = True, fmt='.4g', ax=ax[0])
sns.heatmap(max_scores1.mean_test_score, annot = True, fmt='.4g', ax=ax[1])
ax[0].set_title('Train Set')
ax[1].set_title('CV Set')
plt.show()

# clf1.cv_results_.keys()
```

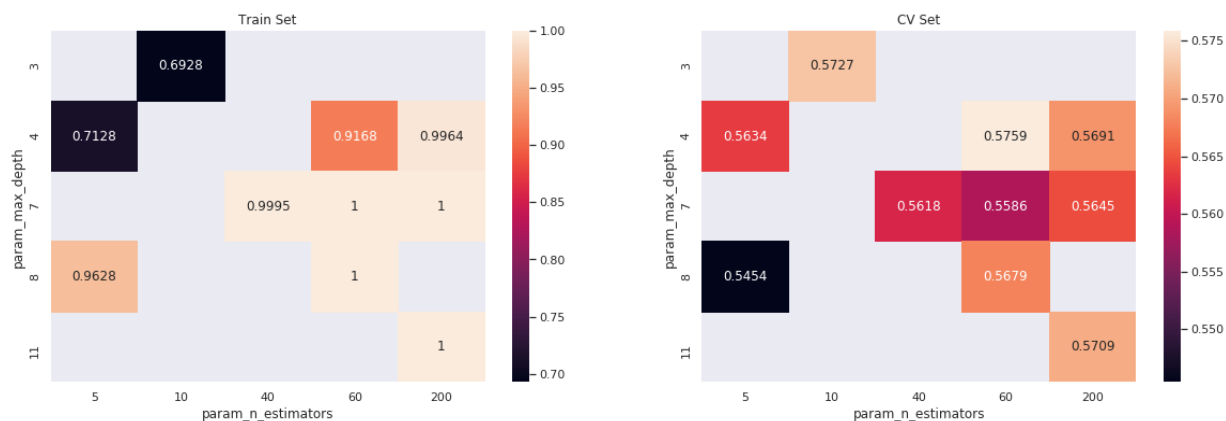

```
In [0]: #Best Estimator and Best tune parameters
print(clf1.best_estimator_)
#Mean cross-validated score of the best_estimator
print(clf1.score(x,y_train))
print(clf1.score(x1,y_test))
```

```
GradientBoostingClassifier(ccp_alpha=0.0, criterion='friedman_mse', init=None,
                           learning_rate=0.1, loss='deviance', max_depth=4,
                           max_features=None, max_leaf_nodes=None,
                           min_impurity_decrease=0.0, min_impurity_split=None,
                           min_samples_leaf=1, min_samples_split=15,
                           min_weight_fraction_leaf=0.0, n_estimators=60,
                           n_iter_no_change=None, presort='deprecated',
                           random_state=None, subsample=1.0, tol=0.0001,
                           validation_fraction=0.1, verbose=0,
                           warm_start=False)

0.8182074961015816
0.5856307621671257
```

```
In [0]: best_tune_parameters=[{'n_estimators':[60], 'max_depth':[4] } ]
```


2.5.5 Receiver Operating Characteristic- (AVG_W2V)

```

In [0]: # https://scikitlearn.org/stable/modules/generated/sklearn.metrics.roc_curve.html
from sklearn.metrics import roc_curve, auc
from sklearn.tree import DecisionTreeClassifier
from sklearn.metrics import roc_curve, auc


clf11= GradientBoostingClassifier(max_depth=4,n_estimators=60)
# clfV1=DecisionTreeClassifier (class_weight = 'balanced',max_depth=10,min_sample
clf11.fit(x, y_train)
# for visulation
# clfV1.fit(X_Tfidf_train, y_train)
#https://scikitlearn.org/stable/modules/generated/sklearn.linear_model.SGDClassifier
y_train_pred1 = clf11.predict_proba(x)[:,1]
y_test_pred1 = clf11.predict_proba(x1)[:,1]
train_fpr1, train_tpr1, tr_thresholds1 = roc_curve(y_train, y_train_pred1)
test_fpr1, test_tpr1, te_thresholds1 = roc_curve(y_test, y_test_pred1)
plt.plot(train_fpr1, train_tpr1, label="train AUC =" +str(auc(train_fpr1, train_tpr1)))
plt.plot(test_fpr1, test_tpr1, label="test AUC =" +str(auc(test_fpr1, test_tpr1)))
plt.legend()
plt.xlabel("False Positive Rate")
plt.ylabel("True Positive Rate")
plt.title("ERROR PLOTS")
plt.grid(True)
plt.show()

```

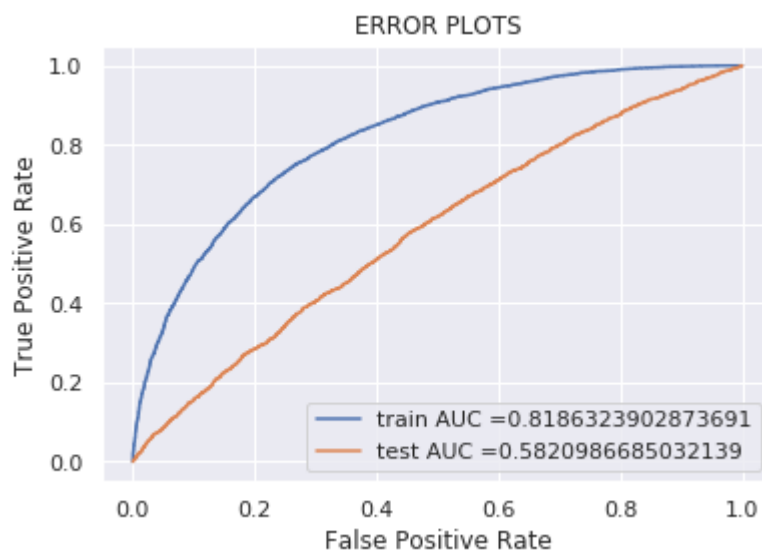

2.5.6 Confusion matrix- AVG_W2V

```
In [0]: # https://stackoverflow.com/questions/35572000/how-can-i-plot-a-confusion-matrix
#function to get heatmap confusion matrix
def get_confusion_matrix(clf,X_te,y_test):
    y_pred = clf.predict(X_te)
    df_cm = pd.DataFrame(confusion_matrix(y_test, y_pred), index = ['Actual NO', 'Actual YES'], columns = ['Predicted NO', 'Predicted YES'])
    sns.heatmap(df_cm, annot=True,annot_kws={"size": 16}, fmt='g')
# %%time
get_confusion_matrix(clf11,x1,y_test)
```

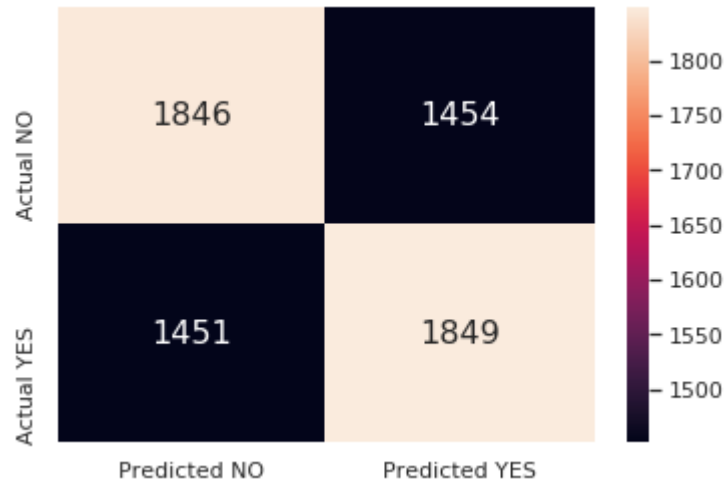

```
In [0]: # https://stackoverflow.com/questions/35572000/how-can-i-plot-a-confusion-matrix
#function to get heatmap confusion matrix
def get_confusion_matrix(clf,X_te,y_test):
    y_pred = clf.predict(X_te)
    df_cm = pd.DataFrame(confusion_matrix(y_test, y_pred), index=['Actual NO','Actual YES'], columns=['Predicted NO','Predicted YES'])
    sns.heatmap(df_cm, annot=True,annot_kws={"size": 16}, fmt='g')
# %%time
get_confusion_matrix(clf11,x,y_train)
```



```
In [0]: #To make best use of the memory we are setting the variable names to 'None' and
# X_avg_w2v_test=None
# X_avg_w2v_train=None
# y_avg_w2v_train=None
x=None
x1=None
gc.collect()
```

2.10 Pretty table summary

```
In [2]: #http://zetcode.com/python/prettytable/
from prettytable import PrettyTable

x = PrettyTable()
x.field_names = ["Vectorizer", "Model", "n_estimators", "max_depth", "Test-AUC"]

x.add_row(["BOW ", "RF", '40', '8', 68.16])
x.add_row(["BOW ", "GBDT", '200', '2', 70.16])
x.add_row(["TFIDF", "RF", '60', '7', 68.16])
x.add_row(["TFIDF", "GBDT", '80', '5', 69.67])
x.add_row(["TFIDF_weighted_W2V", "RF", '45', '3', 57.45])
x.add_row(["TFIDF_weighted_W2V", "GBDT", '80', '2', 58.80])
x.add_row(["AVG_W2V", "RF", '45', '5', 58.07])
x.add_row(["AVG_W2V", "GBDT", '60', '4', 58.20])

print(x)
```

Vectorizer	Model	n_estimators	max_depth	Test-AUC
BOW	RF	40	8	68.16
BOW	GBDT	200	2	70.16
TFIDF	RF	60	7	68.16
TFIDF	GBDT	80	5	69.67
TFIDF_weighted_W2V	RF	45	3	57.45
TFIDF_weighted_W2V	GBDT	80	2	58.8
AVG_W2V	RF	45	5	58.07
AVG_W2V	GBDT	60	4	58.2

```
In [ ]:
```