



fig01 dual cell accuracy

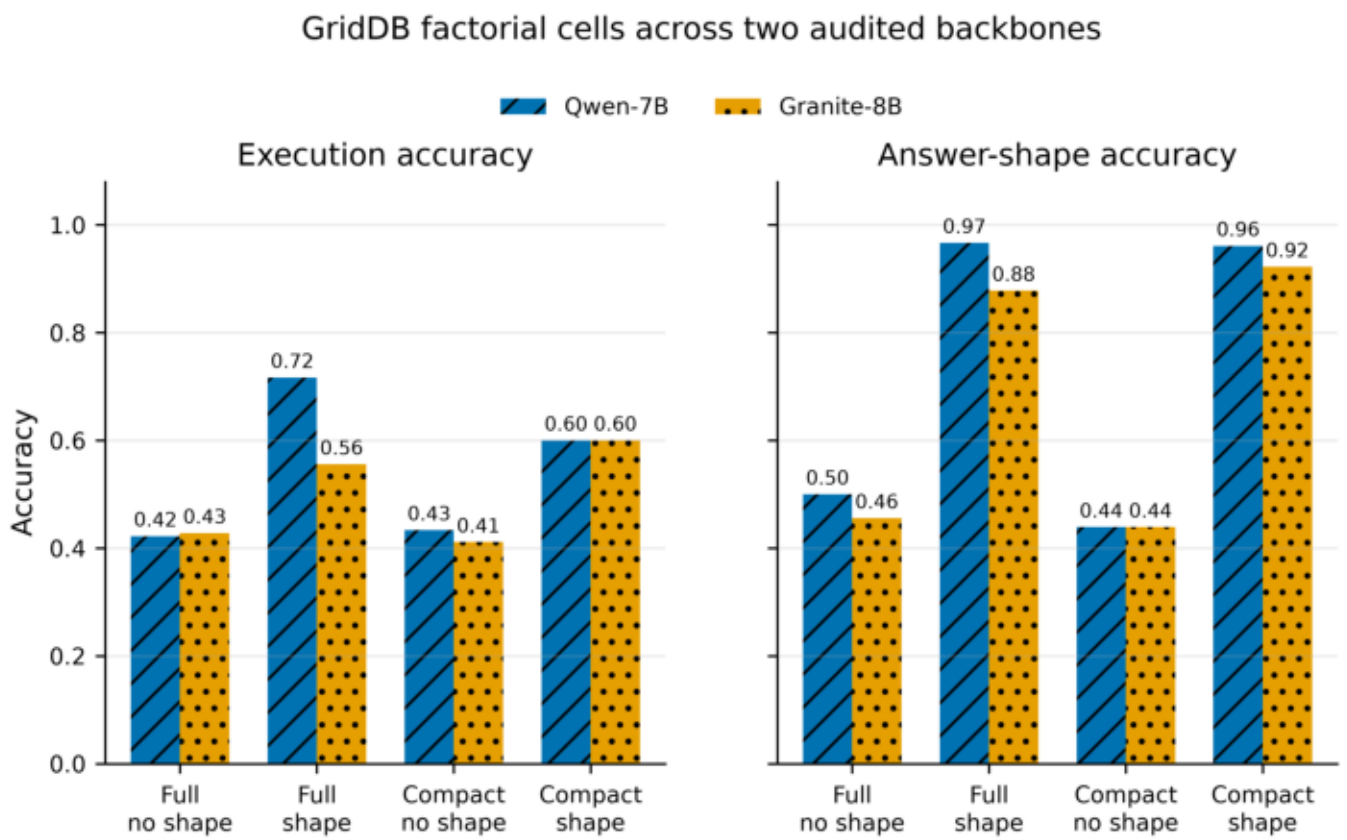


Two quantized instruction backbones (Qwen2.5-Coder-7B Q4_K_M and Granite-3.3-8B Q4_K_M), one GridDB; bounded sensitivity, not general model-family robustness.

fig02 backbone factorial effects

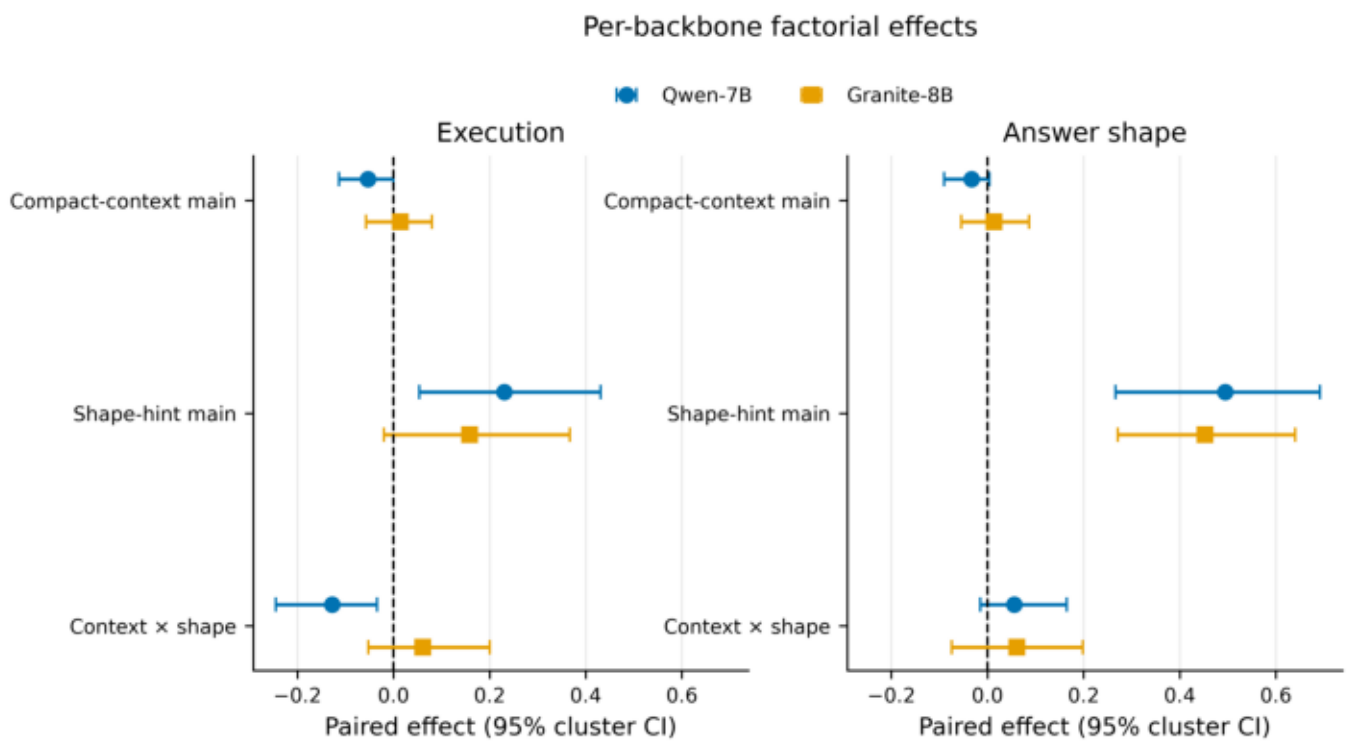


Two quantized instruction backbones (Qwen2.5-Coder-7B Q4_K_M and Granite-3.3-8B Q4_K_M), one GridDB; bounded sensitivity, not general model-family robustness.

fig03 backbone effect modifiers

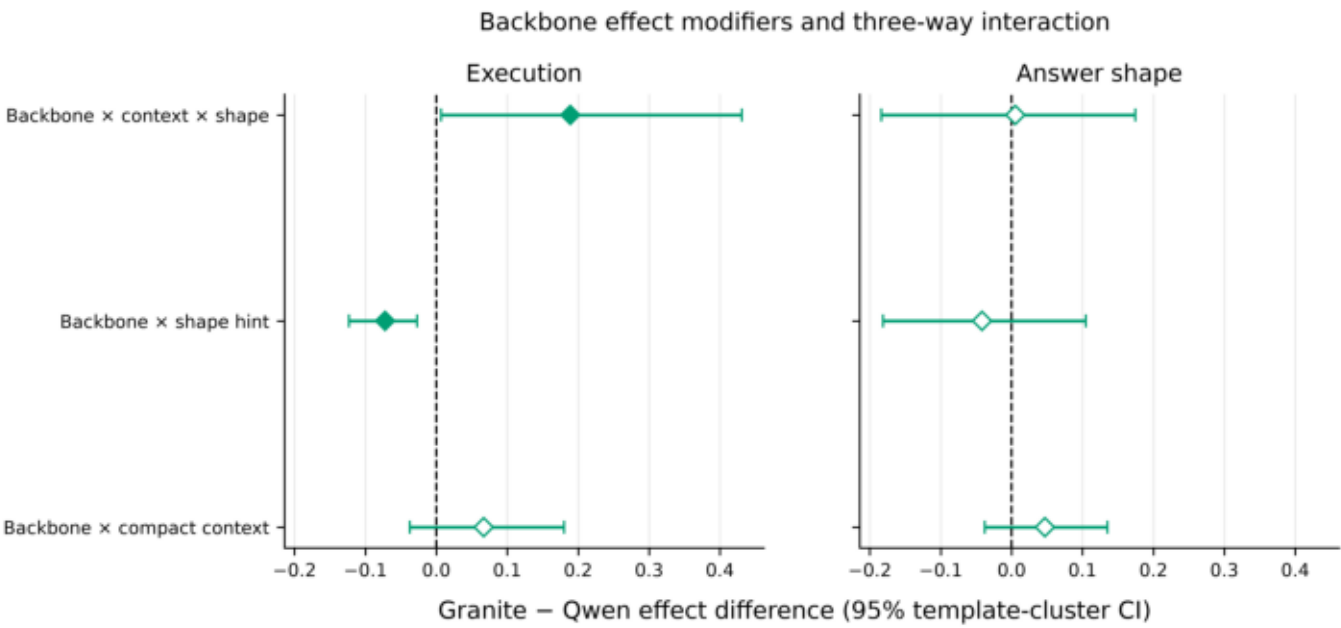


Two quantized instruction backbones (Qwen2.5-Coder-7B Q4_K_M and Granite-3.3-8B Q4_K_M), one GridDB; bounded sensitivity, not general model-family robustness.

fig04 shape effect replication

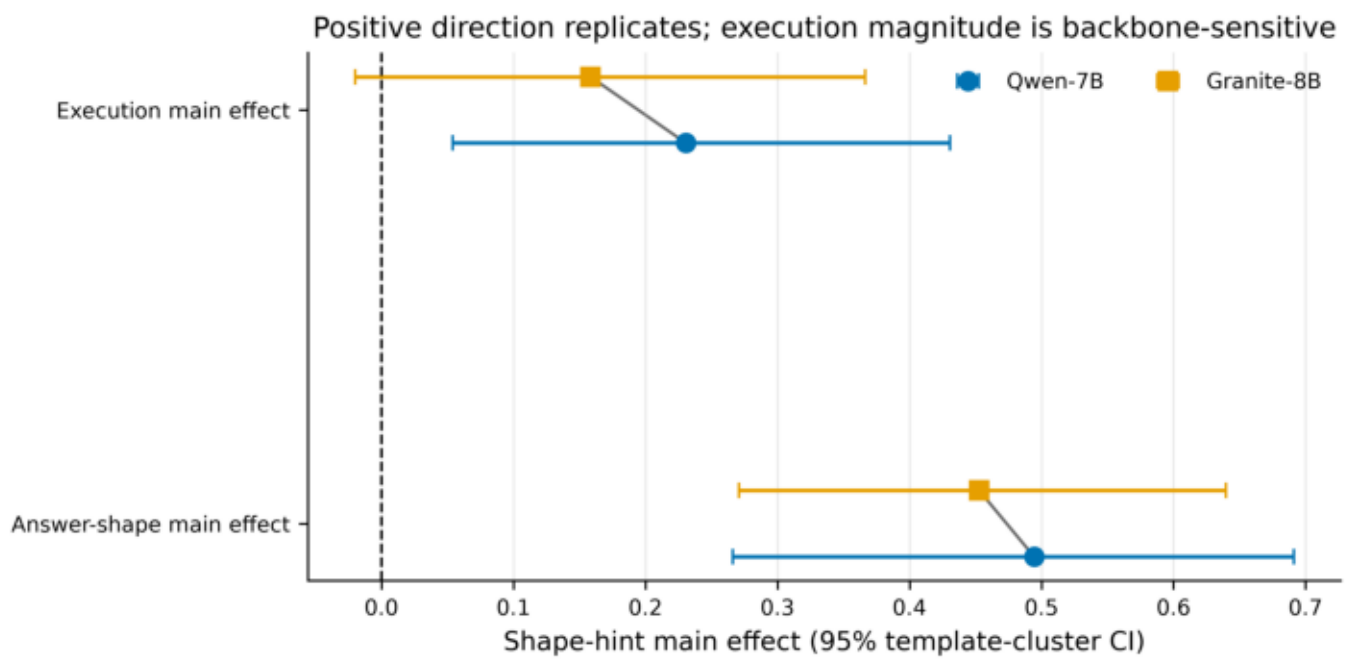

Two quantized instruction backbones (Qwen2.5-Coder-7B Q4_K_M and Granite-3.3-8B Q4_K_M), one GridDB; bounded sensitivity, not general model-family robustness.

fig05 cross backbone cells

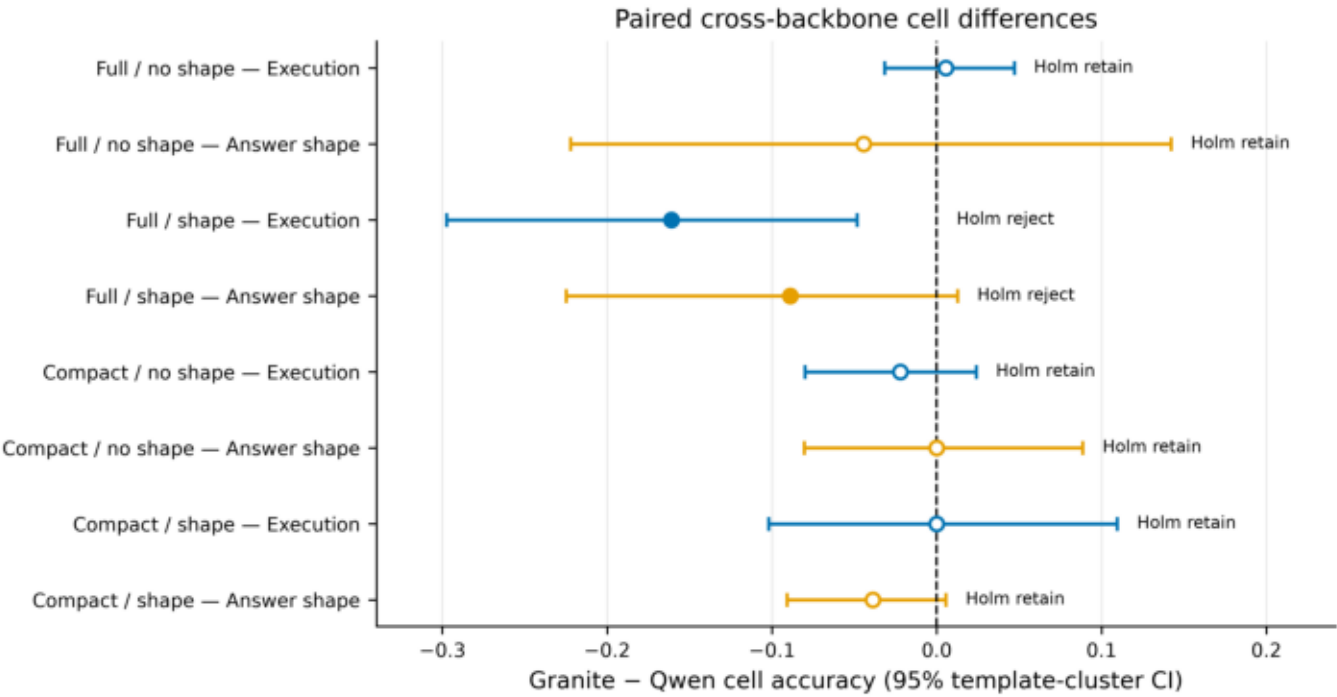

Two quantized instruction backbones (Qwen2.5-Coder-7B Q4_K_M and Granite-3.3-8B Q4_K_M), one GridDB; bounded sensitivity, not general model-family robustness.