


GRU learned-space retrieval as the matched benchmark use case

The target is method independent; raw and randomized spaces are attribution controls, and the target-hour transform is privileged.

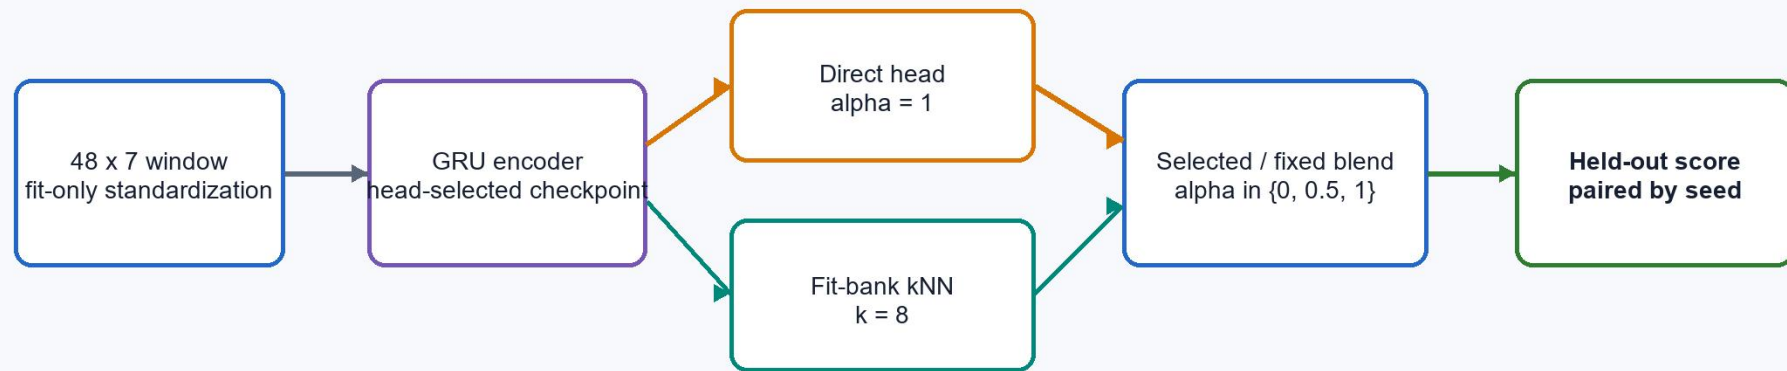

Matched retrieval spaces and external references

Learned

48-d forecasting-trained GRU embedding

Raw

336-d flattened standardized input

Randomized

48-d untrained GRU; same seed; zero updates

External

Persistence, Seasonal-24h, Ridge

Target-hour direct transform: construction/visibility audit only; never rank eligible.