BST Deletion of a Node with One Child

Scanned handwritten notes and flowchart

M0

BST Deletion of a Node with one child.

DATE:

1. Problem Statement.

Write a c++ program to delete a node having one child from a Binary Search Tree (BST). Display the updated BST using inorder traversal. Also, display the parent & child links affected by deletion, handle deletion of the root node when it has one child, & check whether the requested key is absent.

2. objective.

To implement deletion of a node with one child in a Binary Search Tree & understand how the links are updated after deletion.

3. Algorithm

1. Start
2. Create an empty Binary Search Tree.
3. Read the number of nodes & insert the elements into the BST.
4. Enter the key to be deleted.
5. Search for the key in the BST.
6. If the key is not found, display "key not found in BST".
7. If the node has two children, display a message & do not delete it.


FOR EDUCATIONAL USE

DATE:

DATE:

8. If the node has one child, connect it's parent to its child.
9. If the node is the root, make its child the new root.
10. Delete the selected node & display the affected links.
11. Display the Updated BST using inorder traversal.
12. stop.

DATE:

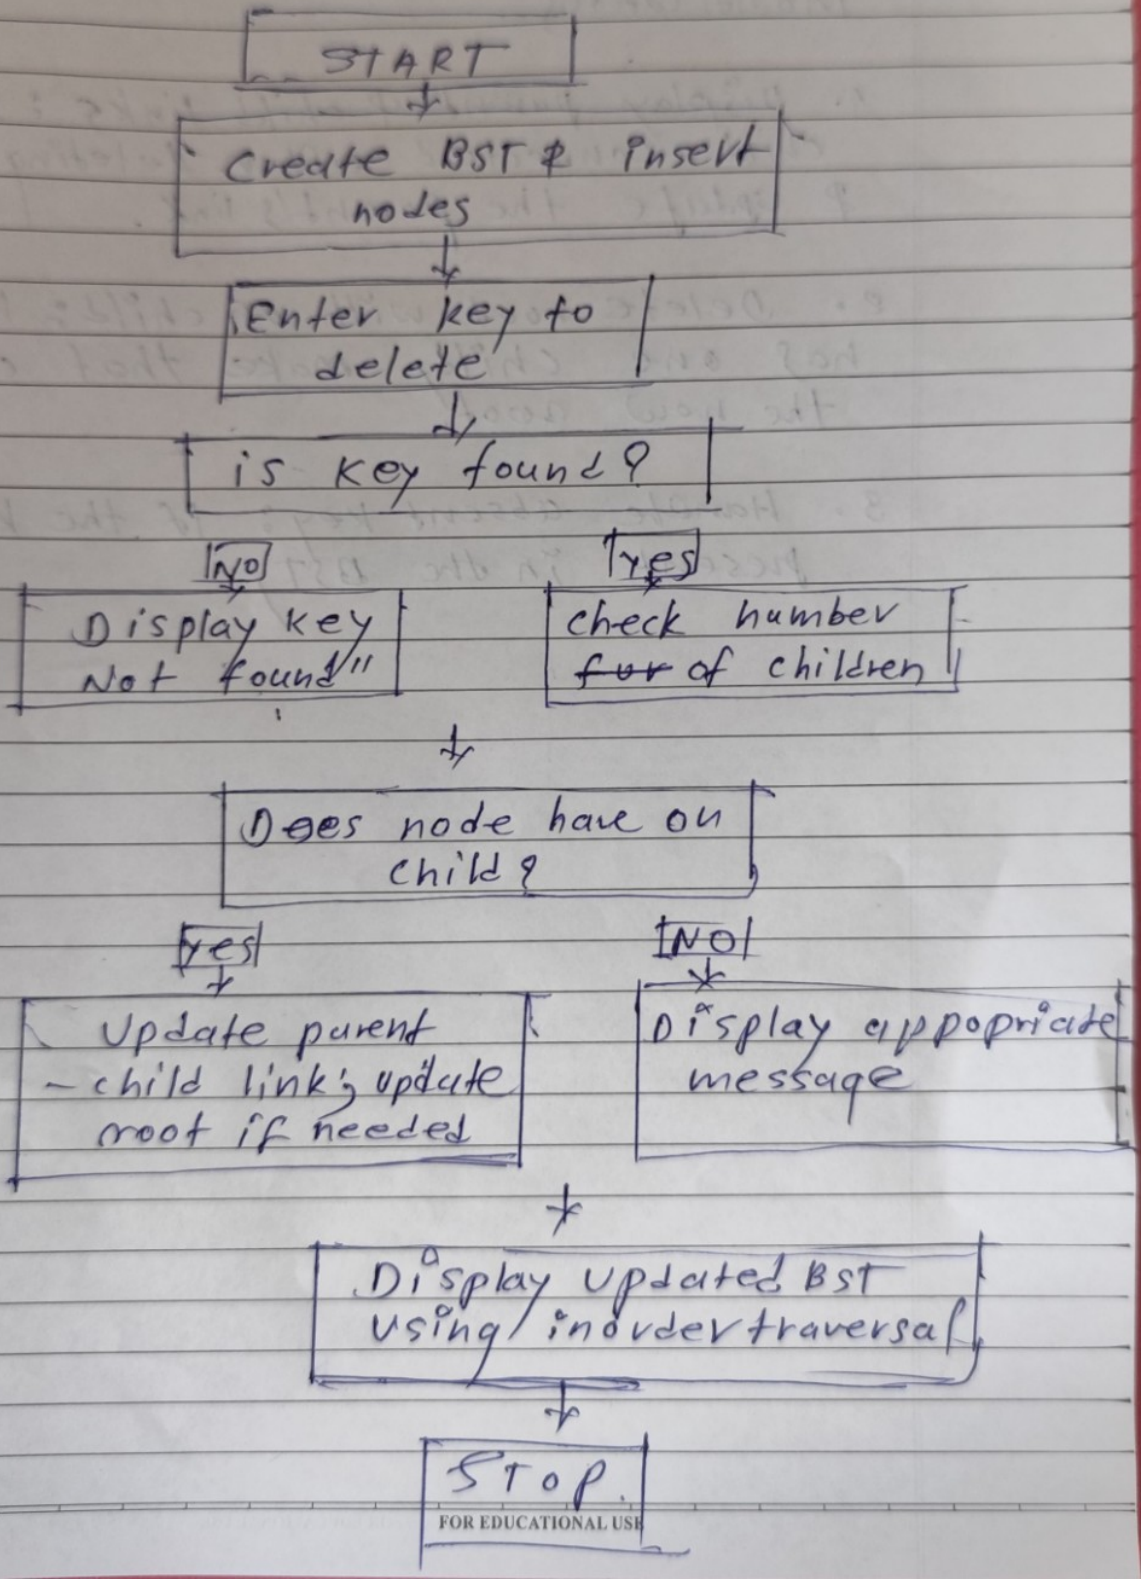

FOR EDUCATIONAL USE