

SPAN CLASSES

Use these classes to set the width of a column

.span-1	.span-13
.span-2	.span-14
.span-3	.span-15
.span-4	.span-16
.span-5	.span-17
.span-6	.span-18
.span-7	.span-19
.span-8	.span-20
.span-9	.span-21
.span-10	.span-22
.span-11	.span-23
.span-12	.span-24

APPEND CLASSES

Add these to a column to add empty columns to the right.

.append-1	.append-13
.append-2	.append-14
.append-3	.append-15
.append-4	.append-16
.append-5	.append-17
.append-6	.append-18
.append-7	.append-19
.append-8	.append-20
.append-9	.append-21
.append-10	.append-22
.append-11	.append-23
.append-12	

PREPEND CLASSES

Add these to a column to add empty columns to the left.

.prepend-1	.prepend-13
.prepend-2	.prepend-14
.prepend-3	.prepend-15
.prepend-4	.prepend-16
.prepend-5	.prepend-17
.prepend-6	.prepend-18
.prepend-7	.prepend-19
.prepend-8	.prepend-20
.prepend-9	.prepend-21
.prepend-10	.prepend-22
.prepend-11	.prepend-23
.prepend-12	

PUSH/PULL CLASSES

Use these classes on an element to **push** it right into the next column, or **pull** it left into the previous column.

.pull-1	.push-1
.pull-2	.push-2
.pull-3	.push-3
.pull-4	.push-4
... up to up to ...
.pull-24	.push-24



blueprintcss
spend your time innovating, not replicating.
version 0.7.2

Blueprint CSS version 0.7.2 (<http://www.blueprintcss.org>)

Copyright © 2007-2008 Olav Bjorkoy (<http://bjorkoy.com>)

Cheat sheet v.1.7 by Gareth J M Saunders, based on Help Sheet v.0.3 by Alejandro Vasquez

STYLESHEET LINK

Download the latest version from <http://www.blueprintcss.org> and add these lines into the <head> of your page. Check that your href path is correct.

```
<link rel="stylesheet" href="blueprint/screen.css" type="text/css"
      media="screen, projection" />
<link rel="stylesheet" href="blueprint/print.css" type="text/css"
      media="print" />
<!--[if lt IE 8]>
<link rel="stylesheet" href="blueprint/ie.css" type="text/css"
      media="screen, projection" />
<![endif]-->
```

USAGE

```
<body>
  <div class="container">
    <div class="span-16">
      <p>Column 1</p>
    </div>
    <div class="span-8 last">
      <p>Column 2</p>
    </div>
  </div>
</body>
```

div.span-x implies a column. Remember to use ".last" for the last column of the row to avoid it jumping to the next row. Columns can be **nested** inside one another.

TYPOGRAPHY


typography.css sets up some sensible default typography. The **font-size** percentage is of 16px (0.75 x 16px = 12px). Line-heights and vertical margins are automatically calculated from this in ems.

The base **line-height** is 18px (1.5em). This means that every element, from line-heights to images have a height that is a multiple of 18 (or 1.5 if you use ems).

h1-h6 color is #111 (nearly black); body **color** is #222 (dark grey); **font-family** is "Helvetica Neue", "Helvetica", "Arial", sans-serif.

GRID defined in grid.css.

Each column is 30px wide with a 10px margin, except the last which has no margin. If you need more or fewer columns use this formula to find the new total width: **total width = (columns x 40px) - 10px**

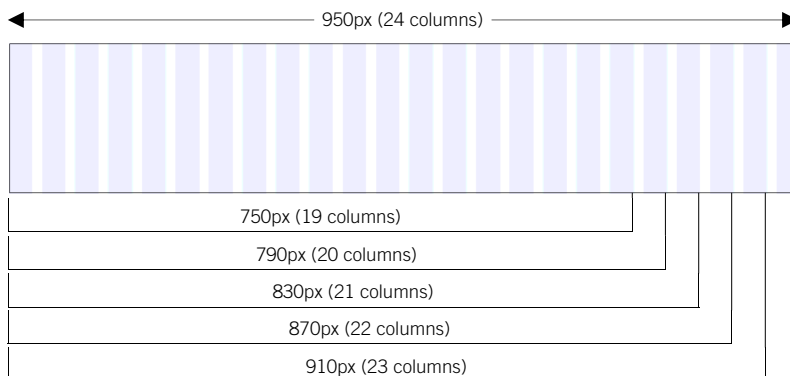

GRID CLASSES

.append-x	Add these to a column to append empty columns; x = 1 to 23.
.border	Shows a border on the right hand side of a column; use on <div>.
.box	Creates a padded box inside a column. (padding: 1.5em; margin-bottom: 1.5em;).
.clear	Regular clearing: apply to a column that should drop below previous ones.
.clearfix	Clearing floats without extra markup. (See http://tinnyurl.com/dh352)
.colborder	Spans one column with a border in the centre.
.container	A container should group all your columns; use on <div>.
div.last	The last column in a row needs this class; use on <div>.
.prepend-x	Add these to a column to prepend empty columns; x = 1 to 23.
.pull-x	Use these classes on an element to pull it left into the previous column; x = 1 to 24.
.push-x	Use these classes on an element to push right it into the next column; x = 1 to 24.
.showgrid	Use this on any div.span / div.container to see the grid.
hr.space	Use this to create a horizontal ruler across a column; can also simply use <hr />.
div.span-x	Use these classes to set the width of a column; x = 1- to 4; use on <div>.

html
reset.css
grid.css
typography.css
forms.css
ie.css

RESET defined in reset.css.

Blueprint CSS resets all browsers' default tags to:

- margin, padding, border: 0
- font-size: 100%
- font-weight: normal
- other font values: inherit
- image borders: 0

Tables still need "cellspacing="0" in the markup though.

TYPOGRAPHY CLASSES

These classes are defined in the **typography.css** file. Other typographic tags as also redefined in this file.

.small	0.8em; line 1.875
.large	1.2em; line 2.5
.hide	display none
.quiet	color #666 (grey)
.loud	color #000 (black)
.highlight	bg #ff0 (yellow)
.added	bg #060 (green)
.removed	bg #900 (red)
.first	mL 0; pL 0
.last	mR 0; pR 0
.top	mT 0; pT 0
.bottom	mB 0; pB 0
img.left	float left; margin
img.right	float right; margin

FORMS

These are defined in the **forms.css** file.

.error	red framed box
.notice	yellow framed box
.success	green framed box
input.text	w 300px pad 5px
input.title	font-size 1.5em
textarea	w 390px h 250px
select	w 200px
label	bold
fieldset	padding 1.4em
legend	font-size 1.2em

IE FIXES

ie.css contains every hack for Internet Explorer.

IE all	Fix margin bugs
	Line height on sub/sup
IE 5	Centre layout
IE 6	Fix legend bug
IE 6 & 7	Fix numbers
	Fix <hr/> margins
IE 7	Fix <code> wrap