

# Data Engineering Capstone Project

## Q&A on ArXiv Kaggle dataset

*By Gari Ciodaro Guerra*

Sept 24, 2020

### Abstract

This document intends to give theoretical support and context to the built application [arXiv-haystack-app](#). Using [Arxiv](#) and Neural Information Processing Systems (NIPS) datasets I created an relational database model that allows the user to do Ad-Hoc queries for analytics. Using [haystack](#) the application allows for question and answering on user defined abstracts of the database.

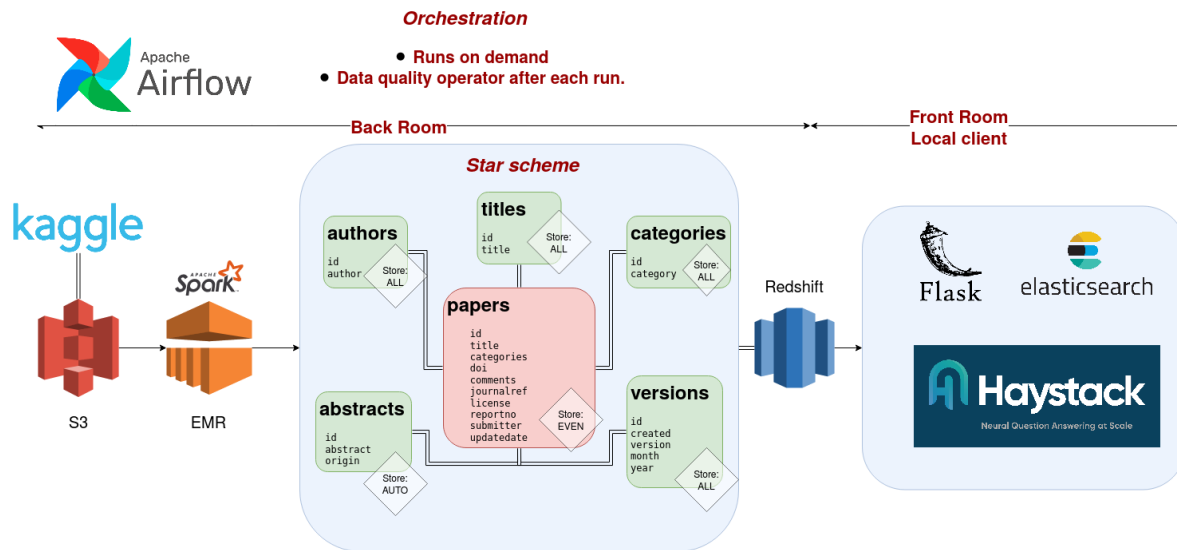


Figure 1: Project Architecture

**Keywords**— S3, Amazon Elastic MapReduce, Pyspark, Airflow, Redshift, Flask, NLP, Q&A, Haystack, Machine Learning, Full stack development, Data Engineering.

# 1 Introduction

The application is the last requirement to graduate from Udacity's Data Engineering Nano degree. The following is the overview of the project as stated on Udacity page course.

*The purpose of the data engineering capstone project is to give you a chance to combine what you've learned throughout the program. This project will be an important part of your portfolio that will help you achieve your data engineering-related career goals.*

## 1.1 My vision

The project has two big parts. The backend was designed to run on the cloud. From storage on S3, both the raw files and the parquet model to EMR processing and Relational database on Redshift. This would allow various applications to be served by this back-end. The other part would be the front end, on local/client side, this means that local user is expected to have the web interface on flask. This would allow him/her to query the Redshift database plus the added capability of asking a question on papers of interest. I image a local user, setting up the flask app, and then exploring the database with it, then later, indexing on to his local elastic-search server, the abstract and title of paper of interests, this could mean filtering by a particular topic, year, or author. After the indexing, the user can ask questions of the type *what do we know about the uncertainty principle?*. The answer will come on the form of a bootstrap card, with scores, possible answers, full paper URL pdf access to the document. The question and answering system is possible with [haystack](#). The following are the core features of haystack on their github.

- Powerful ML models: Utilize all latest transformer based models (BERT, ALBERT, RoBERTa ...)
- Modular & future-proof: Easily switch to newer models once they get published.
- Developer friendly: Easy to debug, extend and modify.
- Scalable: Production-ready deployments via Elasticsearch backend & REST API
- Customizable: Fine-tune models to your own domain & improve them continuously via user feedback

## 2 Gathering of Data

I used the [Arxiv](#) and Neural Information Processing Systems ([NIPS](#)) datasets from kaggle. On listing 1 we can see raw schema of the files. Arxiv in json format and NIPS is on csv files. I hosted both files on a S3: `s3a://arxiv3/input_data/arxiv-metadata-oai-snapshot.json`, `s3a://arxiv3/input_data/NIPS.csv`. To upload the data to s3, I had to create an EC2 instance, install `miniconda`, `kaggle` library and aws client (see listing 2).

Listing 1: Datasets Schema

```
>>> df_arxiv.printSchema()
root
 |-- abstract: string (nullable = true)
 |-- authors: string (nullable = true)
 |-- authors_parsed: array (nullable = true)
 |   |-- element: array (containsNull = true)
 |   |   |-- element: string (containsNull = true)
 |-- categories: string (nullable = true)
 |-- comments: string (nullable = true)
 |-- doi: string (nullable = true)
 |-- id: string (nullable = true)
 |-- journal-ref: string (nullable = true)
 |-- license: string (nullable = true)
 |-- report-no: string (nullable = true)
 |-- submitter: string (nullable = true)
```

```

|-- title: string (nullable = true)
|-- update_date: string (nullable = true)
|-- versions: array (nullable = true)
|   |-- element: struct (containsNull = true)
|   |   |-- created: string (nullable = true)
|   |   |-- version: string (nullable = true)
|
>>> df_papers_nips.printSchema()
root
|-- id: string (nullable = true)
|-- year: string (nullable = true)
|-- title: string (nullable = true)
|-- abstract: string (nullable = true)

```

Listing 2: From kaggle to S3 file transfer.

```

# on a EC2 instance , install miniconda
Wget https://repo.anaconda.com/miniconda/Miniconda3-latest-Linux-x86_64.sh
bash https://repo.anaconda.com/miniconda/Miniconda3-latest-Linux-x86_64.sh
source .bashrc

# install kaggle library
pip install kaggle

# provide your kaggle credentials and change security of file
chmod 600 ~/.kaggle/kaggle.json

# get the dataset
kaggle datasets download Cornell-University/arxiv

# install aws client
curl "https://awscli.amazonaws.com/awscli-exe-linux-x86_64.zip" -o "awscliv2.zip"
unzip awscliv2.zip
sudo ./aws/install

# copy EC2 file to s3
aws s3 cp ./arxiv-metadata-oai-snapshot.json s3://arxiv3/input_data/

```

I used this data to serve a web application. The idea is to combine both datasets, in a star relational model, so that, analytics and machine learning can be performed with the papers.

## 2.1 About ArXiv Dataset

For nearly 30 years, ArXiv has served the public and research communities by providing open access to scholarly articles, from the vast branches of physics to the many subdisciplines of computer science to everything in between, including math, statistics, electrical engineering, quantitative biology, and economics. This rich corpus of information offers significant, but sometimes overwhelming depth.

In these times of unique global challenges, efficient extraction of insights from data is essential. To help make the arXiv more accessible, we present a free, open pipeline on Kaggle to the machine-readable arXiv

dataset: a repository of 1.7 million articles, with relevant features such as article titles, authors, categories, abstracts, full text PDFs, and more.

Our hope is to empower new use cases that can lead to the exploration of richer machine learning techniques that combine multi-modal features towards applications like trend analysis, paper recommender engines, category prediction, co-citation networks, knowledge graph construction and semantic search interfaces.

ArXiv is a collaboratively funded, community-supported resource founded by Paul Ginsparg in 1991 and maintained and operated by Cornell University.

## 2.2 About NIPS Dataset

Neural Information Processing Systems (NIPS) is one of the top machine learning conferences in the world. It covers topics ranging from deep learning and computer vision to cognitive science and reinforcement learning.

This dataset includes the title, authors, abstracts, and extracted text for all NIPS papers to date (ranging from the first 1987 conference to the current 2016 conference). I've extracted the paper text from the raw PDF files and are releasing that both in CSV files and as a SQLite database

## 3 Exploration

On the web application under the *EDA* tab, it is possible to plot the current tendency on paper volume per year, and a distribution of the topics <sup>1</sup>. We see that papers increment exponentially with years, and also that the most popular topics are computer science, Math and Physics. The popularity of topics is always the same, since 2000.

### 3.1 Raw Volume and Uniqueness of the datasets.

From listing 3 we can see that in ArXiv dataset there are 3 papers duplicated, whereas NIPS has none. On listing ?? we can observe that there ArXiv contains 32982 rows completed informed, however we more interested on the abstracts of the papers, and the id. By constraining the null statement, we now have 1753042 row informed. NIPS has all the row filled.

Listing 3: Volume and Uniqueness

```
>>> df_arxiv = spark.read.json(input_data_1)
>>> df_arxiv.persist()
>>> df_papers_nips = spark.read.format("csv")...
>>> df_arxiv.select("id").distinct().count()
1753039
>>> df_arxiv.select("id").count()
1753042
>>> df_papers_nips.select("id").distinct().count()
3946
>>> df_papers_nips.select("id").count()
3946
```

---

<sup>1</sup>The application will query redshift to get the current state

### Papers over years?

**Question** Is there a tendency on the paper production per year?

**R. as 2020 Sept.** Exponential tendency

**Query.** select year,count (distinct id) from versions group by year

Plot

### Popular Macro-Taxonomy

**Question** Is there any predominant topic on Arxiv?

**R. as 2020 Sept.** Computer science, Math, and Physics.

**Query.** select year,category, count(a.id) as count\_id from (select id, category from categories) a left join (select

Plot

Frequency of paper by macro-category

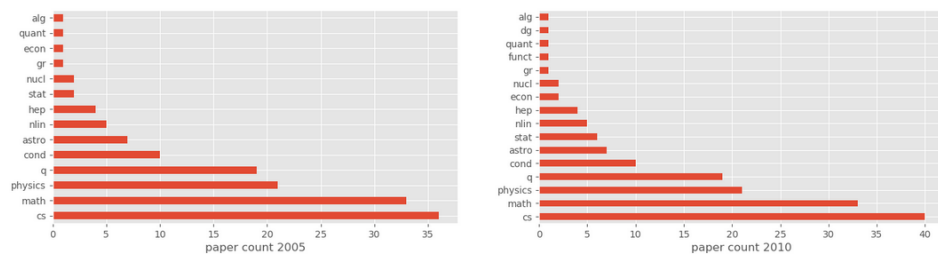


Figure 2: Exploratory plots on Database.

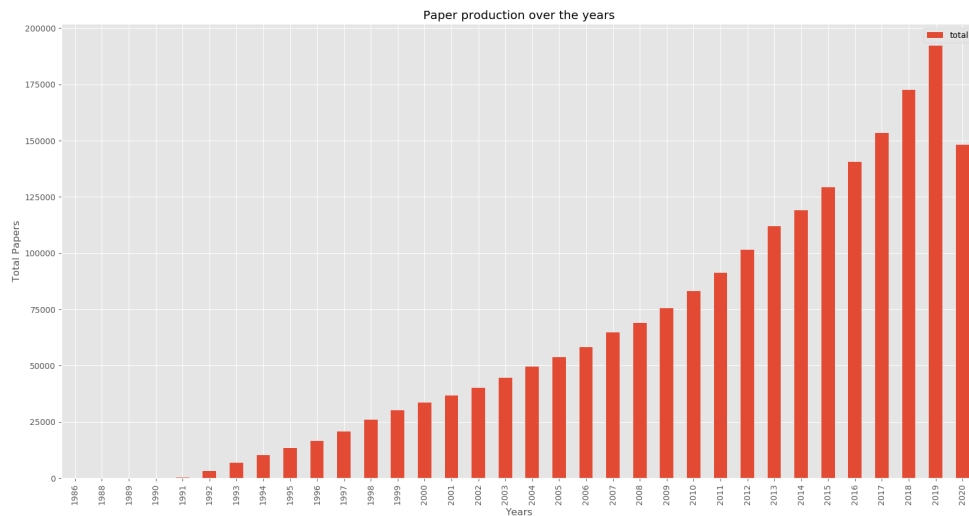


Figure 3: Paper production per year as Sept.2020

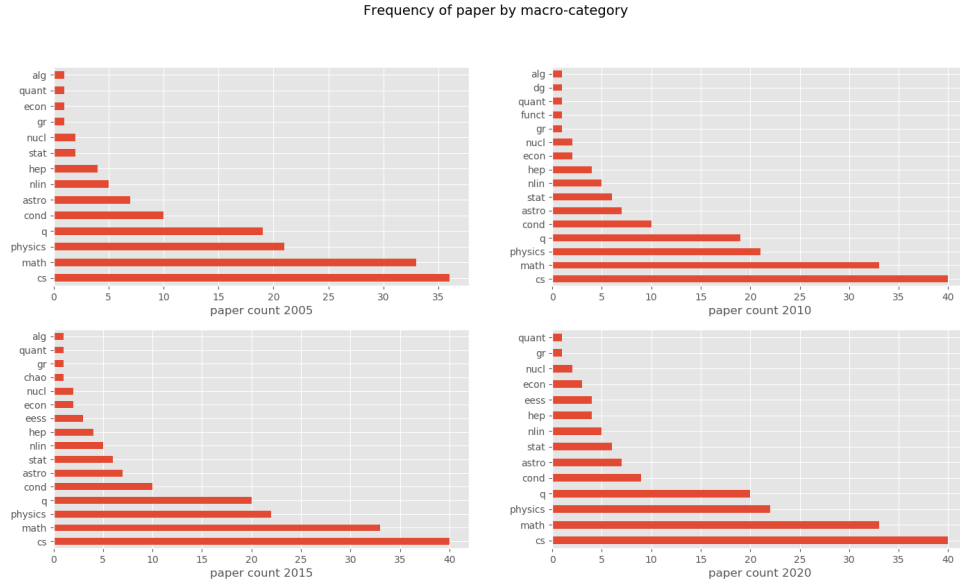


Figure 4: Popular topics in 2000 20010 2015 2020

Listing 4: Completeness of the Datasets

```
>>> df_arxiv.dropna().count()
32982
>>> df_arxiv.dropna(subset=('id', 'abstract')).count()
1753042
>>> df_papers_nips.dropna().count()
3924
```

### 3.2 Assessment

Since both data sets come from kaggle, they have great quality. Additionally, constraints on redshift enforce primary key uniqueness and nullity, so no further quality were required.

## 4 Application Architecture and Workflow.

## Appendix A   Code Repository

All the code implemented and utilized during the execution of the data workflow described in this report is available at the GitHub repository <https://github.com/gariciodaro/arXiv-haystack-app>.