


Natas Level 1 - Level 2

Jump straight in and we are presented with a message on the screen.

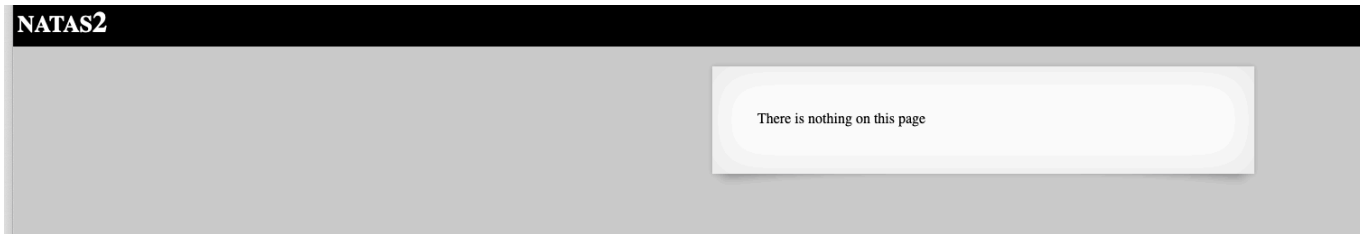

Lets view the source code.

```
<html>
<head>
<!-- This stuff in the header has nothing to do with the level -->
<link rel="stylesheet" type="text/css" href="
[http://natas.labs.overthewire.org/css/level.css](view-
source:http://natas.labs.overthewire.org/css/level.css)">
<link rel="stylesheet" href="[http://natas.labs.overthewire.org/css/jquery-
ui.css](view-source:http://natas.labs.overthewire.org/css/jquery-ui.css)" />
<link rel="stylesheet" href="
[http://natas.labs.overthewire.org/css/wechall.css](view-
source:http://natas.labs.overthewire.org/css/wechall.css)" />
<script src="[http://natas.labs.overthewire.org/js/jquery-1.9.1.js](view-
source:http://natas.labs.overthewire.org/js/jquery-1.9.1.js)"></script>
<script src="[http://natas.labs.overthewire.org/js/jquery-ui.js](view-
source:http://natas.labs.overthewire.org/js/jquery-ui.js)"></script>
<script src=[http://natas.labs.overthewire.org/js/wechall-data.js](view-
source:http://natas.labs.overthewire.org/js/wechall-data.js)></script>
<script src="[http://natas.labs.overthewire.org/js/wechall.js](view-
source:http://natas.labs.overthewire.org/js/wechall.js)"></script>
<script>var wechallinfo = { "level": "natas2", "pass":
"TguMNxKo1DSa1tujBLuZJnDUlCcUAPlI" };</script></head>
<body>
<h1>natas2</h1>
<div id="content">
There is nothing on this page

```

```
</div>
</body></html>
```

We can ignore the the bulk of the code, everything after the header is of interest to us. The only thing that stands out is that we have a png file from a files directory. If we click on the files/pixel.png, we are presented with a black image, but with a 1x1 white pixel.

However if we delete pixel.png from the URL we can get access to the files folder. This then brings up a different source code.

```
<!DOCTYPE HTML PUBLIC "-//W3C//DTD HTML 3.2 Final//EN">
<html>
  <head>
    <title>Index of /files</title>
  </head>
  <body>
<h1>Index of /files</h1>
    <table>
      <tr><th valign="top"></th><th><a href="[/C=N;0=D]" (view-
source:http://natas2.natas.labs.overthewire.org/files/?C=N;0=D)">Name</a>
</th><th><a href="[/C=M;0=A]" (view-
source:http://natas2.natas.labs.overthewire.org/files/?C=M;0=A)">Last
modified</a></th><th><a href="[/C=S;0=A]" (view-
source:http://natas2.natas.labs.overthewire.org/files/?C=S;0=A)">Size</a>
</th><th><a href="[/C=D;0=A]" (view-
source:http://natas2.natas.labs.overthewire.org/files/?
C=D;0=A)">Description</a></th></tr>
      <tr><th colspan="5"><hr></th></tr>
<tr><td valign="top"></td><td><a href="[/]" (view-
source:http://natas2.natas.labs.overthewire.org/)">Parent Directory</a></td>
<td>&nbsp;</td><td align="right"> - </td><td align="right">&nbsp;</td></tr>
<tr><td valign="top"></td><td><a href="[pixel.png]" (view-
source:http://natas2.natas.labs.overthewire.org/files/pixel.png)">pixel.png<
/a></td><td align="right">2024-09-19 07:03 </td><td align="right">303 </td>
```

```
<td>&nbsp;</td></tr>
<tr><td valign="top"></td><td><a href="[users.txt](view-
source:http://natas2.natas.labs.overthewire.org/files/users.txt)">users.txt<
/a></td><td align="right">2024-09-19 07:03 </td><td align="right">145 </td>
<td>&nbsp;</td></tr>
    <tr><th colspan="5"><hr></th></tr>
</table>
<address>Apache/2.4.58 (Ubuntu) Server at natas2.natas.labs.overthewire.org
Port 80</address>
</body></html>
```

On closer inspection, we have a file named users.txt which looks interesting. Click on that and we get the following.

```
# username:password
alice:BYNdCesZqW
bob:jw2ueICLvT
charlie:G5vCxkVV3m
natas3:3gqisGdR0pjm6tpkDKdIW02hSvchLeYH
eve:zo4mJWyNj2
mallory:9urtcpzBmH
```

The password for natas3 is:3gqisGdR0pjm6tpkDKdIW02hSvchLeYH.