

International Conference on Computational Science, ICCS 2012

Search of maximal unique matches in multi-core architectures

Julio César García Vizcaíno¹, Antonio Espinosa¹, Juan Carlos Moure¹, Porfidio Hernández¹*Computer Architecture and Operating Systems, Campus UAB, Edifici Q, 08193 Bellaterra (Barcelona), Spain.*

Abstract

Maximal Unique Matches are common substrings that match a reference and a query genome. They are exact, unique and maximal; that is, they cannot be extended in left or right direction without incurring a mismatch. The computation of MUMs in large genomes is a heavy and repetitive task, so there is a fair chance of parallelize and execute this search in multi-core architectures. This research resembles an approach to find MUMs in genomic sequences with a suffix tree in parallel way. The reference genome is indexed by using a suffix tree in main memory and then parallelized algorithm finds the MUMs of query genome which is readed by several threads. This approach is based on MUMmer, a genome alignment tool, which is able to find Maximal Unique Matches (MUMs).

Keywords: Indexed Search, Bioinformatics, Maximal Unique Match, Multi-core architectures, Parallelization

1. Introduction

The problem of searching maximal unique matching for a minimum length between a reference string and a query string has been identified in several applications, one of them is MUMmer [1]. Although MUMmer's algorithm can perform searches of maximal unique matches (MUMs) with the following use of resources: High use of main memory to store the reference string and a null use of multi-core architectures. If the length of reference and query are very huge, the amount of operations to perform in the search of MUMs increases, see Table 1. The use of parallelism could

Data structure	L [bp]	Search operations	Search [s]	Memory usage [MB]
Suffix tree	20	$9,87 \times 10^{18}$	169189,4	48665,12

Table 1: Search of Maximal Unique Matches between a reference genome (2960,21Mbp) and query genome (2716,96Mbp)

help reduce the execution time for the search of maximal unique matches. One approach of parallelism is to take advantage of multi-core architectures nowadays, Figure 1 shows the process of our data-level parallelism technique.

Email addresses: juliocesar.garcia@caos.uab.es (Julio César García Vizcaíno), antonio.espinosa@caos.uab.es (Antonio Espinosa), juancarlos.moure@uab.es (Juan Carlos Moure), porfidio.hernandez@uab.es (Porfidio Hernández)

In the first phase we construct the suffix tree for reference genome. The second phase splits the query genome in chunks of a fixed size (1 chunk per thread) and it performs the search for MUMs in the chunk, the list of MUMs found are MUM candidates. Phase 3 gets the real MUMs which are unique in the reference and query genome from the list of MUM candidates.

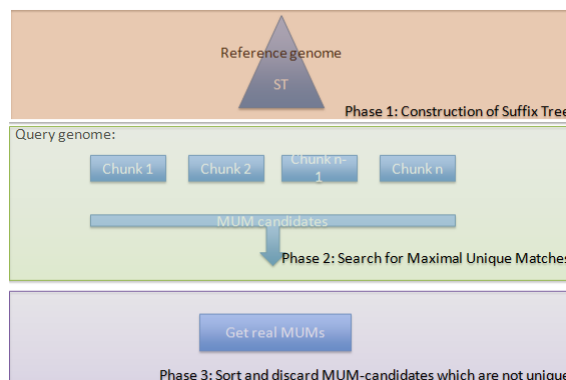


Figure 1: Find MUMs in multi-core architectures for whole genome alignment.

1.1. The MUM: an heuristic approach

Although a pair of conserved genes rarely contain the same entire sequence, they share a lot of short common substrings and some of them are indeed unique to this pair of genes. For example the following two sequences, R and Q:

R=ac ga ctc a gctac t ggtcagctatt acttaccgc\$
 Q=ac tt ctc t gctac ggtcagctatt c acttaccgc\$

It is clear that sequences R and Q have many common substrings, they are: ac, ctc, gctac, ggtcagctatt, acttaccgc. Among those five common substrings, ac is the only substring that is not unique. It occurs more than once in both sequences. You can also observe that actually a, c, t, and g are common substrings of R and Q. However, they are not maximal, i.e. they are contained in at least one longer common substrings. We are only interested in those that are of maximal length.

Our aim is to search for all these short common substrings. Given genomes R and Q, we need to find all common substrings which are unique and of maximal length. Each of such common substrings is known as Maximum Unique Match (MUM). For almost every conserved gene pairs, there exist at least one MUM which is unique to them.

For example, assuming $d = 3$, sequences R and Q in the previous example has four MUMs: ctc, gctac, ggtcagctatt, acttaccgc. Substring ac is not an MUM because its length is smaller than the value of d and it is not unique to both sequences.


R=~~ac~~ ga ~~ctc~~ a gctac t ggtcagctatt acttaccgc\$
 Q=~~ac~~ tt ~~ctc~~ t gctac ggtcagctatt c acttaccgc\$

The concept of MUM is important in whole genome alignment because a significantly long MUM is very likely to be part of the global alignment.

1.1.1. Finding MUMs in a suffix tree

The key idea in this method is to build a suffix tree for genome R, a data structure which allows finding, all distinct subsequences in a given genome.

A suffix tree is a data structure which indexes a whole string in every suffix. It allows finding all matches between a

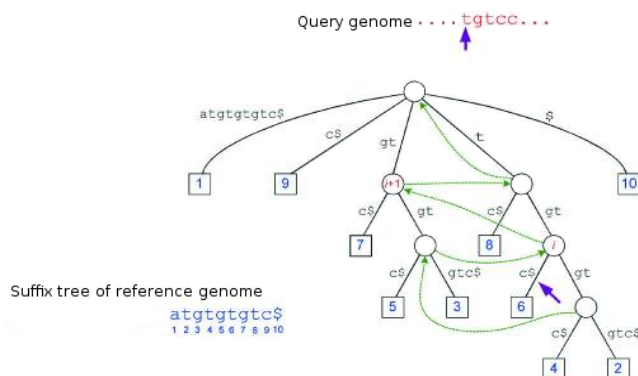

By construction, the location of a match in the suffix tree represents a substring of the subject sequence which maximally matches a prefix of `query suffix`. Thus it is only necessary to verify that, the match is long enough, that it is unique in the subject sequence and that the match is also left maximal. This is done as follows:

1. Does match represent a substring of length h at least minimum match length?
2. Does match correspond to a leaf edge? Then then the string represented by the match is unique in the subject sequence.
3. Is the match left maximal? This is true if one of the following conditions hold:
 - The suffix of the query currently considered is the first suffix, or
 - The string represented by match is a prefix of the subject string, or
 - The characters immediately to the left of the matching strings in the subject sequence and the query sequence are different

MUMs can cover 100% of the known conserved gene pairs. Moreover, finding all MUMs can be done in almost linear time because of the use of suffix links without this artifact we should start every traversal in Suffix Tree from root node adding more execution time because we scan a longer string. Since a Suffix Tree can be queried several times, it is very likely to have more than one query at the same time. So far, Algorithm 1 is a serial execution because it cannot check for more than one suffix at the same time. This problem of searching MUM has a time complexity of $O(m + k)$ where m is the length of the query genome and k is the number of maximal unique matches of some

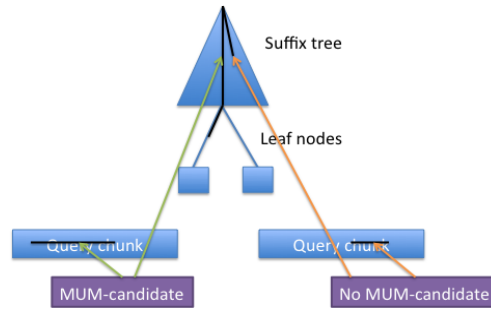


Figure 3: Finding MUMs in a suffix tree. Blue box represents a leaf node and it saves the start position of its suffix.

Algorithm 1: Search for MUMs in a Suffix Tree.

```

input : R, Q, L
output: List of MUMs of length  $\geq L$ , with start position in R and Q and length
begin
  ST  $\leftarrow$  buildST(R);
  foreach position  $i \in Q$  do
    length  $\leftarrow$  TraverseSuffixTree(Q[i], ST);
    if isLeafNode(Q[i]) then
      /* Leaf saves the position of a suffix in ST. */
      ;
      if R[leaf - 1]  $\neq$  Q[i - 1] and length  $\geq L$  then
        MUMcands  $\leftarrow$  saveMUMcand(Rleaf, i, length);
    /* Get unique MUMs from list of MUM-candidates. */
    ;
  MUMs  $\leftarrow$  cleanMUMcand(MUMcands)

```

minimum length. This problem is a very high intensive computing task, for every substring in the query genome the search for a maximum unique match has to be performed.

2. Related work

Search of Maximal Unique Matches to do Whole Genome Alignment was proposed in [3]. There have been some previous work in the parallelization of search of matches in genomic data, like [4, 5, 6], however these works are focused in fixed patterns and read alignment. On the other hand, there have been achievements in parallelization of Whole genome alignment like [7]. The parallelization of searching MUMs with a suffix tree is research field not covered very deep, there is only one approach in [8] but without access to source code to check their implementation and it is more focused with GPU and CPU hybrid architectures and suffix array.

3. Parallel algorithm

The sequential version of the MUM search between a reference and query genome trades high computation time when executed in a single machine.

Previously the algorithm for sequence alignment was described in detail. Now our own proposal of a parallelization of MUM search within multi-core architecture is explained.

There are two resources to improve in this algorithm: Memory usage and CPU. The former was generally improved because it allows being executed in architectures where there is no memory restriction. To improve the performance

of the algorithm a data-level parallelism technique is deployed in advance to genome alignment. Our technique is divided in three phases following:

1. Splitting query genome data (chunks) according to the number of available cores using 1 thread per core.
2. Parallel execution of the task of Algorithm 1 for every chunk then every thread has its own list of MUM-candidates.
3. Get the final list of MUMs from every MUM-candidate list of all threads.

The division of genome data was used using the paradigm of data-level parallelism which consists of a generation of chunks of a query sequence with a fixed size. The chunk size was computed with query genome length divided by number of available threads.

The main idea behind using a Maximal Unique Match (MUM): it is possible to cover a huge region of a genome when reference and query genomes are very closely related. However to get a MUM, it requires an important feature its uniqueness. Uniqueness can only be found when a whole genome is checked, see Figure 4. If some part of it is only evaluated we could miss the rest of the genome. In other words, after finding MUMs within a chunk it is not possible to determine if the MUM found is or not a "unique" MUM, globally in the query genome, because these MUMs are unique only in the chunk that has been read, the rest of the genome it is not known until all query genome has been read. In Figure 4 is shown the consequences of using chunks for query genome. Meanwhile we may speed up the MUM search we need to deal with the discard of MUM-candidates which are not a real MUM. So that, after finding all MUM-candidates for every thread we need to verify which of MUM-candidates are MUM.

In Figure 1 we can see phase 3 which involves to extract the list of MUM from the set of MUM-candidates of every

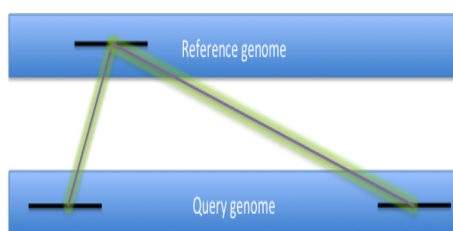


Figure 4: MUM in reference genome but not in query genome.

chunk in the query genome. In order to get the real MUMs we filter MUM-candidates that are overlapped by bigger MUM-candidates.

4. Implementation

Split query genome

As it was previously explained, the approach is to use a fixed size division of query genome. To split query genome the algorithm needs to know in advance how many chunks will be used. Then every chunk is computed with two pointers (left and right end) which points out query genome in main memory.

Finding MUMs

The parallelization is carried out with OpenMP, the Algorithm 1 is applied for every chunk. The algorithm to search MUMs is a process which can be executed without any data dependency. However, when we split a query sequence the following problems arise: Chunk size is a performance factor because we need to have an ideal size to have balanced workload among threads; Different MUM-candidate in query sequence: additional MUMs because we cannot know if the MUM-candidate is unique or not and Lost MUMs: we may skip MUMs because of the lack of control in pointers to query genome, that is every thread should point to the real value in the query genome.

The total number of iterations is the number of chunks created. Every iteration means the whole search of MUMs

within a chunk, following the Algorithm 1, if the right end of chunk is not the end of the query sequence and there are still nucleotides to match then traversal of suffix tree until it occurs a mismatch or a MUM-candidate is found. The key factors in this phase are: number of chunks (every chunk is private for each thread), size of chunks (delimiters for chunks are private for each thread) and number of threads.

Get real MUMs

This phase is applied with an algorithm for the set of MUM-candidates. These are ordered with quicksort according to position in query sequence. Every thread has found a set of MUM-candidates from previous phase but all threads don't produce the MUM-candidates in order. That's why a quicksort is required.

After quicksort we need to get the real MUMs. A real MUM is unique in the whole reference and query genome. Those MUM-candidates which are overlapped by bigger MUMs are discarded too, see Figure 5.

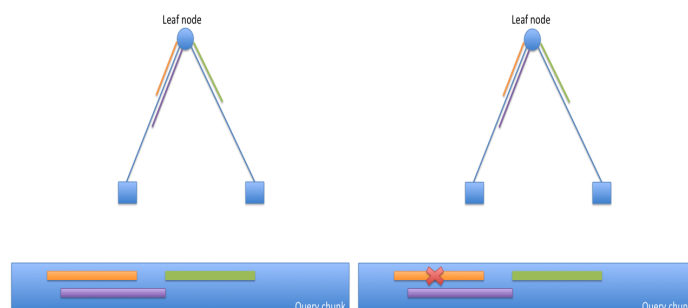


Figure 5: Getting Real MUMs. MUM-candidate in orange colour is discarded because another MUM-candidate has a larger length and they have same match in leaf of the Suffix Tree.

5. Experiments and results

To verify that our approach, can have a better performance to search MUMs of a query and reference genome we check that output of MUMmer and our approach to check that they produce the same MUMs. This test was carried out in the following node:

- Hardware:
 - 2 Processor Intel(R) Xeon(R) E5645 @ 2.4GHz of 6 cores each one, 32KB L1 cache, 256KB L2 and 12MB L3 shared cache per socket.
 - RAM: 96 GB
- Software:
 - Linux Kernel 2.6.32-220.el6.x86_64 #1 SMP
 - gcc 4.7.0 with OpenMP support
 - PAPI 5.0.1
- Genomes:
 - Reference: Silkworm genome, 487.6 [Mbp]
 - Query: Red imported fire ant genome, 335.7 [Mbp]

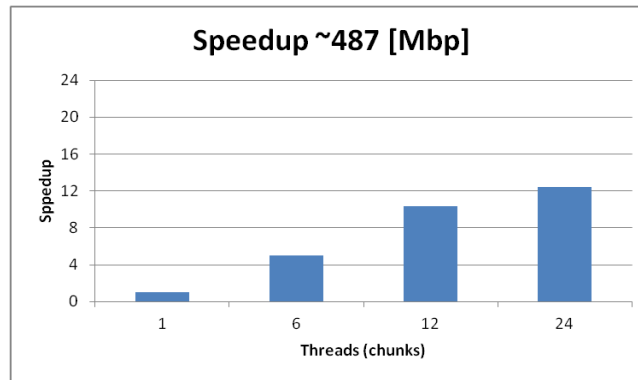


Figure 6: Speedup of our approach to search MUMs in multi-core architectures with OpenMP.

The main objective of the test was to check the performance to search MUMs in multi-core architectures by using OpenMP (threads). The variables to control were: number of chunks for query genome, number of threads: 1, 6, 12 and 24 threads with affinity and OpenMP scheduling: static with chunk size of 1.

Moreover, the CPI and TLB misses rate was measured with the tool likwid¹, these measures were checked only in the search for MUMs. The times were collected for the parallel region of OpenMP. This parallel region is the algorithm to search MUMs.

One key aspect of the several tests deployed was to assure the execution of every thread in a single core, that is no other thread is competing for the same cache. Affinity is a requirement because we need to ensure the scalability of our proposal, without affinity even a number of threads below the number of cores might be in the same core. Affinity ensures us a proper use of performance in a multi-core architecture.

The construction of the suffix tree for the reference genome of length 487.6 [Mbp] takes 208.71 [s] to build and it uses 10.12[GB] of memory. The minimum length for a MUM was 20 [bp]. The query sequence of length 335.7 [Mbp] was divided in chunks equal to the available threads.

Times were collected during the execution of the experiments: execution time to find mums in parallel region with the function `omp_get_wtime` of OpenMP.

Figure 6 shows the speedup for the parallelization of searching of MUMs for several minimum lengths of MUM. Moreover from this Figure 6 we can conclude that we got a near linear speedup with 12 threads, which is the maximum number of cores. Then there is a reduction in the linear speedup because we start using more than 1 thread per core and this causes a degradation in the phase of searching MUMs. As we can see in Figure 6 the better speedup is with one thread per core and it is a consequence of similarity between our reference and query genome.

Our goal is to get the best performance of a multicore architecture while searching MUMs and from the Figure 7 we can watch a decent performance up to 12 threads, when there is more than one thread per core the search time is not reduced to half, see Figure 7.

The reason of this behavior is because the traversal of suffix tree makes the search of MUMs a high intensive memory bound problem. So that the processor is waiting for the next portion of data to traverse the suffix tree. To confirm this idea we measured with Likwid the following counters: Total cycles, Total instructions and TLB misses.

From these hardware counters we get the CPI in Figure 8 which shows that our code can be improved to reduce the CPI value. We are interested in have a good performance when using a multi-core architecture so that in Figure 6 we need to identify the reason of the reduced performance when using more than one thread per core. One reason is because when we are using 24 threads there are more Clock cycles per instruction. To improve the performance of our approach the following proposals may be used:

- Prefetching: this may work because we know in advance what information from suffix tree and query sequence we need in every traversal of suffix tree. If we can allow the use of some part of suffix tree be stored and read in

¹Measure hardware performance counters on Intel and AMD processors.

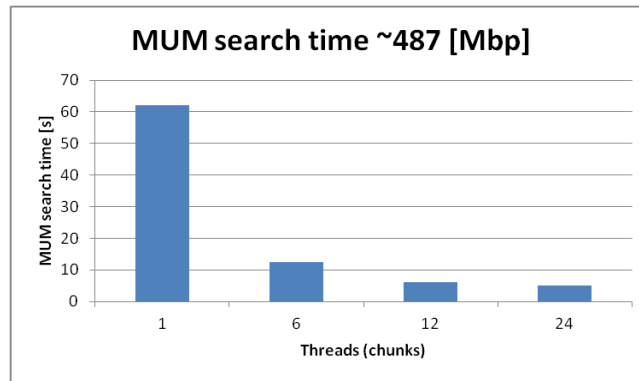


Figure 7: Search for MUMs time of our approach in multi-core architectures with OpenMP.

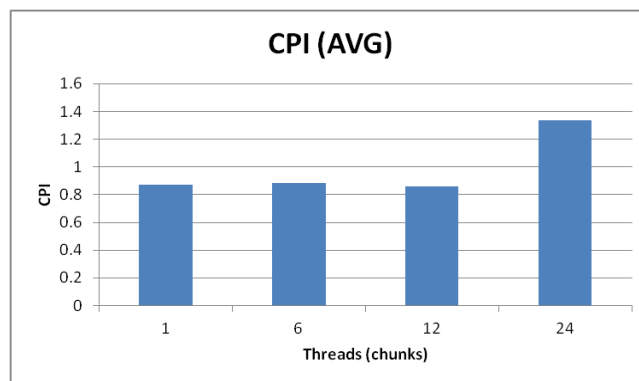


Figure 8: CPI of search for MUMs of minimum length 20[bp] in multi-core architectures with OpenMP.

cache by several threads which request that subtree. However, because we use suffix links to jump to another part of suffix tree so that a new part of suffix tree would have to be read.

- Explicit cache management: this is a obvious consequence of previous bullet because we may need to store part of the suffix tree in some cache-level of processor.
- An improved traversal of suffix tree would improve the overall performance of search of MUMs. So far, one thread traverses the suffix tree if we add multithread traversal of suffix tree to find next edge in the match path we would reduce the execution time.

6. Conclusions

This paper presents an evaluation of performance to search MUMs of a query and reference genome in multi-core architectures with OpenMP. The search of MUMs is performed in a suffix tree and the list of MUMs can help in the process of whole genome alignment. The results shows that the heaviest section of searching MUMs in a suffix tree is improved with the use of a multi-core architecture. Although we got a near linear speedup with only one thread per core, there are more improvements to do. These improvements involve a better use of resources (memory and CPU) when we have more than thread per core. In spite of suffix tree is a good data structure for string matching, when is used in multi-core architectures it shows a slow performance (high CPI) to search MUMs.

From the results obtained we conclude that bottleneck is in our data structure: suffix tree. We require to handle a strategy to traverse a suffix tree in multi-core architectures, this approach only queries the suffix tree for one string at a time. However, the traversal of suffix tree is still done in a serial way.

Acknowledgements

This work was supported by grant from “Ejecución eficiente de aplicaciones multidisciplinarias: nuevos desafíos en la era multi/many core, with reference TIN2011-28689-C02-01”.

References

- [1] A. L. Delcher, S. L. Salzberg, A. M. Phillippy, Using MUMmer to identify similar regions in large sequence sets., Current protocols in bioinformatics editorial board Andreas D Baxevanis et al Chapter 10 (1934-340X (Electronic) LA - eng PT - Journal Article SB - IM) (2003) Unit 10.3.
URL <http://www.ncbi.nlm.nih.gov/pubmed/18428693>
- [2] A. L. Delcher, A. Phillippy, J. Carlton, S. L. Salzberg, MUMmer: comparative applications Fast algorithms for large-scale genome alignment and comparison, Nucleic Acids Research 30 (2002) 2478–2483.
URL <http://www.tigr.org/software/mummer/applications.html>
- [3] A. L. Delcher, S. Kasif, R. D. Fleischmann, J. Peterson, O. White, S. L. Salzberg, Alignment of whole genomes MUMMER, Nucl Acids Res 27 (11) (1999) 2369.
- [4] M. Ouzhan Külekci, W.-K. Hon, R. Shah, J. Scott Vitter, B. Xu, Ψ-RA: a parallel sparse index for genomic read alignment., BMC genomics 12 Suppl 2 (2011) S7. doi:10.1186/1471-2164-12-S2-S7.
URL <http://www.pubmedcentral.nih.gov/articlerender.fcgi?artid=3194238&tool=pmcentrez&rendertype=abstract>
- [5] H. Mongelli, Efficient Two-Dimensional Parallel Pattern Matching with Scaling, North.
- [6] C. S. Kouzinopoulos, P. D. Michailidis, K. G. Margaritis, Parallel Processing of Multiple Pattern Matching Algorithms for Biological Sequences : Methods and Performance Results.
- [7] X. Meng, V. Chaudhary, Exploiting multi-level parallelism for homology search using general purpose processors, October.
URL <http://www.computer.org/portal/web/csd1/doi/10.1109/ICPADS.2005.152>
- [8] G. Encarnac, N. Roma, Advantages and GPU Implementation of High-Performance Indexed DNA Search based on Suffix Arrays, Architecture (2011) 49–55.