

Classifying 112 arXiv Primary Categories from Titles and Abstracts

Gary Zhang, Sanvi Inturi, Elaine Harris-Stapleton, Agastya Iyengar

AI BOOTCAMP

August 6, 2026

1 Project question and current status

This project asks whether a small neural classifier can predict one paper’s arXiv-listed `primary_category` from its title and abstract. Reliable routing could support search or dataset organization, but a predicted category is not proof of a paper’s scientific identity. We completed data curation, duplicate checks, a train-validation-test pipeline, current-model training, held-out evaluation, and error inspection using the course classification workflow [1]. Current blocker is sample size: the median category has only four held-out papers, so one error can materially change its per-class estimate.

1.1 Data, labels, and split

The dataset’s July 16 API snapshot recorded 11,070 submissions from July 3–15, 2026 UTC using daily `submittedDate` queries [2]. Curation removed 3,319 records. Deterministic ranking by withdrawal markers, abstract depth, optional metadata fields (DOI, journal reference, and comment), title length, and category tagging, with proportional category quotas, removed 2,070; subject filtering removed 1,249 Astrophysics, Condensed Matter, and Economics papers. The classifier kept 7,708 of the remaining 7,751 papers in 112 categories with at least five examples and excluded 43 papers from 17 rarer categories. Table 1 gives every target count; codes follow arXiv’s taxonomy [3].

Table 1: All 112 eligible primary categories and pre-split paper counts.

Category	<i>n</i>	Category	<i>n</i>	Category	<i>n</i>	Category	<i>n</i>	Category	<i>n</i>
cs.AI	352	cs.MA	23	math.AG	84	math.RA	20	physics.ins-det	22
cs.AR	40	cs.MM	6	math.AP	182	math.RT	39	physics.med-ph	16
cs.CC	22	cs.MS	5	math.AT	17	math.SG	15	physics.optics	119
cs.CE	37	cs.NE	23	math.CA	28	math.SP	7	physics.plasm-ph	47
cs.CG	20	cs.NI	31	math.CO	232	math.ST	57	physics.soc-ph	32
cs.CL	327	cs.PF	7	math.CT	14	nlin.AO	8	q-bio.BM	5
cs.CR	205	cs.PL	25	math.CV	29	nlin.CD	7	q-bio.NC	18
cs.CV	779	cs.R0	335	math.DG	69	nlin.PS	6	q-bio.PE	12
cs.CY	56	cs.SC	5	math.DS	74	nlin.SI	7	q-bio.QM	16
cs.DB	29	cs.SD	64	math.FA	67	nucl-ex	15	q-fin.CP	6
cs.DC	65	cs.SE	203	math.GM	13	nucl-th	54	q-fin.GN	5
cs.DL	14	cs.SI	16	math.GN	7	physics.acc-ph	11	q-fin.MF	7
cs.DM	12	eess.AS	49	math.GR	32	physics.ao-ph	14	q-fin.PM	5
cs.DS	93	eess.IV	47	math.GT	42	physics.app-ph	17	q-fin.ST	5
cs.ET	11	eess.SP	121	math.HO	7	physics.atom-ph	25	q-fin.TR	9
cs.FL	6	eess.SY	132	math.LO	21	physics.bio-ph	18	quant-ph	468
cs.GR	16	gr-qc	144	math.MG	16	physics.chem-ph	48	stat.AP	27
cs.GT	34	hep-ex	31	math.NA	142	physics.class-ph	8	stat.CO	8
cs.HC	83	hep-lat	14	math.NT	124	physics.comp-ph	25	stat.ME	114
cs.IR	67	hep-ph	178	math.OA	13	physics.ed-ph	8	stat.ML	61
cs.IT	76	hep-th	157	math.OC	143	physics.flu-dyn	71		
cs.LG	681	math-ph	40	math.PR	90	physics.geo-ph	11		
cs.LO	37	math.AC	29	math.QA	17	physics.hist-ph	5		

Each example uses only title plus abstract; its label is the single `primary_category`. A seed-42 per-class stratified split produced 5,394 training, 1,157 validation, and 1,157 held-out test papers. All 7,751 base arXiv IDs were unique, so no revision crossed splits. The category field, directory names, authors, and secondary categories never entered features.

2 Approach

2.1 Input representation

Title and abstract are joined with two newlines. A scikit-learn `FeatureUnion` fitted on training text only creates 8,000 TF-IDF features [4]: 6,000 English word unigram/bigram features and 2,000 within-word character 3–5-gram features. Both use sublinear term frequency; both lowercase and require two training documents per term. Word features remove English stop words, strip Unicode accents, and discard terms appearing in over 99.5% of training papers. Validation and test text use the frozen training vocabulary. The sparse matrix becomes a dense 8,000-value `float32` tensor.

2.2 Classifier, training, and baseline

The PyTorch model, trained from scratch, maps 8,000 inputs to 384 ReLU hidden units, applies dropout 0.25, and emits 112 raw logits. It has 3,115,504 trainable parameters. Square-root inverse-frequency class weights enter cross-entropy loss, which accepts unnormalized logits. AdamW used learning rate 0.001 and weight decay 0.0001 [5]. Training used CPU, batch size 128, seed 42, and at most 20 epochs in PyTorch 2.13.0 with scikit-learn 1.9.0. Validation macro-F1 selected epoch 18; patience was four. The comparison baseline always predicts training-majority class `cs.CV`.

2.3 Evaluation design

Training papers fit TF-IDF and network weights. In the artifact set saved July 30, configuration fixed TF-IDF features and dropout at 0.25; validation macro-F1 selected epoch 18 before test metrics were computed. Section 5 separates this run order from earlier test exposure. A version-1 checkpoint hashes the exact label order and vectorizer. The evidence notebook reconstructed the split and independently recomputed strict metrics from 1,157 predictions.

2.4 Metrics

For N held-out papers, accuracy is

$$\text{accuracy} = \frac{\text{correct predictions}}{N}.$$

For one class, TP counts correctly predicted members, FP counts other papers assigned to it, and FN counts its papers assigned elsewhere. For `cs.CV`, for example, a true `cs.CV` paper predicted `cs.LG` is an FN . Precision $P = TP/(TP + FP)$, recall $R = TP/(TP + FN)$, and $F_1 = 2PR/(P + R)$. Macro-F1 averages 112 class F1 scores equally, exposing rare-class failures that accuracy can hide.

2.5 Reproducibility and scope

Dataset SHA-256 is `1bfe64d02fffedaaa65ef00866e47e8c688966062ba54572c404a08c4657c78a`. The source notebook records class counts, split replay, baseline, recomputed strict metrics, cross-list audit, two examined cases, and figure generation [6]. Learning curves come from the metrics artifact saved July 30.

2.6 Operational research-graph integration

The classifier now sits beside the repository’s daily research knowledge-graph agent. Its verified August 6 snapshot contains 8,754 documents, 8,951 nodes, and 59,256 typed edges; every document has at least one edge. GitHub Actions schedules collection at 13:17 UTC, and the local interface exposes search, placement explanations, hubs, clusters, and topic trends [6]. Graph placement uses recorded arXiv categories, configured source metadata, and rule-extractor evidence. It does not use classifier predictions as ground truth or create edges from them. This operational integration expands how the stored papers can be explored, but it does not change or further validate the 61.37% held-out classification result reported below.

3 Current results

On 1,157 held-out papers, the classifier predicted 710 primary categories correctly: 61.37% accuracy, 34.65% macro-F1, 59.15% weighted-F1, and 84.62% top-3 accuracy. Accuracy exceeded the majority baseline by 51.25 percentage points. Table 2 also shows why accuracy alone is insufficient: the majority rule reaches 10.11% accuracy but only 0.16% macro-F1.

Table 2: Strict primary-category performance on the same held-out papers.

Classifier	Eval. n	Correct	Accuracy	Macro-F1	Top-3	Selection
TF-IDF MLP	1,157	710	61.37%	34.65%	84.62%	epoch 18 by validation macro-F1
Majority <code>cs.CV</code>	1,157	117	10.11%	0.16%	n/a	training labels only

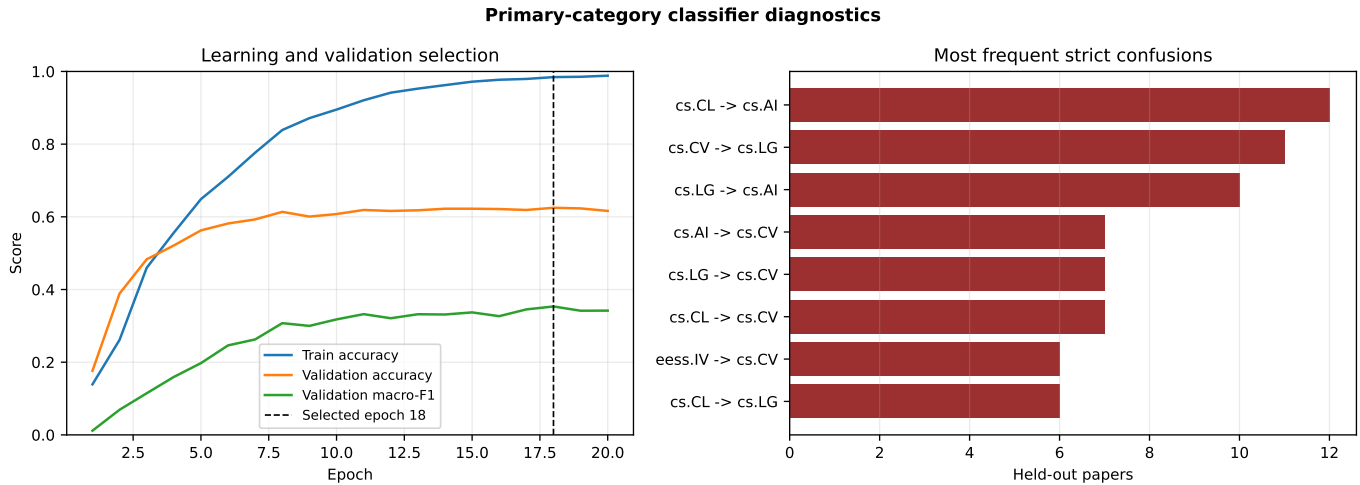


Figure 1: Left: training accuracy continued toward 1.0 while validation accuracy and macro-F1 flattened; the dashed line marks the selected epoch. Right: strict primary-label errors concentrate among several computing categories. Counts come from the 1,157-paper test set.

3.1 Interpretation

Figure 1 shows a large generalization gap. At selected epoch 18, training accuracy was 98.44% ($n = 5,394$), while validation accuracy was 62.49% and validation macro-F1 was 35.34% (both $n = 1,157$); both validation scores declined by epoch 20. Among categories with at least ten test papers, High Energy Physics - Phenomenology had strongest F1 (93.10%, $n = 27$); Sound had weakest (26.67%, $n = 10$). Forty of 112 categories had zero test F1, and 61 had four or fewer test papers. The most frequent error was `cs.CL`→`cs.AI` (12 papers), followed by `cs.CV`→`cs.LG` (11).

Primary-only scoring counts cross-listed alternatives as errors. A post-hoc audit, without changing predictions, found top-1 accuracy of 70.96% when any arXiv-listed category counted; 111 of 447 strict errors matched a listed secondary category. The assignment’s primary-label result remains 61.37%; those 111 predictions remain errors under its stated target.

4 Error analysis

We replayed one correct case, screened the 25 highest-confidence strict errors, and examined two of them. Twelve screened predictions were listed secondary categories. Table 3 shows the correct paper and two strict errors; all three are cited because their titles and labels are discussed [7, 8, 9].

Table 3: Inspected held-out predictions. Confidence is a model score.

Paper (short title)	Primary label	Prediction	Evidence-based interpretation
2607.09583, “Remote Seg.”	<code>cs.CV</code>	<code>cs.CV</code> , 99.95%	Title and abstract explicitly discuss segmentation and remote-sensing imagery; the prediction matches the primary label.
2607.07372, “Quantum Control”	<code>cs.AR</code>	<code>quant-ph</code> , 99.53%	Title and abstract explicitly discuss quantum control. <code>quant-ph</code> is also arXiv-listed, so this is a strict primary-label error rather than an unrelated prediction.
2607.03072, “LOTUSim”	<code>cs.MA</code>	<code>cs.RO</code> , 98.66%	Title and abstract explicitly discuss marine robotics. <code>cs.RO</code> is also arXiv-listed, showing overlap between primary and secondary submission labels.

All nine confusion pairs with at least six errors include Computation and Language, Artificial Intelligence, Computer Vision and Pattern Recognition, or Machine Learning on at least one side. Cross-list matches account for 24.83% of strict errors. Neither statistic establishes model “understanding” or identifies a causal failure mechanism.

5 Limitations, progress, and next step

This is one random split from a curated 13-day window, not a chronological forecast of future submissions. Subject-group exclusions shift the population, and title plus abstract omits full-text evidence. Papers may carry secondary cross-list categories, and 61 classes have at most four test papers. The implementation densifies each 8,000-value TF-IDF row, so memory grows with papers times features. The split protects held-out rows and duplicate base IDs, but the same seed-42 test partition was evaluated in an earlier artifact set. Within the current artifact, validation macro-F1 selected the epoch before test scoring. This report includes no repeated-seed analysis or confidence intervals.

Next, we will change only dropout from 0.25 to 0.50 while holding the dataset, seed-42 split, TF-IDF features, optimizer, batch size, and epoch limit fixed. We predict a smaller train-validation gap and higher validation macro-F1. We will decide from validation macro-F1 before reading the new test result.

6 Conclusion

The classifier reached 61.37% strict primary-category accuracy (710 of 1,157) and 34.65% macro-F1, beating the majority baseline by 51.25 percentage points. This result does not establish reliable rare-class or future-paper performance. Most important completed step is validation-selected evaluation with duplicate and feature-leakage controls; remaining step is the dropout experiment.

References

- [1] High School AI Bootcamp, “Classification with PyTorch,” course materials, 2026.
- [2] arXiv, *API User’s Manual*, <https://info.arxiv.org/help/api/user-manual.html>, accessed July 30, 2026.
- [3] arXiv, *Category Taxonomy*, https://arxiv.org/category_taxonomy, accessed July 30, 2026.
- [4] scikit-learn developers, *scikit-learn 1.9 documentation*, <https://scikit-learn.org/stable/>, accessed August 5, 2026.
- [5] PyTorch contributors, *PyTorch 2.13 documentation*, <https://docs.pytorch.org/docs/stable/>, accessed August 5, 2026.
- [6] *paper-fetcher: arXiv metadata, category-classifier code, and executed evidence notebook*, GitHub repository, <https://github.com/garyzhang1006/paper-fetcher>, accessed August 5, 2026.
- [7] M. Dabaja and T. Celik, “Promptable Concept Segmentation from Above: Evaluating SAM 3’s Zero-Shot and One-Shot Capabilities in Remote Sensing,” arXiv:2607.09583, 2026.
- [8] X. Guo et al., “Vectorizing Quantum Control: A RISC-V Vector Extension Architecture for Scalable Qubit Systems,” arXiv:2607.07372, 2026.
- [9] C. Buche et al., “LOTUSim: Multi-Domain Simulator for Marine Robotics,” arXiv:2607.03072, 2026.