

Array:-

// Taking Input

Sort ("Taking
n");

int n = sc.nextInt();

n=5



int[] arr = new int[n];

for (int i=0; i<n; i++) {

arr[i] = sc.nextInt();


Sort ("Value
of array for
index + i);



sc.close();

== a=b
a=10

Swap in an Array

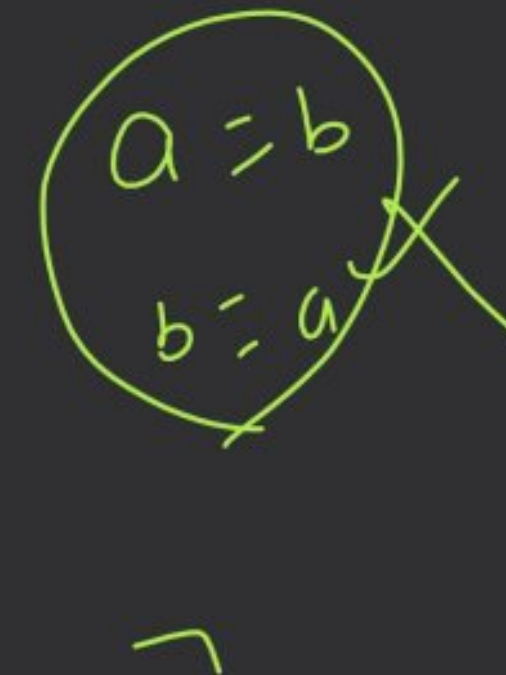

temp = a;
a = b;
b = temp;



Swap in an Array :-

int [] arr = {10, 20, 30, 40};
 ↑ ↑
 0 3

arr[0] = ~~10~~ 40

arr[3] = 10;

temp = arr[0];
arr[0] = arr[3];
arr[3] = temp;

arr[0] = 40

Linear Search :-

int key = 50;

int arr2 { 40, 60, 50, 10, 30, 10, 20, 50 }
0 1 2 3 4 5 6 7
↑ ↑

for (int i = 0; i < arr.length; i++) {

if (arr[i] == key) {

System.out.println(i)

}



(i=1)

50 key

2
1

Ques-1. Print no.'s of Array -

int sum = 0;

int arr = {10, 20, 30, 40, 50};

for (int i = 0; i < arr.length; i++) {

sum = sum + arr[i];

}

int sum = 0;

i = 0 1 2 3 4
sum = 0 10 30 70 120

10	20	30	40	50
0	1	2	3	4

↑
~~sum = 0 10 30~~
~~0 10 30~~

Maximum Element in Array

[20, 50, 10, 80, 100]
0 1 2 3 4
→

20 > 10

```
int maxi = arr[0];  
for (int i = 1; i < arr.length; i++) {  
    if (arr[i] > maxi) {  
        maxi = arr[i];  
    }  
}
```

10 > 50

80 > 50

100 > 80

maxi = 20 / 50 / 80 / 100

Sort (maxi);

H.W.

day run for
3 different input
of array:
(5 run)
(for sum too)


```
13 // }
```

14

15

```
16 public class Main {
```

17

```
18 public static void change(int arr[]) {
```

```
19 arr[0] = 100;
```

20

21

Run | Debug

```
22 public static void main(String[] args) {
```

23

```
24 int arr[] = {1,2,3};
```

25

```
26         change(arr);
```

27

```
28 System.out.println(arr[0]);
```

29

30

```

public class Main {
    public static void change(int arr[]) {
        arr[0] = 100;
        for (int i = 0; i < 3; i++) {
            arr[i] = 10;
        }
    }

    Run | Debug
    public static void main(String[] args) {
        int arr[] = {1, 2, 3};
        change(arr);
        System.out.println(arr[0]);
    }
}

```

Handwritten annotations:

- Red arrows indicate the flow of execution and variable changes.
- Handwritten code snippets:
 - `for (int i = 0; i < 3; i++)` (appearing twice)
 - `arr[i] = 10;`
 - `cout << arr[i];`
- A diagram of an array is shown with indices 0, 1, 2 and values 1, 2, 3. The first element (1) is crossed out with a red 'X'.

File Edit Selection View

EXPLORER

- ARRAY
 - Lecture_1
 - takingInput.class
 - tempCodeR... 1
 - Main.class
 - Main.java
 - takingInput.java

Main.java > Main

```
1 public class Main {  
2  
3     public static void change(int p) {  
4         p = 50;  
5     }  
6  
7     public static void main(String[] args) {  
8         int a = 10;  
9         change(a);  
10        System.out.println(a);  
11    }  
12  
13 }
```

Run | Debug

Handwritten annotations:

- Red arrows pointing to the `change` method call in `main` and the `change` method definition.
- Red text: `50` and `50` with arrows pointing to the parameter `p` in the `change` method.
- Red text: `10` with an arrow pointing to the variable `a` in the `main` method.
- Red text: `10` with an arrow pointing to the `println` statement.
- Red text: `10` inside a box, with an arrow pointing to the `println` statement.
- Red text: `1st line` with an arrow pointing to the `main` method definition.

Ln 12, Col 2 Spaces: 4 UTF-8 CRLF () Java Go Live Prettier

LearnMethods.java x LearnMath.java Math.java

```
1 package methods;
2
3 public class LearnMethods {
4     @ public static <string> void main(String[] args) {
5         // System.out.println(args[0]);
6         // System.out.println("1");
7
8         for(String arg : args){
9             System.out.println(arg);
10        }
11        // greet();
12        // System.out.println("5");
13
14        // average(4,6);
15
16        // greet("Gaurav");
17        // int x = 10;
18        // System.out.println(x);
19        // change(x);
20        // System.out.println(x);
21    }
22
23    // public static void change(int x){
24
```

int () arr;

for (string arg : args) {

System.out.println(arg);

System.out.println(x);

change(x);

System.out.println(x);

Run LearnMethods x

is the array of

thread > src > methods > LearnMethods

42.2 CRLF UTF-8 4 spaces