
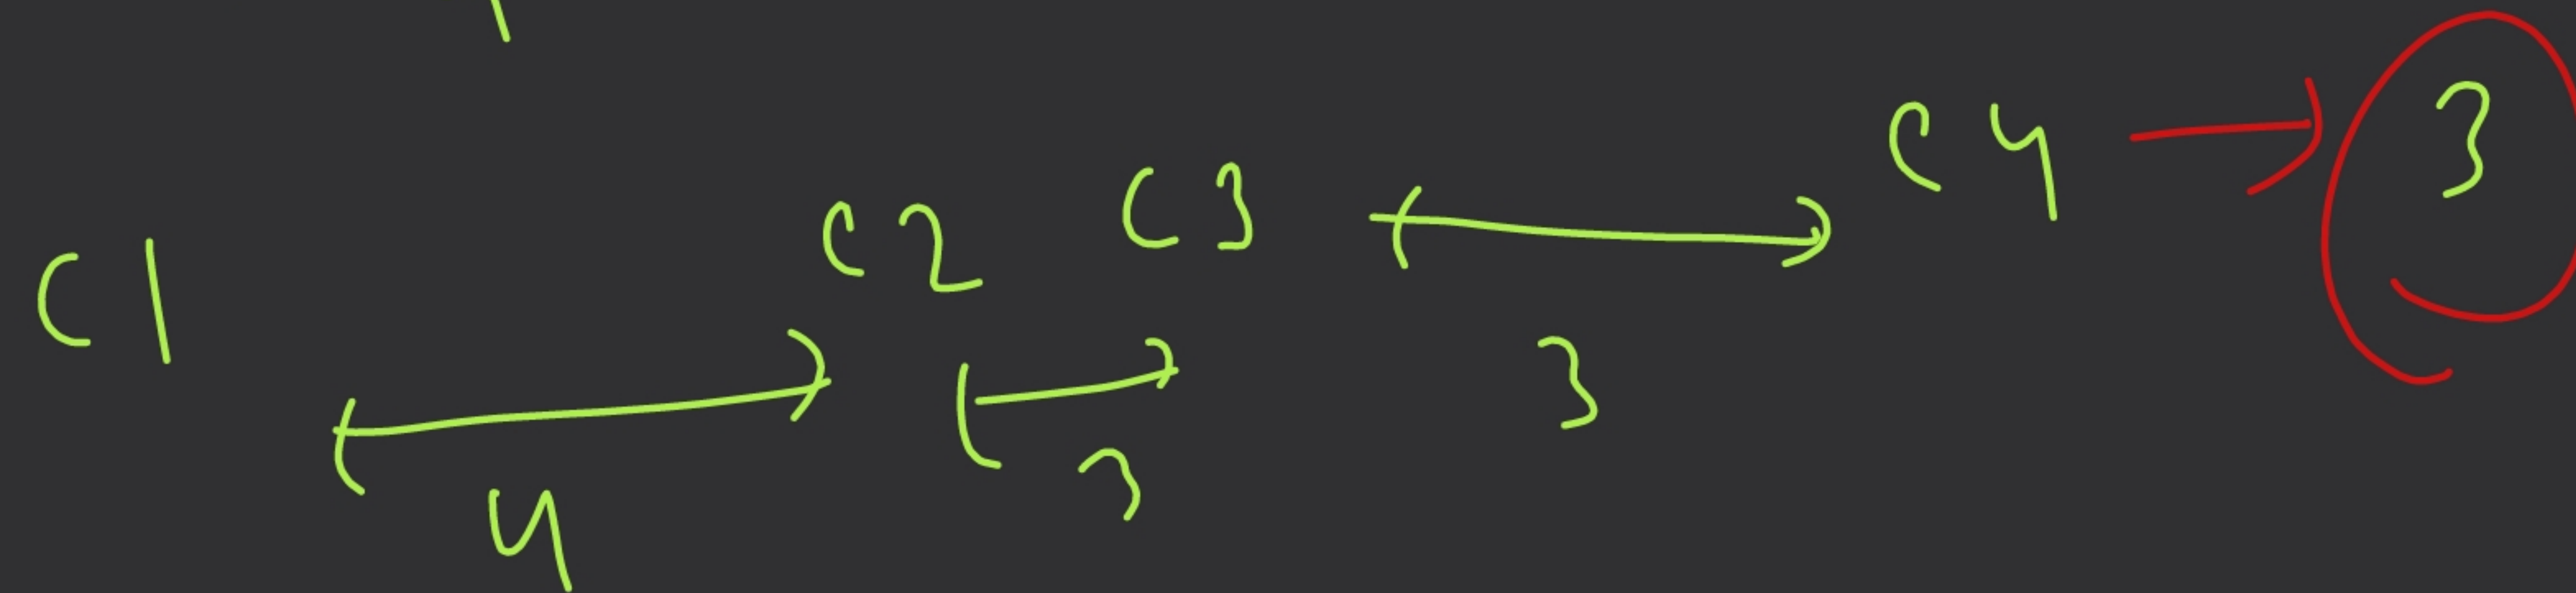
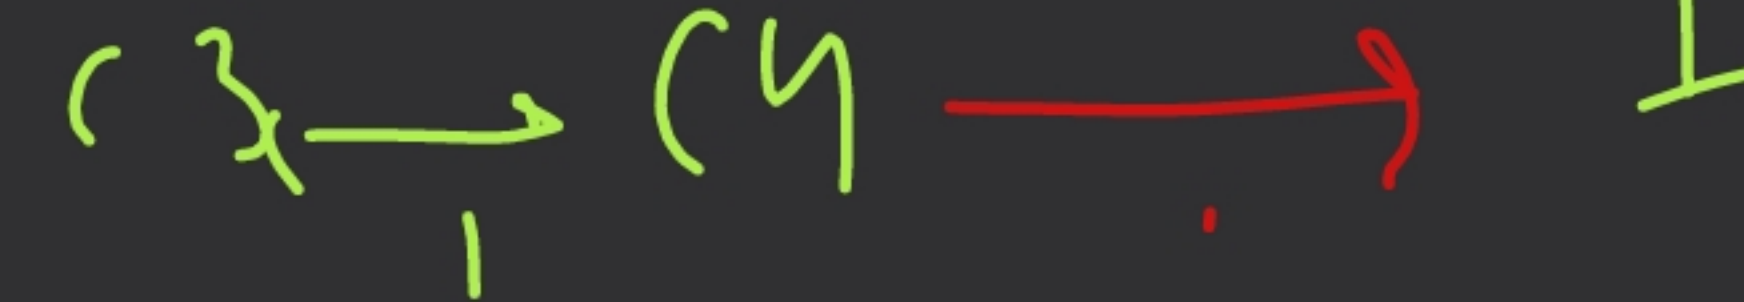


Aggressive Cows

min | max

(k=4)
min

arr = [0 3 4 7 9 10]

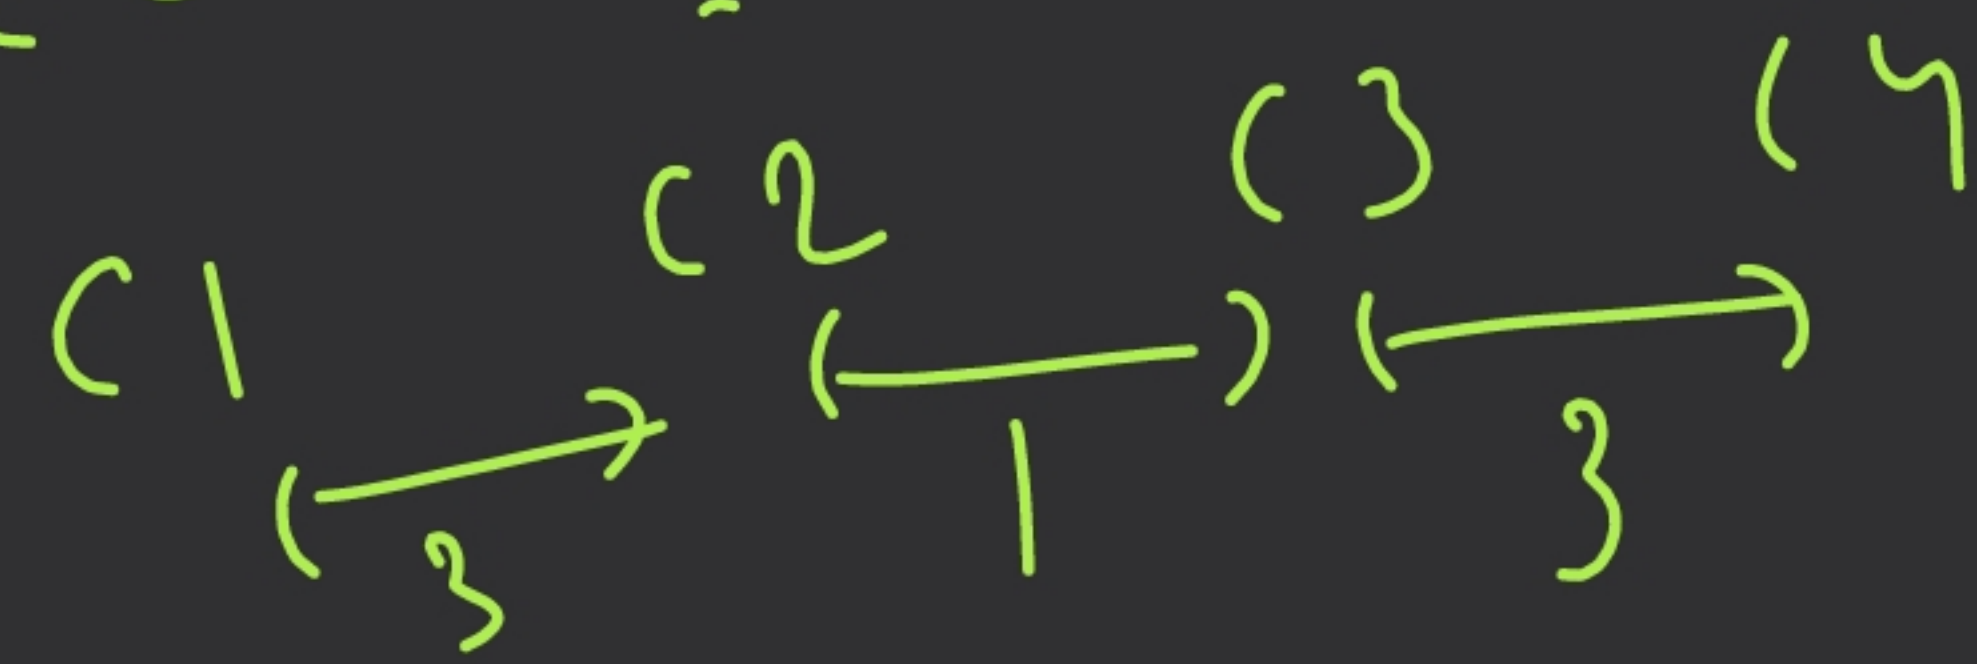

max

1 2 3 4 ... 10
 ✓ ✓ ✓ x x x x x
 low = 1, high = stalls(n-1) - stalls(0);

while (low <= high) {

$$mid = \frac{low + high}{2}$$

if (can place stalls, mid, K) == True)

low = mid + 1;

else




high = mid - 1;

}

return high;

1 2 3 4 5 6 7 8 9 10
 ✓ ✓ ✓ x x x x x x x
 mid = 4
 (4 10)

Multiplication of Matrices :-

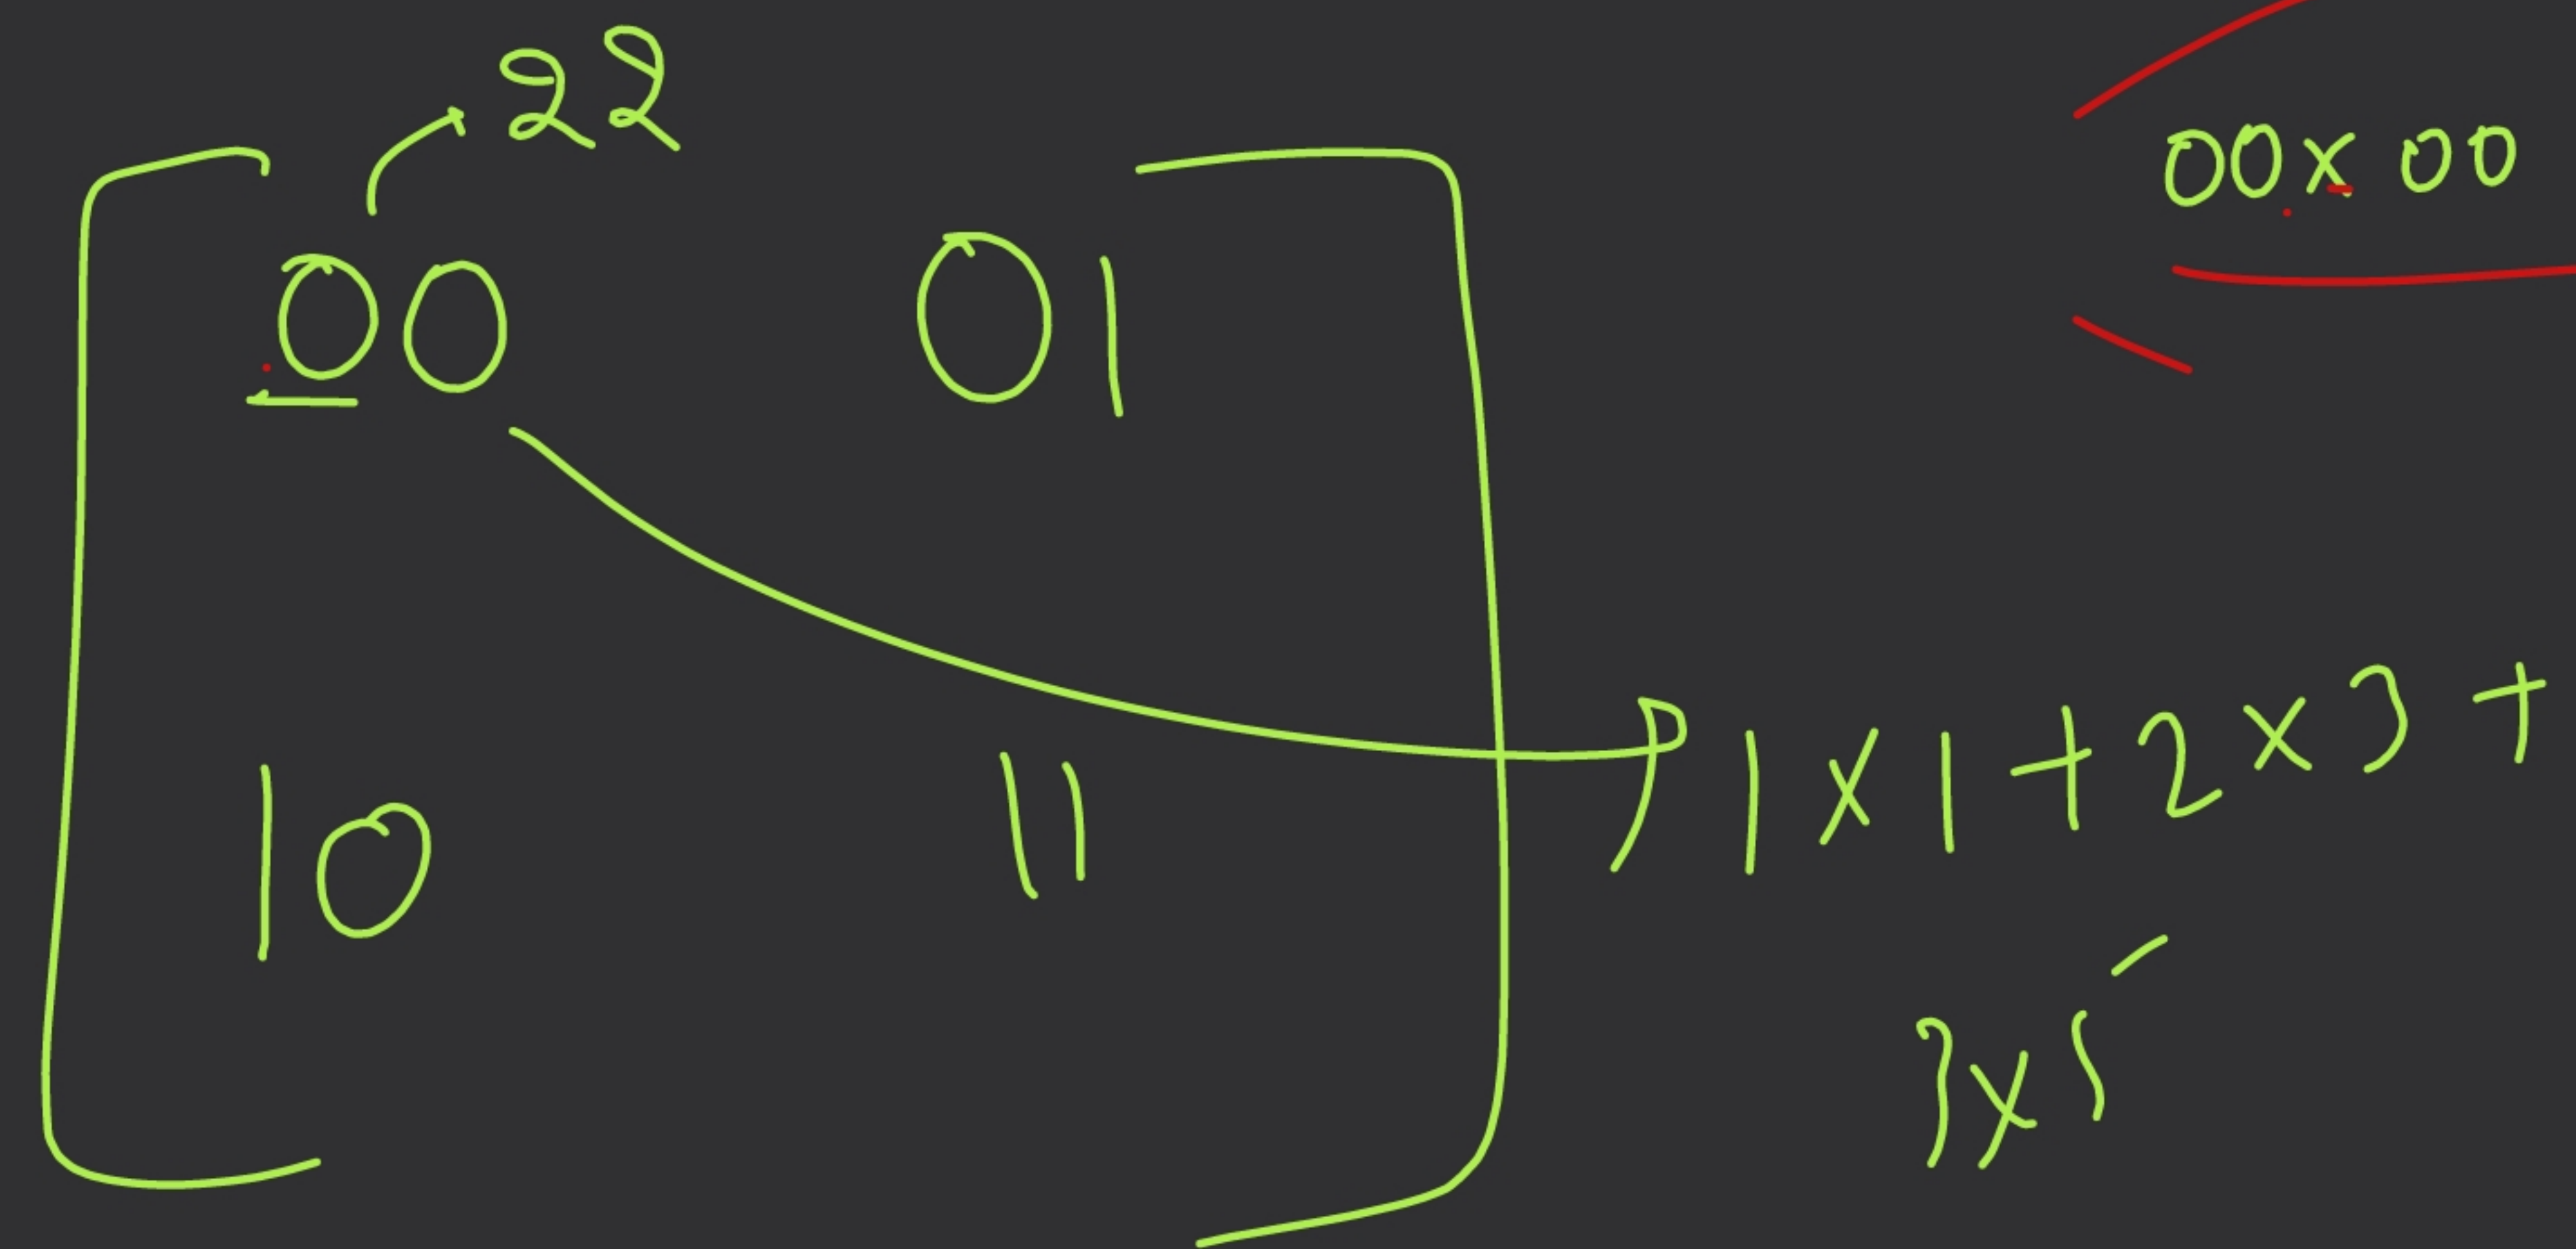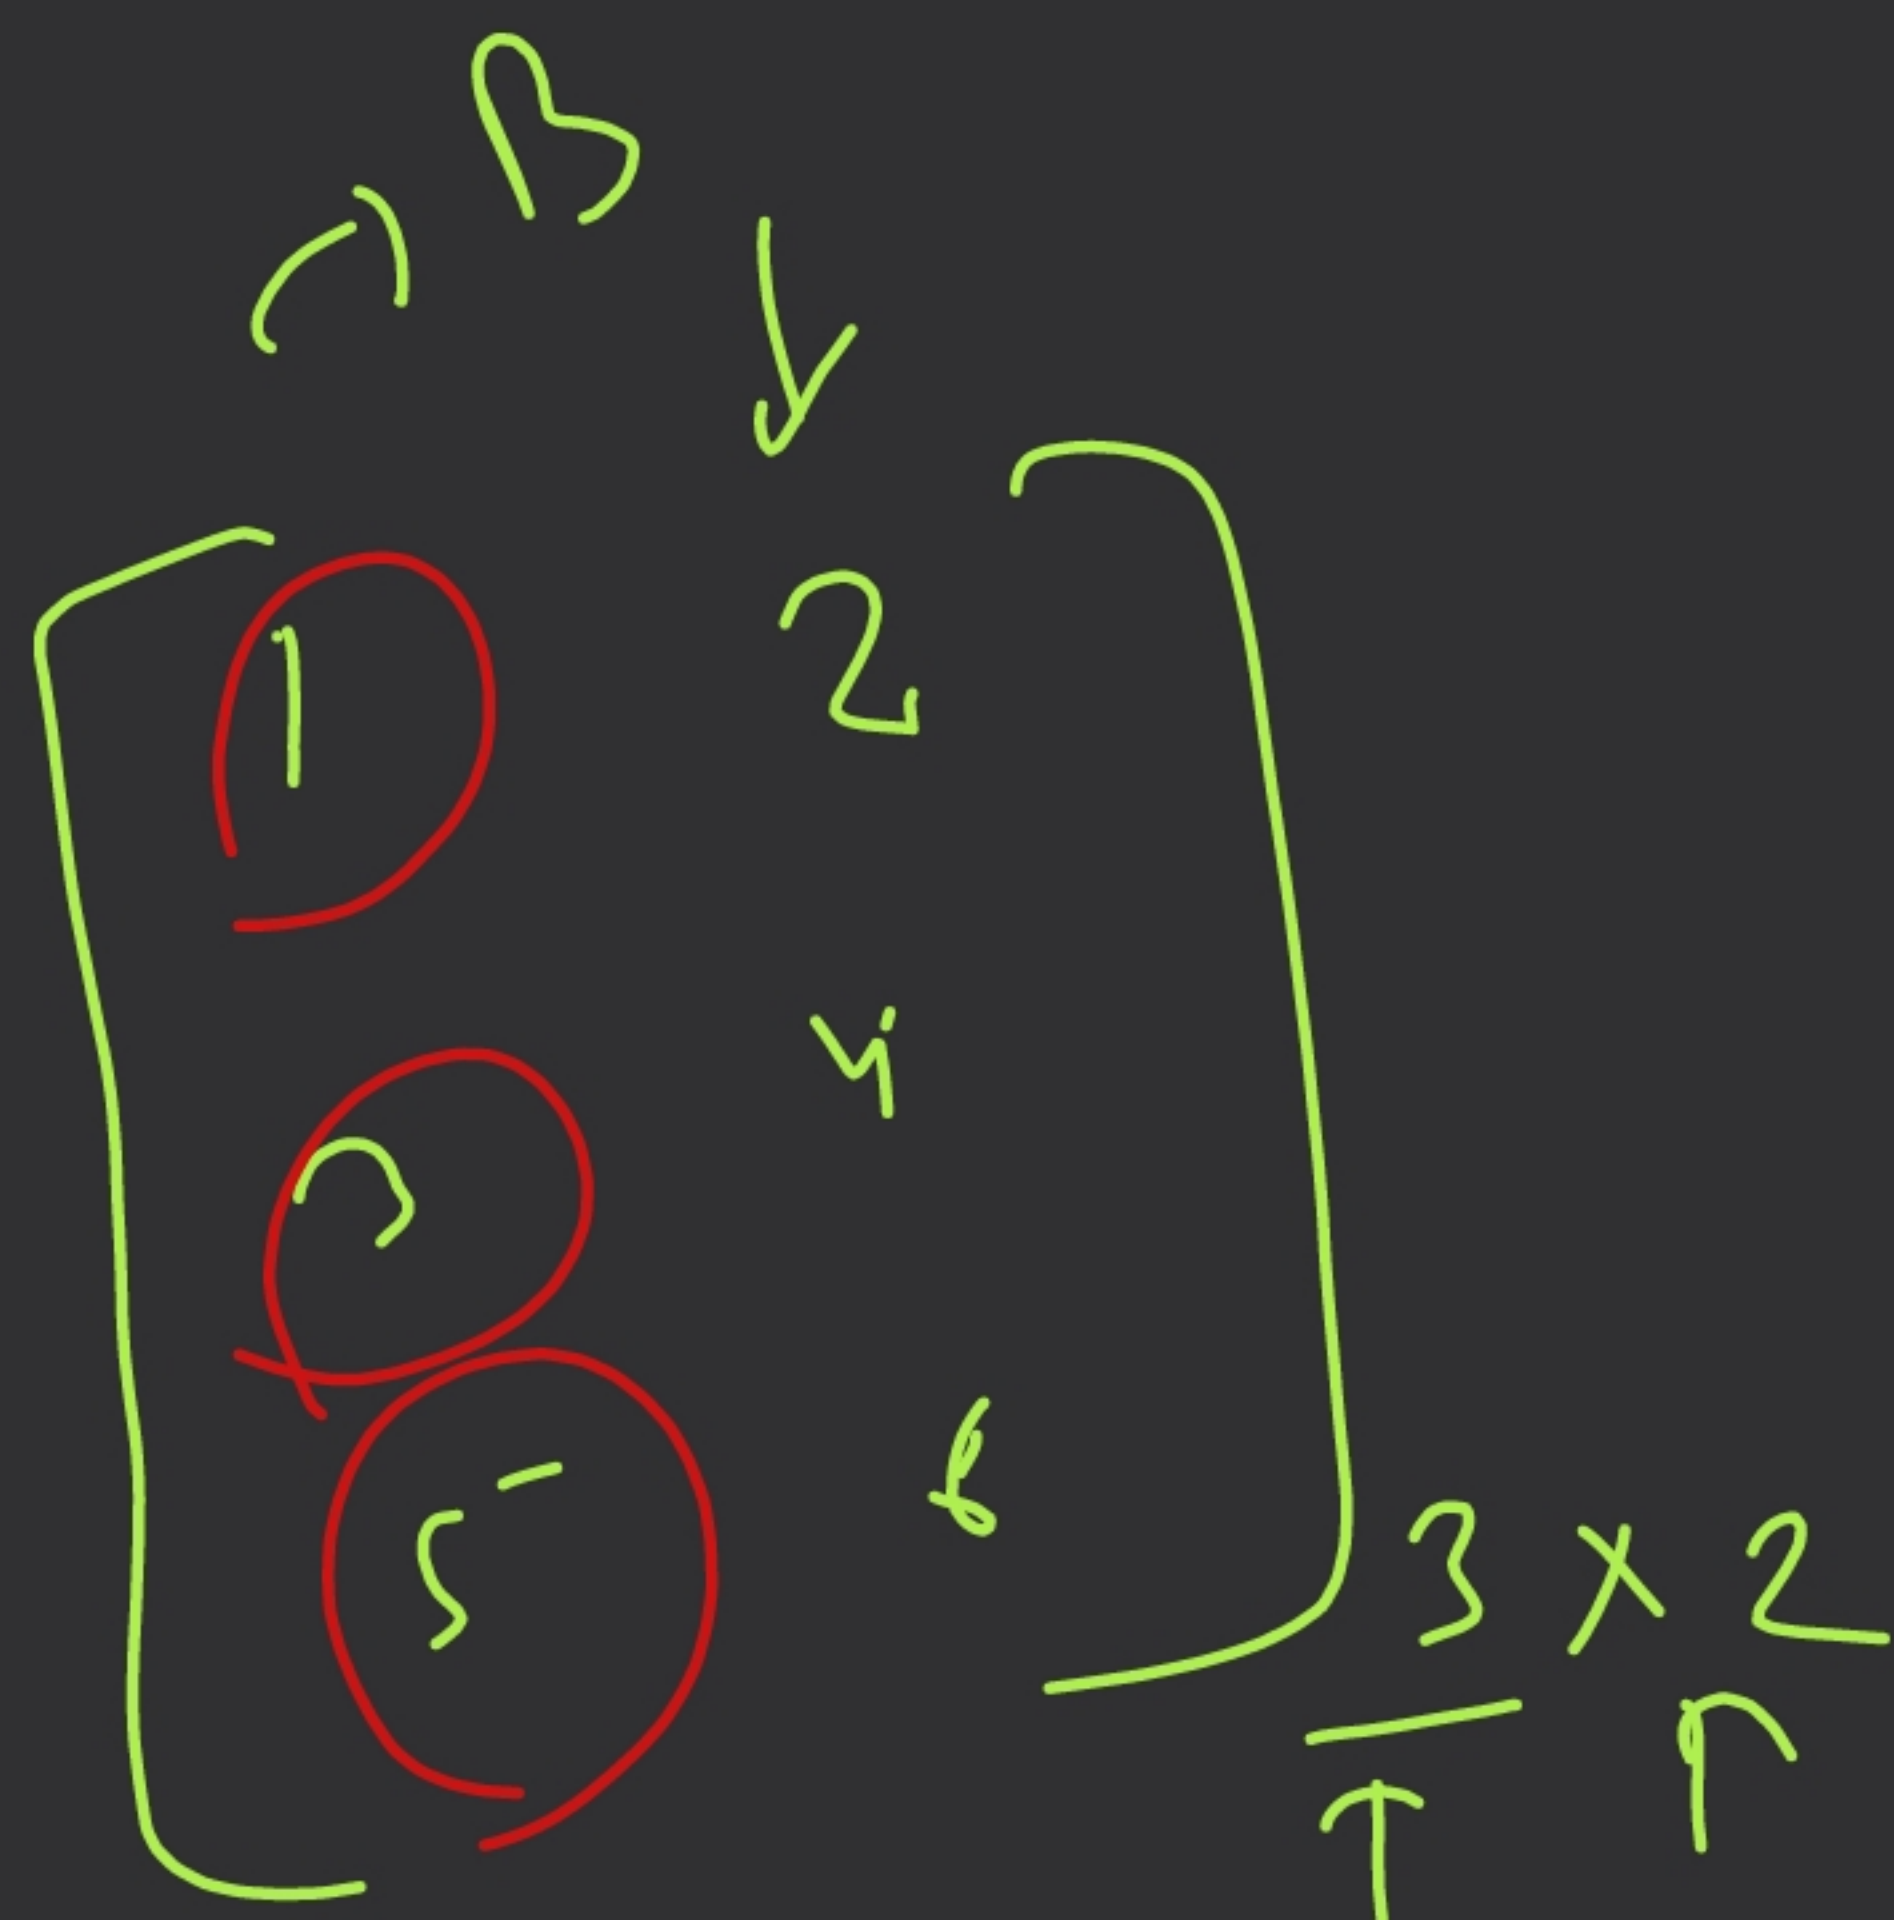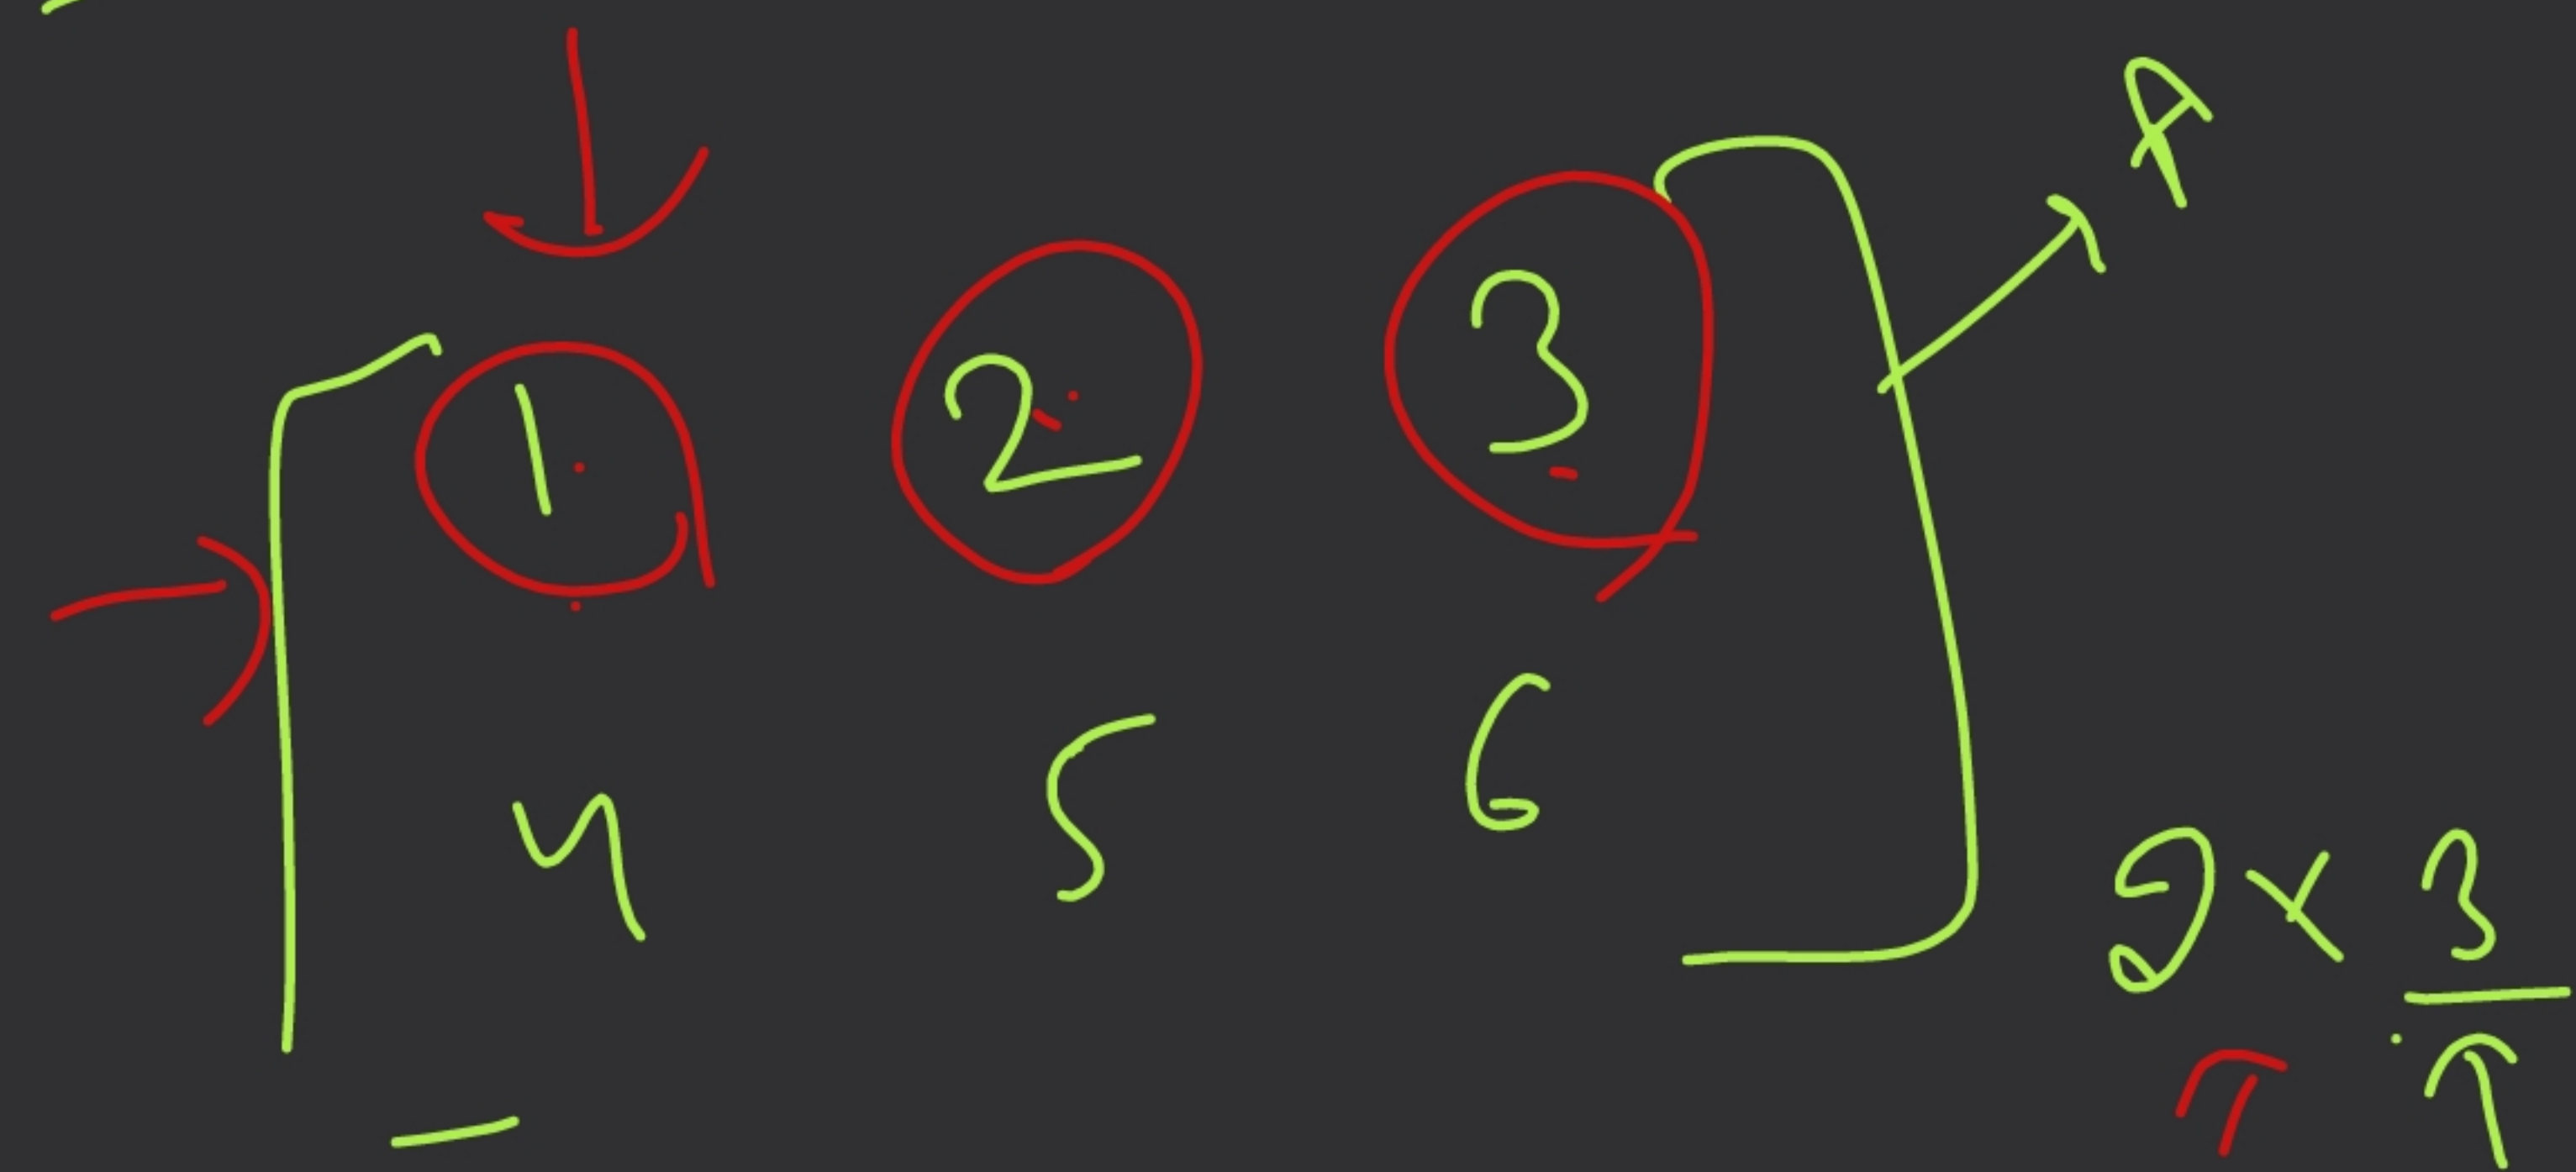

$$00 \times 00 + 01 \times 10 + 02 \times 20$$

$$i=0, j=0, k=0$$

$$00 \times 00 + 01 \times 10 + 02 \times 20$$

$$r1 = A.length$$

$$c1 = A[0].length$$

$$c2 = B[0].length$$

$$\text{int}[] res = \text{new int}[r1]$$

$$\text{for} (\text{int } i = 0 \rightarrow r1)$$

$$\text{for} (\text{int } j = 0 \rightarrow c2)$$

$$\text{for} (\text{int } k = 0; k < c1; k++)$$

$$res[i] += A[i][k] * B[k][j];$$

?

?

1

String:

Java uses String pool

String s = "Hello";




→ strings are immutable

String b = "Hello";



a.equals(b);

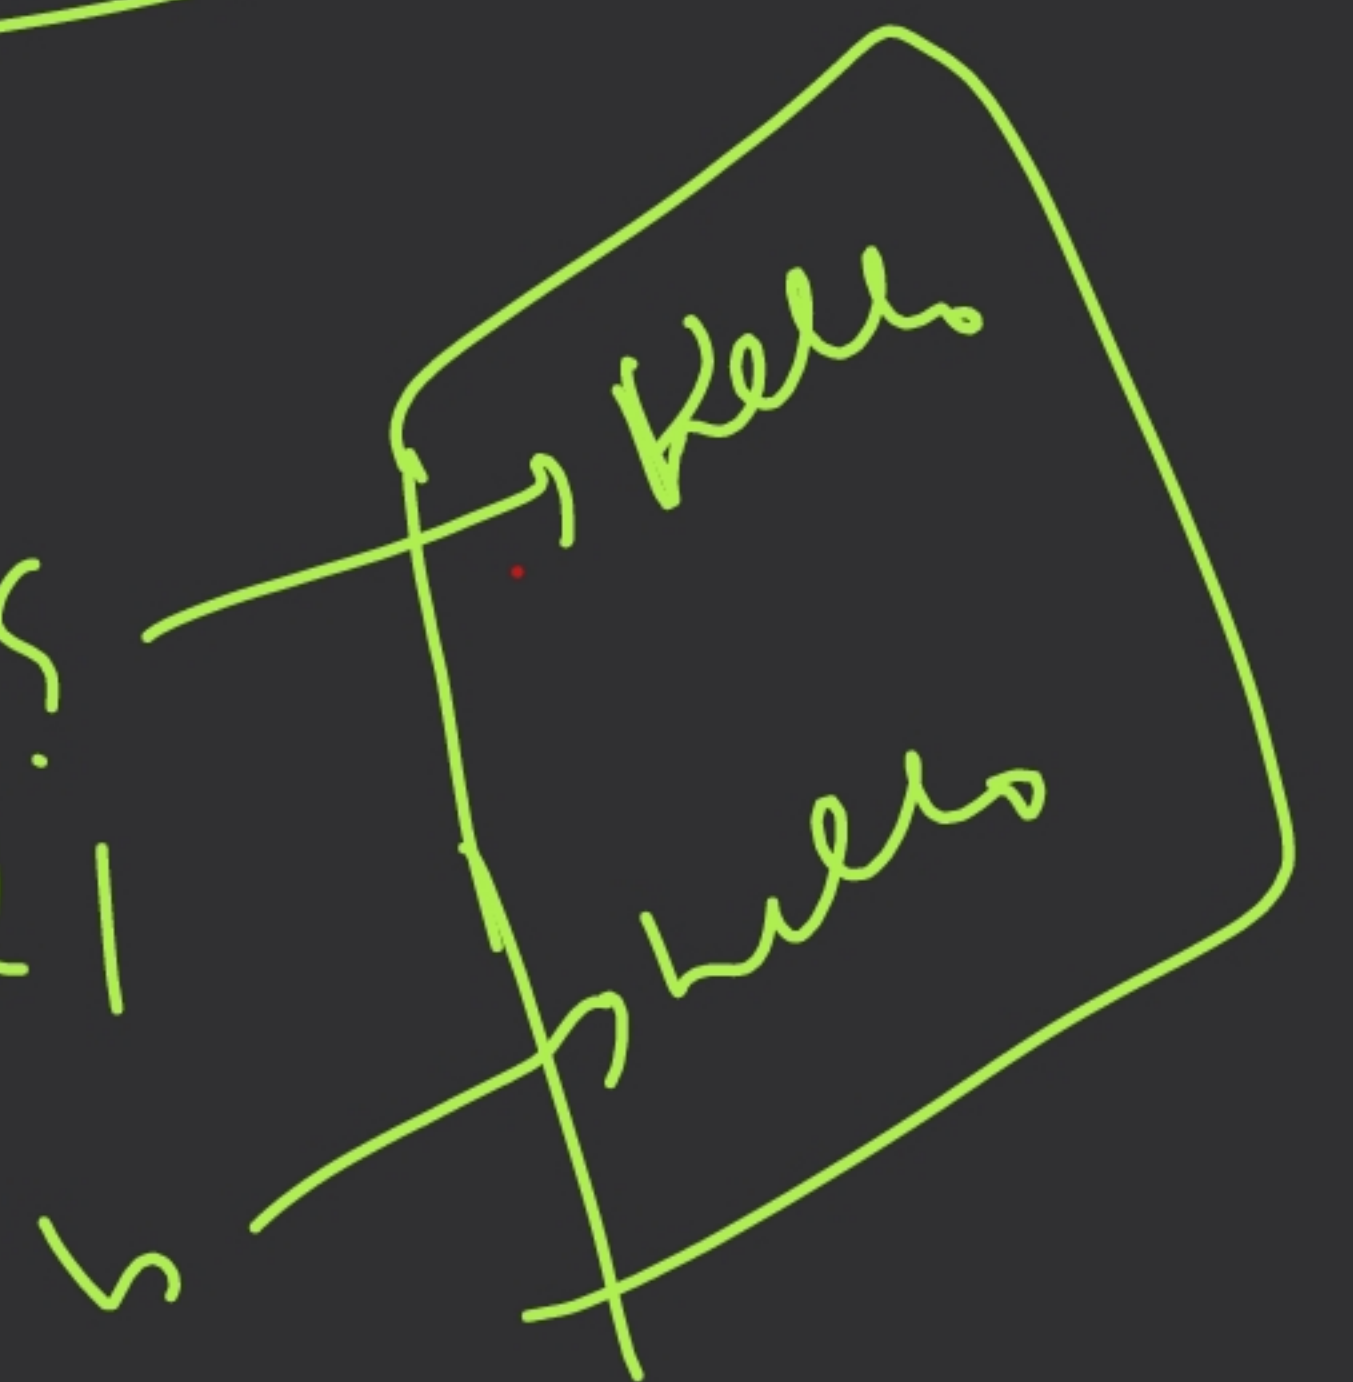

Sort (a == b);

String s = new String("Hello");
String b = new String("hello");

Sort (a == b);

1
10 %

a == b
↓
(Compares the references)

Rule for string

`==` (compare references)

`.equals()` (compare value)

String a = "hello";

String b = new String("hello");

a == b;

a.equals(b);

String c = new String("hello");

c.intern();

H.W.

→ Review the Aggarwal code problem properly

Do Dry Run