
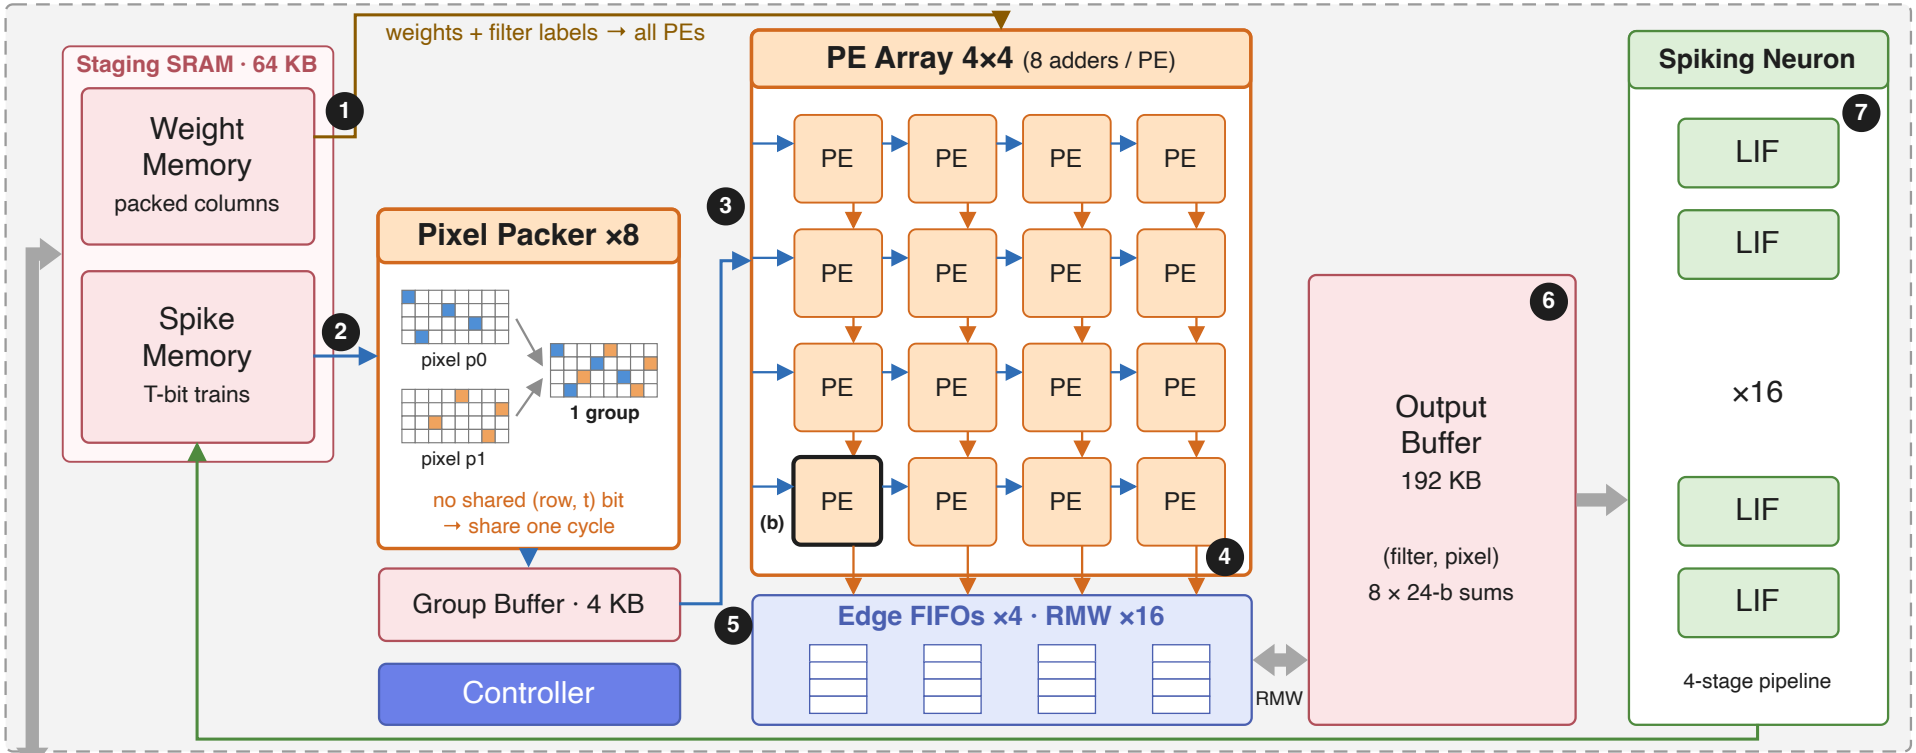


(a)

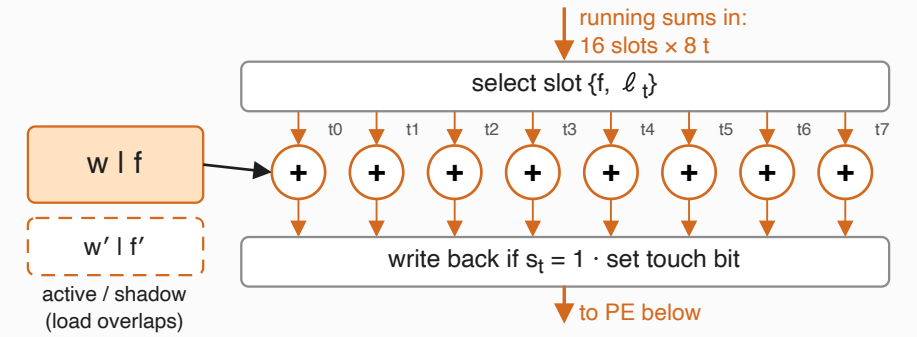

(c) Packed formats

Group (127 b) — up to G = 4 pixels of one K-tile

32 spike bits	32 × 2-b pixel labels	4 × 7-b pixel ids	cnt
4 rows × 8 t	which pixel owns each bit	routed to the edge unit	

Weight column (64 b) — up to F = 4 filters of one K-tile

4 × 8-b weights	4 × 2-b filter labels	4 × 6-b filter ids

Filters share a column when their non-zero weights never fall in the same row (offline). Pixels share a group when their spikes never fall on the same (row, timestep) bit (run time). Labels route every addition, so no PE searches or compares.