

[NEW REFCARD] Drupal 9 Essentials: An Introduction to Core Features

[Read Now](#)

DZone > Java Zone > Microservice Architectures With Spring Cloud and Docker

Microservice Architectures With Spring Cloud and Docker

by Alexander Lukyanchikov · Jun. 02, 16 · Java Zone · Tutorial


This article provides a starting point for understanding common Microservice architecture patterns by example of a proof-of-concept application built with Spring Boot, Spring Cloud, and Docker.

The code is available on Github, and images are available on Docker Hub. You can start the whole system with just one command.

As a basis for this system I chose an old project, whose backend used to be a monolith. The application provides a way to deal with personal finances, organize incomes and expenses, manage savings, analyze statistics, and create simple forecasts.

Functional Services

The monolith application was decomposed into three core microservices. All of them are independently deployable applications, organized around certain business capabilities.

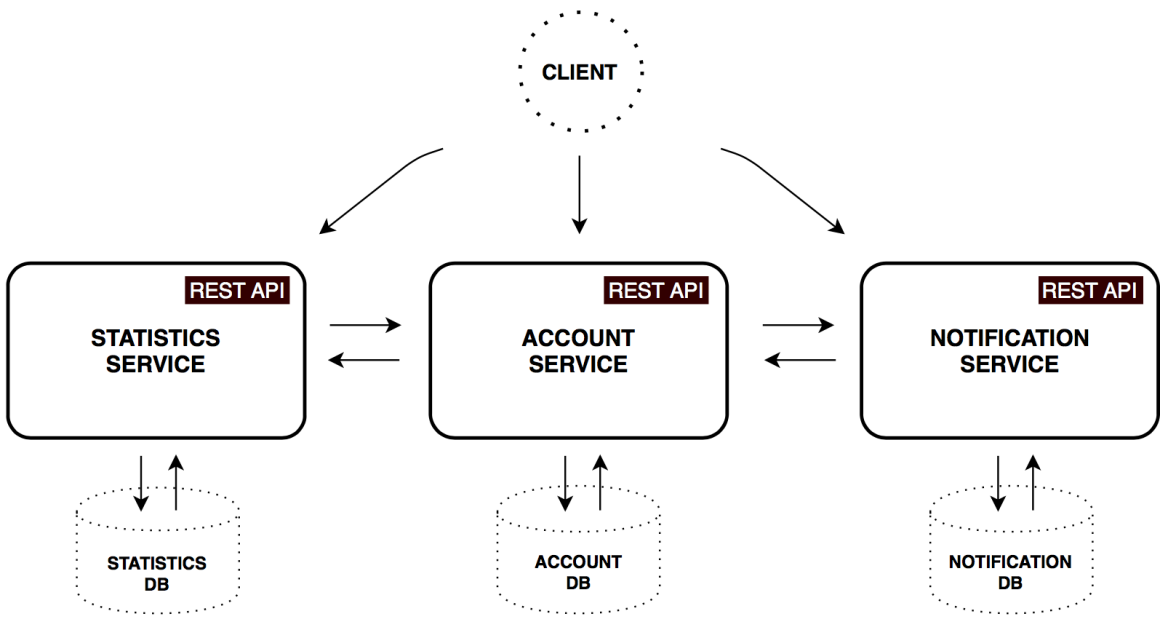

Account Service

Contains general user input logic and validation: incomes/expenses items, savings, and account settings.

METHOD	PATH	DESCRIPTION	USER AUTHENTICATED	AVAILABLE FROM UI
GET	/accounts/{account}	Get specified account data		
GET	/accounts/current	Get current account data	×	×
METHOD GET	PATH /accounts/demo	DESCRIPTION Get demo account data (pre-filled incomes/expenses items, etc)	USER AUTHENTICATED	AVAILABLE FROM UI

METHOD	PATH	DESCRIPTION	USER AUTHENTICATED	AVAILABLE FROM UI
PUT	/accounts/current	Save current account data	×	×
POST	/accounts/	Register new account		×

Statistics Service

Performs calculations on major statistics parameters and captures time series for each account. A datapoint contains values normalized to base currency and time period. This data might be used to track cash flow dynamics in an account's lifetime.

METHOD	PATH	DESCRIPTION	USER AUTHENTICATED	AVAILABLE FROM UI
GET	/statistics/{account}	Get specified account statistics		
GET	/statistics/current	Get current account statistics	×	×
GET	/statistics/demo	Get demo account statistics		×
PUT	/statistics/{account}	Create or update time series datapoint for specified account		

Notification Service

Stores a user's contact information and notification settings (like remind and backup frequency). Scheduled worker collects required information from other services and sends e-mail messages to subscribed customers.


METHOD	PATH	DESCRIPTION	USER AUTHENTICATED	AVAILABLE FROM UI
GET	/notifications/settings/current	Get current account notification settings	×	×
PUT	/notifications/settings/current	Save current account notification settings	×	×


Notes

- Each microservice has it's own database, so there is no way to bypass the API and access persistence data directly.
- For this project, I used MongoDB as the primary database for each service. It also might make sense to have a polyglot persistence architecture (to choose the type of database that is best suited to the service requirements).
- Service-to-service communication is quite simplified: microservices talking using only synchronous REST API. Common practice in a real-world systems is to use combination of interaction styles. For example, perform synchronous GET request to retrieve data and use asynchronous approach via Message broker for create/update operations in order to decouple services and buffer messages. However, this brings us in eventual consistency world.

Infrastructure Services

There's a bunch of common patterns in distributed systems, which could help us to make described core services work. Spring cloud provides powerful tools that enhance Spring Boot applications behaviour to implement those patterns. I'll cover them briefly.



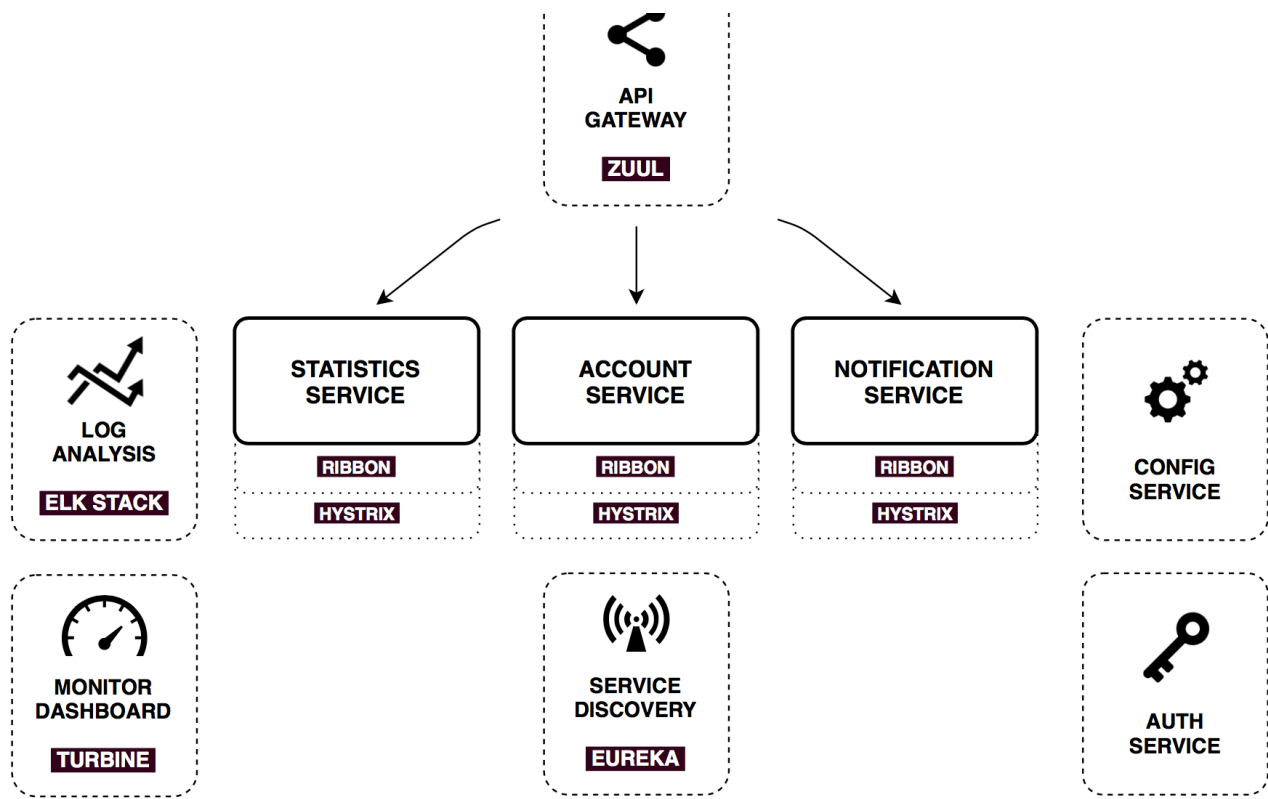

Config Service

Spring Cloud Config is horizontally scalable centralized configuration service for distributed systems. It uses a pluggable repository layer that currently supports local storage, Git, and Subversion.

In this project, I use `native` profile, which simply loads config files from the local classpath. You can see `shared` directory in Config service resources. Now, when Notification-service requests its configuration, Config service responds with `shared/notification-service.yml` and `shared/application.yml` (which is shared between all client applications).

Client-side Usage

Just build Spring Boot application with `spring-cloud-starter-config` dependency, autoconfiguration will do the rest.

Now you don't need any embedded properties in your application. Just provide `bootstrap.yml` with the application name and Config service url:

```
1 spring:
2   application:
3     name: notification-service
4   cloud:
5     config:
6       uri: http://config:8888
7       fail-fast: true
```

With Spring Cloud Config, You Can Change App Configuration Dynamically

For example, the `EmailService` bean was annotated with `@RefreshScope`. That means you can change e-mail text and subject lines without rebuilding and restarting the Notification service application.

First, change the required properties in the Config server. Then, perform the refresh request to the Notification service: `curl -H "Authorization: Bearer #token#" -XPOST http://127.0.0.1:8000/notifications/refresh`

You could also use webhooks to automate this process.

Notes

- There are some limitations for dynamic refreshes though. `@RefreshScope` doesn't work with `@Configuration` classes and can't affect `@Scheduled` methods.
- `fail-fast` property means that the Spring Boot application will fail startup immediately if it cannot connect to the Config Service. That's very useful when you're starting all applications together.
- There are significant security notes below.

Auth Service

Authorization responsibilities are completely extracted to separate server, which grants OAuth2 tokens for backend resource services. Auth Server is used for user authorization as well as for secure machine-to-machine communication inside a perimeter.

In this project, I use `Password credentials` as a grant type for user authorization (since it's only used by the native application UI) and `Client Credentials` as a grant type for microservices authorization.

Spring Cloud Security provides convenient annotations and autoconfigurations to make this really easy to implement from both the server and client side. You can learn more about it in the documentation and check configuration details in Auth Server code.

From the client side, everything works exactly the same as with traditional session-based authorization. You can retrieve `Principal` objects from request, check user roles and other stuff with expression-based access control and `@PreAuthorize` annotation.

Each client in PiggyMetrics (account-service, statistics-service, notification-service and browser) has a scope: `server` for backend services, and `ui` - for the browser. So we can also protect controllers from external access, for example:

```
1@PreAuthorize("#oauth2.hasScope('server')")
2@RequestMapping(value = "accounts/{name}", method = RequestMethod.GET)
3public List<DataPoint> getStatisticsByAccountName(@PathVariable String name) {
4    return statisticsService.findByAccountName(name);
5}
```

API Gateway

As you can see, there are three core services, which expose external APIs to the client. In a real-world system, this number can grow very quickly as well as whole system complexity. Actually, hundreds of services might be involved in rendering one complex webpage.

In theory, a client could make requests to each of the microservices directly. But obviously there are challenges and limitations with this option, like necessity to know all endpoints addresses, perform http request for each piece of information separately, merge the result on a client side. Another problem is non-web-friendly protocols, which might be used on the backend.

Usually a much better approach is to use an API Gateway. It is a single entry point into the system, used to handle requests by routing them to the appropriate backend service or by invoking multiple backend services and aggregating the results. Also, it can be used for authentication, insights, stress and canary testing, service migration, static response handling, active traffic management.

Netflix open sourced such an edge service, and now with Spring Cloud we can enable it with one `@EnableZuulProxy` annotation. In this project, I use Zuul to store static content (UI application) and to route requests to the appropriate microservices. Here's a simple prefix-based routing configuration for the Notification service:

```

1 zuul:
2   routes:
3     notification-service:
4       path: /notifications/**
5       serviceId: notification-service
6       stripPrefix: false

```

That means all requests starting with `/notifications` will be routed to Notification service. There is no hardcoded address, as you can see. Zuul uses Service discovery mechanism to locate Notification service instances and also Circuit Breaker and Load Balancer, described below.

Service Discovery

Another commonly known architecture pattern is service discovery. It allows automatic detection of network locations for service instances, which could have dynamically assigned addresses because of auto-scaling, failures, and upgrades.

The key part of service discovery is the registry. I used Netflix Eureka for this project. Eureka is a good example of the client-side discovery pattern, when the client is responsible for determining the locations of available service instances (using a registry server) and load balancing requests across them.

With Spring Boot, you can easily build Eureka Registry with a `spring-cloud-starter-eureka-server` dependency, `@EnableEurekaServer` annotation, and simple configuration properties.

Client support is enabled with `@EnableDiscoveryClient` annotation and `bootstrap.yml` with application name:

```

1 spring:
2   application:
3     name: notification-service

```

Now, on application startup, it will register with Eureka Server and provide meta-data, such as host and port, health indicator URL, home page, etc. Eureka receives heartbeat messages from each instance belonging to a service. If the heartbeat fails over a configurable timetable, the instance will be removed from the registry.

Also, Eureka provides a simple interface, where you can track running services and the number of available instances: `http://localhost:8761`

The screenshot shows the Spring Eureka web interface. At the top, there's a navigation bar with the Spring Eureka logo and links for HOME and LAST 1000 SINCE STARTUP. The main content area is divided into several sections:

- System Status:** A table showing environment details.

Environment	test	Current time	2016-04-05T08:25:27 +0000
Data center	default	Uptime	00:03
		Lease expiration enabled	false
		Renews threshold	10
		Renews (last min)	6
- DS Replicas:** A section showing the registry status with a green indicator.
- Instances currently registered with Eureka:** A table listing registered services.

Application	AMIs	Availability Zones	Status
ACCOUNT-SERVICE	n/a (1)	(1)	UP (1) - 294720aab0a9:account-service:6000
AUTH-SERVICE	n/a (1)	(1)	UP (1) - 8feb1f6a04a2:auth-service:5000
GATEWAY	n/a (1)	(1)	UP (1) - 4dbf6ede836c:gateway:4000
NOTIFICATION-SERVICE	n/a (1)	(1)	UP (1) - 4e91cd36b09b:notification-service:8000
STATISTICS-SERVICE	n/a (1)	(1)	UP (1) - 070cfc12349a:statistics-service:7000
- General Info:** A table showing system metrics.

Name	Value
total-avail-memory	735mb
environment	test
num-of-cpus	4
current-memory-usage	286mb (38%)
server-uptime	00:03

Load Balancer, Circuit Breaker, and Http Client

Load Balancer, Circuit Breaker, and HTTP Client

Netflix OSS provides another great set of tools.

Ribbon

Ribbon is a client side load balancer which gives you a lot of control over the behavior of HTTP and TCP clients. Compared to a traditional load balancer, there is no need of an additional hop for every over-the-wire invocation — you can contact the desired service directly.

Out of the box, it natively integrates with Spring Cloud and Service Discovery. Eureka Client provides a dynamic list of available servers so Ribbon could balance between them.

Hystrix

Hystrix is the implementation of a Circuit Breaker pattern, which gives a control over latency and failure from dependencies accessed over the network. The main idea is to stop cascading failures in a distributed environment with a large number of microservices. That helps to fail fast and recover as soon as possible — important aspects of fault-tolerant systems that self-heal.

Besides circuit breaker control, with Hystrix you can add a fallback method that will be called to obtain a default value in case the main command fails.

Moreover, Hystrix generates metrics on execution outcomes and latency for each command, that we can use to monitor system behavior.

Feign

Feign is a declarative HTTP client, which seamlessly integrates with Ribbon and Hystrix. Actually, with one `spring-cloud-starter-feign` dependency and `@EnableFeignClients` annotation you have a full suite of a load balancer, circuit breaker, and HTTP client with a sensible ready-to-go default configuration.

Here is an example from Account Service:


```
1 @FeignClient(name = "statistics-service")
2 public interface StatisticsServiceClient {
3
4     @RequestMapping(method = RequestMethod.PUT, value = "/statistics/{accountName}", consumes = MediaType.APPLICATION_JSON_UTF8
5     void updateStatistics(@PathVariable("accountName") String accountName, Account account);
6
7 }
```





- Everything you need is just an interface
- You can share `@RequestMapping` part between Spring MVC controller and Feign methods
- Above example specifies just desired service id - `statistics-service`, thanks to autodiscovery through Eureka (but obviously you can access any resource with a specific url)

Monitor Dashboard

In this project configuration, each microservice with Hystrix on board pushes metrics to Turbine via Spring Cloud Bus (with AMQP broker). The Monitoring project is just a small Spring boot application with Turbine and Hystrix Dashboard.

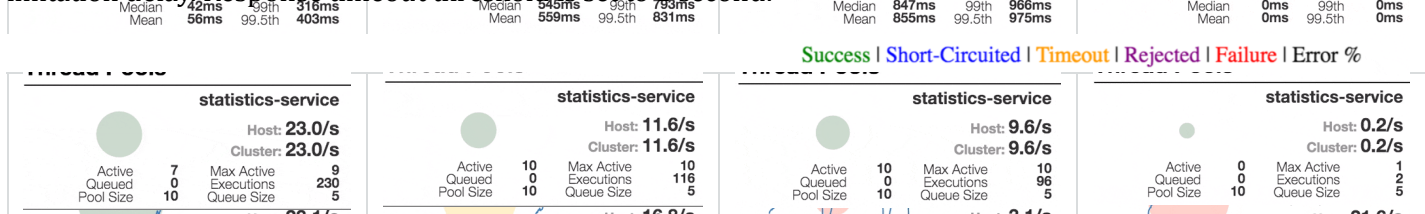Let's see our system behavior under load. Account service calls Statistics service and it responses with a vary imitation delay. Response timeout threshold is set to 5 seconds.



 <p>Host: 23.1/s Cluster: 23.1/s Circuit: Closed</p> <p>Hosts: 1 Median: 42ms Mean: 56ms</p> <p>90th: 84ms 99th: 316ms 99.5th: 403ms</p> <p>Thread Pools</p> <p>statistics-service</p> <p>Host: 23.0/s Cluster: 23.0/s</p> <p>Active: 7 Queued: 0 Pool Size: 10</p> <p>Max Active: 9 Executions: 230 Queue Size: 5</p> <p>0 ms delay</p> <p>Well behaving system. The throughput is about 22 requests/second. Small number of active threads in Statistics service. The median service time is about 50 ms.</p>	 <p>Host: 16.8/s Cluster: 16.8/s Circuit: Closed</p> <p>Hosts: 1 Median: 545ms Mean: 559ms</p> <p>90th: 589ms 99th: 793ms 99.5th: 831ms</p> <p>Thread Pools</p> <p>statistics-service</p> <p>Host: 11.6/s Cluster: 11.6/s</p> <p>Active: 10 Queued: 0 Pool Size: 10</p> <p>Max Active: 10 Executions: 116 Queue Size: 5</p> <p>500 ms delay</p> <p>The number of active threads is growing. We can see purple number of thread-pool rejections and therefore about 30-40% of errors, but circuit is still closed.</p>	 <p>Host: 3.1/s Cluster: 3.1/s Circuit: Open</p> <p>Hosts: 1 Median: 847ms Mean: 855ms</p> <p>90th: 887ms 99th: 966ms 99.5th: 975ms</p> <p>Thread Pools</p> <p>statistics-service</p> <p>Host: 9.6/s Cluster: 9.6/s</p> <p>Active: 10 Queued: 0 Pool Size: 10</p> <p>Max Active: 10 Executions: 96 Queue Size: 5</p> <p>800 ms delay</p> <p>Half-open state: the ratio of failed commands is more than 50%, the circuit breaker kicks in. After sleep window amount of time, the next request is let through.</p>	 <p>Host: 21.6/s Cluster: 21.6/s Circuit: Open</p> <p>Hosts: 1 Median: 0ms Mean: 0ms</p> <p>90th: 0ms 99th: 0ms 99.5th: 0ms</p> <p>Thread Pools</p> <p>statistics-service</p> <p>Host: 0.2/s Cluster: 0.2/s</p> <p>Active: 0 Queued: 0 Pool Size: 10</p> <p>Max Active: 1 Executions: 2 Queue Size: 5</p> <p>1100 ms delay</p> <p>100 percent of the requests fail. The circuit is now permanently open. Retry after sleep time won't close circuit again, because the single request is too slow.</p>
--	--	---	---

Log Analysis

Centralized logging can be very useful when attempting to identify problems in a distributed environment. Elasticsearch, Logstash, and Kibana stack lets you search and analyze your logs, utilization and network activity data with ease. Ready-to-go Docker configuration is described in my other project.

Security


An advanced security configuration is beyond the scope of this proof-of-concept project. For a more realistic simulation of a real system, consider using https and JCE keystore to encrypt microservices passwords and Config server properties content (see documentation for details).

Infrastructure Automation

Deploying microservices, with their interdependence, is a much more complex process than deploying a monolith application. It is important to have a fully automated infrastructure. We can achieve following benefits with a Continuous Delivery approach:

- The ability to release software anytime.
- Any build could end up being a release.
- Build artifacts once, deploy as needed.

Here is a simple Continuous Delivery workflow, implemented in this project:

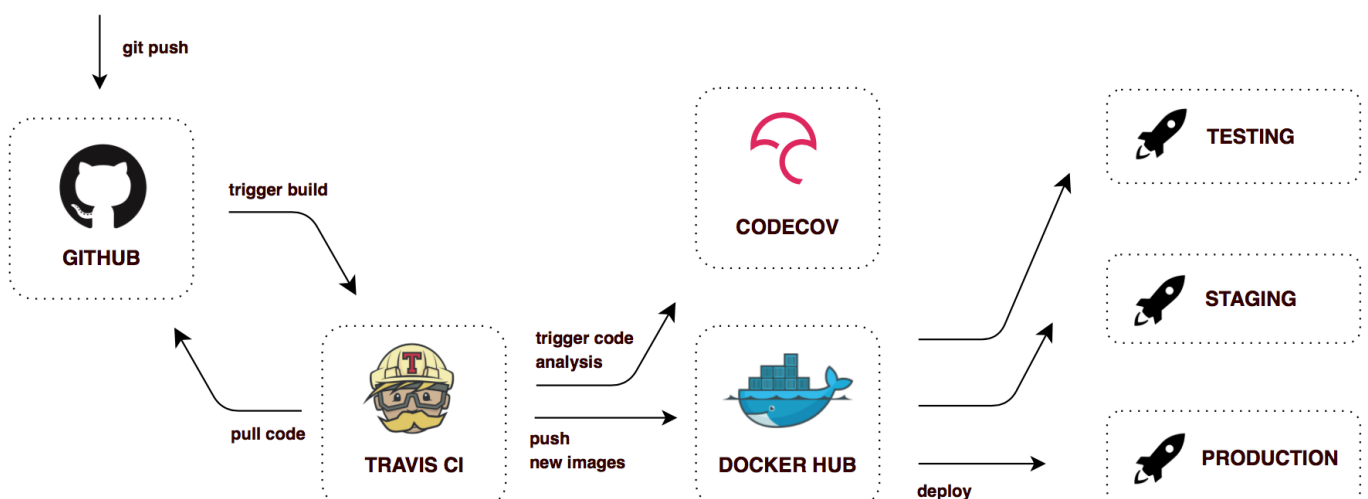

(automatically
or manually
triggered)

In this configuration, Travis CI builds tagged images for each successful Git push. So there is always a latest image for each microservice on Docker Hub and older images are tagged with Git commit hash. It's easy to deploy any of them and quickly roll back, if needed.

How to Run All the Things?

It's really easy and I suggest you to try. Keep in mind, that you are going to start 8 Spring Boot applications, 4 MongoDB instances, and RabbitMq. Make sure you have 4 Gb RAM available on your machine. You can always run just vital services though Gateway, Registry, Config, Auth Service, and Account Service.

Before You Start

- Install Docker and Docker Compose.
- Export environment variables: `CONFIG_SERVICE_PASSWORD`, `NOTIFICATION_SERVICE_PASSWORD`, `STATISTICS_SERVICE_PASSWORD`, `ACCOUNT_SERVICE_PASSWORD`, `MONGODB_PASSWORD`

Production Mode

In this mode, all of the latest images will be pulled from Docker Hub. Just copy `docker-compose.yml` and hit `docker-compose up -d`.

Development Mode

If you'd like to build images yourself (with some changes in the code, for example), you have to clone all repository and build artifacts with Maven. Then,

```
run docker-compose -f docker-compose.yml -f docker-compose.dev.yml up -d
```

`docker-compose.dev.yml` inherits `docker-compose.yml` with additional possibility to build images locally and expose all containers ports for convenient development.

Important Endpoints


- localhost:80 - Gateway
- localhost:8761 - Eureka Dashboard
- localhost:9000 - Hystrix Dashboard
- localhost:8989 - Turbine stream (source for Hystrix Dashboard)
- localhost:15672 - RabbitMq management

Notes


All Spring Boot applications require already running Config Server for startup. But we can start all containers simultaneously because of `fail-fast` Spring Boot property and `restart: always` docker-compose option. That means all dependent containers will try to restart until Config Server will be up and running.

Also, Service Discovery mechanism needs some time after all applications startup. Any service is not available for discovery by clients until the instance, the Eureka server and the client all have the same metadata in their local cache, so it could take 3 heartbeats. Default heartbeat period is 30 seconds.


Like This Article? Read More From DZone

 related
article
thumbnail

DZone Article
Java-Based Microservices Architecture and Abixen


 related
article
thumbnail

DZone Article
The Netflix Stack Using Spring Boot - Part 1: Eureka

 **related article thumbnail** **DZone Article**
SpringOne Replay: Real World
Microservices With Spring Cloud, Netflix
OSS, and Kubernetes [Video]

 **related refcard thumbnail** **Free DZone Refcard**
Java 14

Topics: CONTINUOUS DELIVERY , DOCKER , JAVA , MICROSERVICE ARCHITECTURE , NETFLIX OSS , SPRING , SPRING CLOUD

Published at DZone with permission of Alexander Lukyanchikov . [See the original article here.](#) 
Opinions expressed by DZone contributors are their own.

ABOUT US

About DZone
Send feedback
Careers

ADVERTISE

Developer Marketing Blog
Advertise with DZone
+1 (919) 238-7100

CONTRIBUTE ON DZONE

MVB Program
Zone Leader Program
Become a Contributor
Visit the Writers' Zone

LEGAL

Terms of Service
Privacy Policy

CONTACT US

600 Park Offices Drive
Suite 150
Research Triangle Park, NC 27709
support@dzone.com
+1 (919) 678-0300

Let's be friends:    

DZone.com is powered by  AnswerHub logo