

Maxicash Integration

Welcome to MaxiCash

The MaxiCash integration platform allows merchants to integrate with the MaxiCash platform to receive payments via their mobile applications or websites. The API uses JSON to interact with any software development technology. In order to receive MaxiCash payments for your website or mobile application, you must be registered on the MaxiCash platform as a merchant. Here are the steps to follow:

- **Step 1. Download the MaxiCash mobile application and sign up ...**



- **Step 2. Contact us to upgrade your account to a merchant account at info @maxicashapp.com. You will receive a merchant form to fill out in order to provide details about your business and your preferred withdrawal wallet or banking information.**
- **Step 3. Once the documents are filled out, you will receive Live and Sandbox (Test) accounts (MerchantID and MerchantPassword)**

The MaxiCash platform has 2 currencies, the maxiDollar and the maxiRand. The maxiDollar has an exchange rate of 1 to 1 against the US dollar and is the most used currency by our merchant network. Merchants in South Africa use the maxiRand currency, which has an exchange rate of 1 to 1 against the South African Rand.

Payment Reference

Currency :

Amount :

Powered By
maxicash

Choose Your Payment method

- Credit & Debit Cards
- Maxi Cash Wallet**
- Paypal
- Mobile Banking

Pay with Maxi Cash Wallet

maxicash

MaxiCash Telephone No

PAY NOW

CANCEL


© 2017 - MaxiCash App

Mobile application and website integrations

The integration of the MaxiCash platform supports 2 integration models: mobile applications (MaxiCash API) and websites (MaxiCash gateway).

The **MaxiCash gateway** is primarily designed to allow simple and quick integration of the website with the MaxiCash platform. With the MaxiCash gateway, you can receive payments from MaxiCash users and others. The gateway also allows the merchant to receive payments from non-MaxiCash users using **credit cards, Mobile Money, and others.**

The MaxiCash gateway includes e-commerce plugins for **Wordpress/WooCommerce and Prestashop (1.6 and 1.7).**

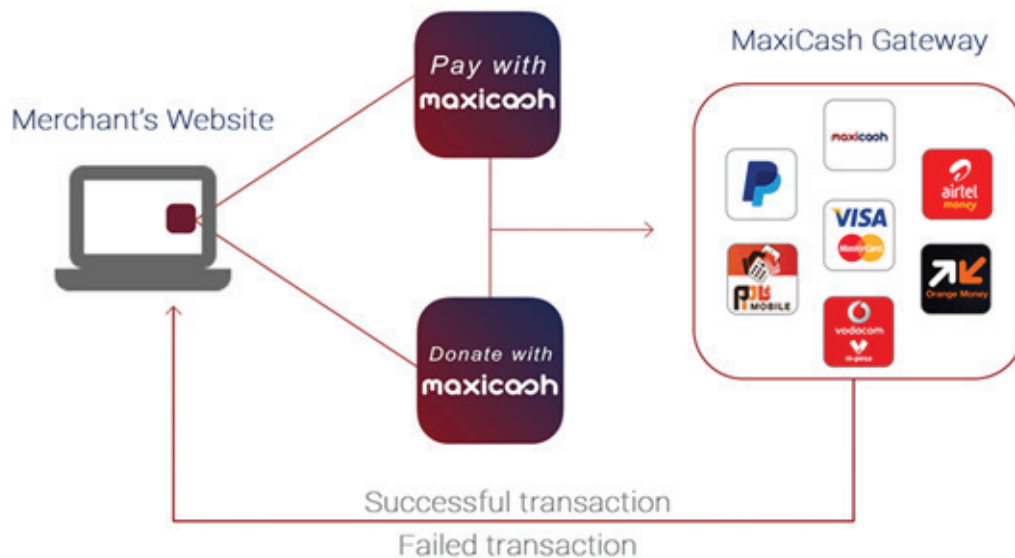

MaxiCash Gateway.

The MaxiCash gateway allows the merchant to collect payments into their MaxiCash account using multiple payment channels such as credit cards, MaxiCash, Mobile Money, and Mobile Banking.

Integration with MaxiCash Gateway can be done using the following methods:

- Form Post
- Posting to URL with QueryString
- eCommerce Plugin (Wordpress/WooCommerce & Prestashop 1.6/1.7)

Form Post Payment

The FormPost method allows you to call the MaxiCash Gateway with an HTML form.

Post the form with the attributes below using these URLs:

- Test: <https://api-testbed.maxicashapp.com/PayEntryPost>
- Live: <https://api.maxicashapp.com/PayEntryPost>

Here's how to use each parameter:

- **PayType** : Always set to MaxiCash, unless otherwise specified. This parameter is mandatory.
- **Amount** :The expected amount for the transaction. This amount will be credited to your MaxiCash account. **This parameter is mandatory**. Please note that amounts are expected in cents. This means that if you want to process a payment of 1 USD, you should send an amount of 100.
- **Currency**: The currency of the transaction. **This parameter is mandatory**. Typically takes 5 values: USD, ZAR, CDF, maxiRand, or maxiDollar.

- **Phone:** The payer's phone number. **This parameter is optional.** Generally used for Mobile Money payment methods.
- **E-mail :** The payer's email address. **This parameter is optional.** Generally used for credit card payments.
- **Merchant ID:** The merchant ID authenticates the merchant on the platform. **This parameter is mandatory.**
- **Merchant Password :** The Merchant Password works in conjunction with the MerchantID to authenticate the merchant on the platform. **This parameter is mandatory.**
- **Language:** Allows specifying a language on the gateway. **This parameter is optional.** Currently, only English (en) and French (fr) are supported. When not specified, the system defaults to English
- **Reference:** This is a transaction reference used by the merchant. **This parameter is mandatory.**
- **accepturl:** This is the merchant's webpage to which the payer will be redirected when their payment is successful. **This parameter is mandatory.** The MaxiCash gateway will add some query string parameters described below.
- **cancelurl :** This is the merchant's webpage to which the payer will be redirected if they choose to cancel the payment. **This parameter is optional.** The MaxiCash gateway will add some query string parameters described below. If this parameter is not specified, MaxiCash will default to the decline URL.
- **declineurl :** This is the merchant's webpage to which the payer will be redirected in case of payment failure. MaxiCash also defaults to this parameter if the cancel URL is not specified. **This parameter is mandatory.** The MaxiCash gateway will add some query string parameters described below.
- **notifyurl :** This parameter informs the merchant site of the transaction status before the payer is redirected to accepturl, declineurl, or failureurl. **This parameter is optional but recommended.**

```
<form action="https://api.maxicashapp.com/PayEntryPost" method="POST">
  <input type="hidden" name="PayType" value="MaxiCash">
  <input type="hidden" name="Amount" value="{TOTAL_AMOUNT}">
  <input type="hidden" name="Currency" value="MaxiDollar">
  <input type="hidden" name="Telephone" value="{MAXICASH_TELEPHONE_NO}">
  <input type="hidden" name="Email" value="{MAXICASH_EMAIL}">
  |
  <input type="hidden" name="MerchantID" value="{YOUR_MERCHANT_ID}">
  <input type="hidden" name="MerchantPassword"
value="{YOUR_MERCHANT_PASSWORD}">
  <input type="hidden" name="Language" value="En">
  <input type="hidden" name="Reference" value="{REFERENCE_OF_TRANSACTION}">
  <input type="hidden" name="accepturl" value="{SUCCESS_URL}">
  <input type="hidden" name="cancelurl" value="{CANCEL_URL}">
  <input type="hidden" name="declineurl" value="{FAILURE_URL}">
  <input type="hidden" name="notifyurl" value="{NOTIFY_URL}">
  </form>
```

QueryString URL Payment

The queryString method allows you to call the MaxiCash Gateway with a JSON string in a Data parameter in the request URL.

Post the JSON in the Data parameter with the attributes below using these URLs:

- Test: <https://api-testbed.maxicashapp.com/PayEntry>
- Live: <https://api.maxicashapp.com/PayEntry>

```
https://api.maxicashapp.com/payentry?data={PayType:"MaxiCash",Amount:"{TOTAL_AMOUNT}"
,Currency:"maxiDollar",Telephone:"{MAXICASH_TELEPHONE_NO}",MerchantID:"{YOUR_ME
RCHANT_ID}",MerchantPassword:"{YOUR_MERCHANT_PASSWORD}",Language:"fr",Referen
ce:"{REFERENCE_OF_TRANSACTION}",Accepturl:"{SUCCESS_URL}",Cancelurl:"{CANCEL_
URL}",Declineurl:"{FAILURE_URL}",NotifyURL:"{NOTIFY_URL}"}
```

API MaxiCash

The MaxiCash API allows the merchant to receive payment into their MaxiCash account from a MaxiCash or non-MaxiCash user and to pay their partners into their MaxiCash account or their mobile money.

Note: ALL AMOUNTS WITH MAXICASH ARE IN CENTS, FOR EXAMPLE, TO MAKE A PAYMENT OF 1 USD, THE API MUST RECEIVE 100 CENTS IN THE REQUEST.

Fundraising (Credit/Debit Card)

Integration with the MaxiCash API for collecting funds can be done with one of these options:

- **PayNowSync**
- **PayNowAsynch**
- **Pay Credit Card**

PayNowSynch

This method is used to process a synchronous MaxiCash payment from a website or mobile application. The method receives a currency, an amount, a phone number according to the chosen payment method (MaxiCash, Airtel money, Mpsa, Orange money, etc.), a payment method, a reference, and the language.

- Initiate the payment with the **PayNowSynch** method and wait for the payment status.
- The user will receive a **notification on their phone according to the chosen payment method** and will have 60 seconds to approve the payment.
- During a synchronous payment, the API waits for up to **420 seconds** before the transaction expires.

Method POST Endpoint

Test: <https://webapi-test.maxicashapp.com/Integration/PayNowSynch>

Live: <https://webapi.maxicashapp.com/Integration/PayNowSynch>

Request Body Structure

Nom	Description	Type	Additional Information
MerchantID	Required for authenticating the request	String	
MerchantPassword	Required to authenticate the request	String	
RequestData	Contains the payment details	Dictionary	
PayType	Defines the customer's payment method	Integer	0 for Maxicash / 1 for Airtel money / 2 for Mpsa / 3 for Orange money
Montant	The amount that the merchant sends	String	Always in cents. If you want to send 1 maxidollar, insert 100.
Reference	This is a payment reference	String	
Téléphone	Phone number of the MaxiCash user	String	

Example of the request body

```
{
  "RequestData": {
    "Amount": "100",
    "Reference": "tbnhgfcc",
    "Telephone": "243824707127"
  },
  "MerchantID": "XXXXXXXXXXXXXXXXXXXXXXXXXXXX",
  "MerchantPassword": "XXXXXXXXXXXXXXXXXXXXXXXXXXXX",
  "PayType": 0,
  "CurrencyCode": "USD" // CDF pour franc congolais
}
```

Example of the response body

```
{
  "SessionToken": null,
  "ResponseStatus": "Failed",
  "ResponseError": "transaction failed",
  "ResponseData": "",
  "ResponseDesc": "",
  "TransactionID": null,
  "Reference": null
}
```

PayNowAsynch

This method is used to process an asynchronous MaxiCash payment, particularly payments made from a Mobile Banking on a website or mobile application. The method receives a currency, an amount, a phone number according to the chosen payment method (MaxiCash, Airtel money, Mpsa, Orange money, etc.), a payment method, a reference, and the language.

- Initiate the payment with the **PayNowAsynch** method and wait for the payment status.
- The user will receive an **OTP** and will have 60 seconds to approve the payment.
- Complete the operation with the **CompletePayLater** method
- During a synchronous payment, the API waits for up to **420 seconds** before the transaction expires.

Method POST Endpoint

Test: <https://webapi-test.maxicashapp.com/Integration/PayNowSync>

Live: <https://webapi.maxicashapp.com/Integration/PayNowSync>

NB: PayNowAsynch only supports payment via Mobile Banking. :
- RakkaCash from BGDFI BANK with PayType 51

Example of the request body

```
{
  "RequestData": {
    "Amount": "100",
    "Reference": "", votre reference
    "Telephone": "243820000000"
  },
  "MerchantID": "",
  "MerchantPassword": "",
  "PayType": 51,
  "CurrencyCode": "USD"
}
```

Example of the response body

```
{
  "SessionToken": null,
  "ResponseStatus": "", // status of the request
  "ResponseError": "", // raison of the failure of the request
  "ResponseData": "",
  "ResponseDesc": "",
  "TransactionID": "",
  "Reference": null
}
```

CompletePayLater

This method is used to validate the payment with the OTP received from PayNowAsynch.

Method POST Endpoint

Test: <https://webapi-test.maxicashapp.com/Integration/PayNowSync>

Live: <https://webapi.maxicashapp.com/Integration/PayNowSync>

Example of the request body

```
{
  "PIN": "537733", // the otp from the PayNowAsynch
  "TransactionID": "MC638319278922464540", TransactionID received from PayNowAsynch
  "MerchantID": " MerchantID ",
  "MerchantPassword": " MerchantPassword ",
  "UserToken": ""
}
```

Pay Credit Card

This method is used to process a credit card payment from a website or mobile application..

- Initiate the payment with the PayCreditCard method, and you will receive a 'pending' status and a payment link in the ResponseData.

Method POST Endpoint

Test: <https://webapi-test.maxicashapp.com/Integration/PayCreditCard>

Live: <https://webapi.maxicashapp.com/Integration/PayCreditCard>

Request Body Structure

Example of the request body

```
{
  "PayType": "MaxiCash",
  "MerchantID": "*****",
  "MerchantPassword": "*****",
  "Amount": "300",
  "Currency": "USD",
  "Telephone": "243820000000",
  "Language": "fr",
  "Reference": "REF09766789",
  "SuccessURL": " Your redirection link if the request is success ",
  "FailureURL": " Your redirection link if the request is Faild",
  "CancelURL": " Your redirection link if the request is Cancel ",
  "NotifyURL": " ",
  "FirstName": "firstname",
  "LastName": "lastname",
  "Email": "payer's Email ",
  "cData": {
    "cDate": "12/2023",
    "cNumber": "4000000000000002",
    "vCVV": "123"
  }
}
```

Example of the response body

```
{
  "SessionToken": "",
  "ResponseStatus": "pending",
  "ResponseError": "",
  "ResponseData": "https://mpi.quipugmbh.com/index.jsp?ORDERID=1994364&SESSIONID=8E32F8AF8FA9E5D2B4A658C59C10D9D5",
  "ResponseDesc": "",
  "TransactionID": "",
  "Reference": null
}
```

Pay out (BC)

TopUpMobileMoney

For deposits, you can use our mobile money Top Up endpoint. This method is done in two steps.

Step 1: Retrieve a token by executing the endpoints below. In the response, the token is found in the ResponseData.

Method GET Endpoint

Test:

https://webapitest.maxicashme.com/Integration/Login?IntegratorUsername=*****&IntegratorPassword=****

Live:

https://webapi.maxicashme.com/Integration/Login?IntegratorUsername=*****&IntegratorPassword=****

Exemple du corps de la réponse

```
{
  "SessionToken": "b55e6ecf-a80a-43aa-82e6-5d09c8263fb7",
  "ResponseStatus": "Success",
  "ResponseError": null,
  "ResponseData": "b55e6ecf-a80a-43aa-82e6-5d09c8263fb7",
  "ResponseDesc": "merchant Name",
  "TransactionID": "d1117dcb-1112-4cb6-9188-8999538491dd",
  "Reference": null
}
```

Setp 2 : Execute the payout with the method TopUpMobileMoney

Method GET Endpoint

Test: <https://webapi-test.maxicashapp.com/Integration/TopUpMobileMoney>

Live: <https://webapi.maxicashapp.com/Integration/TopUpMobileMoney>

Example of the request body

```
{
  "RequestData": {
    "Amount": "100",
    "Reference": "",
    "Telephone": "243000000000", // number of the beneficiary
    "BeneficiaryFirstName": "firstname of the beneficiary",
    "BeneficiarySurname": "surname of the beneficiary ",
    "SenderFirstName": "firstname of the sender",
    "SenderSurname": " surname of the sender ",
    "SenderTelephone": "number of the sender ",
    "SourceOfFund": "business"
  },
  "UserToken": "your token",
  "ToAcountType": 1 // type de paiement
}
```

- The options for ToAccountType are as follows:

- o 1 = Airtel
- o 2 = Mpesa
- o 3 = Orange

Example of the response body

```
{
  "SessionToken": "b55e6ecf-a80a-43aa-82e6-5d09c8263fb7",
  "ResponseStatus": "Success",
  "ResponseError": null,
  "ResponseData": "Completed",
  "ResponseDesc": "The client has received the payment",
  "TransactionID": "6ffc1146-80bd-4bf3-acc8-5c8491fba348",
  "Reference": "7f2254b8-2543-12k1112"
}
```

TopUpMaxiCashWallet

For deposits into a MaxiCash wallet, you can use our Top Up MaxiCash Wallet endpoint. This method is done in two steps.

Step 1: Retrieve a token by executing the endpoints below. In the response, the token is found in the ResponseData.

Method GET Endpoint

Test:

https://webapitest.maxicashme.com/Integration/Login?IntegratorUsername=*****&IntegratorPassword=****

Live:

https://webapi.maxicashme.com/Integration/Login?IntegratorUsername=*****&IntegratorPassword=****

Example of the response body

```
{
  "SessionToken": "b55e6ecf-a80a-43aa-82e6-5d09c8263fb7",
  "ResponseStatus": "Success",
  "ResponseError": null,
  "ResponseData": "Completed",
  "ResponseDesc": "Nom du marchand",
  "TransactionID": "d1117dcb-1112-4cb6-9188-8999538491dd",
  "Reference": null
}
```

Setp 2 : Execute the payout with the method TopUpMaxiCashWallet

Method GET

Endpoint

Test: <https://webapi-test.maxicashapp.com/Integration/TopUpMaxiCashWallet>

Live: <https://webapi.maxicashapp.com/Integration/TopUpMaxiCashWallet>

Example of the request body

```
{
  "RequestData": {
    "Amount": "100",
    "Reference": "tes-armaud160523",
    "Telephone": "+243824707127",
    "AccountNumber": "",
    "BeneficiaryFirstName": "Arnaud",
    "BeneficiarySurname": "Ngandu",
    "SenderFirstName": "Maxi",
    "SenderSurname": "Shop",
    "SenderTelephone": "+2431111111111",
    "SourceOfFund": "business"
  },
  "UserToken": "9b652188-dc8c-46b9-ab29-87a92f1abf98"
}
```

Example of the response body

```
{
  "SessionToken": "9b652188-dc8c-46b9-ab29-87a92f1abf98",
  "ResponseStatus": "Success",
  "ResponseError": null,
  "ResponseData": "",
  "ResponseDesc": null,
  "TransactionID": "672945",
  "Reference": null
}
```

Other important Endpoint

Check Payement by Reference

This method is used to check the status of a payment with a reference.

Method GET

Endpoint

Test:

<https://webapi-test.maxicashapp.com/Integration/ CheckPaymentStatusByReference>

Live:

<https://webapi.maxicashapp.com/Integration/ CheckPaymentStatusByReference>

Example of the request body

```
{
  "MerchantID": "****",
  "MerchantPassword": "*****",
  "Reference": "votre reference",
  "TransactionID": ""
}
```

TopUpMobileMoneyStatusByRef

This method is used to check the status of a Mobile Money payout with a reference

Method GET Endpoint

Test:

<https://webapi-test.maxicashapp.com/Integration/TopUpMobileMoneyStatusByRef>

Live:

<https://webapi.maxicashapp.com/Integration/TopUpMobileMoneyStatusByRef>

Example of the request body

```
{
  "RequestData": {
    "Reference": "longa-arnaudtest2j20230510"
  },
  "UserToken": "4fc6989f-8ea9-4338-8e7e-75f202a55625"
}
```

Example of the request body

```
{
  "SessionToken": "4fc6989f-8ea9-4338-8e7e-75f202a55625",
  "ResponseStatus": "success",
  "ResponseError": null,
  "ResponseData": "Completed",
  "ResponseDesc": null,
  "TransactionID": "33a5a00a-eb59-4c7f-b47a-82eedeb55e10",
  "Reference": "longa-arnaudtest2j20230510"
}
```

Check the validity of a generated token

This method is used to verify the validity of a generated token.

Method GET Endpoint

Test:

<https://webapi-test.maxicashme.com/Integration/IsTokenValid?Token={Token}>

Live:

<https://webapi.maxicashme.com/Integration/IsTokenValid?Token={Token}>