ADML at the FinEval 2026: Version-Aware Retrieval and Grounded Sparse Editing for Multilingual Financial QA

Gautier Marti[1] · **Khaled AlNuaimi**[1,2]

[1] ADIA [2] Khalifa University

Agent-led research across three tasks, with financial QA as a case study

Greek financial NER

1st Entity F1 0.9676

OFFICIAL PRIVATE RESULT

Japanese implicit communication

Tied 1st Accuracy 0.9714 · 34/35

OFFICIAL PRIVATE RESULT

Multilingual financial QA

2nd ROUGE-1 F1 0.3726

OFFICIAL PRIVATE RESULT

Extensive research led to simple final submissions.

The agent built and tested models; the evaluation ultimately favored exact retrieval and explicit rules.

01 The research process

An agent-led workflow implemented experiments, checked evidence and recorded failed hypotheses.

Audit — Data, metric, provenance → **Hypothesize** — Target a failure mode → **Implement** — Models and experiments → **Evaluate** — Groups, seeds, time → **Keep or reject** — Log evidence; iterate

Promotion required independent evidence: entity/source/company groups, seed checks, harm counts and temporal confirmation.

209 research scripts **32** Python modules **99** test files **25** preregistration documents

Repository snapshot: 340 Python files; 48,468 physical lines including tests. These measure code scope, not experiment count or productivity.

02 Three systems developed for new inputs

TASK 1 · GREEK NER

Repair spans conservatively

Greek BERT, Greek Legal BERT, XLM-R, GLiNER

Domain adaptation; numeric rules; nested spans; annotation-operation learning; cross-seed consensus.

Entity-linked folds; count corrections and newly introduced errors.

TASK 2 · JAPANESE ICR

Model commitment, not sentiment

Tohoku BERT, Rinna RoBERTa, ModernBERT, Nemotron 9B

Ordinal decoding/losses; EDINET adaptation; NLI transfer; rationale supervision; expert routing.

Source-held-out folds; independent confirmation of apparent gains.

TASK 3 · MULTILINGUAL QA

Compile facts, then test edits

Eva-4B; Qwen 27B, 35B and 57B model trials

Typed fact graphs; constrained planning and realization; evidence filtering; sparse answer edits.


Company/report groups and older-to-newer packet confirmation.

03 QA: candidate quality versus selection

Grounded compiler: every number has a source or derivation.

Parse — Statements + news → **Type facts** — Period, unit, value → **Validate** — Source + arithmetic → **Realize** — ≤100 words

Historical QA · 192 rows · macro ROUGE-1 F1

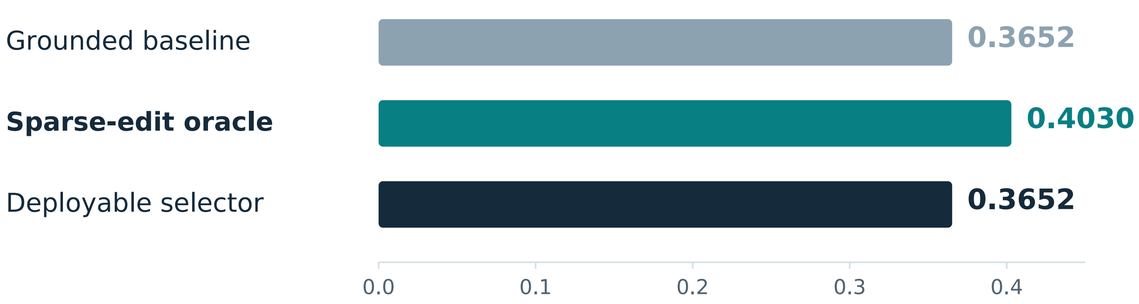

Oracle gain: +0.0377, using reference answers to choose the edit. This is candidate headroom, not a deployable score.

The nested selector abstained on every row. Under both time and company shift, another selector changed 4 rows and harmed all 4.

04 The gates rejected plausible gains

Selected examples; results use different tasks and evaluation sets.

Entity-aware adaptation · NER — STOP

0.8064 → 0.7580 Fold-0 macro entity F1. All entity types regressed; stop before the remaining folds.

ModernBERT replacement · ICR — REJECT

0.6917 → 0.6245 Source-held-out accuracy. All five folds worsened; 14 corrections, 31 new errors.

Qwen 35B fact filtering · QA — REJECT

0.7454 → 0.7638 Fact-set F1 improved, but one company's score fell 0.0544; the safety gate failed.

Conservative span consensus · NER — KEEP

0.9208 → 0.9332 80-row validation: 4 corrections, 0 new errors. Two-seed support; retained for development.

NER validation was repeatedly inspected; the retained gain is development evidence, not a fresh hidden-test result.

05 Test release changed what the benchmark rewarded

11 August: test inputs audited. 17 August: external-data permission and public scores resolved the final choices.

NER · exact retrieval

200/200

test queries matched earlier public inputs

Final: retrieve full-query references.

ICR · semantic rules

4/15 → 15/15

public correct: BERT → explicit-cue rubric

New response style changed the choice.

QA · exact retrieval

0.9994 / 0.3726

public (24) / private (52) ROUGE-1 F1

76/76 queries matched public inputs.

External public data were permitted. Selected inference was CPU-only, with no model or API calls.

Benchmark success and generalization evidence can diverge.

The QA score gap suggests reference-version shift; private references were unavailable.
Our input-based systems handle new inputs, but private superiority over retrieval was not measured.

Benchmarks: Plutus (EMNLP 2025); Ebisu (2026); MultiFinBen (ACL 2026). Methods/results: ADML FinEval system papers and experiment records.

Papers, code & materials
github.com/gautiermarti/fineval-2026-adml