

COMMUNITY DATA ANALYSIS USING VEGAN

Gavin L. Simpson
UBC Study Group · Nov 25th 2015

1

MATERIALS

Handouts and all the sources are on github:
github.com/gavinsimpson/UBCVeganStudyGroup

2

CONSTRAINED ORDINATION

CANONICAL CORRESPONDENCE ANALYSIS

CCA is the constrained form of CA; fitted using `cca()`

Finds axes that are **linear** combinations of the explanatory variables

Two interfaces for specifying models

- basic; `cca1 <- cca(X = varespec, Y = varechem)`
- formula; `cca1 <- cca(varespec ~ ., data = varechem)`

Formula interface is the more powerful — *recommended*

4

CANONICAL CORRESPONDENCE ANALYSIS

```
cca1 <- cca(varespec ~ ., data = varechem)
cca1
```

Call: cca(formula = varespec ~ N + P + K + Ca + Mg + S + Al + Fe + Mn + Zn + Mo + Baresoil + Humdepth + pH, data = varechem)

	Inertia	Proportion	Rank
Total	2.0832	1.0000	
Constrained	1.4415	0.6920	14
Unconstrained	0.6417	0.3080	9

Inertia is mean squared contingency coefficient

Eigenvalues for constrained axes:

CCA1	CCA2	CCA3	CCA4	CCA5	CCA6	CCA7	CCA8	CCA9	CCA10
0.4389	0.2918	0.1628	0.1421	0.1180	0.0890	0.0703	0.0584	0.0311	0.0133

CCA11 CCA12 CCA13 CCA14
0.0084 0.0065 0.0062 0.0047

Eigenvalues for unconstrained axes:

CA1	CA2	CA3	CA4	CA5	CA6	CA7	CA8	CA9
0.19776	0.14193	0.10117	0.07079	0.05330	0.03330	0.01887	0.01510	0.00949

5

REDUNDANCY ANALYSIS

RDA is the constrained form of PCA; fitted using `rda()`.

```
rda1 <- rda(varespec ~ ., data = varechem)
rda1
```

Call: rda(formula = varespec ~ N + P + K + Ca + Mg + S + Al + Fe + Mn + Zn + Mo + Baresoil + Humdepth + pH, data = varechem)

	Inertia	Proportion	Rank
Total	1825.6594	1.0000	
Constrained	1459.8891	0.7997	14
Unconstrained	365.7704	0.2003	9

Inertia is variance

Eigenvalues for constrained axes:

RDA1	RDA2	RDA3	RDA4	RDA5	RDA6	RDA7	RDA8	RDA9	RDA10	RDA11	RDA12
820.1	399.3	102.6	47.6	26.8	24.0	19.1	10.2	4.4	2.3	1.5	0.9

RDA13 RDA14
0.7 0.3

Eigenvalues for unconstrained axes:

PC1	PC2	PC3	PC4	PC5	PC6	PC7	PC8	PC9
186.19	88.46	38.19	18.40	12.84	10.55	5.52	4.52	1.09

6

EIGENVALUES

Use `eigenvals()` to extract Eigenvalues from a fitted ordination object

```
eigenvals(cca1)
```

CCA1	CCA2	CCA3	CCA4	CCA5	CCA6	CCA7
0.4388704	0.2917753	0.1628465	0.1421302	0.1179519	0.0890291	0.0702945

CCA8 CCA9 CCA10 CCA11 CCA12 CCA13 CCA14
0.0583592 0.0311408 0.0132944 0.0083644 0.0065385 0.0061563 0.0047332

CA1 CA2 CA3 CA4 CA5 CA6 CA7
0.1977645 0.1419256 0.1011741 0.0707868 0.0533034 0.0332994 0.0188676

CA8 CA9
0.0151044 0.0094876

7

EIGENVALUES

`summary()` method for `eigenvals()` shows more information

```
summary(eigenvals(cca1, constrained = TRUE))
```

Importance of components:

	CCA1	CCA2	CCA3	CCA4	CCA5	CCA6	CCA7
Eigenvalue	0.4389	0.2918	0.1628	0.1421	0.11795	0.08903	0.07029
Proportion Explained	0.3045	0.2024	0.1130	0.0986	0.08183	0.06176	0.04877
Cumulative Proportion	0.3045	0.5069	0.6198	0.7184	0.80027	0.86203	0.91080

CCA8 CCA9 CCA10 CCA11 CCA12 CCA13
Eigenvalue 0.05836 0.03114 0.01329 0.008364 0.006538 0.006156
Proportion Explained 0.04049 0.02160 0.00922 0.005800 0.004540 0.004270
Cumulative Proportion 0.95128 0.97288 0.98211 0.987910 0.992450 0.996720

CCA14
Eigenvalue 0.004733
Proportion Explained 0.003280
Cumulative Proportion 1.000000

8

EXTRACTING AXIS SCORES

To extract a range of scores from a fitted ordination use `scores()`

- takes an ordination object as the first argument
- **choices** — which axes? Defaults to `c(1,2)`
- **display** — which type(s) of scores to return
 - **"sites"** or **"wa"**: scores for samples in response matrix
 - **"species"**: scores for variables/columns in response
 - **"lc"**: linear combination site scores
 - **"bp"**: biplot scores (coords of arrow tip)
 - **"cn"**: centroid scores (coords of factor centroids)

9

EXTRACTING AXIS SCORES

```
str(scores(cca1, choices = 1:4, display = c("species", "sites")), max = 1)
```

```
List of 2
 $ species: num [1:44, 1:4] 0.0753 -0.1813 -1.0535 -1.2774 -0.1526 ...
 ..- attr(*, "dimnames")=List of 2
 $ sites  : num [1:24, 1:4] 0.178 -0.97 -1.28 -1.501 -0.598 ...
 ..- attr(*, "dimnames")=List of 2
```

```
head(scores(cca1, choices = 1:2, display = "sites"))
```

```
      CCA1      CCA2
18  0.1784733 -1.0598842
15 -0.9702382 -0.1971387
24 -1.2798478  0.4764498
27 -1.5009195  0.6521559
23 -0.5980933 -0.1840362
19 -0.1102881  0.7143142
```

10

SCALINGS...

When we draw the results of many ordinations we display 2 or more sets of data

Can't display all of these and maintain relationships between the scores

Solution scale one set of scores relative to the other via the **scaling** argument

- **scaling** = 1 — Focus on sites, scale site scores by λ_i
- **scaling** = 2 — Focus on species, scale species scores by λ_i
- **scaling** = 3 — Symmetric scaling, scale both scores by $\sqrt{\lambda_i}$
- **scaling** = -1 — As above, but
- **scaling** = -2 — For `cca()` multiply results by $\sqrt{(1/(1 - \lambda_i))}$
- **scaling** = -3 — this is Hill's scaling
- **scaling** < 0 — For `rda()` divide species scores by species' σ
- **scaling** = 0 — raw scores

```
scores(cca1, choices = 1:2, display = "species", scaling = 3)
```

11

SCALINGS...

From vegan version 2.3-1 we have a simpler way to select the type of scaling

scaling can be a character vector indicating the broad type of scaling required

- **"species"**
- **"sites"**
- **"symmetric"**
- **"none"**

A second argument then allows selection of the relevant negative scaling type:

- **correlation** = TRUE for linear methods
- **hill** = TRUE for unimodal methods

12

PARTIAL CONSTRAINED ORDINATIONS

Partial constrained ordinations remove the effect of one or more variables *then* fit model of interest

Argument Z is used for a data frame of variables to partial out

Or with the formula interface use the **Condition()** function


```
pcca <- cca(X = varespec,
            Y = varechem[, "Ca", drop = FALSE],
            Z = varechem[, "pH", drop = FALSE])
pcca <- cca(varespec ~ Ca + Condition(pH), data = varechem) ## easier!
```

13

TRIPLLOTS

Triplots will generally produce a mess; we can really only display a couple of bits approximately anyway Trying to cram three things in is a recipe for a mess... but we can do it


```
plot(cca1)
```

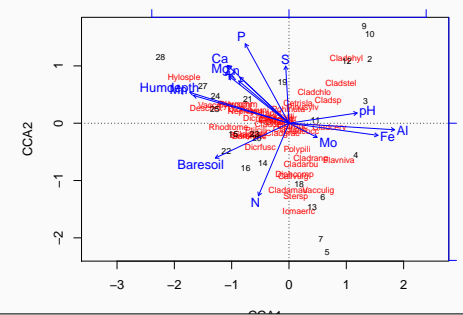

14

TRIPLLOTS

```
plot(cca1)
```

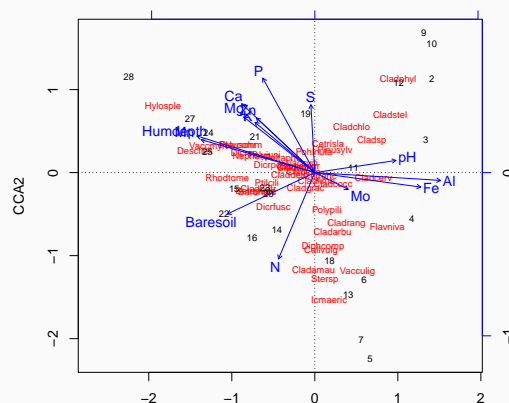

15

BUILDING CONSTRAINED ORDINATION MODELS

If we don't want to think it's easy to fit a poor model with many constraints

That's what we just did with **cca1** and **rda1**

Remember, CCA and RDA are *just regression methods* — everything you know about regression applies here

A better approach is to *think* about the important variables and include only those

The formula interface allows you to create interaction or quadratic terms easily (though be careful with latter)

It also handles factor or class constraints automatically unlike the basic interface

16

BUILDING CONSTRAINED ORDINATION MODELS

```
vare.cca <- cca(varespec ~ Al + P*(K + Baresoil), data = varechem)
vare.cca
```

```
Call: cca(formula = varespec ~ Al + P * (K + Baresoil), data =
varechem)
```

```

      Inertia Proportion Rank
Total      2.083      1.000
Constrained 1.046      0.502   6
Unconstrained 1.038      0.498  17
Inertia is mean squared contingency coefficient
```

```
Eigenvalues for constrained axes:
  CCA1  CCA2  CCA3  CCA4  CCA5  CCA6
0.3756 0.2342 0.1407 0.1323 0.1068 0.0561
```

```
Eigenvalues for unconstrained axes:
  CA1  CA2  CA3  CA4  CA5  CA6  CA7  CA8
0.27577 0.15411 0.13536 0.11803 0.08887 0.05511 0.04919 0.03781
(Shown only 8 of all 17 unconstrained eigenvalues)
```

17

BUILDING CONSTRAINED ORDINATION MODELS

For CCA we have little choice but to do

1. Fit well-chosen set of candidate models & compare, or
2. Fit a *full* model of well-chosen variables & then do stepwise selection

But automatic approaches to model building should be used cautiously!

The standard `step()` function can be used as **vegan** provides two helper methods, `deviance()` and `extractAIC()`, used by `step()`

Vegan also provides methods for class **"cca"** for `add1()` and `drop1()`

18

STEPWISE SELECTION IN CCA

`step()` uses AIC which is a fudge for RDA/CCA. Alternatively use function `ordistep()`

1. Define an upper and lower model scope, say the full model and the null model
2. To step from the lower scope or null model we use

```
upr <- cca(varespec ~ ., data = varechem)
lwr <- cca(varespec ~ 1, data = varechem)
set.seed(1)
mods <- ordistep(lwr, scope = formula(upr), trace = 0)
```

`trace = 0` is used here to turn off printing of progress

Permutation tests are used (more on these later); the theory for an AIC for ordination is somewhat loose

19

STEPWISE SELECTION IN CCA

The object returned by `ordistep()` is a standard **"cca"** object with an extra component `$anova`

```
mods

Call: cca(formula = varespec ~ Al + P + K, data = varechem)

      Inertia Proportion Rank
Total      2.0832      1.0000
Constrained 0.6441      0.3092   3
Unconstrained 1.4391      0.6908  20
Inertia is mean squared contingency coefficient

Eigenvalues for constrained axes:
  CCA1  CCA2  CCA3
0.3616 0.1700 0.1126

Eigenvalues for unconstrained axes:
  CA1  CA2  CA3  CA4  CA5  CA6  CA7  CA8
0.3500 0.2201 0.1851 0.1551 0.1351 0.1003 0.0773 0.0537
(Shown only 8 of all 20 unconstrained eigenvalues)
```

20

STEPWISE SELECTION IN CCA

The `$anova` component contains a summary of the steps involved in automatic model building

`mods$anova`

```

      Df    AIC      F Pr(>F)
+ Al   1 128.61 3.6749 0.005 **
+ P    1 127.91 2.5001 0.005 **
+ K    1 127.44 2.1688 0.035 *
---
Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1

```

21

STEPWISE SELECTION IN CCA

Step-wise model selection is fairly fragile; if we start from the full model we won't end up with the same final model

```
mods2 <- ordistep(upr, scope = list(lower = formula(lwr), upper = formula(upr)), trace = 0)
```

`mods2`

```
Call: cca(formula = varespec ~ P + K + S + Mo + Baresoil + Humdepth, data = varechem)
```

```

      Inertia Proportion Rank
Total      2.0832      1.0000
Constrained 0.9377      0.4501    6
Unconstrained 1.1455      0.5499   17
Inertia is mean squared contingency coefficient

```

```

Eigenvalues for constrained axes:
CCA1  CCA2  CCA3  CCA4  CCA5  CCA6
0.3712 0.2356 0.1364 0.0974 0.0813 0.0159

```

```

Eigenvalues for unconstrained axes:
CA1  CA2  CA3  CA4  CA5  CA6  CA7  CA8
0.3295 0.1893 0.1548 0.1269 0.0968 0.0616 0.0464 0.0337
(Shown only 8 of all 17 unconstrained eigenvalues)

```

22

ADJUSTED r^2 FOR LINEAR MODELS

As with ordinary R^2 , that of an RDA is biased for the same reasons as for a linear regression

- adding a variable to constraints will increase R^2
- the larger the number of constraints in the model the larger R^2 is due to random correlations

Can attempt to account for this bias via an *adjusted* R^2 measure

$$R_{adj}^2 = 1 - \frac{n-1}{n-m-1}(1 - R^2)$$

- n is number of samples m is number of constraints (model degrees of freedom)
- Can be used up to $\sim M > n/2$ before becomes too conservative
- Can be negative
- Compute using `RsquareAdj()`

23

STEPWISE SELECTION VIA ADJUSTED r^2

The problems with stepwise selection in regression models are myriad. Affects RDA, CCA, etc as well

Blanchet, Legendre, and Borcard (2008) proposed a two-step solution for models where R_{adj}^2 makes sense

- *Global test* of all constraints
 - Proceed **only** if this test is significant
 - Helps prevent inflation of overall type I error
- Proceed with forward selection, but with *two* stopping rules
 - Usual significance threshold α
 - The global R_{adj}^2
 - Stop if next candidate model is non-significant or if R_{adj}^2 exceeds the global R_{adj}^2

Available in `ordiR2step()`

24

PERMUTATION TESTS

PERMUTATION TESTS IN VEGAN

RDA has lots of theory behind it, CCA not as much. However, ecological/environmental data invariably violate what little theory we have

Instead we use permutation tests to assess the *importance* of fitted models — the data are shuffled in some way and the model refitted to derive a Null distribution under some hypothesis of *no effect*

26

PERMUTATION TESTS IN VEGAN

What *is* shuffled and *how* is of **paramount** importance for the test to be valid

- If no conditioning (partial) variables then rows of the species data are permuted
- With conditioning variables, two options are available, both of which *permute residuals* from model fits
 - The *full model* uses residuals from model $Y = X + Z + \epsilon$
 - The *reduced model* uses residuals from model $Y = Z + \epsilon$
- In **vegan** which is used can be set via argument **model** with "**direct**", "**full**", and "**reduced**" respectively
- In current **vegan** option **method** = "**full**" is disabled

27

PERMUTATION TESTS IN VEGAN

A test statistic is required, computed for observed model & each permuted model
vegan uses a pseudo- F statistic

$$F = \frac{\chi^2_{model}/df_{model}}{\chi^2_{resid}/df_{resid}}$$

Evaluate whether F is unusually large relative to the null (permutation) distribution of F

28

PERMUTATION TESTS IN VEGAN: anova()

- The main user function is the `anova()` method
- It is an interface to the lower-level function `permutest.cca()`
- At its most simplest, the `anova()` method tests whether the “model” as a whole is significant

$$F = \frac{1.4415/14}{0.6417/9} = 1.4441$$

```
set.seed(42)
(perm <- anova(cca1, permutations = 499))

Permutation test for cca under reduced model
Permutation: free
Number of permutations: 499

Model: cca(formula = vareSPEC ~ N + P + K + Ca + Mg + S + Al + Fe + Mn + Zn + Mo + Baresoil + Humdepth + pH, data = varechem)
      Df ChiSquare    F Pr(>F)
Model   14   1.44148 1.4441 0.048 *
Residual 9   0.64171
---
Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
```

29

DETAILS ON THE PERMUTATIONS — permustats

To get details on the permutations use `permustats()`

```
pstat <- permustats(perm)
summary(pstat)
```

	statistic	SES	mean	lower	median	upper
Model	1.4441	1.9675	1.0513		1.0266	1.4190


(Interval (Upper - Lower) = 0.95)

30

DETAILS ON THE PERMUTATIONS — permustats

To get details on the permutations use `permustats()`

```
layout(matrix(1:2, ncol = 2))
plot(density(pstat))
qqnorm(pstat)
layout(1)
```

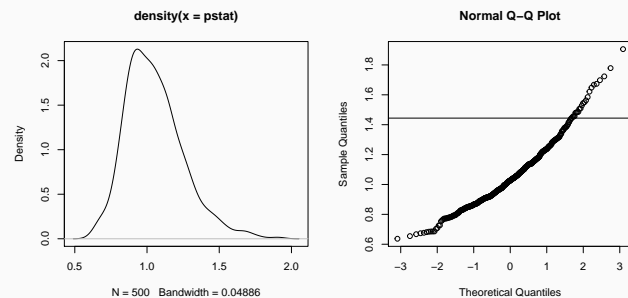

31

PERMUTATION TESTS IN VEGAN: anova()

`anova.cca()` has a number of arguments

```
function (object, ..., permutations = how(nperm = 999), by = NULL,
      model = c("reduced", "direct", "full"), parallel = getOption("mc.cores"),
      strata = NULL, cutoff = 1, scope = NULL)
NULL
```

- `permutations` controls the permutation test; one of
 1. a number of (unrestricted) permutations to do
 2. a matrix of pre-generated permutations
 3. an object returned by `how()`
- `by` determines what is tested; the default is to test the model
- More direct control can be achieved via `permutest.cca()`
- `parallel` allows for running the permutations on multiple CPU cores

32

TYPES OF PERMUTATION TEST IN VEGAN

A number of types of test can be envisaged

- Testing the overall significance of the model
- Testing constrained (canonical) axes
- Testing individual model terms *sequentially*
- The *marginal* effect of a single variable

The first is the default in `anova()`

The other three can be selected via the argument `by`

33

PERMUTATION TESTS | TESTING CANONICAL AXES

- The constrained (canonical) axes can be individually tests by specifying `by = "axis"`
- The first axis is tested in terms of variance explained compared to residual variance
- The second axis is tested after partialling out the first axis... and so on

```
set.seed(1)
anova(mods, by = "axis", permutations = 499)
```

Permutation test for cca under reduced model
Marginal tests for axes
Permutation: free
Number of permutations: 499

Model: cca(formula = varespec ~ Al + P + K, data = varechem)

	Df	ChiSquare	F	Pr(>F)
CCA1	1	0.36156	5.0249	0.002 **
CCA2	1	0.16996	2.3621	0.014 *
CCA3	1	0.11262	1.5651	0.114
Residual	20	1.43906		

Signif. codes: 0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1

34

PERMUTATION TESTS | TESTING TERMS SEQUENTIALLY

- The individual terms in the model can be tested using `by = "terms"`
- The terms are assessed in the order they were specified in the model, sequentially from first to last
- Test is of the additional variance explained by adding the k th variable to the model
- **Ordering of the terms** will affect the results

```
set.seed(5)
anova(mods, by = "terms", permutations = 499)
```

Permutation test for cca under reduced model
Terms added sequentially (first to last)
Permutation: free
Number of permutations: 499

Model: cca(formula = varespec ~ Al + P + K, data = varechem)

	Df	ChiSquare	F	Pr(>F)
Al	1	0.29817	4.1440	0.002 **
P	1	0.18991	2.6393	0.012 *
K	1	0.15605	2.1688	0.030 *
Residual	20	1.43906		

Signif. codes: 0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1

35

PERMUTATION TESTS | TESTING TERMS MARGINAL EFFECTS

- The marginal *effect* of a model term can be assessed using `by = "margin"`
- The marginal *effect* is the effect of a particular term when all other model terms are included in the model

```
set.seed(10)
anova(mods, by = "margin", permutations = 499)
```

Permutation test for cca under reduced model
Marginal effects of terms
Permutation: free
Number of permutations: 499

Model: cca(formula = varespec ~ Al + P + K, data = varechem)

	Df	ChiSquare	F	Pr(>F)
Al	1	0.31184	4.3340	0.002 **
P	1	0.16810	2.3362	0.014 *
K	1	0.15605	2.1688	0.032 *
Residual	20	1.43906		

Signif. codes: 0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1

36

CONSTRAINED ORDINATION WORKED EXAMPLE | SPRING MEADOW VEGETATION

Example & data taken from Leps & Smilauer, Case Study 2

Spring fen meadow vegetation in westernmost Carpathian mountains

```
## load vegan
library("vegan")

## load the data
spp <- read.csv("data/meadow-spp.csv", header = TRUE, row.names = 1)
env <- read.csv("data/meadow-env.csv", header = TRUE, row.names = 1)
```

37

CONSTRAINED ORDINATION WORKED EXAMPLE | SPRING MEADOW VEGETATION

CCA a reasonable starting point as the gradient is long here (check with `decorana()` if you want)

```
m1 <- cca(spp ~ ., data = env)
set.seed(32)
anova(m1, permutations = 499)
```


Permutation test for cca under reduced model
Permutation: free
Number of permutations: 499

```
Model: cca(formula = spp ~ Ca + Mg + Fe + K + Na + Si + SO4 + PO4 + NO3 + NH3 + Cl + Corg + pH + conduct + slope,
Df ChiSquare F Pr(>F)
Model 15 1.5597 1.497 0.002 **
Residual 54 3.7509
---
Signif. codes: 0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
```

38

CONSTRAINED ORDINATION WORKED EXAMPLE | SPRING MEADOW VEGETATION

```
plot(m1)
```

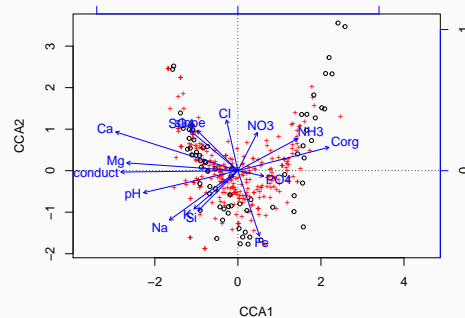

39

CONSTRAINED ORDINATION WORKED EXAMPLE | SPRING MEADOW VEGETATION

```
set.seed(67)
lwr <- cca(spp ~ 1, data = env)
m2 <- ordistep(lwr, scope = formula(m1), trace = FALSE, permutations = 99)
```

m2

Call: `cca(formula = spp ~ Ca + conduct + Corg + NH3 + Si, data = env)`

	Inertia	Proportion	Rank
Total	5.3107	1.0000	
Constrained	0.8034	0.1513	5
Unconstrained	4.5073	0.8487	64

Inertia is mean squared contingency coefficient

Eigenvalues for constrained axes:

CCA1	CCA2	CCA3	CCA4	CCA5
0.4221	0.1195	0.1036	0.0807	0.0775

Eigenvalues for unconstrained axes:


CA1	CA2	CA3	CA4	CA5	CA6	CA7	CA8
0.29763	0.19604	0.17163	0.15357	0.14613	0.14229	0.13519	0.12476

(Showed only 8 of all 64 unconstrained eigenvalues)

40

CONSTRAINED ORDINATION WORKED EXAMPLE | SPRING MEADOW VEGETATION

plot(m2)

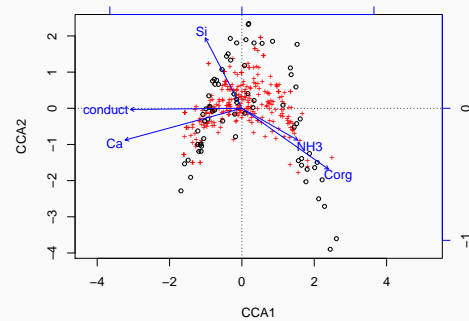

41

CONSTRAINED ORDINATION WORKED EXAMPLE | SPRING MEADOW VEGETATION

m2\$anova

	Df	AIC	F	Pr(>F)
+ Ca	1	453.14	4.7893	0.01 **
+ conduct	1	453.29	1.7915	0.01 **
+ Corg	1	453.61	1.6011	0.01 **
+ NH3	1	453.96	1.5533	0.01 **
+ Si	1	454.42	1.4231	0.01 **

Signif. codes: 0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1

42

CONSTRAINED ORDINATION WORKED EXAMPLE | SPRING MEADOW VEGETATION


Alternative is RDA with a transformation

```
spph <- decostand(spp, method = "hellinger")
m3 <- rda(spph ~ ., data = env)
lwr <- rda(spph ~ 1, data = env)
m4 <- ordistep(lwr, scope = formula(m3), trace = FALSE, permutations = 99)
```

43

CONSTRAINED ORDINATION WORKED EXAMPLE | SPRING MEADOW VEGETATION

plot(m4)

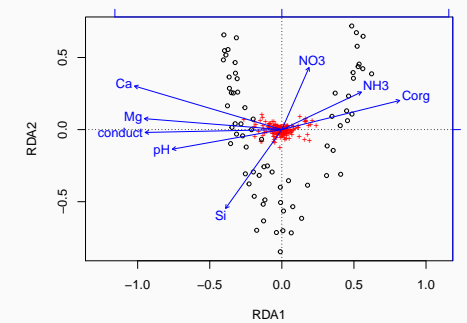

44

CONSTRAINED ORDINATION WORKED EXAMPLE | SPRING MEADOW VEGETATION

Stepwise using R^2_{adj}

```
m5 <- ordiR2step(lwr, scope = formula(m3), trace = FALSE, permutations = 99)
m5$anova
```

	R2.adj	Df	AIC	F	Pr(>F)
+ Ca	0.12588	1	-41.779	10.9370	0.01 **
+ NH3	0.14628	1	-42.468	2.6242	0.01 **
+ conduct	0.16322	1	-42.925	2.3570	0.01 **
+ Si	0.17711	1	-43.164	2.1136	0.01 **
+ Corg	0.18518	1	-42.940	1.6442	0.01 **
+ NO3	0.19257	1	-42.680	1.5853	0.02 *
+ pH	0.19966	1	-42.417	1.5583	0.01 **
<All variables>	0.20332				

Signif. codes: 0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1

45

DIAGNOSTICS FOR CONSTRAINED ORDINATIONS

vegan provides a series of diagnostics to help assess the model fit

- `goodness()`
- `inertcomp()`
- `spenvcor()`
- `intersectcor()`
- `vif.caa()`

46

RESTRICTED PERMUTATION TESTS

RESTRICTED PERMUTATION TESTS

What *is* shuffled and *how* is of **paramount** importance for the test to be valid

Complete randomisation (default in **vegan**) assumes a null hypothesis where all observations are *independent*

Ecological / environmental data often aren't independent

- Temporal or spatial correlation
- Clustering, repeated measures
- Nested sampling designs (Split-plots designs)
- Blocks
- ...

Permutation *must* give null distribution of the test statistic whilst preserving the *dependence* between observations

Trick is to shuffle the data whilst preserving that dependence

48

RESTRICTED PERMUTATIONS

Canoco has had restricted permutations for a *long* time. **vegan** has only recently caught up & we're not (quite) there yet

vegan used to only know how to completely randomise data or completely randomise within blocks (via **strata** in **vegan**)

The newish package **permute** grew out of initial code in the **vegan** repository to generate the sorts of restricted permutations available in Canoco

We have now fully integrated **permute** into **vegan**...

vegan depends on **permute** so it will already be installed & loaded when using **vegan**

49

RESTRICTED PERMUTATIONS WITH PERMUTE

permute follows Canoco closely — at the chiding of Cajo ter Braak when it didn't do what he wanted!

Samples can be thought of as belonging to three levels of a hierarchy

- the *sample* level; how are individual samples permuted
- the *plot* level; how are samples grouped at an intermediate level
- the *block* level; how are samples grouped at the outermost level

Blocks define groups of plots, each of which can contain groups of samples

50

RESTRICTED PERMUTATIONS WITH PERMUTE

Blocks are *never* permuted; if defined, only plots or samples *within* the blocks get shuffled & samples are **never** swapped between blocks

Plots or samples within plots, or both can be permuted following one of four simple permutation types

1. Free permutation (randomisation)
2. Time series or linear transect, equal spacing
3. Spatial grid designs, equal regular spacing
4. Permutation of plots (groups of samples)
5. Fixed (no permutation)

Multiple plots per block, multiple samples per plot; plots could be arranged in a spatial grid and samples within each of the plots form a time series

51

RESTRICTED PERMUTATIONS WITH PERMUTE | BLOCKS

Blocks are a random factor that does not interact with factors that vary within blocks

Blocks form groups of samples that are never permuted between blocks, only within blocks

Using blocks you can achieve what the **strata** argument used to in **vegan**; needs to be a factor variable

The variation *between* blocks should be excluded from the test; **permute** doesn't do this for you!


Use **+ Condition(blocks)** in the model formula where **blocks** is a factor containing the block membership for each observation

52

RESTRICTED PERMUTATIONS WITH PERMUTE | TIME SERIES & LINEAR TRANSECTS

Can *randomly* link starting point of one series to any time point of another series if series are stationary under null hypothesis that the series are unrelated

Achieve this via cyclic shift permutations — wrap series into a circle by joining start and end points

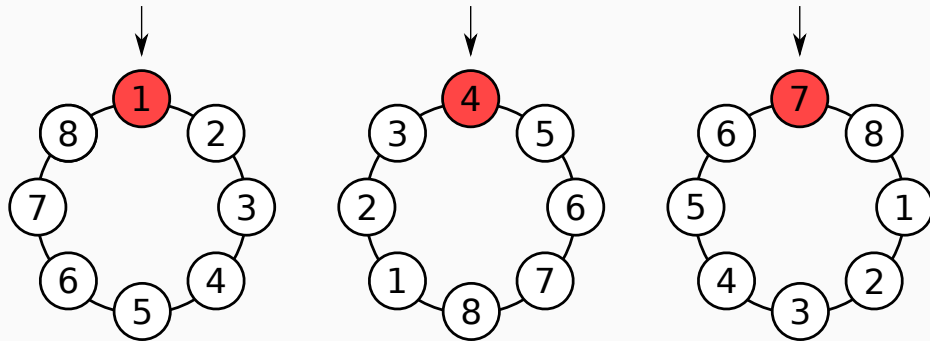

53

RESTRICTED PERMUTATIONS WITH PERMUTE | TIME SERIES & LINEAR TRANSECTS

Works OK if there are no trends or cyclic pattern — autocorrelation structure only broken at the end points *if* series are stationary

Can detrend to make series stationary but not if you want to test significance of a trend

```
shuffle(10, control = how(within = Within(type = "series")))
```

```
[1] 10 1 2 3 4 5 6 7 8 9
```

54


RESTRICTED PERMUTATIONS WITH PERMUTE | SPATIAL GRIDS

The trick of cyclic shifts can be extended to two dimensions for a regular spatial grid arrangement of points

Now shifts are *toroidal* as we join the end point in the x direction together and in the y direction together

```
matrix(perm, ncol = 3)
```

```
[,1] [,2] [,3]
[1,] 6 9 3
[2,] 4 7 1
[3,] 5 8 2
```



Source: Dave Burke, Wikimedia

55

RESTRICTED PERMUTATIONS WITH PERMUTE | WHOLE-PLOTS & SPLIT-PLOTS I

Split-plot designs are hierarchical with two levels of units

1. **whole-plots**, which contain
2. **split-plots** (the samples)

Can permute one or both of these but whole-plots must be of equal size

Essentially allows more than one error stratum to be analyzed

Test effect of constraints that vary *between* whole plots by permuting the whole-plots whilst retaining order of split-plots (samples) within the whole-plots

Test effect of constraints that vary *within* whole-plots by permuting the split-plots within whole-plots without permuting the whole-plots

56

RESTRICTED PERMUTATIONS WITH PERMUTE | WHOLE-PLOTS & SPLIT-PLOTS II

Whole-plots or split-plots can be time series, linear transects or rectangular grids in which case the appropriate restricted permutation is used

If the split-plots are parallel time series & **time** is an autocorrelated error component affecting all series then the same cyclic shift can be applied to each time series (within each whole-plot) (**constant** = **TRUE**)

57

RESTRICTED PERMUTATIONS WITH PERMUTE | MIRRORING

(Without wanting to get *too* technical) Mirroring in restricted permutations allows for isotropy in dependencies by reflecting the ordering of samples in time or spatial dimensions

For a linear transect, technically the autocorrelation at lag h is equal to that at lag $-h$ (also in a trend-free time series)

Hence the series (1, 2, 3, 4) and (4, 3, 2, 1) are equivalent from this point of view & we can draw permutations from either version

Similar argument can be made for spatial grids

Using **mirror** = **TRUE** then can double (time series, linear transects) or quadruple (spatial grids) the size of the set of permutations

58

RESTRICTED PERMUTATIONS WITH PERMUTE | THE SET OF PERMUTATIONS

Using restricted permutations can severely reduce the size of the set of allowed permutations

As the minimum p value obtainable is $1/np$ where np is number of allowed permutations (including the observed) this can impact the ability to detect signal/pattern

If we don't want mirroring

- in a time series of 20 samples the minimum p is 1/20 (0.05)
- in a time series of 100 samples the minimum p is 1/100 (0.01)
- in a data set with 10 time series each of 20 observations (200 total), if we assume an autocorrelated error component over all series (**constant** = **TRUE**) then there are only 20 permutations of the data and minimum p is 0.05

When the set of permutations is small it is better to switch to an exact test & evaluate all permutations in the set rather than randomly sample from the set

59

RESTRICTED PERMUTATIONS WITH PERMUTE | DESIGNING PERMUTATION SCHEMES

In **permute**, we set up a permutation scheme with **how()**

We sample from the permutation scheme with

- **shuffle()**, which gives a single draw from scheme, or
- **shuffleSet()**, which returns a set of n draws from the scheme

allPerms() can generate the entire set of permutations — **note** this was designed for small sets of permutations & is slow if you request it for a scheme with many thousands of permutations!

60

RESTRICTED PERMUTATIONS WITH PERMUTE | DESIGNING PERMUTATION SCHEMES

`how()` has three main arguments

1. **within** — takes input from helper `Within()`
2. **plots** — takes input from helper `Plots()`
3. **blocks** — takes a factor variable as input

```
plt <- gl(3, 10)
h <- how(within = Within(type = "series"), plots = Plots(strata = plt))
```

61

RESTRICTED PERMUTATIONS WITH PERMUTE | DESIGNING PERMUTATION SCHEMES

Helper functions make it easy to change one or a few aspects of permutation scheme, rest left at defaults

`args(Within)`

```
function (type = c("free", "series", "grid", "none"), constant = FALSE,
  mirror = FALSE, ncol = NULL, nrow = NULL)
NULL
```

`args(Plots)`

```
function (strata = NULL, type = c("none", "free", "series", "grid"),
  mirror = FALSE, ncol = NULL, nrow = NULL)
NULL
```

62

RESTRICTED PERMUTATIONS WITH PERMUTE | DESIGNING PERMUTATION SCHEMES

`how()` has additional arguments, many of which control the heuristics that kick in to stop you shooting yourself in the foot and demanding 9999 permutations when there are only 10

- **complete** should we enumerate the entire set of permutations?
- **minperm** lower bound on the size of the set of permutations at & below which we turn on complete enumeration

`args(how)`

```
function (within = Within(), plots = Plots(), blocks = NULL,
  nperm = 199, complete = FALSE, maxperm = 9999, minperm = 99,
  all.perms = NULL, make = TRUE, observed = FALSE)
NULL
```

63

RESTRICTED PERMUTATIONS WITH PERMUTE | TIME SERIES EXAMPLE I

Time series within 3 plots, 10 observation each

```
plt <- gl(3, 10)
h <- how(within = Within(type = "series"),
  plots = Plots(strata = plt))
set.seed(4)
p <- shuffle(30, control = h)
do.call("rbind", split(p, plt)) ## look at perms in context
```

	[,1]	[,2]	[,3]	[,4]	[,5]	[,6]	[,7]	[,8]	[,9]	[,10]
1	7	8	9	10	1	2	3	4	5	6
2	12	13	14	15	16	17	18	19	20	11
3	24	25	26	27	28	29	30	21	22	23

64

RESTRICTED PERMUTATIONS WITH PERMUTE | TIME SERIES EXAMPLE II

Time series within 3 plots, 10 observation each, same permutation within each

```
plt <- gl(3, 10)
h <- how(within = Within(type = "series", constant = TRUE),
        plots = Plots(strata = plt))
set.seed(4)
p <- shuffle(30, control = h)
do.call("rbind", split(p, plt)) ## look at perms in context
```

```
[,1] [,2] [,3] [,4] [,5] [,6] [,7] [,8] [,9] [,10]
1    7    8    9   10    1    2    3    4    5    6
2   17   18   19   20   11   12   13   14   15   16
3   27   28   29   30   21   22   23   24   25   26
```

65

RESTRICTED PERMUTATIONS WITH PERMUTE | WORKED EXAMPLE WITH VEGAN

Now we've seen how to drive **permute**, we can use the same **how()** commands to set up permutation designs within **vegan** functions

Analyse the Ohraz data Case study 5 of Leps & Smilauer

Repeated observations of composition from an experiment

- Factorial design (3 replicates)
- Treatments: fertilisation, mowing, *Molinia* removal

Test 1 of the hypotheses

There are no directional changes in species composition in time that are common to all treatments or specific treatments

66

RESTRICTED PERMUTATIONS WITH PERMUTE | WORKED EXAMPLE WITH VEGAN

Analyse the Ohraz data Case study 5 of Leps & Smilauer

```
## load the data
spp <- read.csv("data/ohraz-spp.csv", header = TRUE, row.names = 1)
env <- read.csv("data/ohraz-env.csv", header = TRUE, row.names = 1)
molinia <- spp[, 1]
spp <- spp[, -1]

env <- transform(env, year = as.numeric(as.character(year))) # Year as numeric
```

67

RESTRICTED PERMUTATIONS WITH PERMUTE | WORKED EXAMPLE WITH VEGAN

```
c1 <- rda(spp ~ year + year:mowing + year:fertilizer + year:removal +
        Condition(plotid), data = env)
(h <- how(nperm = 499, within = Within(type = "none"),
        plots = with(env, Plots(strata = plotid, type = "free"))))
```

Permutation Design:

Blocks:
Defined by: none

Plots:
Plots: plotid
Permutation type: free
Mirrored?: No

Within Plots:
Permutation type: none

Permutation details:
Number of permutations requested: 499
Max. number of permutations allowed: 9999
Evaluate all permutations?: No. Activation limit: 99

68

RESTRICTED PERMUTATIONS WITH PERMUTE | WORKED EXAMPLE WITH VEGAN

```
set.seed(23)
anova(c1, permutations = h, model = "reduced")

Permutation test for rda under reduced model
Plots: plotid, plot permutation: free
Permutation: none
Number of permutations: 499

Model: rda(formula = spp ~ year + year:mowing + year:fertilizer + year:removal + Condition(plotid), data =
      Df Variance      F Pr(>F)
Model    4   158.85 6.4247 0.002 **
Residual 90   556.30
---
Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
```

69

RESTRICTED PERMUTATIONS WITH PERMUTE | WORKED EXAMPLE WITH VEGAN

```
set.seed(24)
anova(c1, permutations = h, model = "reduced", by = "axis")

Permutation test for rda under reduced model
Marginal tests for axes
Plots: plotid, plot permutation: free
Permutation: none
Number of permutations: 499

Model: rda(formula = spp ~ year + year:mowing + year:fertilizer + year:removal + Condition(plotid), data =
      Df Variance      F Pr(>F)
RDA1    1    89.12 14.4173 0.002 **
RDA2    1    34.28  5.5458 0.004 **
RDA3    1    26.52  4.2900 0.004 **
RDA4    1     8.94  1.4458 0.640
Residual 90   556.30
---
Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
```

70

HIERARCHICAL ANALYSIS OF CRAYFISH

Variation in communities may exist at various scales, sometimes hierarchically
 A first step in understanding this variation is to test for its existence
 In this example from Leps & Smilauer (2014) uses crayfish data from Spring River, Arkansas/Missouri, USA, collected by Dr.~Camille Flinders.
 567 records of 5 species (each sub-divided into *Large* & *Small* individuals)

71

HIERARCHICAL ANALYSIS OF CRAYFISH

```
## load data
crayfish <- head(read.csv("data/crayfish-spp.csv"), [-1], -1)
design <- read.csv("data/crayfish-design.csv", skip = 1)[-1]

## fixup the names
names(crayfish) <- gsub("\\.", "", names(crayfish))
names(design) <- c("Watershed", "Stream", "Reach", "Run",
                  "Stream.Nested", "Reach.Nested", "Run.Nested")
```

72

HIERARCHICAL ANALYSIS OF CRAYFISH — UNCONSTRAINED

Number of samples have 0 crayfish, which excludes unimodal methods

```
m.pca <- rda(crayfish)
summary(eigenvals(m.pca))
```

Importance of components:


	PC1	PC2	PC3	PC4	PC5	PC6	PC7
Eigenvalue	3.5728	1.8007	1.1974	0.9012	0.79337	0.38886	0.28132
Proportion Explained	0.3818	0.1924	0.1280	0.0963	0.08478	0.04155	0.03006
Cumulative Proportion	0.3818	0.5742	0.7022	0.7985	0.88325	0.92480	0.95486

	PC8	PC9	PC10
Eigenvalue	0.21225	0.20528	0.004881
Proportion Explained	0.02268	0.02194	0.000520
Cumulative Proportion	0.97754	0.99948	1.000000

73

HIERARCHICAL ANALYSIS OF CRAYFISH — UNCONSTRAINED

```
layout(matrix(1:2, ncol = 2))
biplot(m.pca, type = c("text", "points"), scaling = "species")
set.seed(23)
ev.pca <- envfit(m.pca ~ Watershed, data = design, scaling = "species")
plot(ev.pca, labels = levels(design$Watershed), add = FALSE)
layout(1)
```

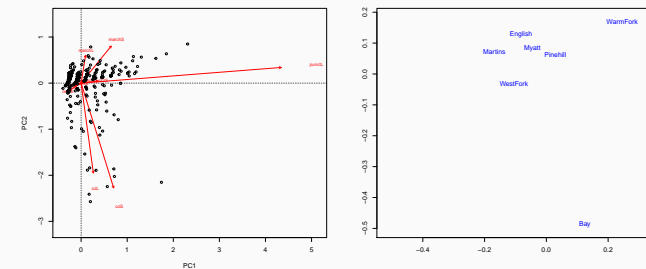

74

HIERARCHICAL ANALYSIS OF CRAYFISH — WATERSHED SCALE

```
m.ws <- rda(crayfish ~ Watershed, data = design)
m.ws
```

Call: rda(formula = crayfish ~ Watershed, data = design)

	Inertia	Proportion	Rank
Total	9.3580	1.0000	
Constrained	1.7669	0.1888	6
Unconstrained	7.5911	0.8112	10

Inertia is variance

Eigenvalues for constrained axes:

	RDA1	RDA2	RDA3	RDA4	RDA5	RDA6
	0.7011	0.5540	0.3660	0.1064	0.0381	0.0013

Eigenvalues for unconstrained axes:

	PC1	PC2	PC3	PC4	PC5	PC6	PC7	PC8	PC9	PC10
	3.0957	1.2109	0.9717	0.7219	0.5333	0.3838	0.2772	0.2040	0.1879	0.0048

75

HIERARCHICAL ANALYSIS OF CRAYFISH — WATERSHED SCALE

```
summary(eigenvals(m.ws, constrained = TRUE))
```

Importance of components:

	RDA1	RDA2	RDA3	RDA4	RDA5	RDA6
Eigenvalue	0.7011	0.5540	0.3660	0.1064	0.03814	0.001279
Proportion Explained	0.3968	0.3135	0.2072	0.0602	0.02159	0.000720
Cumulative Proportion	0.3968	0.7103	0.9175	0.9777	0.99928	1.000000

```
set.seed(1)
ctrl <- how(nperm = 499,
  within = Within(type = "none"),
  plots = with(design, Plots(strata = Stream, type = "free")))
(sig.ws <- anova(m.ws, permutations = ctrl))
```

Permutation test for rda under reduced model
 Plots: Stream, plot permutation: free
 Permutation: none
 Number of permutations: 499

```
Model: rda(formula = crayfish ~ Watershed, data = design)
      Df Variance      F Pr(>F)
Model   6  1.7669 21.724  0.002 **
Residual 560  7.5911
---
Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
```

76

HIERARCHICAL ANALYSIS OF CRAYFISH — STREAM SCALE

```
m.str <- rda(crayfish ~ Stream + Condition(Watershed), data = design)
m.str
```

```
Call: rda(formula = crayfish ~ Stream + Condition(Watershed), data
= design)
```

	Inertia	Proportion	Rank
Total	9.3580	1.0000	
Conditional	1.7669	0.1888	6
Constrained	1.1478	0.1227	10
Unconstrained	6.4433	0.6885	10

Inertia is variance
Some constraints were aliased because they were collinear (redundant)

Eigenvalues for constrained axes:

RDA1	RDA2	RDA3	RDA4	RDA5	RDA6	RDA7	RDA8	RDA9	RDA10
0.4928	0.2990	0.2058	0.0782	0.0372	0.0224	0.0063	0.0030	0.0029	0.0002

Eigenvalues for unconstrained axes:

PC1	PC2	PC3	PC4	PC5	PC6	PC7	PC8	PC9	PC10
2.7853	0.8528	0.7737	0.6317	0.5144	0.2808	0.2517	0.1923	0.1559	0.0046

77

HIERARCHICAL ANALYSIS OF CRAYFISH — STREAM SCALE

```
summary(eigenvals(m.str, constrained = TRUE))
```

Importance of components:

	RDA1	RDA2	RDA3	RDA4	RDA5	RDA6
Eigenvalue	0.4928	0.2990	0.2058	0.07824	0.03719	0.02235
Proportion Explained	0.4293	0.2605	0.1793	0.06816	0.03240	0.01947
Cumulative Proportion	0.4293	0.6898	0.8691	0.93731	0.96971	0.98918

	RDA7	RDA8	RDA9	RDA10
Eigenvalue	0.006326	0.003042	0.002894	0.0001546
Proportion Explained	0.005510	0.002650	0.002520	0.0001300
Cumulative Proportion	0.994690	0.997340	0.999870	1.0000000

```
set.seed(1)
ctrl <- how(nperm = 499,
  within = Within(type = "none"),
  plots = with(design, Plots(strata = Reach, type = "free")),
  blocks = with(design, Watershed))
(sig.str <- anova(m.str, permutations = ctrl))
```

Permutation test for rda under reduced model
Blocks: with(design, Watershed)
Plots: Reach, plot permutation: free
Permutation: none
Number of permutations: 499

Model: rda(formula = crayfish ~ Stream + Condition(Watershed), data = design)

	Df	Variance	F	Pr(>F)
Model	14	1.1478	6.9477	0.004 **
Residual	546	6.4433		

Signif. codes: 0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1

78

HIERARCHICAL ANALYSIS OF CRAYFISH — REACH SCALE

```
m.re <- rda(crayfish ~ Reach + Condition(Stream), data = design)
m.re
```

```
Call: rda(formula = crayfish ~ Reach + Condition(Stream), data =
design)
```

	Inertia	Proportion	Rank
Total	9.3580	1.0000	
Conditional	2.9148	0.3115	20
Constrained	1.4829	0.1585	10
Unconstrained	4.9603	0.5301	10

Inertia is variance
Some constraints were aliased because they were collinear (redundant)

Eigenvalues for constrained axes:

RDA1	RDA2	RDA3	RDA4	RDA5	RDA6	RDA7	RDA8	RDA9	RDA10
0.6292	0.2706	0.2146	0.1414	0.1123	0.0467	0.0344	0.0270	0.0064	0.0003

Eigenvalues for unconstrained axes:

PC1	PC2	PC3	PC4	PC5	PC6	PC7	PC8	PC9	PC10
2.1635	0.6000	0.5605	0.5166	0.3749	0.2212	0.2052	0.1588	0.1477	0.0040

79

HIERARCHICAL ANALYSIS OF CRAYFISH — REACH SCALE

```
summary(eigenvals(m.re))
```

Importance of components:

	RDA1	RDA2	RDA3	RDA4	RDA5	RDA6
Eigenvalue	0.62923	0.27057	0.21462	0.14135	0.11229	0.04669
Proportion Explained	0.09766	0.04199	0.03331	0.02194	0.01743	0.00725
Cumulative Proportion	0.09766	0.13965	0.17296	0.19490	0.21232	0.21957

	RDA7	RDA8	RDA9	RDA10	PC1	PC2
Eigenvalue	0.03440	0.02704	0.006381	0.0003486	2.1635	0.60799
Proportion Explained	0.00534	0.00420	0.000990	0.0000500	0.3358	0.09436
Cumulative Proportion	0.22491	0.22911	0.230100	0.2301500	0.5659	0.66029

	PC3	PC4	PC5	PC6	PC7	PC8
Eigenvalue	0.56047	0.51656	0.37495	0.22122	0.20516	0.15875
Proportion Explained	0.08699	0.08017	0.05819	0.03433	0.03184	0.02464
Cumulative Proportion	0.74728	0.82745	0.88564	0.91997	0.95181	0.97645

	PC9	PC10
Eigenvalue	0.14770	0.004021
Proportion Explained	0.02292	0.000620
Cumulative Proportion	0.99938	1.000000

```
set.seed(1)
ctrl <- how(nperm = 499,
  within = Within(type = "none"),
  plots = with(design, Plots(strata = Run, type = "free")),
  blocks = with(design, Stream))
(sig.re <- anova(m.re, permutations = ctrl))
```

Permutation test for rda under reduced model
Blocks: with(design, Stream)
Plots: Run, plot permutation: free
Permutation: none

80

HIERARCHICAL ANALYSIS OF CRAYFISH — RUN SCALE

```
m.run <- rda(crayfish ~ Run + Condition(Reach), data = design)
m.run
```

Call: rda(formula = crayfish ~ Run + Condition(Reach), data = design)

	Inertia	Proportion	Rank
Total	9.3580	1.0000	
Conditional	4.3977	0.4699	62
Constrained	1.8225	0.1948	10
Unconstrained	3.1378	0.3353	10

Inertia is variance
Some constraints were aliased because they were collinear (redundant)

Eigenvalues for constrained axes:

RDA1	RDA2	RDA3	RDA4	RDA5	RDA6	RDA7	RDA8	RDA9	RDA10
0.8541	0.3141	0.1679	0.1393	0.1328	0.0835	0.0474	0.0429	0.0390	0.0016

Eigenvalues for unconstrained axes:

PC1	PC2	PC3	PC4	PC5	PC6	PC7	PC8	PC9	PC10
1.3137	0.4165	0.3832	0.2759	0.2378	0.1725	0.1215	0.1130	0.1016	0.0021

81

HIERARCHICAL ANALYSIS OF CRAYFISH — RUN SCALE

```
summary(eigenvals(m.run))
```

Importance of components:

	RDA1	RDA2	RDA3	RDA4	RDA5	RDA6
Eigenvalue	0.8541	0.31406	0.16791	0.13925	0.13278	0.08345
Proportion Explained	0.1722	0.06331	0.03385	0.02807	0.02677	0.01682
Cumulative Proportion	0.1722	0.23551	0.26936	0.29743	0.32420	0.34102

	RDA7	RDA8	RDA9	RDA10	PC1	PC2
Eigenvalue	0.04738	0.04289	0.03904	0.00163	1.3137	0.41653
Proportion Explained	0.00955	0.00865	0.00787	0.00033	0.2648	0.08397
Cumulative Proportion	0.35058	0.35922	0.36709	0.36742	0.6323	0.71623

	PC3	PC4	PC5	PC6	PC7	PC8
Eigenvalue	0.38322	0.27587	0.23785	0.17248	0.12150	0.11296
Proportion Explained	0.07726	0.05562	0.04795	0.03477	0.02449	0.02277
Cumulative Proportion	0.79349	0.84910	0.89705	0.93182	0.95632	0.97909

	PC9	PC10
Eigenvalue	0.10158	0.002149
Proportion Explained	0.02048	0.000430
Cumulative Proportion	0.99957	1.000000

```
set.seed(1)
ctrl <- how(nperm = 499,
  within = Within(type = "free"),
  blocks = with(design, Reach))
(sig.run <- anova(m.run, permutations = ctrl))
```

Permutation test for rda under reduced model
Blocks: with(design, Reach)
Permutation: free
Number of permutations: 499

82

OTHER STUFF

THE cca.object

- Objects of class **"cca"** are complex with many components
- Entire class described in `?cca.object`
- Depending on what analysis performed some components may be `NULL`
- Used for (C)CA, PCA, RDA, and CAP (`capscale()`)

84

THE `cca.object`

`cca1` has a large number of components

- `$call` how the function was called
- `$grand.total` in (C)CA sum of 'rowsum'
- `$rowsum` the row sums
- `$colsum` the column sums
- `$tot.chi` total inertia, sum of Eigenvalues
- `$pCCA` Conditioned (partial-ed out) components
- `$CCA` Constrained components
- `$CA` Unconstrained components
- `$method` Ordination method used
- `$inertia` Description of what inertia is

85

THE `cca.object`

Depending on how one called `cca()` etc some of these components will be `NULL`

`$pCCA` is only filled in if a *partial* constrained ordination fitted

`rda()` returns objects with classes `"rda"` and `"cca"`, but in most cases those objects work like those of class `"cca"`

The Eigenvalues and axis scores are now spread about the `$CA` and `$CCA` components (also `$pCCA` if a *partial* CCA)

Thankfully we can use *extractor* functions to get at such things

86

DIAGNOSTICS FOR CONSTRAINED ORDINATIONS | GOODNESS OF FIT

`goodness()` computes two goodness of fit statistics for species or sites

Which goodness of fit measure is returned is controlled by argument `statistic`

- `statistic = "explained"` (default) gives the cumulative proportion of variance explained by each axis
- `statistic = "distance"` gives the residual distance between the "fitted" location in constrained ordination space and the location in the full dimensional space

87

DIAGNOSTICS FOR CONSTRAINED ORDINATIONS | GOODNESS OF FIT

```
head(goodness(mods))
```

	CCA1	CCA2	CCA3
Callvulg	0.0062471656	0.318907619	0.8254657
Empenigr	0.1164701677	0.137604904	0.1953245
Rhodtome	0.0999089739	0.169697909	0.1824153
Vaccmyrt	0.2361482843	0.240516323	0.2406730
Vaccviti	0.1523704591	0.156502301	0.2110550
Pinusylv	0.0009244423	0.004802076	0.0060096

```
head(goodness(mods, summarize = TRUE))
```

	Callvulg	Empenigr	Rhodtome	Vaccmyrt	Vaccviti	Pinusylv
	0.8254657	0.1953245	0.1824153	0.2406730	0.2110550	0.0060096

88

DIAGNOSTICS FOR CONSTRAINED ORDINATIONS | INERTIA DECOMPOSITION

`inertcomp()` decomposes the variance in samples or species in partial, constrained, and unconstrained components

Same two types of measure available by argument `statistic`

- `statistic = "explained"` (default) gives the decomposition in terms of variance
- `statistic = "distance"` gives decomposition in terms of the the residual distance
- Can output as proportions of total via `proportion = TRUE`

```
head(inertcomp(mods, proportional = TRUE))
```

	CCA	CA
Callvulg	0.8254657	0.1745343
Empenigr	0.1953245	0.8046755
Rhodtome	0.1824153	0.8175847
Vaccmyrt	0.2406730	0.7593270
Vaccviti	0.2110550	0.7889450
Pinusylv	0.0060096	0.9939904

89

DIAGNOSTICS FOR CONSTRAINED ORDINATIONS | SPECIES-ENVIRONMENT CORRELATIONS

`spenvcor()` returns the species-environment correlation

The (weighted) correlation between the weighted average-based and the linear combination-based sets of site scores

A *poor* measure of goodness of fit. Sensitive to

- outliers (like all correlations)
- overfitting (using too many constraints)

Better models can have poorer species-environment correlations

```
spenvcor(mods)
```

	CCA1	CCA2	CCA3
	0.8554808	0.8132873	0.8792797

90

DIAGNOSTICS FOR CONSTRAINED ORDINATIONS | INTERSET CORRELATIONS

`intersectcor()` returns the interset correlations; the (weighted) correlation between the weighted average-based site scores and each constraint variable

Another *poor* diagnostic

- correlation based
- focuses on a single constraint-axis combination at a time

Vector fitting (`envfit()`) or biplot scores (`scores(model, display = "bp")`) are better alternatives

```
intersectcor(mods)
```

	CCA1	CCA2	CCA3
Al	0.7356151	-0.1302334	0.4259623
P	-0.3589749	-0.6110772	0.4478933
K	-0.3768462	-0.1339192	0.7760441

91

VARIANCE INFLATION FACTORS

Linear dependencies between constraints can be investigated via the *variance inflation factor* or VIF

VIF is a measure of how much the variance of $\hat{\beta}_j$ is inflated by presence of other covariates

Lots of rules of thumb

- VIF ≥ 20 indicates *strong collinearity* in constraints
- VIF ≥ 10 potentially of concern & should be looked at

Computed via `vif.cca()`

92

RE-USE

Copyright ©(2015) Gavin L. Simpson *Some Rights Reserved*

Unless indicated otherwise, this slide deck is licensed under a Creative Commons Attribution 4.0 International License.



REFERENCES

Blanchet, F Guillaume, Pierre Legendre, and Daniel Borcard. 2008. "Forward Selection of Explanatory Variables." *Ecology* 89 (9). Eco Soc America: 2623–32.