

Sensitivity Analysis of Biochemical Systems Using Bond Graphs: Additional Material – Illustrative Examples

Peter Gawthrop. *peter.gawthrop@unimelb.edu.au*

May 27, 2023

Contents

1	Introduction	2
2	Supporting software	2
2.1	Import packages	2
2.2	Transfer function properties	3
2.3	Plotting and printing	4
2.4	Steady-state by simulation	4
2.5	Stoichiometry	5
2.6	Linearisation	5
2.7	Extract subsystem from linear system	6
2.8	Plotting	8
2.9	Normalisation constants	8
3	Simple example $A = B = C$ revisited.	9
3.1	Bond Graph	9
3.2	Parameters	9
3.3	Stoichiometry & linearisation	10
3.4	Sensitivity Bond Graph – change chemostats	11
3.4.1	Compare sensitivity with exact simulation	12
3.5	Sensitivity Bond Graph – change K_B	13
3.5.1	Stoichiometry & linearisation	14
3.5.2	Compare sensitivity with exact simulation	15
3.6	Sensitivity Bond Graph – change κ_1	15
3.6.1	Stoichiometry & linearisation	16
3.6.2	Compare sensitivity with exact simulation	17
4	Sensitivity components	18
4.1	sCe	18
4.1.1	Bond Graph	18
4.2	sRe	19
4.2.1	Bond Graph	19
4.3	Simple system revisited	20
4.3.1	Parameters	20
4.3.2	Stoichiometry & linearisation	21
4.3.3	Stoichiometric matrix	22
4.4	Sensitivity Bond Graph – change B	22
4.4.1	Compare sensitivity with exact simulation	23
4.5	Sensitivity Bond Graph – change r1	24
4.5.1	Compare sensitivity with exact simulation	25

4.6	Sensitivity Bond Graph – change r_2	25
4.6.1	Compare sensitivity with exact simulation	26
5	Stoichiometric approach	27
5.1	Supporting software	27
5.2	Simple example $A = B = C$	29
5.2.1	Vary λ	34
5.2.2	Sloppy parameters	36
5.3	Example: Enzyme-catalysed reaction	40
5.3.1	Vary λ	44
5.3.2	Simulate over flow range - quasi steady-state. Supporting software	45
5.3.3	Simulate over flow range - quasi steady-state. Vary Re components.	48
5.3.4	Initial condition sensitivity.	50
5.4	Example: Modulated Enzyme-catalysed reaction	51
5.4.1	Vary λ	58
5.4.2	Sanity check on sensitivity system	59
5.4.3	Show system transfer functions	60
5.4.4	Test model reduction	60
5.4.5	Simulate over flow range - quasi steady-state. Vary Activation and Inhibition.	62
5.4.6	Simulate over flow range - quasi steady-state. Vary Re components	64
5.4.7	Simulate over flow range - quasi steady-state. Vary substrate concentration.	66
5.4.8	Sloppy parameters	68
5.4.9	Initial condition sensitivity.	76

1 Introduction

This notebook generates the figures for the paper: Sensitivity Analysis of Biochemical Systems Using Bond Graphs. The companion notebook Sensitivity_PPP.ipynb contains the Pentose Phosphate Pathway example.

2 Supporting software

2.1 Import packages

```
[1]: ## Some useful imports
import BondGraphTools as bgt
import numpy as np
import sympy as sp
import matplotlib.pyplot as plt
import control as con
import copy
import importlib

## For reimporting: use imp.reload(module)
import importlib as imp

## Stoichiometric analysis
import stoich as st

## SVG
```

```

import svgBondGraph as sbg

## Stoichiometry to BG
import stoichBondGraph as stbg

## Modularity
# import modular as bgm

## Sloppy parameters
import sloppy as slp

## Display (eg disp.SVG(), disp.
import IPython.display as disp

##
quiet = True
Plotting = False
Titles = not Plotting
grid = False

fontsize=20

## Normalisation
Normalise = True

## Use lambda as system input or just perturb parameter
lambdaIn = True

```

Warning - scikit.odes not found. Simulations are disabled.

2.2 Transfer function properties

```

[2]: def tfProps(tf,method='truncate'):

    ## Steady-state gain
    g = con.dcgain(tf)

    if not con.issiso(tf):
        g = g[0][0]

    ## Time constant
    ## Check if direct link
    direct_link = np.any(tf.D)
    ## Only set tau=0 if siso
    if direct_link and con.issiso(tf):
        ## Instant response
        tau = 0
    else:
        ## Reduce to first-order to estimate time constant
        ## Note that method='matchdc' can give a kernel crash - use 'truncate'
        tf1 = con.balred(sys,orders=1,method=method)

```

```

poles = con.poles(tf1)
realPoles = np.real(poles)
tau = -1/min(realPoles)

return g,tau

```

2.3 Plotting and printing

```

[3]: ## Optional plotting
def Savefig(name):
    if Plotting:
        plt.rcParams.update({'font.size': fontsize})
        plt.tight_layout()
        plotname = 'Figs/'+name+'.pdf'
        print('Saving',plotname)
        plt.savefig(plotname)

```

```

[4]: def latex(m,name):
    lm = sp.latex(sp.Matrix(m),mat_delim="(")
    return name+' &= '+lm

## Optional print latex for the paper
printing = True
def printLatex(s,sc=None):
    if printing:
        ## System properties in LaTeX
        AA = Sys.A; print(latex(AA,'A'))
        BB = Sys.B; print(latex(BB,'B'))
        CC = Sys.C; print(latex(CC,'C'))
        DD = Sys.D; print(latex(DD,'D'))

        for m in ['species','reaction','Nf','Nr','N']:
            print(st.sprintln(s,m))

        if not (sc==None):
            print('% Nc matrix')
            print(st.sprintln(sc,'N'))

        print(st.sprintln(s,all=True,chemformula=True))
        print(st.sprintv1(s))

```

2.4 Steady-state by simulation

```

[5]: ## Steady-state by simulation
def SteadyState(s,sc,sf=None,parameter={},X0=None,t_ss=1000):
    t = np.linspace(0,t_ss)
    dat = st.
    ↪sim(s,sc=sc,sf=sf,t=t,parameter=parameter,X0=X0,tol=1e-4,quiet=quiet)
    X_ss = dat['X'][-1]

```

```

V_ss = dat['V'][-1]
#dX_ss = sc['N']@V_ss
dX_ss = dat['dX'][-1]
dXc_ss = dat['dXc'][-1]
print(f'Steady-state finder error: {np.linalg.norm(dXc_ss):.2e}')
return X_ss,V_ss

```

2.5 Stoichiometry

```

[6]: def Stoichiometry(model,chemostats=[],flowstats=[],CommonSpecies=None,sensitivity=False):
    →
    ## Stoichiometry
    s = st.stoich(model,quiet=quiet)

    ## Unify species
    if not (CommonSpecies is None):
        commonSpecies = st.merge(s,CommonSpecies=CommonSpecies)
    #     print(commonSpecies)
    st.unify(s,commonSpecies=commonSpecies)

    ## Sensitivity
    if sensitivity:
        extra = st.stoichSensitivity(s)
    else:
        extra = []

    #     print(chemostats+extra)

    ## Chemostats and flowstats
    sc = st.statify(s,chemostats=chemostats+extra)
    sf = st.statify(s,flowstats=flowstats)

    return s,sc,sf

```

2.6 Linearisation

```

[7]: def Linear(s,sc,sf=None,parameter={},X0=None, invar='X', outvar = 'V',␣
    →quiet=False):

    ## Steady state
    if X0 is None:
        X0 = np.ones(s['n_X'])
    #     print(len(X0))

    X_ss,V_ss = SteadyState(s,sc,sf=sf,parameter=parameter,X0=X0)
    dX_ss = s['N']@V_ss
    print('X_ss =',X_ss)
    print('V_ss =', V_ss)

```

```
#     print('dX_ss =', dX_ss)

## Linearise
sys = st.lin(s,sc,sf=sf,x_ss=X_ss,parameter=parameter,
            invar=invar,outvar=outvar,quiet=quiet)

return sys,X_ss,V_ss,dX_ss
```

```
[8]: def linStep(sc,sys,T=None,X0=None):
      """ Linearised response: step (X0 is None) or initial conditions_
      →(otherwise)
      """

      if X0 is None:
          resp = con.step_response(sys,T)
          y = resp.y[:,0,:].T
      else:
          L_xX = sc['L_xX']
          G_X = sc['G_X']
          resp = con.initial_response(sys,T,X0=L_xX@X0)
          y = resp.y.T

      return y
```

2.7 Extract subsystem from linear system

```
[9]: def Index(A,a):

      I = []
      for aa in a:
          i = A.index(aa)
          I.append(i)
      return np.array(I)

      def zapSmall(x,tol=1e-10,quiet=True):

          xx = np.zeros(len(x))
          for i,val in enumerate(x):
              if abs(val)>tol:
                  xx[i] = x[i]
              else:
                  if not quiet:
                      print(f'Setting {i}th coefficient {val:.2} to zero')
          return xx

      def_
      →extractSubsystem(SYS,sc,sf,inp,outp,minreal=False,tol=None,order=None,quiet=False):
      →
```

```

Sys = copy.copy(SYS)
chemostats = sc['chemostats']
if sf is None:
    flowstats = []
else:
    flowstats = sf['flowstats']
species = sc['species']
reaction = sc['reaction']

## Index of input and output
if inp[0] in chemostats:
    i_inp = Index(chemostats,inp)
#     print('Input:', i_inp, chemostats[i_inp[0]])
else:
    i_inp = Index(flowstats,inp)+len(chemostats)

#     print(i_inp)

if outp[0] in chemostats:
    i_outp = Index(chemostats,outp)
elif outp[0] in species:
    i_outp = Index(species,outp)
else:
    if outp[0] in reaction:
        i_outp = Index(reaction,outp)
    else:
        print(f'Output {outp} does not exist')

## Extract tf
n_y = len(i_outp)
n_u = len(i_inp)
nn = Sys.A.shape
n_x = nn[0]
#     print(n_x)

sys = con.ss(Sys.A,
              Sys.B[:,i_inp].reshape(n_x,n_u),
              Sys.C[i_outp,:].reshape(n_y,n_x),
              Sys.D[i_outp][:,i_inp].reshape(n_y,n_u))
if minreal:
    sys = con.minreal(sys,tol=tol,verbose=False)

## Reduce order
if not (order is None):
    sys = con.balred(sys,order,method='matchdc')

return sys

```

2.8 Plotting

```
[10]: def plotSensitivity(dat, reactions=['r1', 'r2'], plotSim=True, name=None, grid=False):  
    plotSensitivity(dat, reactions=['r1', 'r2'], plotSim=True, name=None, grid=False):  
    ## Folt  
    plt.rcParams.update({'font.size': fontsize})  
    if plotSim:  
        plt.plot(t, y_lin, color='black', lw=3)  
    else:  
        plt.plot(t, y_lin, label=label, lw=3)  
  
    for reac in reactions:  
        i = s['reaction'].index(reac)  
        if plotSim:  
            label = reac + r' ($\tilde{\lambda}$ = ' + f'{lam-1:0.2f})'  
            pc = int(round(100*(lam-1)))  
            label = f'{reac} ({pc}% )'  
            plt.plot(t, (dat['V'][:,i]-V_ss[i])/(lam-1),  
                    lw=5, ls='dashed', label=label)  
  
    if grid:  
        plt.grid()  
    plt.legend()  
    plt.xlabel(r'$t$')  
    plt.ylabel(r'$\tilde{f}/\tilde{\lambda}$')  
    # plt.tight_layout()
```

```
[11]: def plotLines(lw=4, ls='dotted'):  
    plt.hlines(g, min(t), max(t), color='black', ls=ls, lw=lw)  
    plt.vlines(tau, min(y_lin.flatten()), max(y_lin.  
    flatten()), color='black', ls=ls, lw=lw)
```

2.9 Normalisation constants

```
[12]: T_human = 37 # Human body temperature  
K_0 = 273.15  
print(f'T_human = {T_human} degC = {T_human+K_0} K')  
  
mu_0 = RT = st.RT(T_cent=T_human)  
print(f'mu_0 = {mu_0*1e-3:0.3f} kJ/mol')  
  
F = st.F() # Faraday's constant  
print(f'F = {F*1e-3:0.2f} kC/mol')  
  
V_0 = RT/F  
print(f'V_0 = {V_0*1e3:0.2f} mV')  
  
P_0 = 1e-3
```



```

v_0 = P_0/mu_0
print(f'v_0 = {v_0*1e6:0.4f} micro mol /s')

i_0 = F*v_0
print(f'i_0 = {i_0*1e3:0.2f} mA')

```

```

T_human = 37 degC = 310.15 K
mu_0 = 2.579 kJ/mol
F = 96.49 kC/mol
V_0 = 26.73 mV
v_0 = 0.3878 micro mol /s
i_0 = 37.42 mA

```

3 Simple example $A = B = C$ revisited.


3.1 Bond Graph

```

[13]: # Simple example A = B = C
      sbg.model('ABC_abg.svg')
      import ABC_abg
      disp.SVG('ABC_abg.svg')

```

[13]:

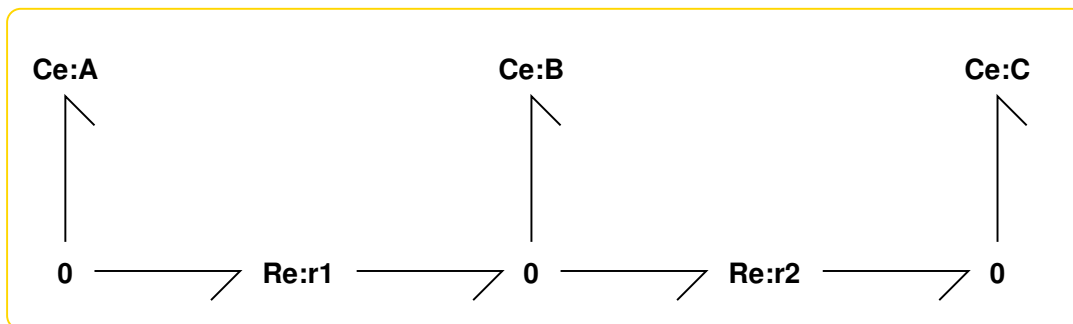

```

[14]: ## BG generated equations
      # model = ABC_abg.model()
      # for cr in model.constitutive_relations:
      #     print(cr)
      #     #print(sp.diff(cr, 'x_0'))

```

3.2 Parameters

```

[15]: ## Parameters
      parameter = {}
      parameter['K_A'] = 1
      parameter['K_B'] = 1
      parameter['kappa_r1'] = 1
      parameter['kappa_r2'] = 9
      print(parameter)

```

```
## Initial states
X_A_0 = 2
```

```
{'K_A': 1, 'K_B': 1, 'kappa_r1': 1, 'kappa_r2': 9}
```

3.3 Stoichiometry & linearisation

```
[16]: ## Stoichiometry
s,sc,sf = Stoichiometry(ABC_abg.model(),chemostats=['A','C'],flowstats=[])
```

```
[17]: ## Linearise
Parameter = copy.copy(parameter)
Parameter['K_A'] = X_A_0*parameter['K_A']
Sys,X_ss,V_ss,dX_ss = □
    ↳Linear(s,sc,parameter=parameter,X0=[X_A_0,1,1],quiet=quiet)
i_A = s['species'].index('A')
X_A_ss = X_ss[i_A]

## Show transfer function
con.tf(Sys)

## Lambda for comparison
lam = 1.1
```

Steady-state finder error: 8.88e-16

```
X_ss = [2.  1.1 1. ]
```

```
V_ss = [0.9 0.9]
```

```
[18]: printLatex(s,sc=sc)
```

```
A &= \left(\begin{matrix}-10.0\end{matrix}\right)
B &= \left(\begin{matrix}1.0 & 9.0\end{matrix}\right)
C &= \left(\begin{matrix}-1.0\\9.0\end{matrix}\right)
D &= \left(\begin{matrix}1.0 & 0\\0 & -9.0\end{matrix}\right)
\begin{align}
X&= \begin{pmatrix}
X_{A}\\
X_{B}\\
X_{C}
\end{pmatrix}
\end{align}

\begin{align}
V&= \begin{pmatrix}
V_{r1}\\
V_{r2}
\end{pmatrix}
\end{align}

\begin{align}
```

```

Nf &=
\left(\begin{matrix}1 & 0\\0 & 1\\0 & 0\end{matrix}\right)
\end{align}

\begin{align}
Nr &=
\left(\begin{matrix}0 & 0\\1 & 0\\0 & 1\end{matrix}\right)
\end{align}

\begin{align}
N &=
\left(\begin{matrix}-1 & 0\\1 & -1\\0 & 1\end{matrix}\right)
\end{align}

%% Nc matrix
\begin{align}
N &=
\left(\begin{matrix}0 & 0\\1 & -1\\0 & 0\end{matrix}\right)
\end{align}

\begin{align}
\ch{A} &<> [ r1 ] B }\\
\ch{B} &<> [ r2 ] C }
\end{align}

\begin{align}
v_{r1} &= \kappa_{r1} \left(K_{A} x_{A} - K_{B} x_{B}\right)\\
v_{r2} &= \kappa_{r2} \left(K_{B} x_{B} - K_{C} x_{C}\right)
\end{align}

```

```

[19]: ## Show dc gain
print('DC gain: \n', con.dcgain(Sys))

```

```

DC gain:
[[ 0.9 -0.9]
 [ 0.9 -0.9]]

```

3.4 Sensitivity Bond Graph – change chemostats

```

[20]: ## Extract sensitivity system
inp = ['A']
outp = ['r1', 'r2']
sys = extractSubsystem(Sys, sc, sf, inp, outp)

## Include factor X_A_0 into the linearised system
sys.B = sys.B*X_A_0
sys.D = sys.D*X_A_0

```

```

[21]: ## Show transfer function
con.tf(sys)

```

[21]:

$$\begin{bmatrix} \frac{2s+18}{s+10} \\ \frac{18}{s+10} \end{bmatrix}$$

```
[22]: ## System matrix  
sys
```

[22]:

$$\left(\begin{array}{c|c} -10 & 2 \\ \hline -1 & 2 \\ 9 & 0 \end{array} \right)$$

```
[23]: ## Show dc gain  
print('DC gain: \n', con.dcgain(sys))
```

DC gain:
[[1.8]
[1.8]]


3.4.1 Compare sensitivity with exact simulation

```
[24]: ## Exact Simulate with changed x_A  
X_ss_1 = copy.copy(X_ss)  
X_ss_1[i_A] = lam*X_A_ss  
print(X_ss)  
t = np.linspace(0,1)  
dat = st.sim(s,sc=sc,t=t,parameter=parameter,X0=X_ss_1,quiet=quiet)  
print(parameter)
```

[2. 1.1 1.]
{'K_A': 1, 'K_B': 1, 'kappa_r1': 1, 'kappa_r2': 9}

```
[25]: ## Step response to change in A  
y_lin = linStep(sc,sys,T=t)
```


```
[26]: ## Plot  
plotSensitivity(dat,)
```

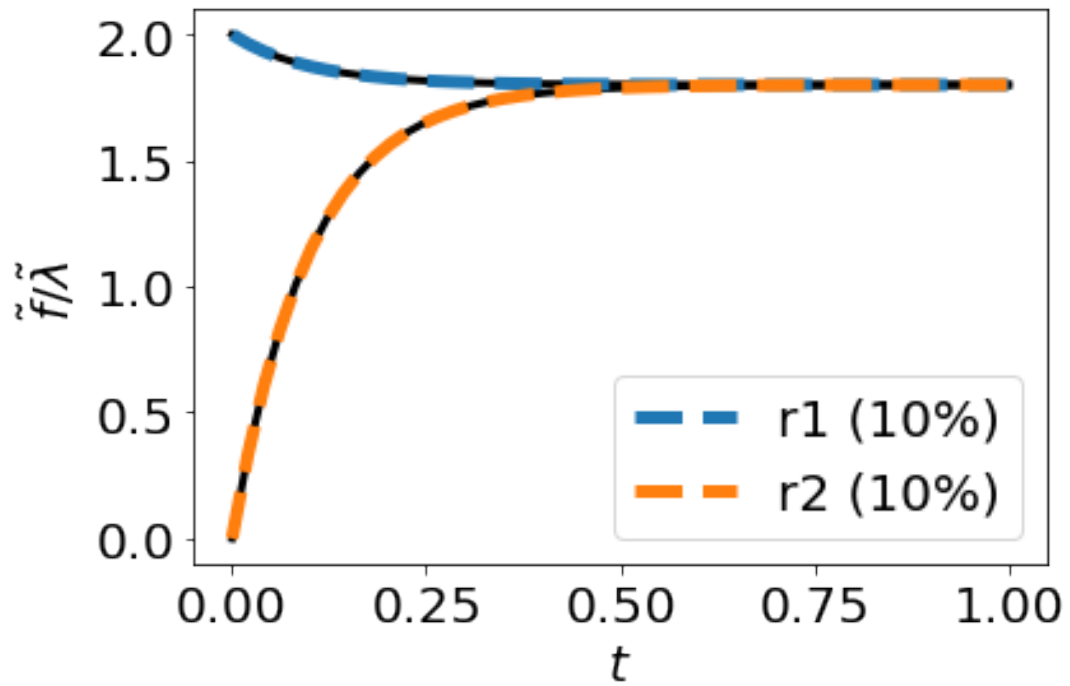

3.5 Sensitivity Bond Graph – change K_B

```
[27]: # Simple example A = B = C: sensitivity
      sbg.model('sKABC_abg.svg')
      import sKABC_abg
      disp.SVG('sKABC_abg.svg')
```

[27]:

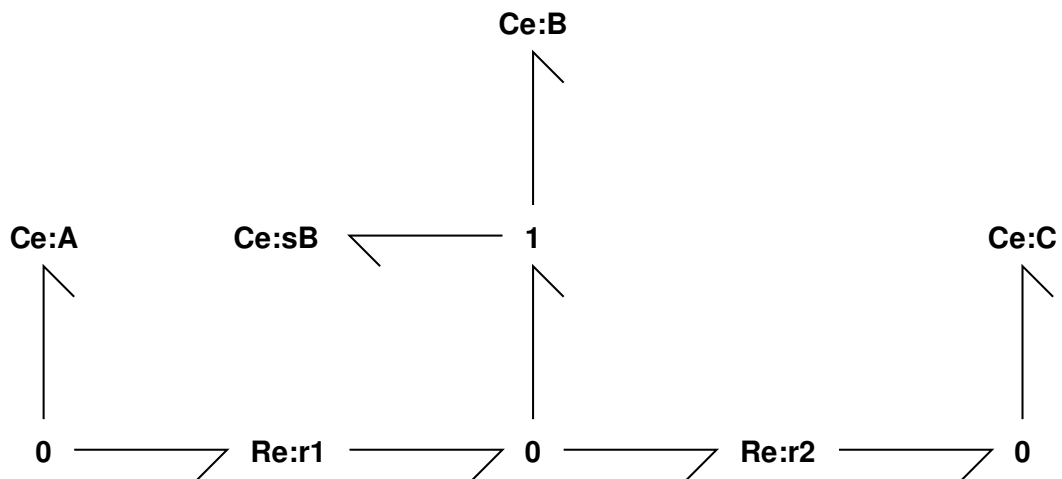

3.5.1 Stoichiometry & linearisation

```
[28]: ## Stoichiometry
s,sc,sf = Stoichiometry(sKABC_abg.
    ↳model(),chemostats=['A','C','sB'],flowstats=[])

## Linearise
Sys,X_ss,V_ss,dX_ss =↳
    ↳Linear(s,sc,parameter=parameter,X0=[2,1,1,1],quiet=quiet)

## Extract sensitivity system
inp = ['sB']
outp = ['r1','r2']
sys = extractSubsystem(Sys,sc,sf,inp,outp)

## Species and reactions
print(s['species'])
print(s['reaction'])
```

Steady-state finder error: 8.88e-16

X_ss = [2. 1.1 1. 1.]

V_ss = [0.9 0.9]

['A', 'B', 'C', 'sB']

['r1', 'r2']

```
[29]: ## Show transfer function
con.tf(sys)
```

[29]:

$$\begin{bmatrix} \frac{-1.1s}{s+10} \\ \frac{9.9s}{s+10} \end{bmatrix}$$

```
[30]: ## System matrix
sys
```

[30]:

$$\left(\begin{array}{c|c} -10 & -11 \\ \hline -1 & -1.1 \\ 9 & 9.9 \end{array} \right)$$

```
[31]: ## Show dc gain
print('DC gain: \n', con.dcgain(sys))
```

DC gain:

[[0.]


[0.]]

3.5.2 Compare sensitivity with exact simulation

```
[32]: ## Exact Simulate with changed K
parameter1 = copy.copy(parameter)
parameter1['K_B'] *= lam
t = np.linspace(0,1)
dat = st.sim(s,sc=sc,t=t,parameter=parameter1,X0=X_ss,quiet=quiet)
```

```
[33]: ## Step response to sB
y_lin = linStep(sc,sys,T=t)
```


```
[34]: ## Plot
plotSensitivity(dat,)
```

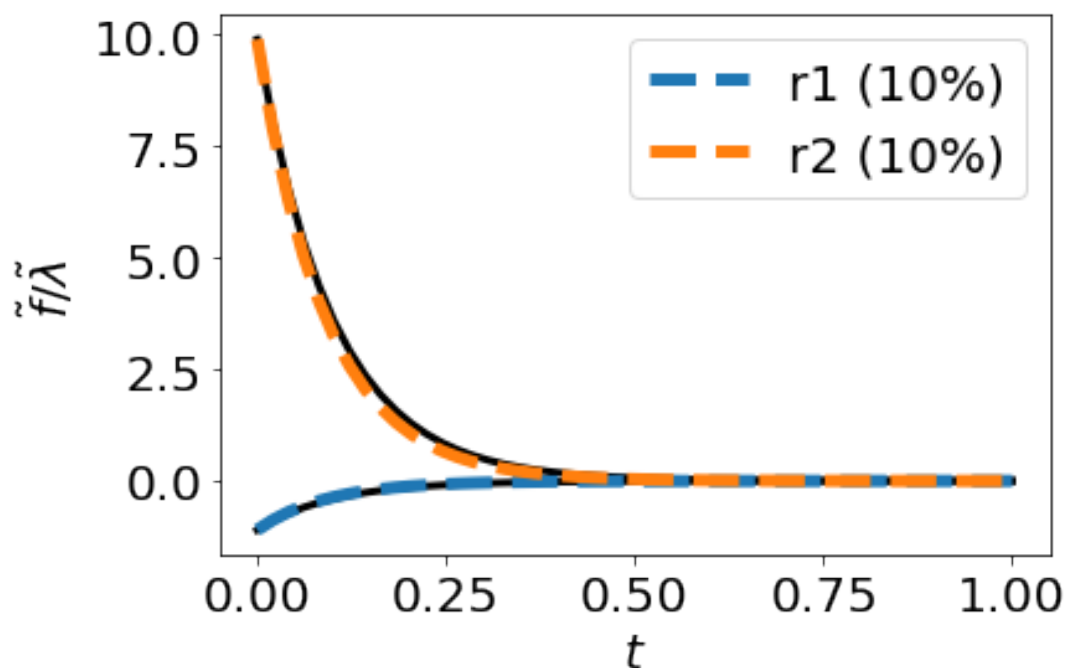

3.6 Sensitivity Bond Graph – change κ_1

```
[35]: # Simple example A = B = C: sensitivity
sbg.model('sKapABC_abg.svg')
import sKapABC_abg
disp.SVG('sKapABC_abg.svg')
```

```
[35]:
```

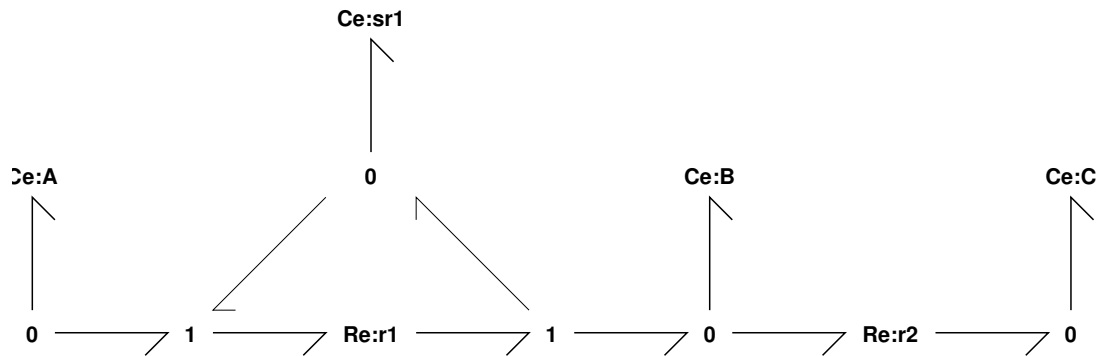

```
[36]: ## BG generated equations
model = sKapABC_abg.model()
for cr in model.constitutive_relations:
    print(cr)
    #print(sp.diff(cr, 'x_0'))
```

```
K_A*K_sr1*kappa_r1*x_0*x_3 - K_B*K_sr1*kappa_r1*x_1*x_3 + dx_0
-K_A*K_sr1*kappa_r1*x_0*x_3 + K_B*K_sr1*kappa_r1*x_1*x_3 + K_B*kappa_r2*x_1 -
K_C*kappa_r2*x_2 + dx_1
-K_B*kappa_r2*x_1 + K_C*kappa_r2*x_2 + dx_2
dx_3
```

3.6.1 Stoichiometry & linearisation

```
[37]: print(s['reaction'])
## Stoichiometry
s,sc,sf = Stoichiometry(sKapABC_abg.model(),chemostats=['A','C','sr1'])
print(sf['flowstats'])

## Linearise
Sys,X_ss,V_ss,dX_ss = _
↳Linear(s,sc,parameter=parameter,X0=[2,1,1,1],quiet=quiet)

## Extract sensitivity system
inp = ['sr1']
outp = ['r1','r2']
sys = extractSubsystem(Sys,sc,sf,inp,outp)

## Show transfer function
con.tf(sys)
```

```
['r1', 'r2']
[]
Steady-state finder error: 8.88e-16
X_ss = [2.  1.1 1.  1. ]
V_ss = [0.9 0.9]
```

[37]:

$$\left[\begin{array}{c} \frac{0.9s+8.1}{s+10} \\ \frac{8.1}{s+10} \end{array} \right]$$

```
[38]: ## System matrix
sys
```

[38]:

$$\left(\begin{array}{c|c} -10 & 0.9 \\ -1 & 0.9 \\ 9 & 0 \end{array} \right)$$

```
[39]: ## Show dc gain
print('DC gain: \n', con.dcgain(sys))
```


```
DC gain:
[[0.81]
 [0.81]]
```

3.6.2 Compare sensitivity with exact simulation

```
[40]: ## Exact Simulate with changed K
lam = 1.1
parameter1 = copy.copy(parameter)
parameter1['kappa_r1'] *= lam
t = np.linspace(0,1)
dat = st.sim(s,sc=sc,sf=sf,t=t,parameter=parameter1,X0=X_ss,quiet=quiet)
```

```
[41]: ## Step response to sB
y_lin = linStep(sc,sys,T=t)
```

```
[42]: ## Plot
plotSensitivity(dat,)
```

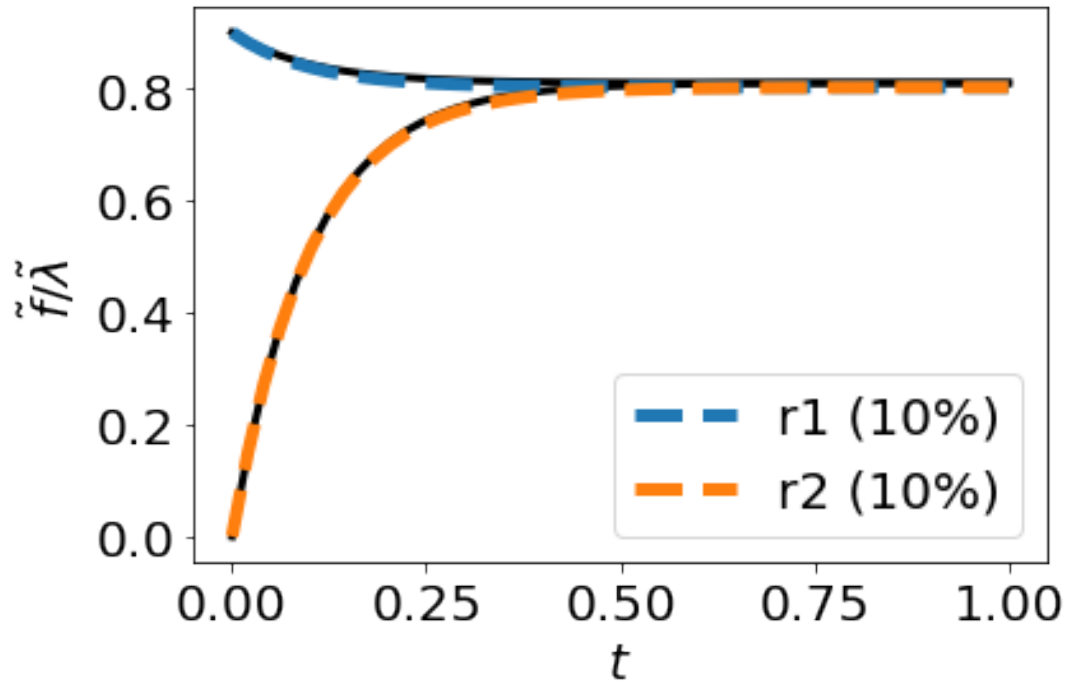

[43]: sys

[43]:

$$\left(\begin{array}{c|c} -10 & 0.9 \\ -1 & 0.9 \\ 9 & 0 \end{array} \right)$$

[44]: disp.Latex(st.sprintvl(s))

[44]:

$$v_{r1} = K_{sr1}\kappa_{r1}x_{sr1}(K_Ax_A - K_Bx_B) \quad (1)$$

$$v_{r2} = \kappa_{r2}(K_Bx_B - K_Cx_C) \quad (2)$$


4 Sensitivity components

4.1 sCe

4.1.1 Bond Graph

```
[45]: # sCe
      sbg.model('sCe_abg.svg')
      import sCe_abg
      disp.SVG('sCe_abg.svg')
```


[45]:

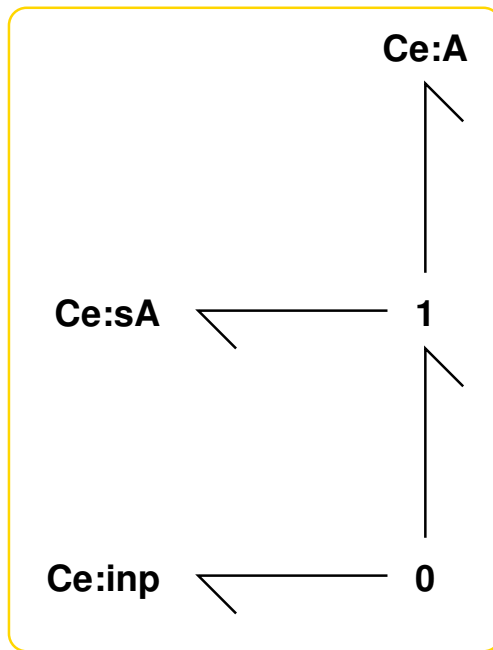

4.2 sRe

4.2.1 Bond Graph

```
[46]: # sRe
      sbg.model('sRe_abg.svg')
      import sRe_abg
      disp.SVG('sRe_abg.svg')
```

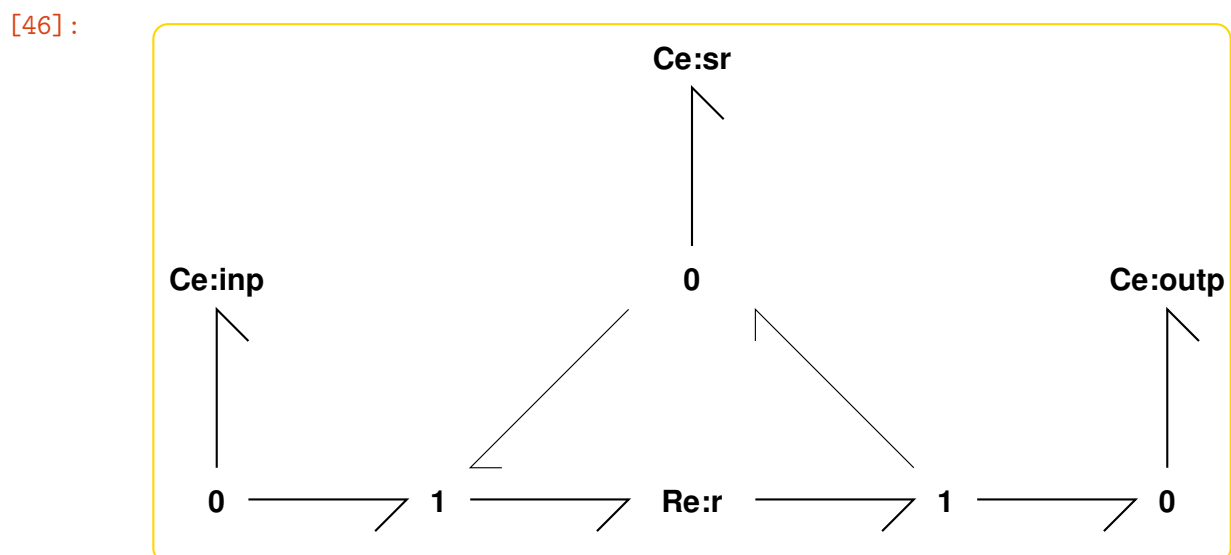

4.3 Simple system revisited


```
[47]: # Simple example  $A = B = C$  with sensitivity components
sbgl.model('sABC_abg.svg')
import sABC_abg
disp.SVG('sABC_abg.svg')
```

Creating subsystem: sCe:B

Creating subsystem: sRe:r1

Creating subsystem: sRe:r2

[47]:

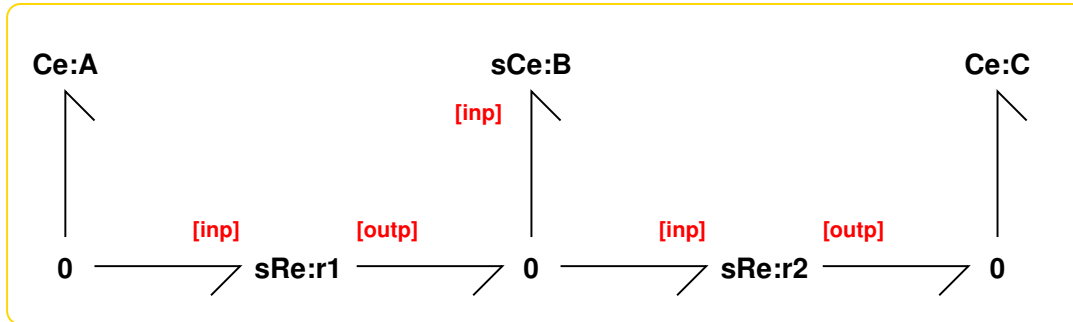

4.3.1 Parameters

```
[48]: ## Parameters
# parameter = {}
# parameter['K_A'] = 1
# parameter['K_B_A'] = 1
# parameter['kappa_r1'] = 0.1
# parameter['kappa_r2'] = 0.9
# print(parameter)

## Initial states
# X_A_0 = 2
```

```
[49]: ## Parameters
parameter = {}
parameter['K_A'] = 1
parameter['K_B_A'] = 1
parameter['kappa_r1_r'] = 1
parameter['kappa_r2_r'] = 9
print(parameter)

## Initial states
X_A_0 = 2
```

{'K_A': 1, 'K_B_A': 1, 'kappa_r1_r': 1, 'kappa_r2_r': 9}

4.3.2 Stoichiometry & linearisation

```
[50]: ## Stoichiometry
s,sc,sf = Stoichiometry(sABC_abg.
    ↳model(),chemostats=['A','C','B_sA','r1_sr','r2_sr'],flowstats=[])

## Species
print(s['species'])

## Reactions
print(s['reaction'])



## Linearise
Sys,X_ss,V_ss,dX_ss =_
    ↳Linear(s,sc,parameter=parameter,X0=[X_A_0,1,1,1,1,1],quiet=quiet)

## Lambda for comparison
lam = 1.1
```

```
['A', 'C', 'B_A', 'B_sA', 'r1_sr', 'r2_sr']
['r1_r', 'r2_r']
Steady-state finder error: 8.88e-16
X_ss = [2.  1.  1.1 1.  1.  1. ]
V_ss = [0.9 0.9]
```

```
[51]: ## Show reactions
disp.Latex(st.sprinrl(s,all=True,chemformula=True))
```

[51]:



```
[52]: ## Show system
Sys
```

[52]:

$$\left(\begin{array}{c|ccccc} -10 & 1 & 9 & -11 & 0.9 & -0.9 \\ -1 & 1 & 0 & -1.1 & 0.9 & 0 \\ 9 & 0 & -9 & 9.9 & 0 & 0.9 \end{array} \right)$$

```
[53]: ## Show transfer function
con.tf(Sys)
```

[53]:

$$\begin{bmatrix} \frac{s+9}{s+10} & \frac{-9}{s+10} & \frac{-1.1s}{s+10} & \frac{0.9s+8.1}{s+10} & \frac{0.9}{s+10} \\ \frac{9}{s+10} & \frac{s+10}{s+10} & \frac{9.9s}{s+10} & \frac{8.1}{s+10} & \frac{0.9s+0.9}{s+10} \end{bmatrix}$$

4.3.3 Stoichiometric matrix

```
[54]: disp.Latex(st.sprintl(s, 'N'))
```

[54]:

$$N = \begin{pmatrix} -1 & 0 \\ 0 & 1 \\ 1 & -1 \\ 1 & -1 \\ 0 & 0 \\ 0 & 0 \end{pmatrix} \quad (5)$$

```
[55]: disp.Latex(st.sprintl(s, 'Nf'))
```

[55]:

$$Nf = \begin{pmatrix} 1 & 0 \\ 0 & 0 \\ 0 & 1 \\ 0 & 1 \\ 1 & 0 \\ 0 & 1 \end{pmatrix} \quad (6)$$

```
[56]: disp.Latex(st.sprintl(s, 'Nr'))
```

[56]:

$$Nr = \begin{pmatrix} 0 & 0 \\ 0 & 1 \\ 1 & 0 \\ 1 & 0 \\ 1 & 0 \\ 0 & 1 \end{pmatrix} \quad (7)$$

```
[57]: ## Show dc gain
print('DC gain: \n', con.dcgain(Sys))
```

DC gain:

```
[[ 0.9 -0.9  0.    0.81  0.09]
 [ 0.9 -0.9  0.    0.81  0.09]]
```

4.4 Sensitivity Bond Graph – change B

```
[58]: ## Extract sensitivity system
inp = ['B_sA']
outp = ['r1_r', 'r2_r']
sys = extractSubsystem(Sys, sc, sf, inp, outp)
```

```
[59]: ## Show transfer function
con.tf(sys)
```

[59]:

$$\begin{bmatrix} \frac{-1.1s}{s+10} \\ \frac{9.9s}{s+10} \end{bmatrix}$$

```
[60]: ## System matrix  
sys
```

[60]:

$$\left(\begin{array}{c|c} -10 & -11 \\ \hline -1 & -1.1 \\ 9 & 9.9 \end{array} \right)$$

```
[61]: ## Show dc gain  
print('DC gain: \n', con.dcgain(sys))
```


DC gain:
[[0.]
[0.]]

4.4.1 Compare sensitivity with exact simulation

```
[62]: ## Exact Simulate with changed K  
parameter1 = copy.copy(parameter)  
parameter1['K_B_A'] *= lam  
t = np.linspace(0,1)  
dat = st.sim(s,sc=sc,t=t,parameter=parameter1,X0=X_ss,quiet=quiet)
```

```
[63]: ## Step response to sB  
y_lin = linStep(sc,sys,T=t)
```

```
[64]: ## Plot  
plotSensitivity(dat,reactions=outp)
```

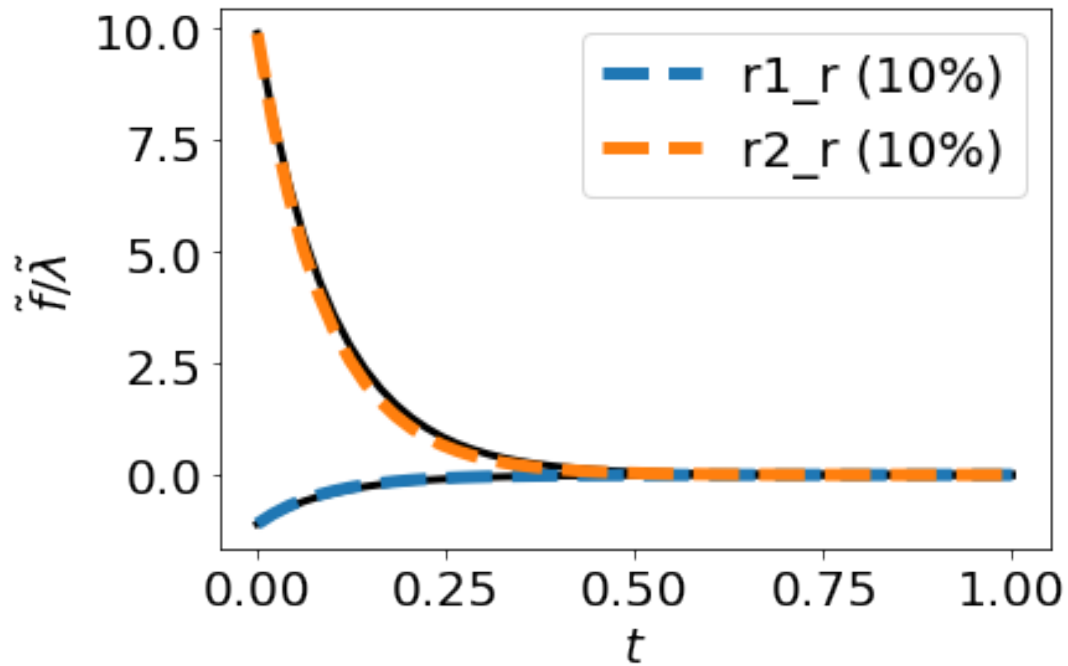

4.5 Sensitivity Bond Graph – change r1

```
[65]: ## Extract sensitivity system
inp = ['r1_sr']
outp = ['r1_r', 'r2_r']
sys = extractSubsystem(Sys, sc, sf, inp, outp)
```

```
[66]: ## Show transfer function
con.tf(sys)
```

```
[66]:
```

$$\begin{bmatrix} \frac{0.9s+8.1}{s+10} & \\ \frac{8.1}{s+10} & \end{bmatrix}$$

```
[67]: ## System matrix
sys
```

```
[67]:
```

$$\left(\begin{array}{c|c} -10 & 0.9 \\ -1 & 0.9 \\ 9 & 0 \end{array} \right)$$

```
[68]: ## Show dc gain
print('DC gain: \n', con.dcgain(sys))
```

```
DC gain:
[[0.81]
 [0.81]]
```



4.5.1 Compare sensitivity with exact simulation

```
[69]: ## Exact Simulate with changed r1
parameter1 = copy.copy(parameter)
parameter1['kappa_r1_r'] *= lam
t = np.linspace(0,1)
dat = st.sim(s,sc=sc,t=t,parameter=parameter1,X0=X_ss,quiet=quiet)
print(parameter1)
```

```
{'K_A': 1, 'K_B_A': 1, 'kappa_r1_r': 1.1, 'kappa_r2_r': 9}
```

```
[70]: ## Step response to sr1
y_lin = linStep(sc,sys,T=t)
```

```
[71]: ## Plot
plotSensitivity(dat,reactions=outp)
```

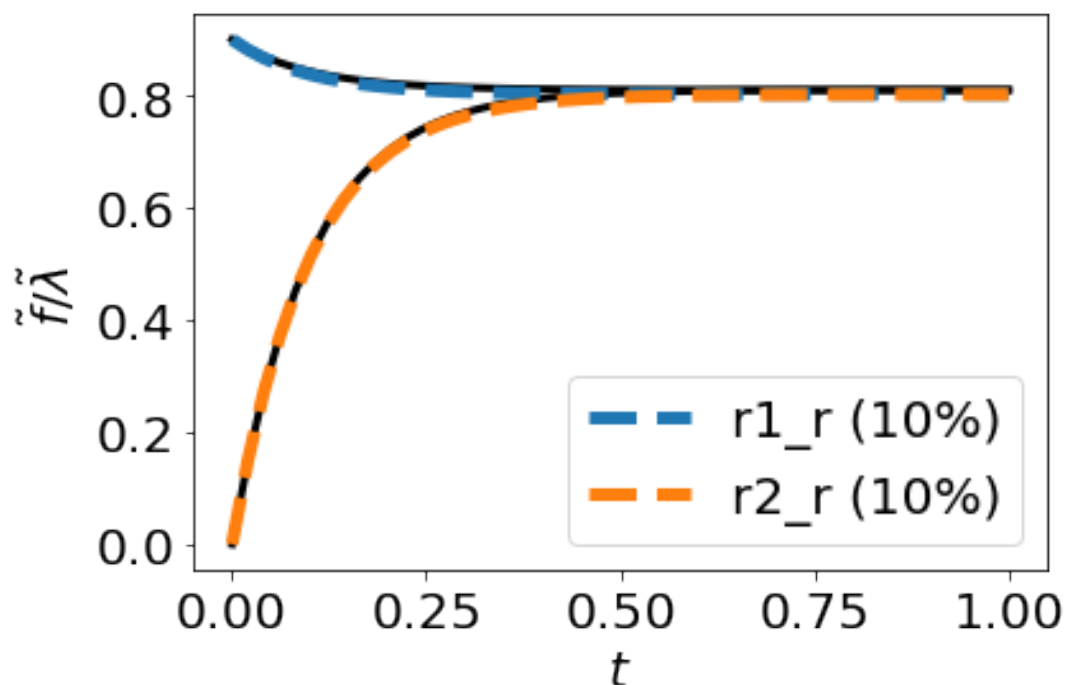

4.6 Sensitivity Bond Graph – change r2

```
[72]: ## Extract sensitivity system
inp = ['r2_sr']
outp = ['r1_r', 'r2_r']
sys = extractSubsystem(Sys,sc,sf,inp,outp)
```

```
[73]: ## Show transfer function
con.tf(sys)
```

```
[73]:
```

$$\begin{bmatrix} \frac{0.9}{s+10} \\ \frac{0.9s+0.9}{s+10} \end{bmatrix}$$

```
[74]: ## System matrix
sys
```

[74]:

$$\left(\begin{array}{c|c} -10 & -0.9 \\ \hline -1 & 0 \\ 9 & 0.9 \end{array} \right)$$

```
[75]: ## Show dc gain
print('DC gain: \n', con.dcgain(sys))
```

```
DC gain:
[[0.09]
 [0.09]]
```


4.6.1 Compare sensitivity with exact simulation

```
[76]: ## Exact Simulate with changed r2
parameter1 = copy.copy(parameter)
parameter1['kappa_r2_r'] *= lam
t = np.linspace(0,1)
dat = st.sim(s,sc=sc,t=t,parameter=parameter1,X0=X_ss,quiet=quiet)
print(parameter1)
print(X_ss)
```

```
{'K_A': 1, 'K_B_A': 1, 'kappa_r1_r': 1, 'kappa_r2_r': 9.9}
[2.  1.  1.1 1.  1.  1. ]
```

```
[77]: ## Step response to sr2
y_lin = linStep(sc,sys,T=t)
```

```
[78]: ## Plot
plotSensitivity(dat,reactions=outp)
```

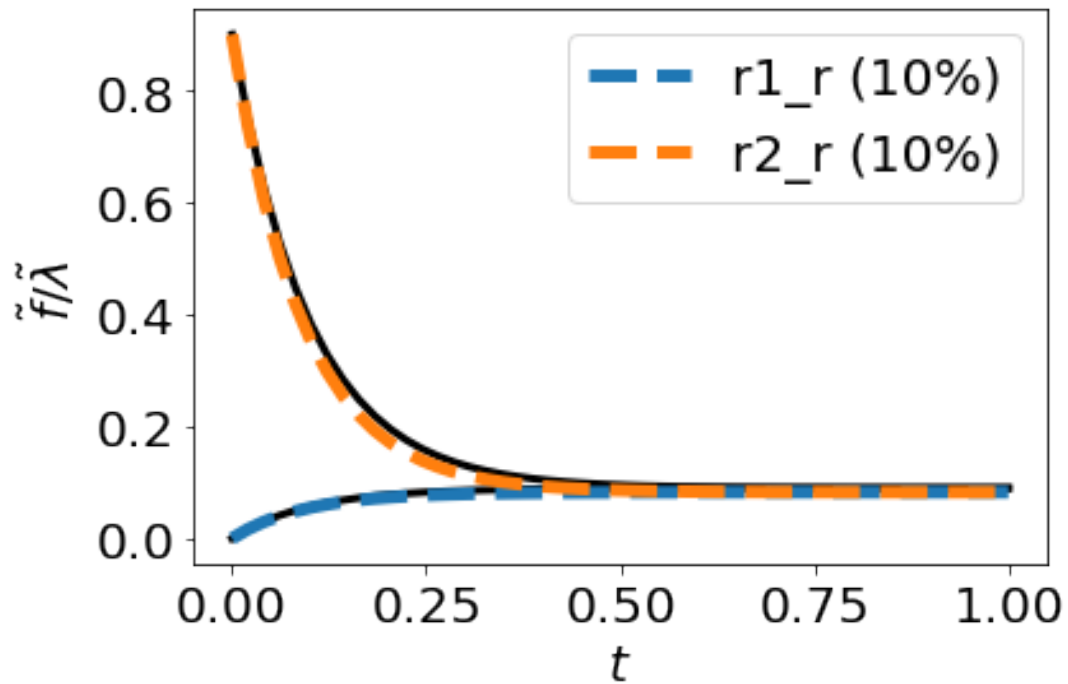

5 Stoichiometric approach

5.1 Supporting software

```
[79]: def stoichSensitivity(model,chemostats=['A','C'],  

→parameter={},X0=None,CommonSpecies=None):  

    """Sensitivity analysis via stoichiometric approach """  
  

    ## Stoichiometry  

    s,sc,sf =  

    →Stoichiometry(model,chemostats=chemostats,CommonSpecies=CommonSpecies,sensitivity=True)  
  

    ## Linearise  

    if X0 is None:  

        X0 = np.ones(s['n_X'])  

        i_chem = s['species'].index(chemostats[0])  

        X0[i_chem] = 2  
  

    Sys,X_ss,V_ss,dX_ss = Linear(s,sc,parameter=parameter,X0=X0,quiet=quiet)  
  

    return s,sc,sf,Sys,X_ss,V_ss,dX_ss  
  

def simSensitivity(s,sc,sf,Sys,X_ss,V_ss,dX_ss,chemostats=['A','C'],  

    inp=['sr1'],outp=['r1','r2'],t_last=2,parameter={},  

    lam=1.2,order=None,sX0=None,lambdaIn=True):
```

```

## Extract sensitivity system
sys = extractSubsystem(Sys,sc,sf,inp=inp,outp=outp,order=order)

## Time
t = np.linspace(0,t_last,500)

## Sensitivity step response
# step = con.step_response(sys,T=t)
# y_lin = step.y[:,0,:].T
y_lin = linStep(sc,sys,T=t,X0=sX0)

## Exact simulation with changed parameter or state
X_ss_1 = copy.copy(X_ss)
parameter1 = copy.copy(parameter)
inComp = inp[0][1:]

if sX0 is None:
    ## Parameter or chemostat perturbation
    X_chemo = {}
    if inComp in chemostats:
        ## Perturb state
        iComp = s['species'].index(inComp)
        X_ss_1[iComp] = lam*X_ss_1[iComp]
    # y_lin *= X_ss_1[iComp]
    else:
        if lambdaIn:
            print("Use lambda as input")
            ## Perturb lambda chemostat initial state
            iComp = s['species'].index('s'+inComp)
            X_ss_1[iComp] = lam*X_ss_1[iComp]
        else:
            ## Perturb parameter
            print('Perturb parameter')
            if inComp[0].isupper():
                parname = 'K_'+inComp
            else:
                parname = 'kappa_'+inComp

            if parname in list(parameter.keys()):
                parameter1[parname] = lam*parameter[parname]
            else:
                parameter1[parname] = lam

    dat = st.
    →sim(s,sc=sc,sf=sf,t=t,parameter=parameter1,X0=X_ss_1,X_chemo=X_chemo,
        quiet=quiet,Normalise=Normalise)
    else:
        ## Initial condition perturbation.
        X_ss_1 += (lam-1)*sX0
        dat = st.
    →sim(s,sc=sc,sf=sf,t=t,parameter=parameter1,X0=X_ss_1,quiet=quiet,Normalise=Normalise)


```

```
return dat,y_lin,t,sys
```

5.2 Simple example $A = B = C$

```
[80]: # Simple example A = B = C
      sbg.model('ABC_abg.svg')
      import ABC_abg
      disp.SVG('ABC_abg.svg')
```

[80]:

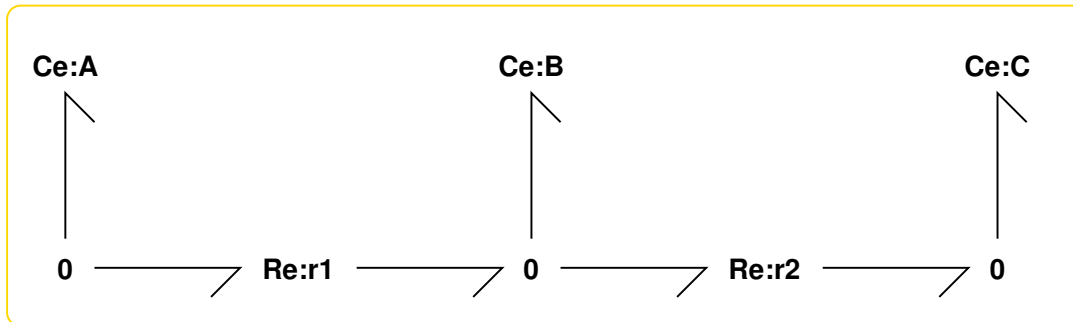

```
[81]: ## Parameters
      parameter = {}
      parameter['K_A'] = 1
      parameter['K_B'] = 1
      parameter['kappa_r1'] = 1
      parameter['kappa_r2'] = 9
      print(parameter)

      ## Initial states
      X_A_0 = 2
```

```
{'K_A': 1, 'K_B': 1, 'kappa_r1': 1, 'kappa_r2': 9}
```

```
[82]: ## ABC model
      dcgain = {}
      s,sc,sf,sys,X_ss,V_ss,dX_ss = stoichSensitivity(ABC_abg.
      ↪model(),parameter=parameter)
      lam = 1.1
      outp = ['r1','r2']
      for inp in ['sA','sB','sC','sr1','sr2']:
          dat,y_lin,t,sys = simSensitivity(s,sc,sf,sys,X_ss,V_ss,dX_ss,
          parameter=parameter,inp=[inp],outp=outp,
          lam=lam,t_last=1,lambdaIn=lambdaIn)

      # g = con.dcgain(sys)[0][0]

      g,tau = tfProps(sys)
      dcgain[inp] = g
      if Titles:
```

```


plt.title(f'{inp} (g = {g:.3f})')
plotSensitivity(dat, reactions=outp)
plotLines()
# plt.hlines(g, min(t), max(t), color='black', ls='dashed')
Savefig('ABC_'+inp)
plt.show()

```



Steady-state finder error: 8.88e-16

X_{ss} = [2. 1.1 1. 1. 1. 1. 1. 1.]


V_{ss} = [0.9 0.9]

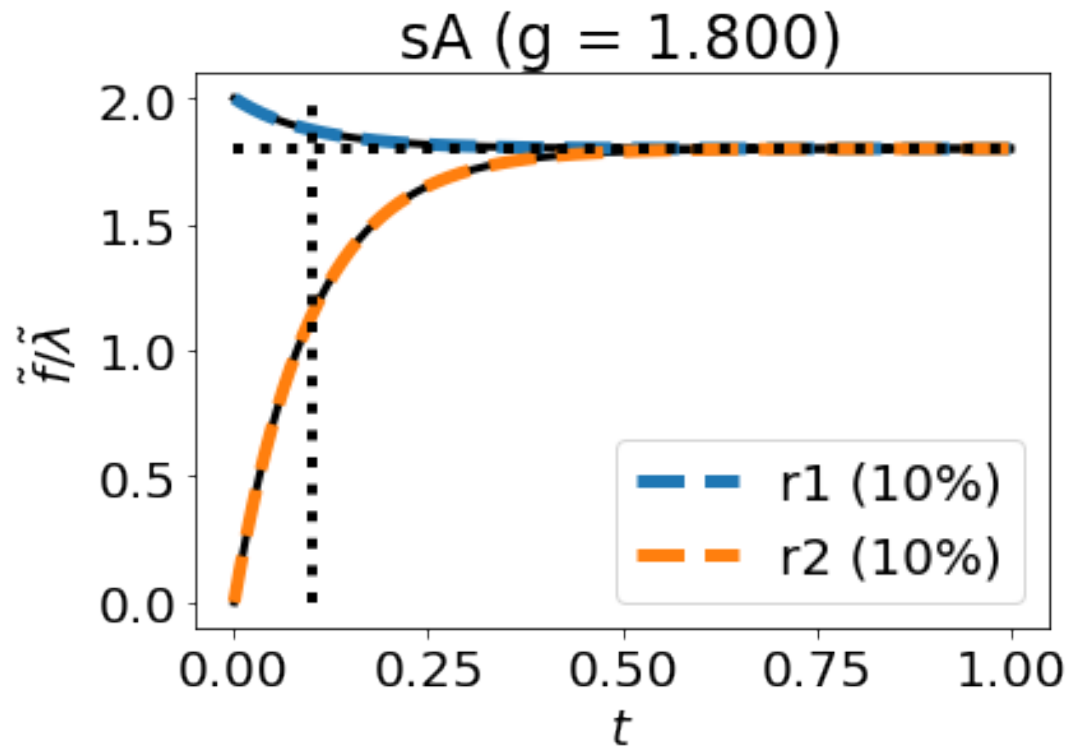


Use lambda as input

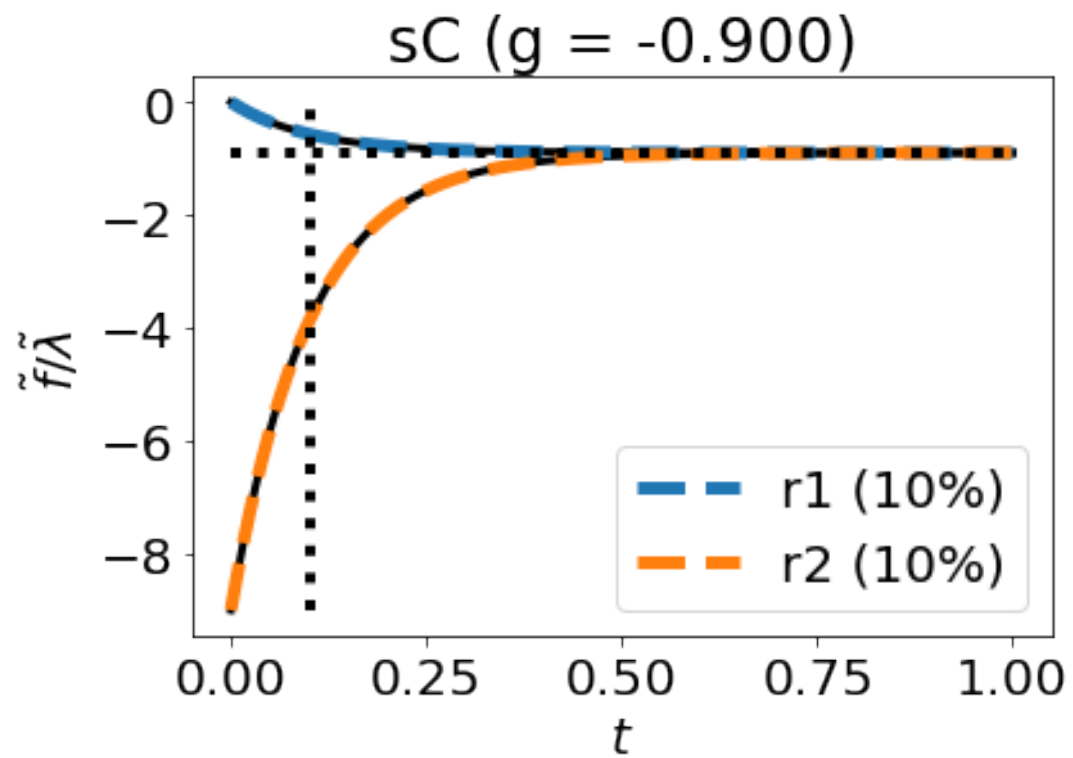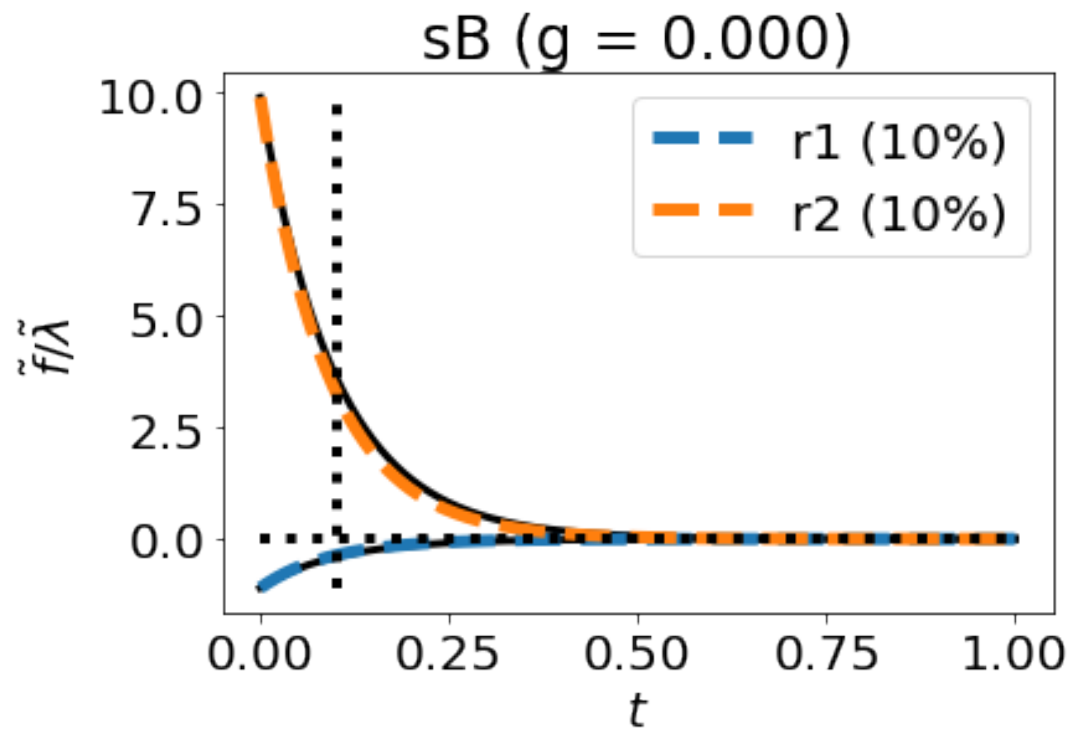

Use lambda as input

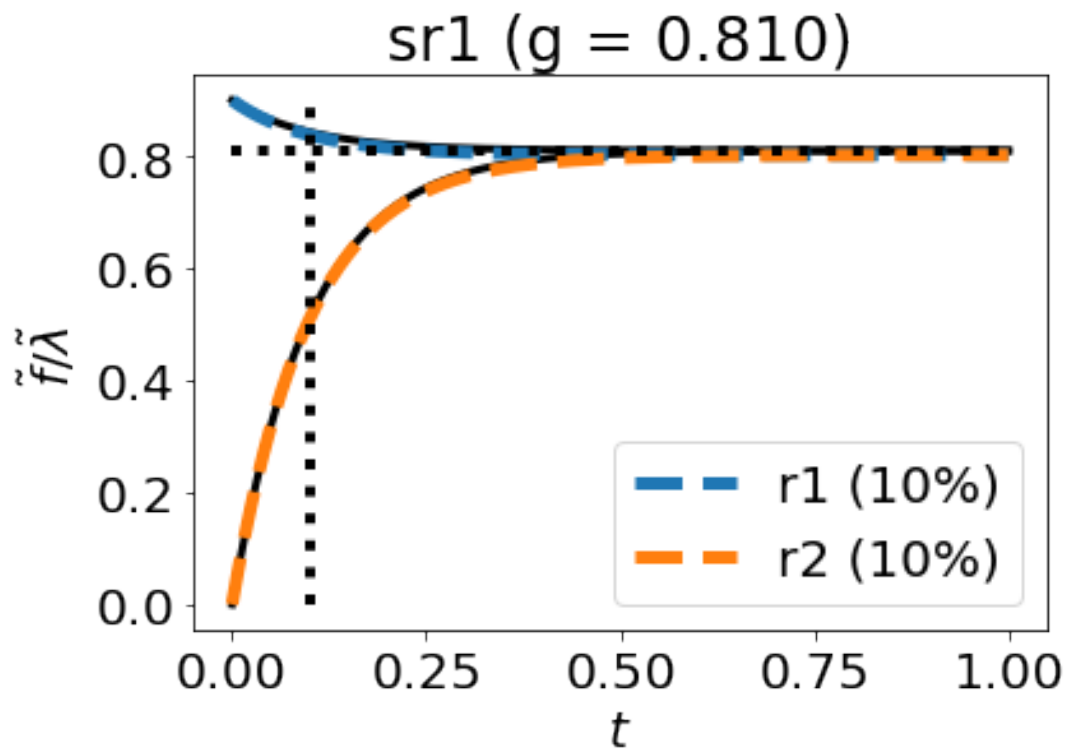

Use lambda as input

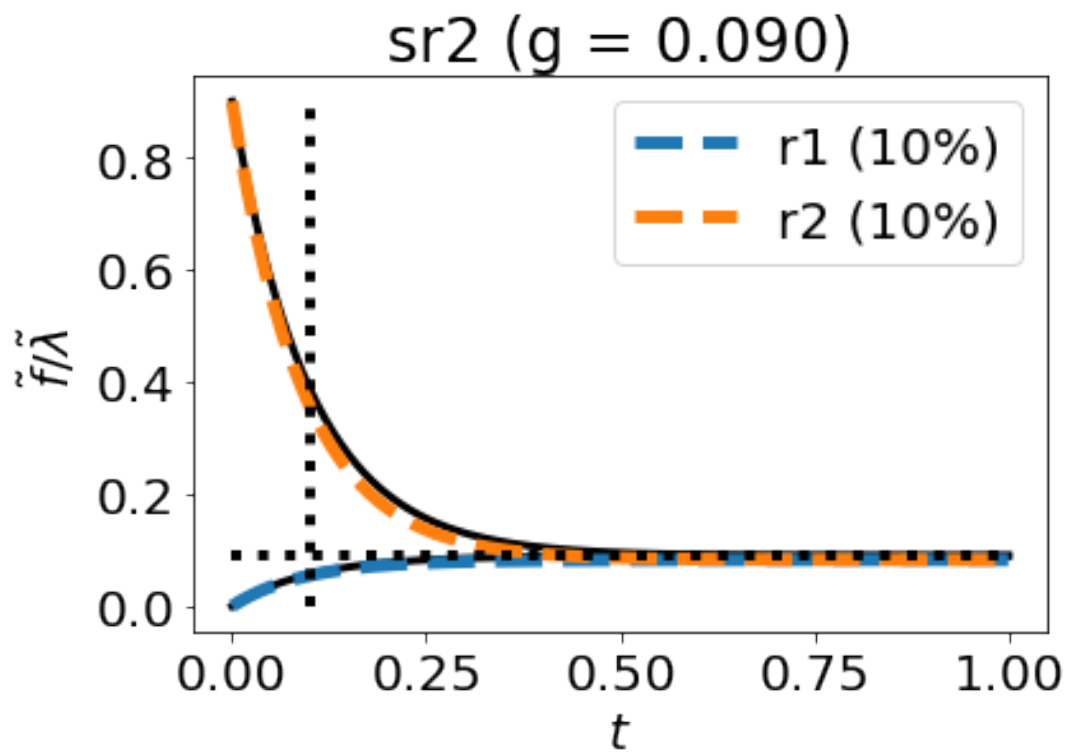


```
[83]: printLatex(s,sc=sc)
```

```
A &= \left(\begin{matrix}-10.0\end{matrix}\right)
B &= \left(\begin{matrix}1.0 & 9.0 & 2.0 & -11.0 & 9.0 & 0.9 & \\
-0.9000000000000001\end{matrix}\right)
C &= \left(\begin{matrix}-1.0\\9.0\end{matrix}\right)
D &= \left(\begin{matrix}1.0 & 0 & 2.0 & -1.1 & 0 & 0.9 & 0\\0 & -9.0 & 0 & 9.9 \\
& -9.0 & 0 & 0.9000000000000001\end{matrix}\right)
\begin{align}
X&= \begin{pmatrix}
X_{\{A\}}\\
X_{\{B\}}\\
X_{\{C\}}\\
X_{\{sA\}}\\
X_{\{sB\}}\\
X_{\{sC\}}\\
X_{\{sr1\}}\\
X_{\{sr2\}}
\end{pmatrix}
\end{align}

\begin{align}
V&= \begin{pmatrix}
V_{\{r1\}}\\
V_{\{r2\}}
\end{pmatrix}
\end{align}

\begin{align}
Nf &=
\left(\begin{matrix}1.0 & 0\\0 & 1.0\\0 & 0\\1.0 & 0\\0 & 1.0\\0 & 0\\1.0 & 0\\0 & 1.0\end{matrix}\right)
\end{align}

\begin{align}
Nr &=
\left(\begin{matrix}0 & 0\\1.0 & 0\\0 & 1.0\\0 & 0\\1.0 & 0\\0 & 1.0\\1.0 & 0\\0 & 1.0\end{matrix}\right)
\end{align}

\begin{align}
N &=
\left(\begin{matrix}-1.0 & 0\\1.0 & -1.0\\0 & 1.0\\-1.0 & 0\\1.0 & -1.0\\0 & 1.0\\0 & 0\end{matrix}\right)
\end{align}

%% Nc matrix
\begin{align}
N &=
\left(\begin{matrix}0 & 0\\1.0 & -1.0\\0 & 0\\0 & 0\\0 & 0\\0 & 0\\0 & 0\end{matrix}\right)
```

```
\end{align}
```


```
\begin{align}
\ch{A + sA + sr1 &<> [ r1 ] B + sB + sr1 }\\
\ch{B + sB + sr2 &<> [ r2 ] C + sC + sr2 }
\end{align}
```

```
\begin{align}
v_{r1} &= \kappa_{r1} \left(K_{sr1} x_{sr1}\right)^{1.0} \left(\left(K_{A} x_{A}\right)^{1.0} \left(K_{sA} x_{sA}\right)^{1.0} - \left(K_{B} x_{B}\right)^{1.0} \left(K_{sB} x_{sB}\right)^{1.0}\right) \\
v_{r2} &= \kappa_{r2} \left(K_{sr2} x_{sr2}\right)^{1.0} \left(\left(K_{B} x_{B}\right)^{1.0} \left(K_{sB} x_{sB}\right)^{1.0} - \left(K_{C} x_{C}\right)^{1.0} \left(K_{sC} x_{sC}\right)^{1.0}\right)
\end{align}
```

5.2.1 Vary λ

```
[84]: inp = 'sr1'
      outp = ['r2']
      #for lam in [1.1,2,11]:
      for lam in [0.01,0.9,1.1,1.99]:
          dat,y_lin,t,sys = simSensitivity(s,sc,sf,Sys,X_ss,V_ss,dX_ss,
          parameter=parameter,inp=[inp],outp=outp,lam=lam,t_last=1,lambdaIn=lambdaIn)
      # print(con.dcgain(sys))
      g = con.dcgain(sys)
      if Titles:
          plt.title(f'{inp} (g = {g:.3f})')
      plotSensitivity(dat,reactions=outp)
      plotLines()
      Savefig('ABC_lambda')
```

Use lambda as input
 Use lambda as input
 Use lambda as input
 Use lambda as input

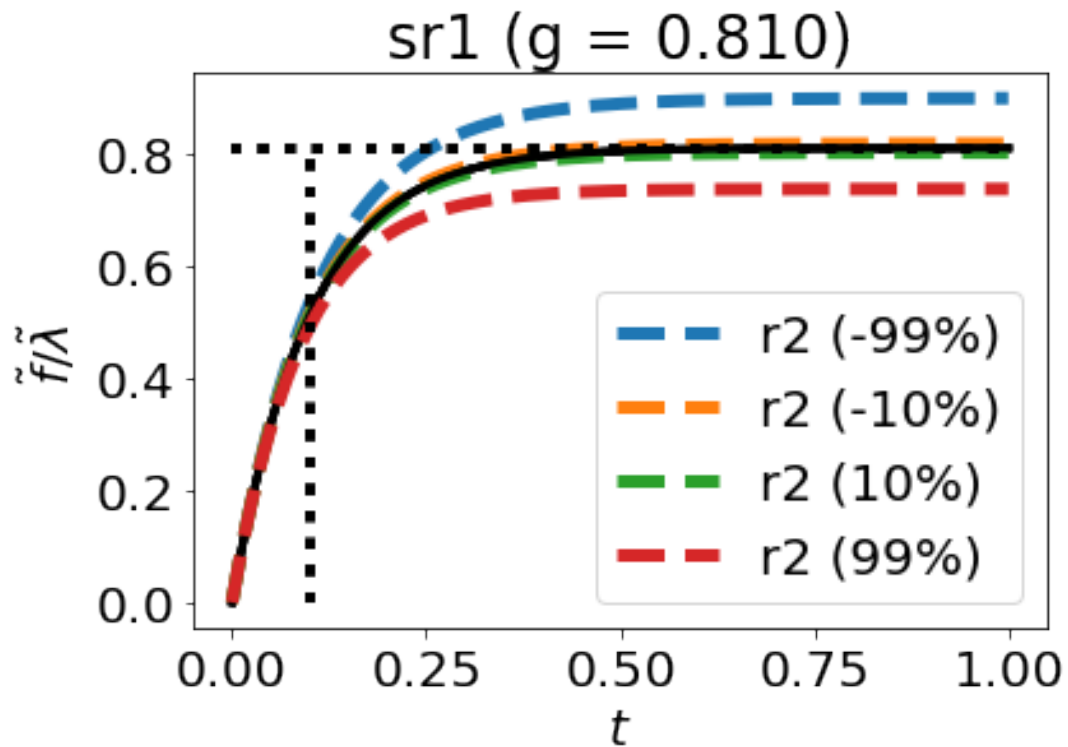

```
[85]: ## Show system
      Sys
```

[85]:

$$\left(\begin{array}{c|ccccccc} -10 & 1 & 9 & 2 & -11 & 9 & 0.9 & -0.9 \\ \hline -1 & 1 & 0 & 2 & -1.1 & 0 & 0.9 & 0 \\ 9 & 0 & -9 & 0 & 9.9 & -9 & 0 & 0.9 \end{array} \right)$$

```
[86]: ## Show system TF
      print(sc['chemostats'])
      con.tf(Sys)
```

['A', 'C', 'sA', 'sB', 'sC', 'sr1', 'sr2']

[86]:

$$\begin{bmatrix} \frac{s+9}{s+10} & \frac{-9}{s+10} & \frac{2s+18}{s+10} & \frac{-1.1s}{s+10} & \frac{-9}{s+10} & \frac{0.9s+8.1}{s+10} & \frac{0.9}{s+10} \\ \frac{9}{s+10} & \frac{-9s-9}{s+10} & \frac{18}{s+10} & \frac{9.9s}{s+10} & \frac{-9s-9}{s+10} & \frac{8.1}{s+10} & \frac{0.9s+0.9}{s+10} \end{bmatrix}$$

```
[87]: ## Show DC gain
      con.dcgain(Sys)
```

```
[87]: array([[ 0.9 , -0.9 ,  1.8 ,  0. , -0.9 ,  0.81,  0.09],
           [ 0.9 , -0.9 ,  1.8 ,  0. , -0.9 ,  0.81,  0.09]])
```

```
[88]: ## Show initial reponse
      print(Sys.D)
```

```
[[ 1.   0.   2.  -1.1  0.   0.9  0. ]
 [ 0.  -9.   0.   9.9 -9.   0.   0.9]]
```

5.2.2 Sloppy parameters

```
[89]: imp.reload(slp)

def sloppy(Sys,inp,outh,t=None,GainOnly=False):
    sys = extractSubsystem(Sys,sc,sf,inp,outh)
    #print(sys)
    H,eig,eigv,t = slp.Sloppy(sys,t=t,GainOnly=GainOnly)
    print(H)
    slp.SloppyPlot(eig,eigv,inp)
    slp.SloppyPrint(eig,eigv,inp,min_eig=0)
    # if not GainOnly:
    #     slp.SloppyPlotData(t,y,inp,outh)

def sloppyBoth(Sys,inp,outh,t=1):

    sys = extractSubsystem(Sys,sc,sf,inp,outh)
    SysName = sc['name']
    print(SysName)
    if (max(t)<1e2):
        name = f'{SysName}_sloppy_{inp[0]}'
    else:
        name = f'{SysName}_sloppy_{inp[0]}_long'

    #print(sys)
    H,eig,eigv,t = slp.Sloppy(sys,t=t,GainOnly=False)
    print(f'\n t_f = {max(t):0.2f}')
    print('H:')
    slp.SloppyPrint(eig,eigv,inp,min_eig=0)

    H,Eig,Eigv,t = slp.Sloppy(sys,t=t,GainOnly=True)
    print('H_ss:')
    slp.SloppyPrint(Eig,Eigv,inp,min_eig=0)

    ## Direct computation
    print('Direct:')
    gain = con.dcgain(sys)[0]
    norm = np.sum(gain*gain)
    ngain = gain/np.sqrt(norm)
    slp.SloppyPrint([norm],np.array([ngain]).T,inp,min_eig=0.0,min_eigv=0.
    →05,max_eigs=2)

    ## Plot
    slp.SloppyPlot(eig,eigv,inp,Eig=Eig,Eigv=Eigv)

    Savefig(name)
    plt.show()
```

```

for t_last in [1,1e3]:
    if t_last==0:
        t = None
    else:
        t = np.linspace(0,t_last,100)
        sloppyBoth(Sys,['sr1','sr2'],['r1'],t=t)
        sloppyBoth(Sys,['sA','sC'],['r1'],t=t)


```

ABC

```

t_f = 1.00
H:
\sqrt{\sigma_1} &= 0.82 & V_1\Lambda &= + 0.995 \lambda_{r1} + 0.097 \lambda_{r2}
\sqrt{\sigma_2} &= 0.021 & V_2\Lambda &= + 0.995 \lambda_{r2} - 0.097 \lambda_{r1}
H_{ss}:
\sqrt{\sigma_1} &= 0.81 & V_1\Lambda &= + 0.994 \lambda_{r1} + 0.110 \lambda_{r2}
\sqrt{\sigma_2} &= 1e-06 & V_2\Lambda &= + 0.994 \lambda_{r2} - 0.110 \lambda_{r1}
Direct:
\sqrt{\sigma_1} &= 0.81 & V_1\Lambda &= + 0.994 \lambda_{r1} + 0.110 \lambda_{r2}

```

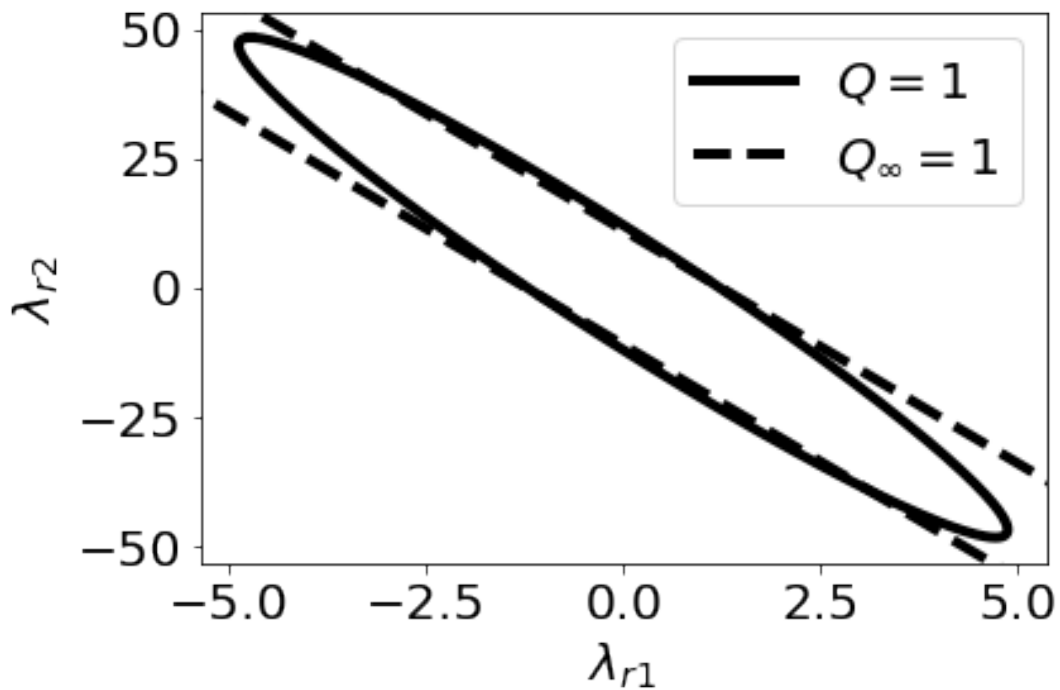

ABC

```


t_f = 1.00
H:
\sqrt{\sigma_1} &= 2 & V_1\Lambda &= + 0.914 \lambda_{A} - 0.407 \lambda_{C}
\sqrt{\sigma_2} &= 0.19 & V_2\Lambda &= + 0.914 \lambda_{C} + 0.407 \lambda_{A}
H_{ss}:
\sqrt{\sigma_1} &= 2 & V_1\Lambda &= + 0.894 \lambda_{A} - 0.447 \lambda_{C}

```

```

\sqrt{\sigma_2} \approx 1e-06 \ \& \ V_2 \backslash \Lambda \approx + 0.894 \ \lambda_{\{C\}} + 0.447 \ \lambda_{\{A\}}
Direct:
\sqrt{\sigma_1} \approx 2 \ \& \ V_1 \backslash \Lambda \approx + 0.894 \ \lambda_{\{A\}} - 0.447 \ \lambda_{\{C\}}

```

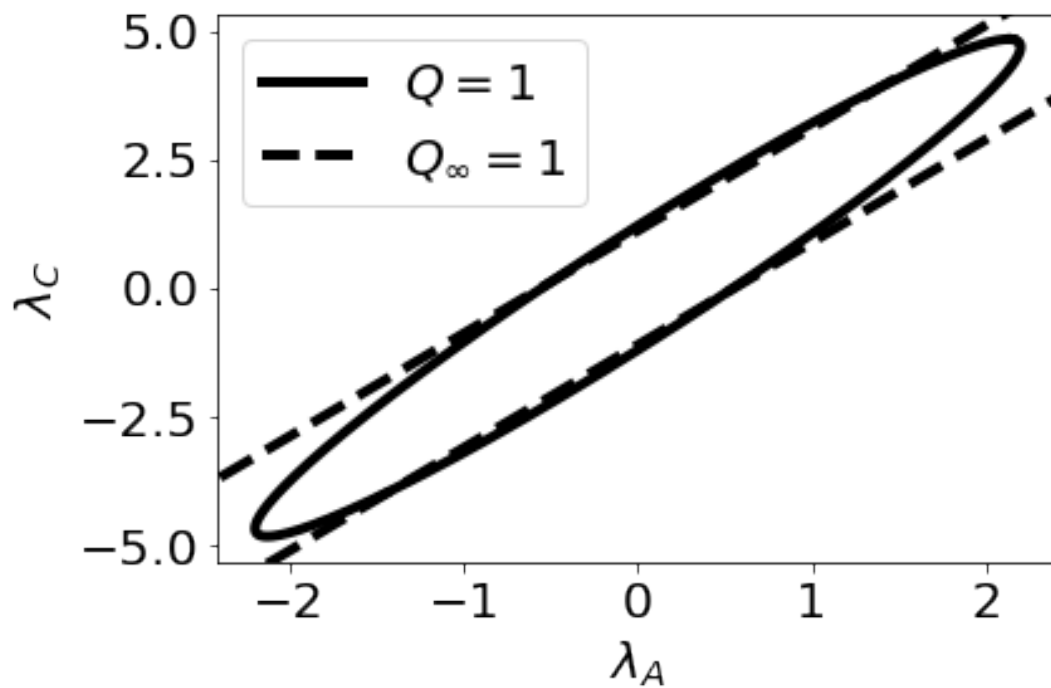


ABC

```


t_f = 1000.00
H:
\sqrt{\sigma_1} \approx 0.82 \ \& \ V_1 \backslash \Lambda \approx + 0.994 \ \lambda_{\{r1\}} + 0.109 \ \lambda_{\{r2\}}
\sqrt{\sigma_2} \approx 0.0099 \ \& \ V_2 \backslash \Lambda \approx + 0.994 \ \lambda_{\{r2\}} - 0.109
\lambda_{\{r1\}}
H_{ss}:
\sqrt{\sigma_1} \approx 0.81 \ \& \ V_1 \backslash \Lambda \approx + 0.994 \ \lambda_{\{r1\}} + 0.110 \ \lambda_{\{r2\}}
\sqrt{\sigma_2} \approx 1e-06 \ \& \ V_2 \backslash \Lambda \approx + 0.994 \ \lambda_{\{r2\}} - 0.110 \ \lambda_{\{r1\}}
Direct:
\sqrt{\sigma_1} \approx 0.81 \ \& \ V_1 \backslash \Lambda \approx + 0.994 \ \lambda_{\{r1\}} + 0.110 \ \lambda_{\{r2\}}

```

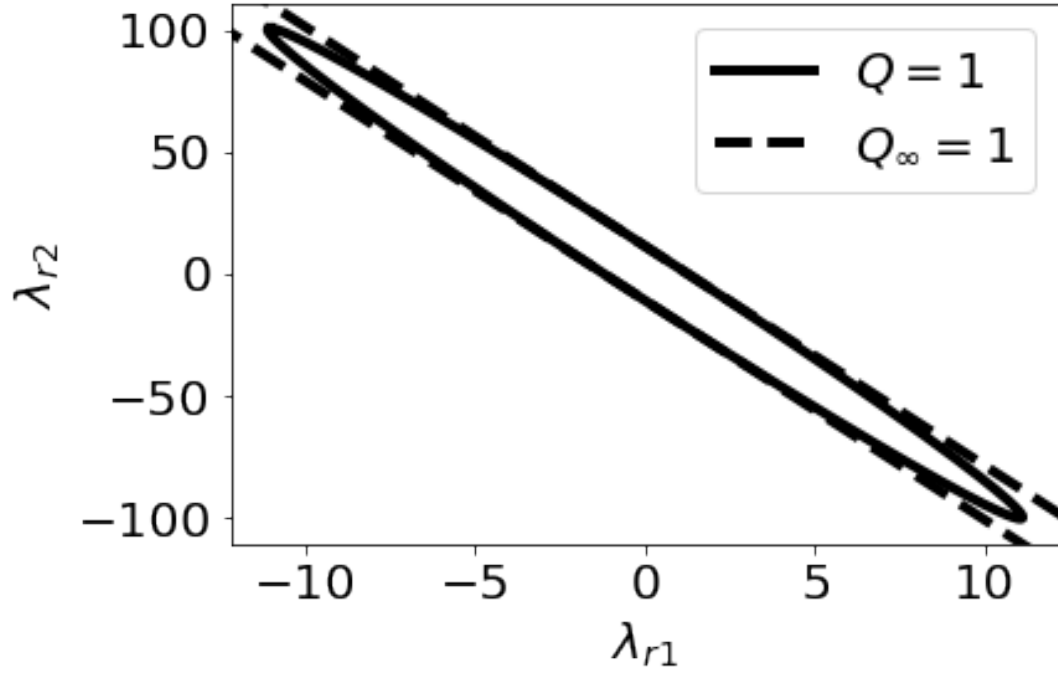

ABC


```
t_f = 1000.00
H:
\sqrt{\sigma_1} \&= 2 \& V_1\Lambda \&= + 0.896 \lambda_{A} - 0.444 \lambda_{C}
\sqrt{\sigma_2} \&= 0.089 \& V_2\Lambda \&= + 0.896 \lambda_{C} + 0.444 \lambda_{A}
H_{ss}:
\sqrt{\sigma_1} \&= 2 \& V_1\Lambda \&= + 0.894 \lambda_{A} - 0.447 \lambda_{C}
\sqrt{\sigma_2} \&= 1e-06 \& V_2\Lambda \&= + 0.894 \lambda_{C} + 0.447 \lambda_{A}
Direct:
\sqrt{\sigma_1} \&= 2 \& V_1\Lambda \&= + 0.894 \lambda_{A} - 0.447 \lambda_{C}
```

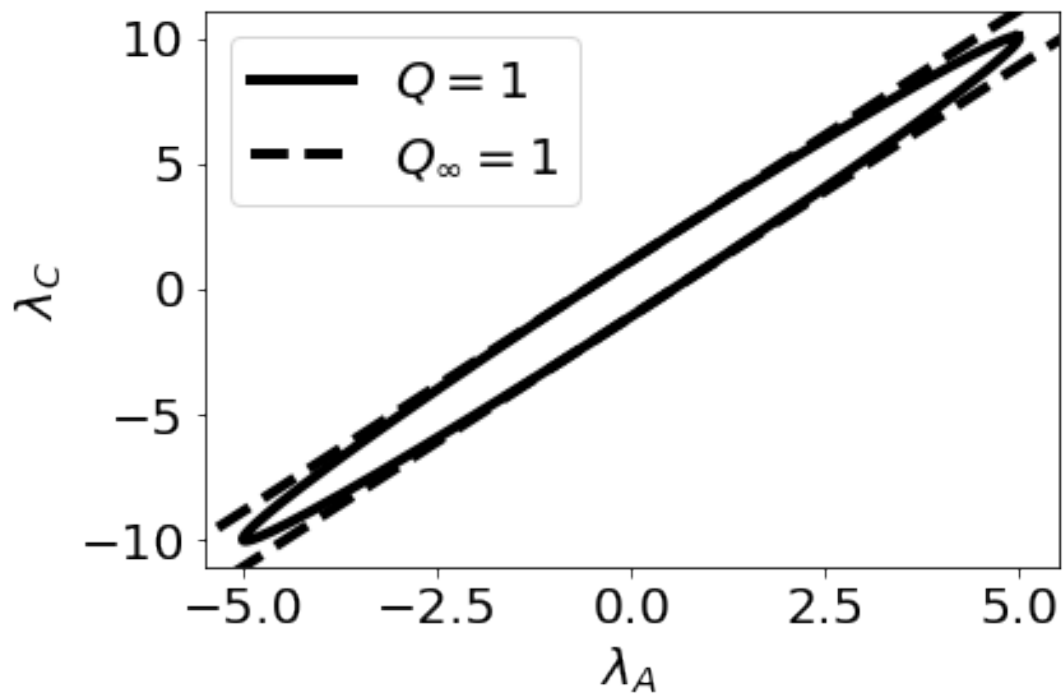

5.3 Example: Enzyme-catalysed reaction

```
[90]: sbg.model('ECR_abg.svg')
import ECR_abg
imp.reload(ECR_abg)
disp.SVG('ECR_abg.svg')
```

[90]:

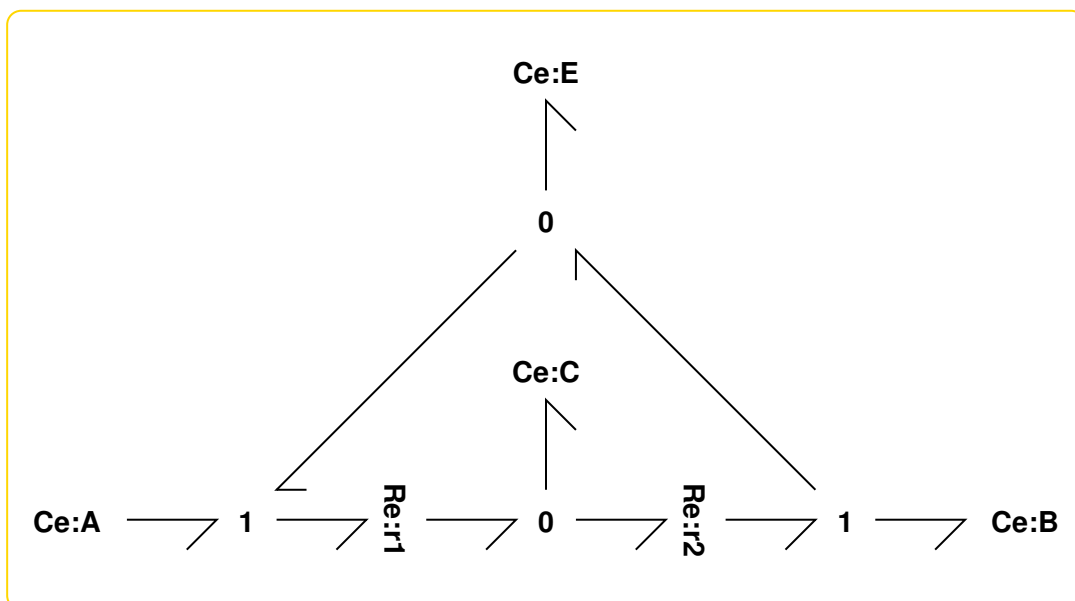


```
[91]: ## Stoichiometry
s0 = st.stoich(ECR_abg.model(),quiet=quiet)
species = s0['species']
reaction=s0['reaction']
n_X = s0['n_X']
n_V = s0['n_V']
```

```
[92]: ## Initial states (for sensitivity system)
e0 = 10 ## Total bound and unbound enzyme
XX0 = {}
# XX0['A'] = 1
XX0['E'] = e0/2
XX0['C'] = e0/2
X0 = np.ones(2*n_X+n_V)

for spec in XX0:
    X0[species.index(spec)] = XX0[spec]
```

```
[93]: ## Parameters
kappa_1 = 1
K_B = 1e-3

parameter = {}
parameter['K_A'] = 1
parameter['K_B'] = K_B
parameter['kappa_r1'] = kappa_1
parameter['kappa_r2'] = 1
print(parameter)
```

```
{'K_A': 1, 'K_B': 0.001, 'kappa_r1': 1, 'kappa_r2': 1}
```

```
[94]: ## Chemostats
chemostats = ['A','B']
```

```
[95]: dcgain = {}
syss = {}
s,sc,sf,Sys,X_ss,V_ss,dX_ss = stoichSensitivity(ECR_abg.
    ↳model(),parameter=parameter,chemostats=chemostats,X0=X0)
lam = 1.01
Outp = ['r1','r2']
Inp = ['sA','sr2']
t_last = 2/kappa_1
for outp in Outp:
    for inp in Inp:
        dat,y_lin,t,sys = simSensitivity(s,sc,sf,Sys,X_ss,V_ss,dX_ss,
            ↳parameter=parameter,inp=[inp],outp=[outp],
            ↳lam=lam,t_last=t_last,lambdaIn=lambdaIn)
        syss[inp] = sys
#     g = con.dcgain(sys)
```

```


g,tau = tfProps(sys)
dcgain[inp] = g
#print(g)
if Titles:
    plt.title(f'{inp} (g = {g:.3f}; tau = {tau:0.1f})')
plotSensitivity(dat, reactions=[outp])
plotLines()
Savefig('ECR_'+inp+'_'+outp)
plt.show()

```



Steady-state finder error: 1.26e-15

X_ss = [1. 1. 3.336 6.664 1. 1. 1. 1. 1. 1.]


V_ss = [3.329 3.329]

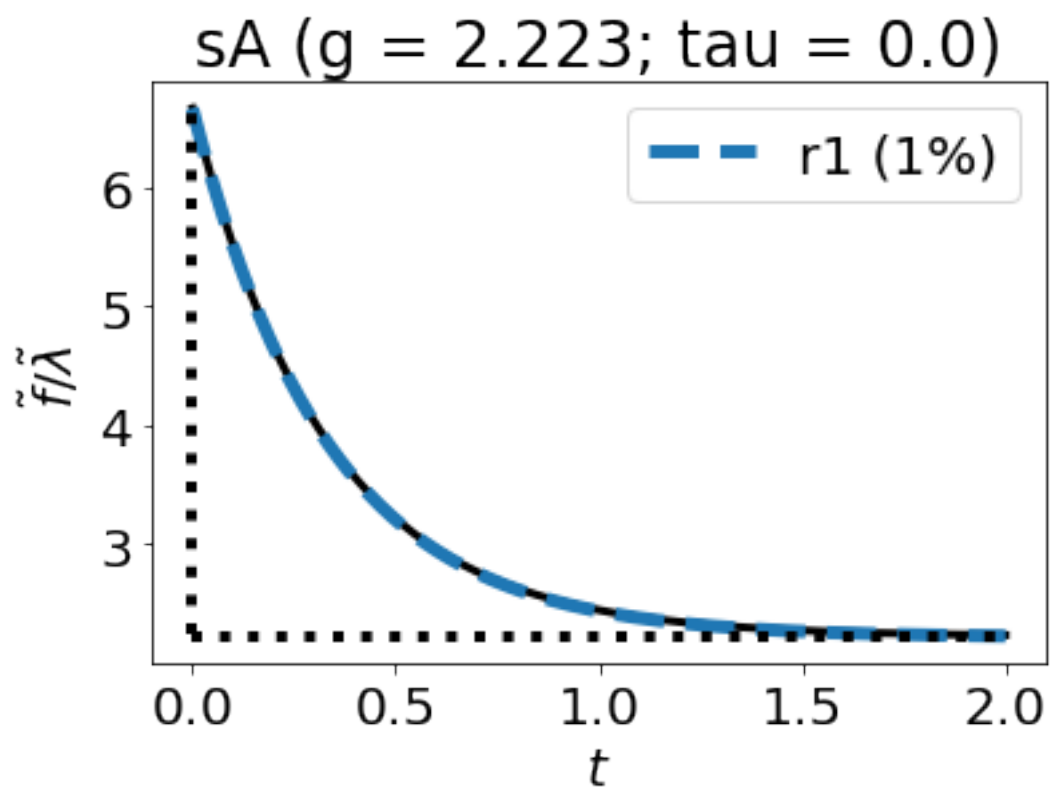

Use lambda as input

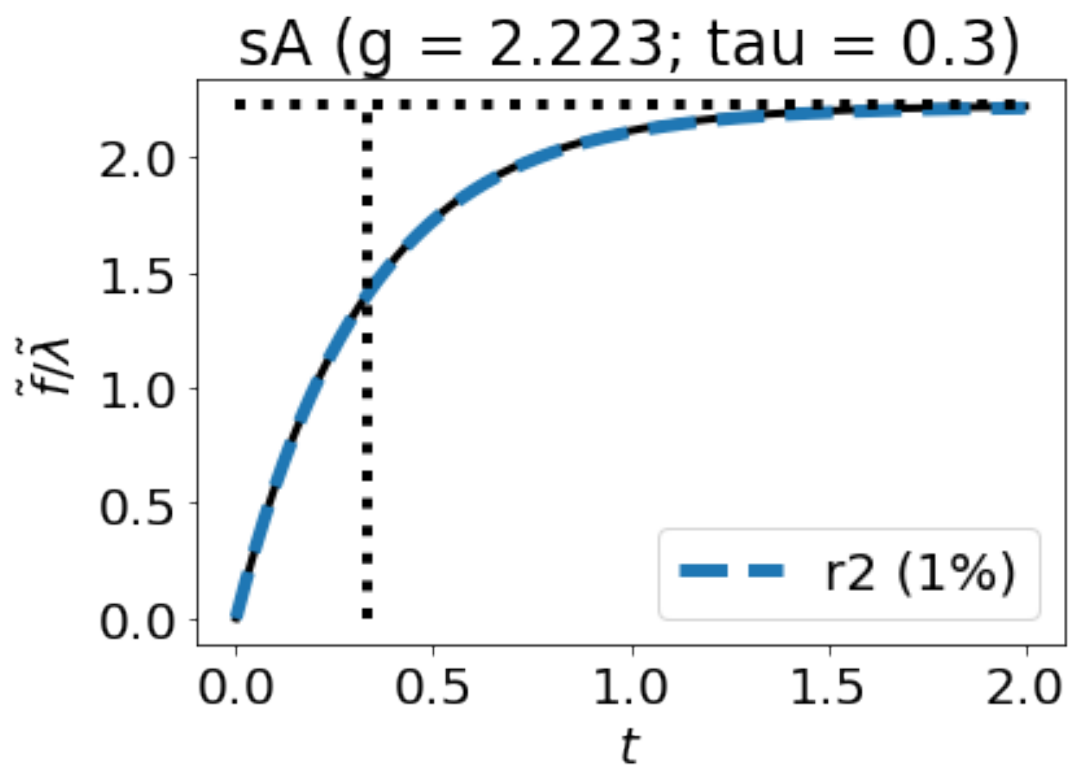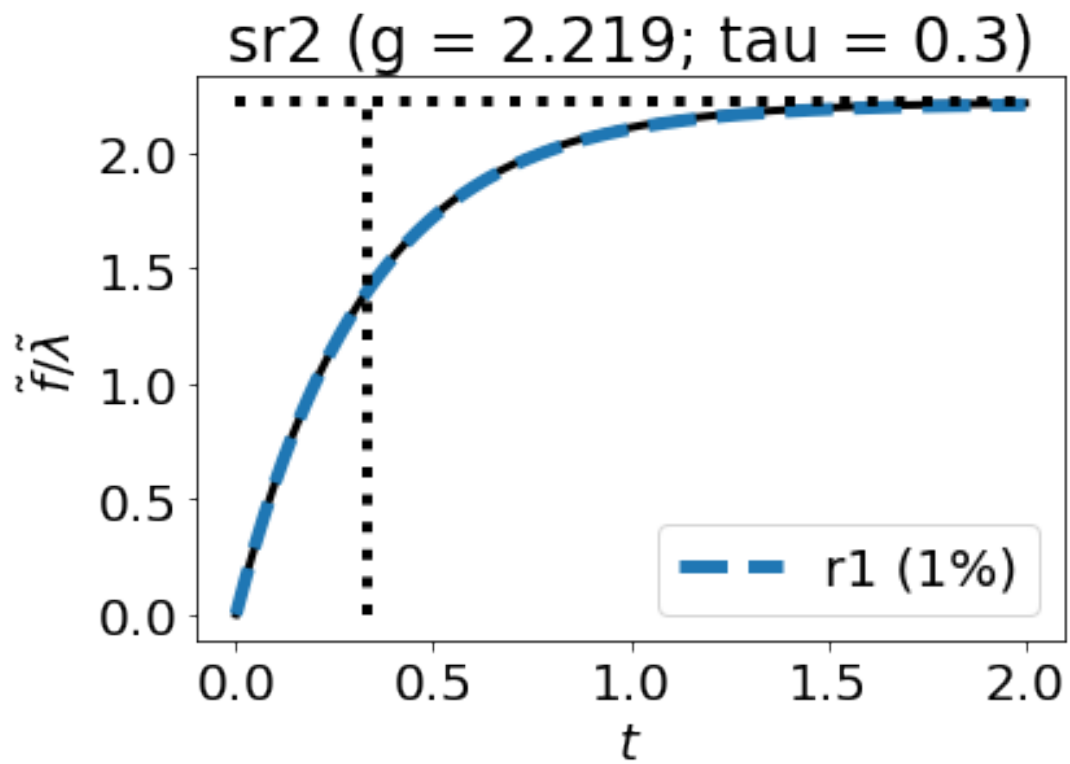


Use lambda as input

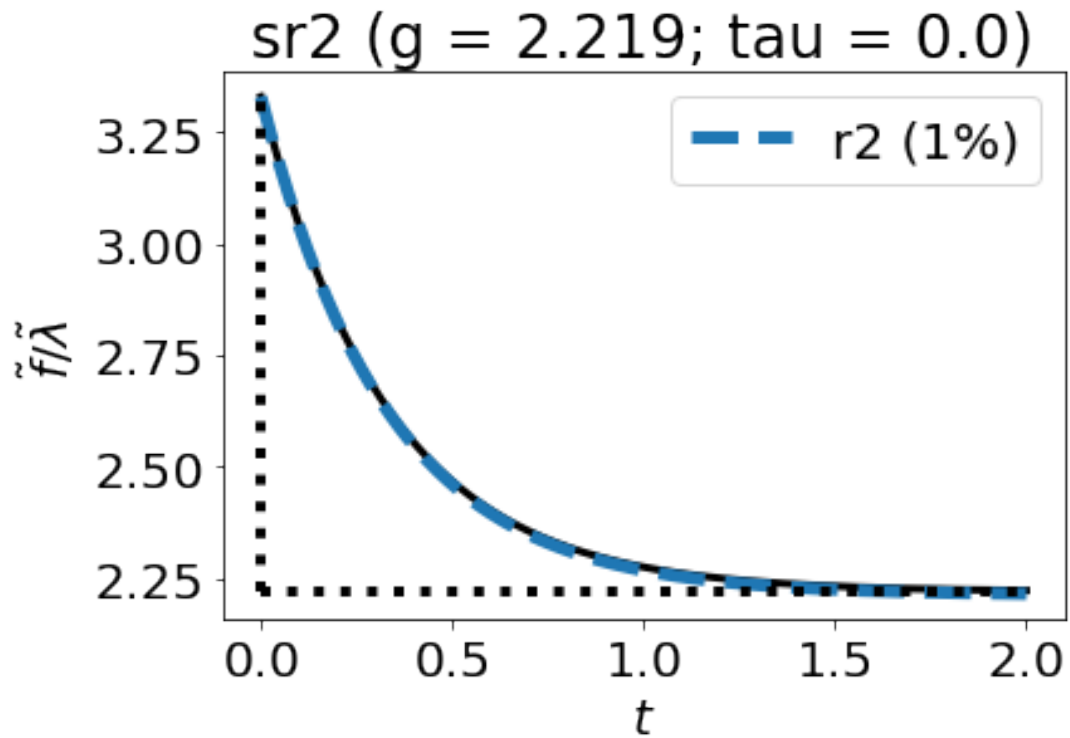

5.3.1 Vary λ

```
[96]: inp = 'sA'
      outp = ['r2']
      for lam in [1.01, 1.1, 2]:
          dat, y_lin, t, sys = simSensitivity(s, sc, sf, Sys, X_ss, V_ss, dX_ss,
                                             ↳parameter=parameter, inp=[inp], outp=outp,
                                             ↳lam=lam, t_last=t_last, lambdaIn=lambdaIn)
          # print(con.dcgain(sys))
          g, tau = tfProps(sys)
          if Titles:
              plt.title(f'{inp} (g = {g:.3f})')
          plotSensitivity(dat, reactions=outp)
          plotLines()
      Savefig('ECR_lambda')
```

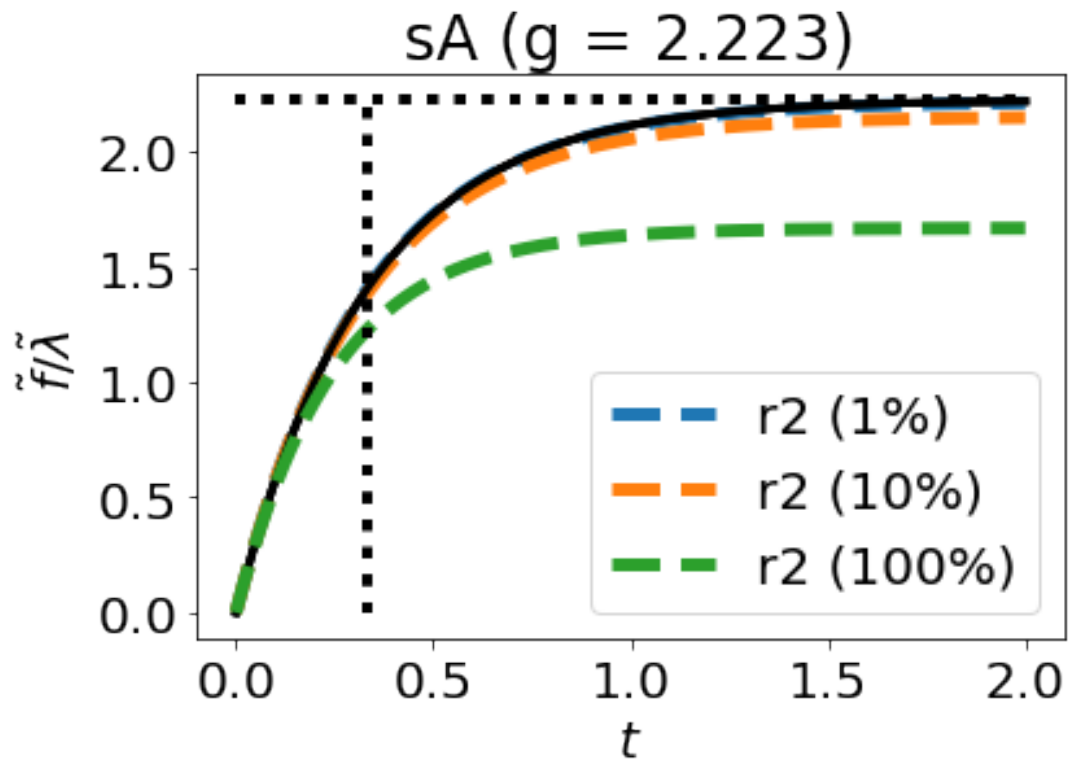

```
[97]: ## Show system
      #Sys
```

```
[98]: ## Show system TFs
      con.tf(syss['sA'])
```

```
[98]:
```

$$\frac{6.671}{s + 3.001}$$

```
[99]: con.tf(syss['sr2'])
```

```
[99]:
```

$$\frac{3.329s + 6.658}{s + 3.001}$$

5.3.2 Simulate over flow range - quasi steady-state. Supporting software

```
[100]: def QuasiSteadyState(Inp=['sAct', 'sInh'], points=10, x_max=100, grid=False):

    ## Extract info
    species = s['species']
    reaction = s['reaction']

    ### Simulate over flow range.
    ## Slow ramp for x_A
    X_chemo = {}
```

```

t_d = 1e3
t_last = 1e6
# points = 50
t = np.linspace(0,t_last,points)
x_0 = 0.1
X0[species.index('A')] = x_0
slope = (x_max-x_0)/(t_last-t_d)
X_chemo['A'] = f'({x_0} + {slope}*(t-{t_d})*(1*(t>{t_d})))'
print(X_chemo)

## Steady-state
X_ss,V_ss = SteadyState(s,sc,parameter=parameter,X0=X0)

## Simulate
ndat = st.
→sim(s,sc=sc,t=t,parameter=parameter,X0=X_ss,X_chemo=X_chemo,quiet=quiet)

## Plot
# st.plot(s,ndat,species=['E0','E','C'],reaction=['r2'])

## Plot flow v X_A
ylabel = r'$\tilde{f}_2/\tilde{\lambda}$'
X_A = ndat['X'][:,species.index('A')]
V_2 = ndat['V'][:,reaction.index('r2')]
plt.plot(X_A,V_2,lw=5)
if grid:
    plt.grid()
plt.xlabel('$\lambda_{X_A}$')
plt.ylabel('$f$')

sysname = s['name']
plotname = f'{sysname}_flow'
Savefig(plotname)
plt.show()
plt.clf()

## Compute sensitivity gain for each steady-state
X = ndat['X']
DCgain = {}
Tau = {}

for inp in Inp:
    DCgain[inp] = []
    Tau[inp] = []
    for x in X:
        ## Linearise about this steady-state
        Sys = st.lin(s,sc,x_ss=x,parameter=parameter,
                    quiet=quiet)

        ## Extract relevant subsystems
        outp = ['r1']

```

```

        sys = extractSubsystem(Sys,sc,sf,inp=[inp],outp=outp)
#         dcgain = con.dcgain(sys)
        dcgain,tau = tfProps(sys)
#         print(dcgain)
        DCgain[inp].append(dcgain)
        Tau[inp].append(tau)

# plt.plot(X_A,V_2,lw=6,label='flow')
INP = ''
for inp in Inp:
    plt.plot(X_A,DCgain[inp],label=inp[1:],lw=5)
    INP += inp+'_'
plt.legend()
if grid:
    plt.grid()
plt.xlabel('$X_A$')
plt.ylabel(ylabel)
plotname = f'{sysname}_{INP}X'
Savefig(plotname)
plt.show()

# plt.plot(X_A,V_2,lw=6,label='flow')
## Plot DC gain v flow
for inp in Inp:
    plt.plot(V_2,DCgain[inp],label=inp[1:],lw=5)

plt.legend()
if grid:
    plt.grid()
plt.xlabel('$f$')
ylabel = '$g_{\infty}$'
plt.ylabel(ylabel)
plotname = f'{sysname}_{INP}f'
Savefig(plotname)
plt.show()

## Plot time-constant v flow
for inp in Inp:
    plt.plot(V_2,Tau[inp],label=inp[1:],lw=5)

plt.legend()
if grid:
    plt.grid()
plt.xlabel('$f$')
plt.ylabel(r'$\tau$')
plotname = f'{sysname}_{INP}f_tau'
Savefig(plotname)
plt.show()



```



5.3.3 Simulate over flow range - quasi steady-state. Vary Re components.

```
[101]: QuasiSteadyState(Inp=['sr1','sr2'],points=50)
```

```
{'A': '(0.1 + 0.0001*(t-1000.0)*(1*(t>1000.0)))'}
```

```
Steady-state finder error: 7.85e-17
```

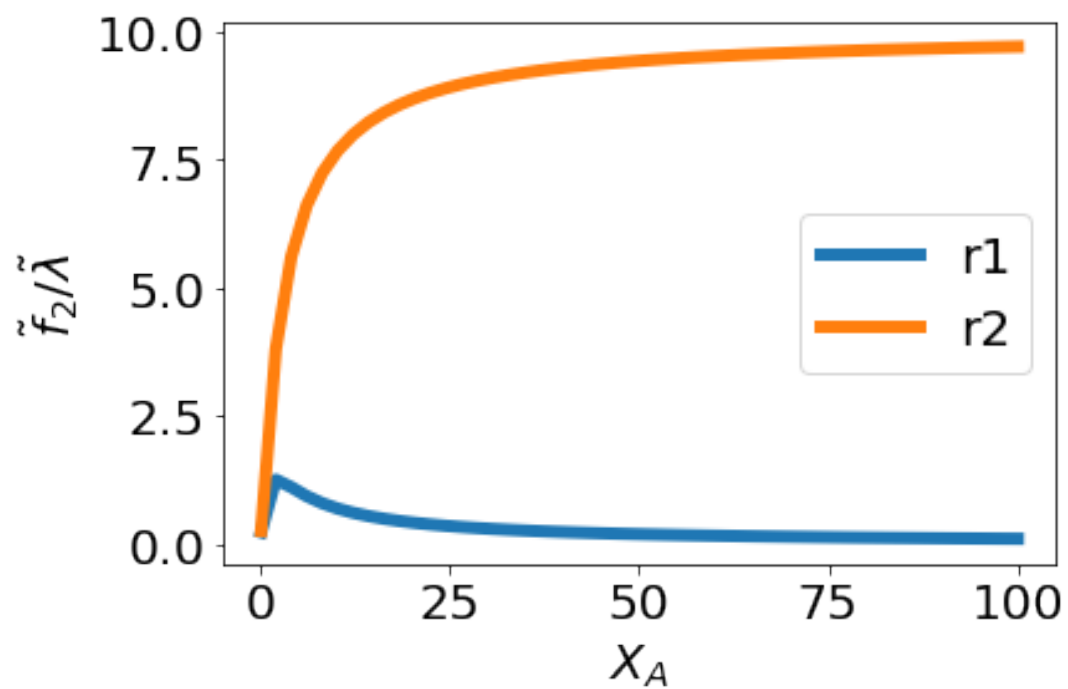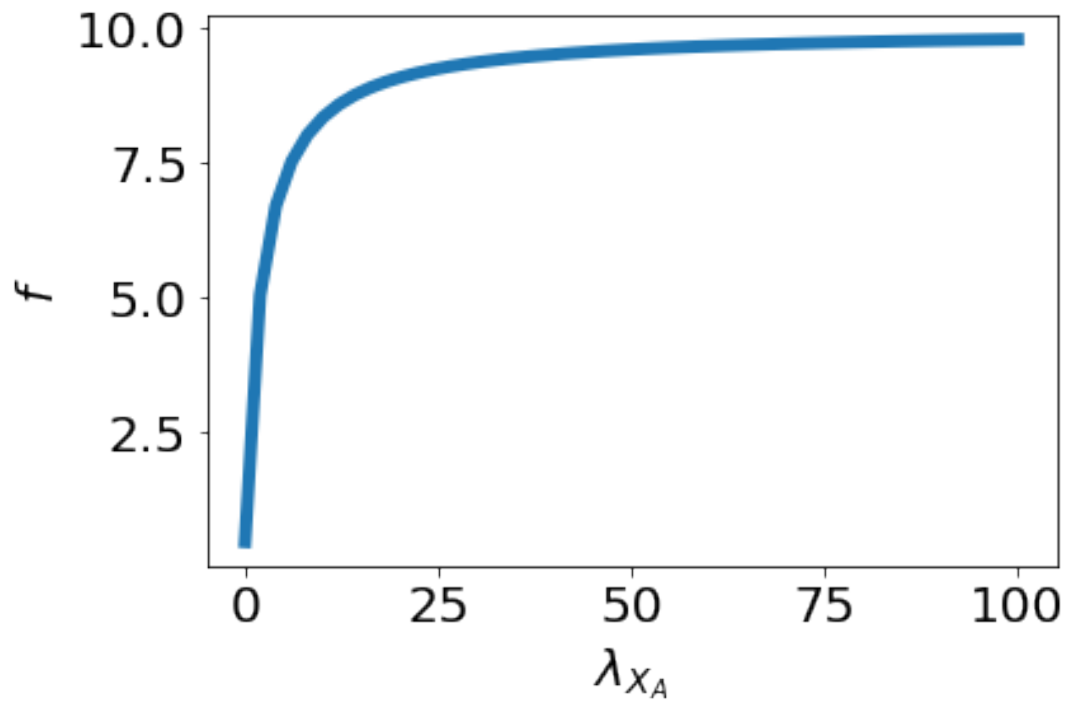

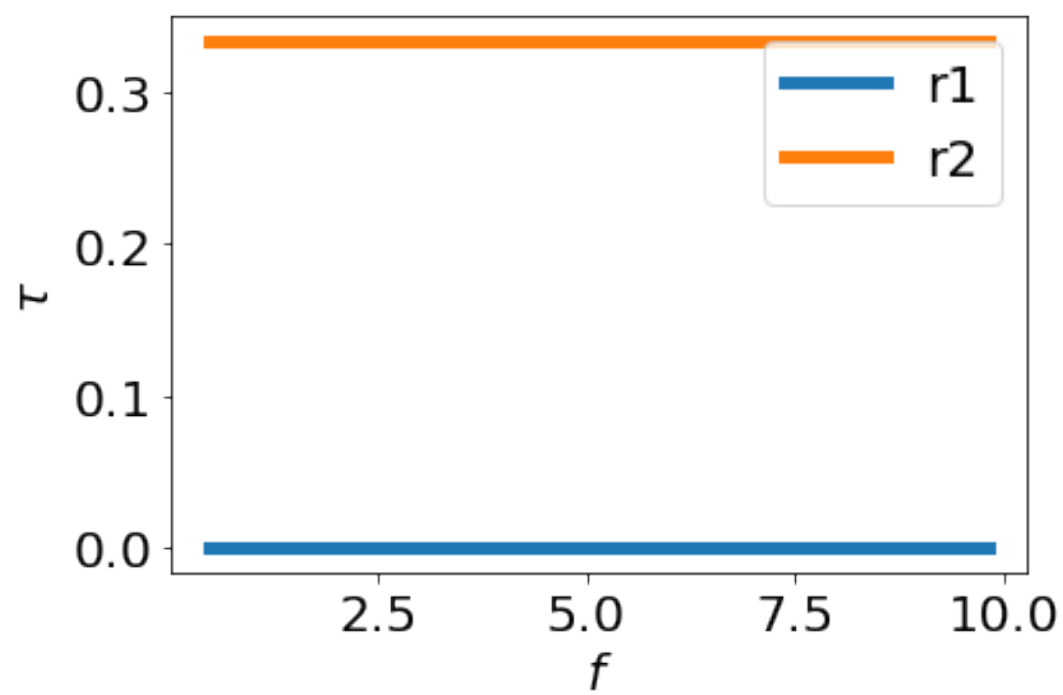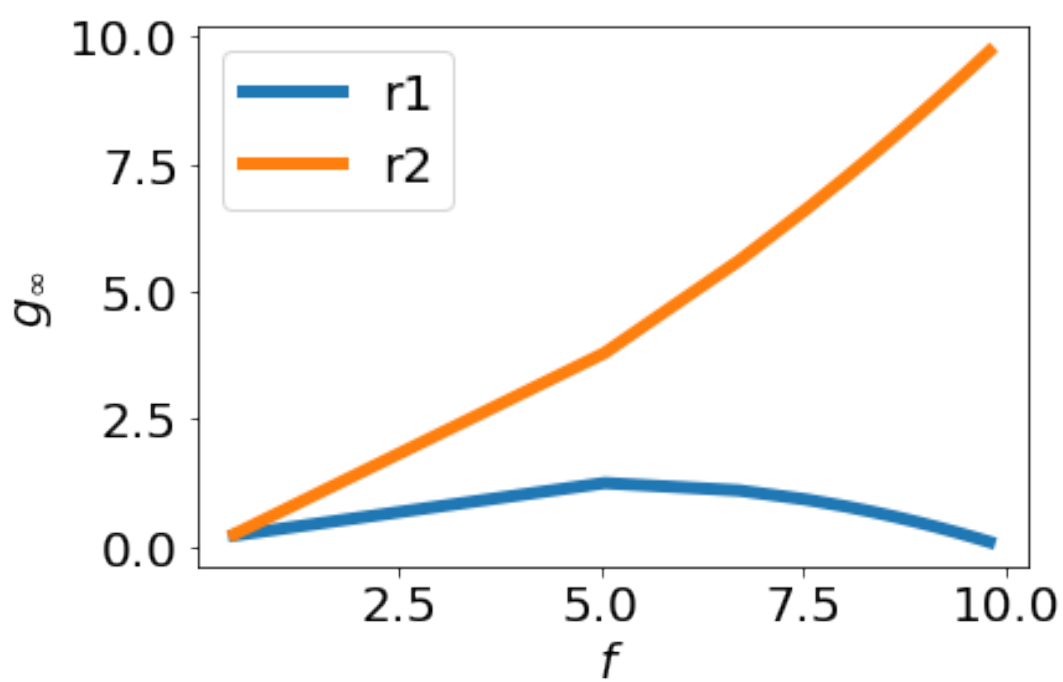


5.3.4 Initial condition sensitivity.

```
[102]: ## Set up deviation state for full system
n_X = sc['n_X']
sX0 = np.zeros(n_X)
spec = sc['species']
i_C = spec.index('C')
i_E = spec.index('E')
sX0[i_E] = 1
sX0[i_C] = -1

## Test conserved moiety compatability
G_c = sc['G']
error = np.linalg.norm(G_c@sX0)
print('Compatibility error =',error)

## Compare linear and non-linear
inp = 'sr1'
outp = ['r2']
for lam in [1.1,2,]:
    dat,y_lin,t,sys = simSensitivity(s,sc,sf,Sys,X_ss,V_ss,dX_ss,
                                   sX0=sX0,
                                   ↵
                                   ↳parameter=parameter,inp=[inp],outp=outp,lam=lam,t_last=1)
    # print(con.dcgain(sys))
    g = con.dcgain(sys)
    # if Titles:
    # plt.title(f'{inp} (g = {g:.3f})')
    plotSensitivity(dat,reactions=outp)
    g=0;plotLines()
Savefig('ECR_IC')
```


Compatibility error = 0.0

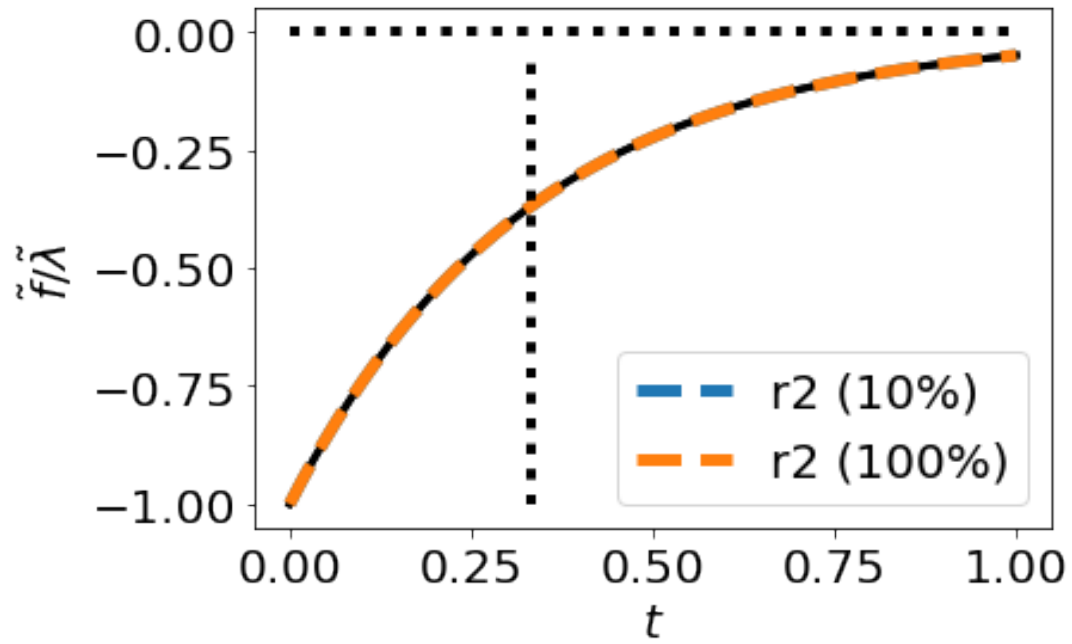

5.4 Example: Modulated Enzyme-catalysed reaction

```
[103]: sbg.model('ecr_abg.svg')
import ecr_abg
imp.reload(ecr_abg)
disp.SVG('ecr_abg.svg')
```

[103]:

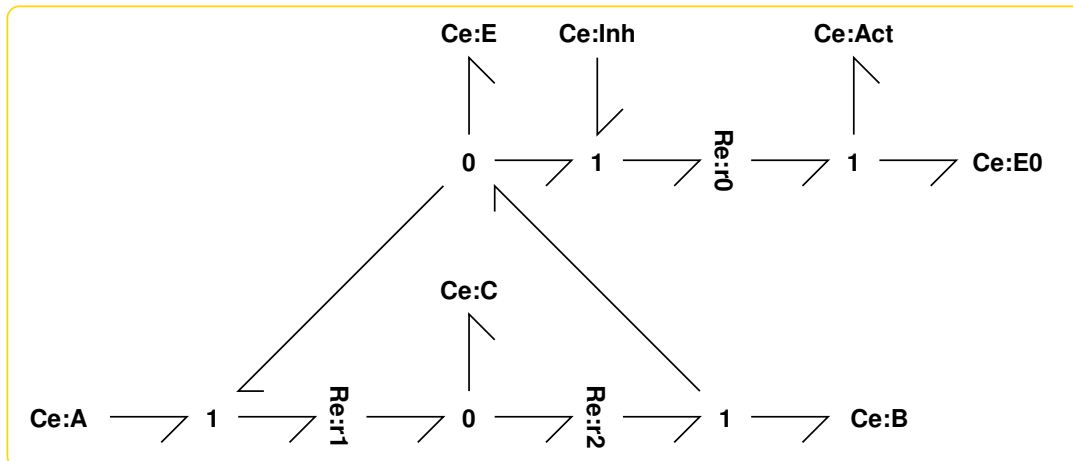

```
[104]: ## Stoichiometry
s0 = st.stoich(ecr_abg.model(),quiet=quiet)
species = s0['species']
n_X = s0['n_X']
n_V = s0['n_V']
```

```
[105]: ## Initial states (for sensitivity system)
# e0 = 10
XX0 = {}
# XX0['A'] = 1
XX0['E'] = e0/3
XX0['E0'] = e0/3
XX0['C'] = e0/3
XX0['Inh'] = 1
X0 = np.ones(2*n_X+n_V)
```

```
for spec in XX0:
    X0[species.index(spec)] = XX0[spec]
```

```
[106]: ## Parameters
parameter = {}
parameter['K_A'] = 1
parameter['K_B'] = K_B
# parameter['K_F'] = 1
# parameter['K_G'] = 1
parameter['kappa_r0'] = 1
parameter['kappa_r1'] = kappa_1
parameter['kappa_r2'] = 1
parameter['K_E0'] = 1
print(parameter)
```

```
{'K_A': 1, 'K_B': 0.001, 'kappa_r0': 1, 'kappa_r1': 1, 'kappa_r2': 1, 'K_E0': 1}
```

```
[107]: ## Chemostats
chemostats = ['A', 'B', 'Act', 'Inh']
```

```
[108]: imp.reload(st)
dcgain = {}
syss = {}
print(s['species'])
s,sc,sf,Sys,X_ss,V_ss,dX_ss = stoichSensitivity(ecr_abg.
    ↳model(),parameter=parameter,chemostats=chemostats,X0=X0)
lam = 1.1
outp = ['r1', 'r2']
Inp = ['sA', 'sr1', 'sr2', 'sAct', 'sInh']
#Inp = ['sAct', 'sInh', 'sA', 'sB']
t_last = 4
for inp in Inp:
    dat,y_lin,t,sys = simSensitivity(s,sc,sf,Sys,X_ss,V_ss,dX_ss,
                                   parameter=parameter,inp=[inp],outp=outp,
                                   lam=lam,t_last=t_last,lambdaIn=lambdaIn)

    syss[inp] = sys
    print(sys)
#     g = con.dcgain(sys)[0][0]
    g,tau = tfProps(sys)
    dcgain[inp] = g
    print(f'g = {g:0.2f}, tau = {tau:0.2f}')
```

```

if Titles:
    plt.title(f'{inp} (g = {g:.3f})')
plotSensitivity(dat, reactions=outp)
plotLines()
#     plt.hlines(g, min(t), max(t), color='black', ls='dashed')
Savefig('ecr_'+inp)
plt.show()

```

```

['A', 'B', 'C', 'E', 'sA', 'sB', 'sC', 'sE', 'sr1', 'sr2']
Steady-state finder error: 1.66e-15
X_ss = [1.      1.      1.      2.002 3.999 3.999 1.      1.      1.      1.      1.
 1.      1.      1.      1.      1. ]
V_ss = [-8.882e-16  1.998e+00  1.998e+00]
<LinearIOSystem>: sys[316]
Inputs (1): ['u[0]']
Outputs (2): ['y[0]', 'y[1]']
States (2): ['x[0]', 'x[1]']

A = [[-2.      1.001]
      [ 1.     -3.001]]


B = [[ 3.999]
      [-3.999]]

C = [[-1.      1.   ]
      [ 1.     -0.001]]

D = [[3.999]
      [0.   ]]

g = 1.60, tau = 0.32

```

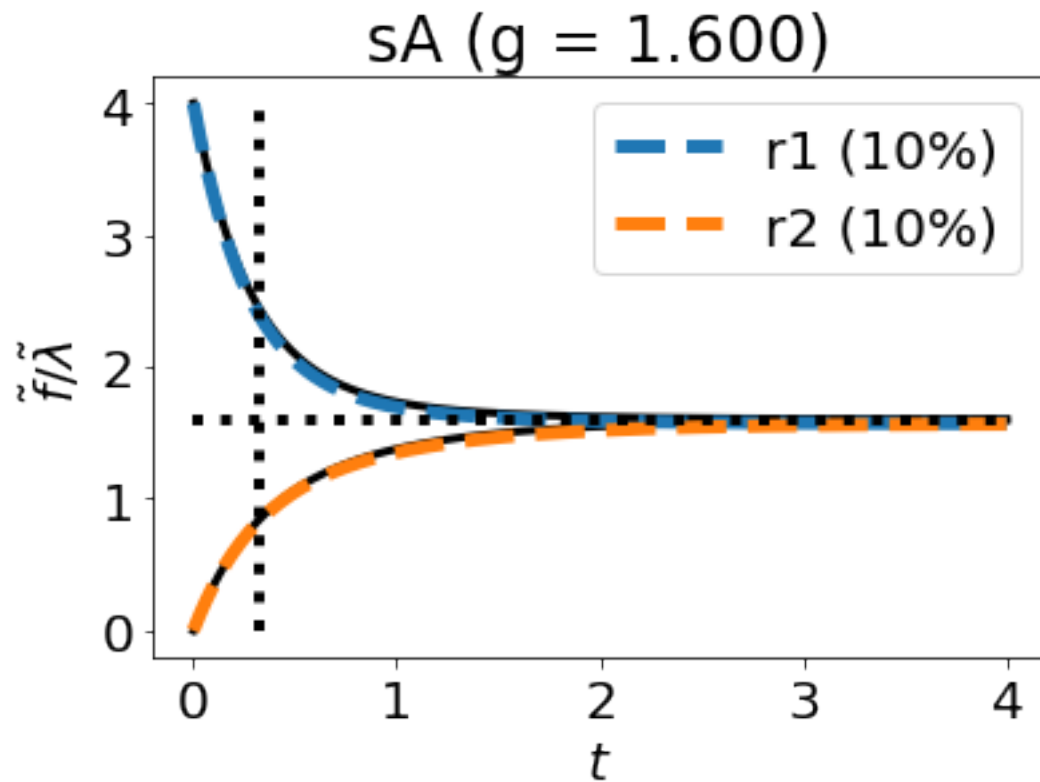

Use lambda as input
 <LinearIOSystem>: sys[318]
 Inputs (1): ['u[0]']
 Outputs (2): ['y[0]', 'y[1]']
 States (2): ['x[0]', 'x[1]']


$A = \begin{bmatrix} -2. & 1.001 \\ 1. & -3.001 \end{bmatrix}$

$B = \begin{bmatrix} 1.998 \\ -1.998 \end{bmatrix}$

$C = \begin{bmatrix} -1. & 1. \\ 1. & -0.001 \end{bmatrix}$

$D = \begin{bmatrix} 1.998 \\ 0. \end{bmatrix}$

$g = 0.80$, $\tau = 0.32$

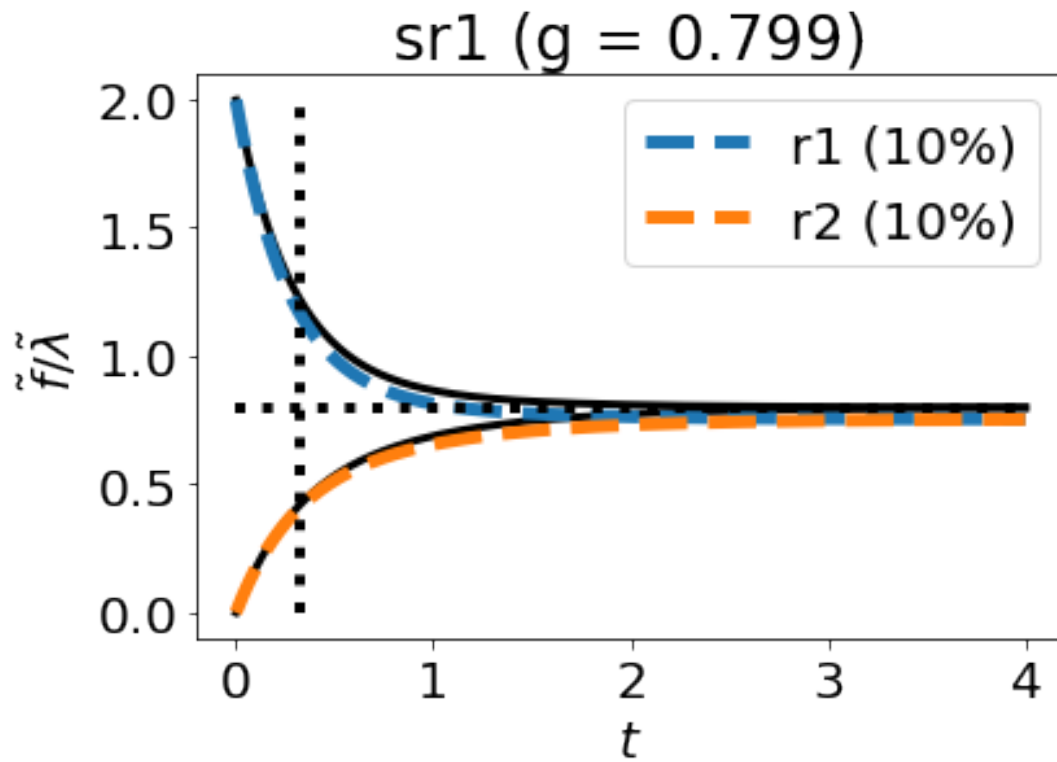

Use lambda as input
 <LinearIOSystem>: sys[320]
 Inputs (1): ['u[0]']
 Outputs (2): ['y[0]', 'y[1]']
 States (2): ['x[0]', 'x[1]']


A = $\begin{bmatrix} -2. & 1.001 \\ 1. & -3.001 \end{bmatrix}$

B = $\begin{bmatrix} -1.998 \\ 1.998 \end{bmatrix}$

C = $\begin{bmatrix} -1. & 1. \\ 1. & -0.001 \end{bmatrix}$

D = $\begin{bmatrix} 0. \\ 1.998 \end{bmatrix}$

g = 1.20, tau = 0.32

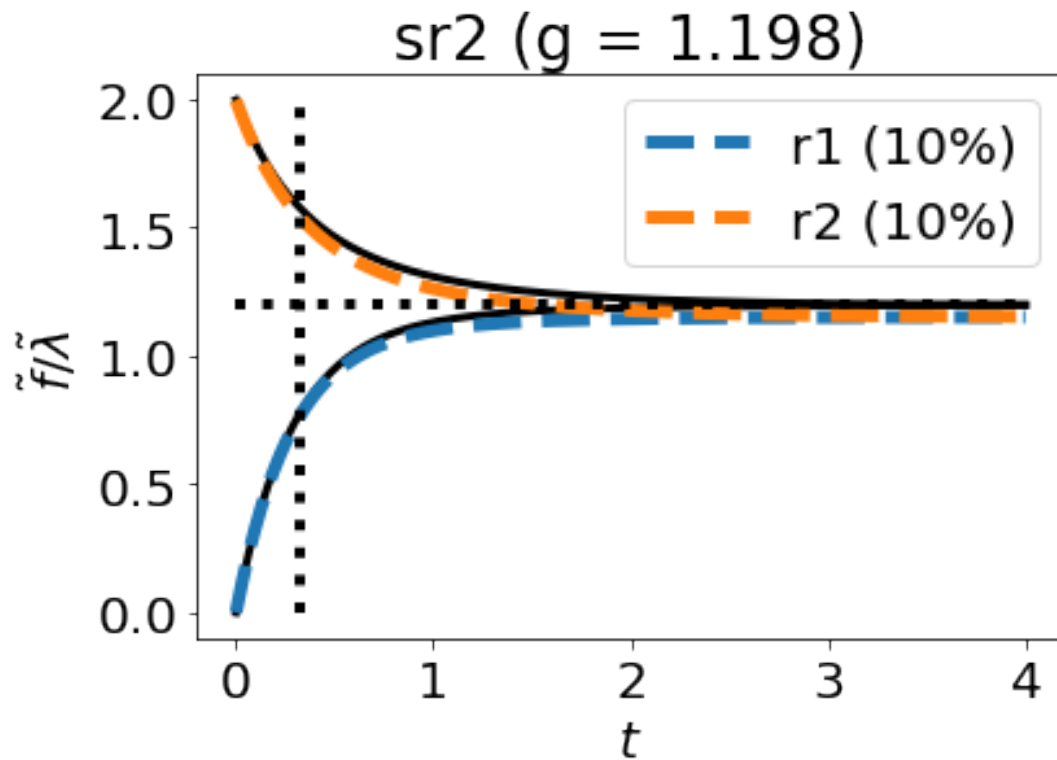

```
Use lambda as input
<LinearIOSystem>: sys[322]
Inputs (1): ['u[0]']
Outputs (2): ['y[0]', 'y[1]']
States (2): ['x[0]', 'x[1]']
```


```
A = [[-2.    1.001]
      [ 1.   -3.001]]
```

```
B = [[0.   ]
      [3.999]]
```

```
C = [[-1.    1.   ]
      [ 1.   -0.001]]
```

```
D = [[0.]
      [0.]]
```

```
g = 0.80, tau = 0.40
```
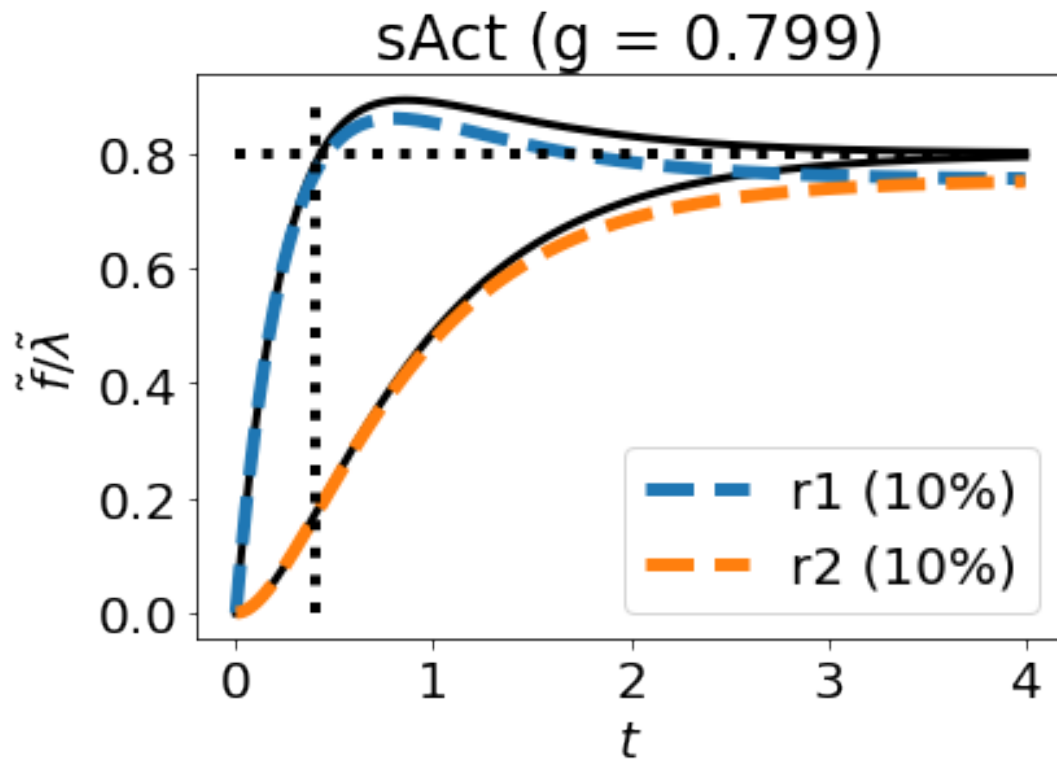
```
Use lambda as input
<LinearIOSystem>: sys[324]
Inputs (1): ['u[0]']
Outputs (2): ['y[0]', 'y[1]']
States (2): ['x[0]', 'x[1]']
```


```
A = [[-2.    1.001]
      [ 1.   -3.001]]
```

```
B = [[ 0.   ]
      [-3.999]]
```

```
C = [[-1.    1.   ]
      [ 1.   -0.001]]
```

```
D = [[0.]
      [0.]]
```

```
g = -0.80, tau = 0.40
```

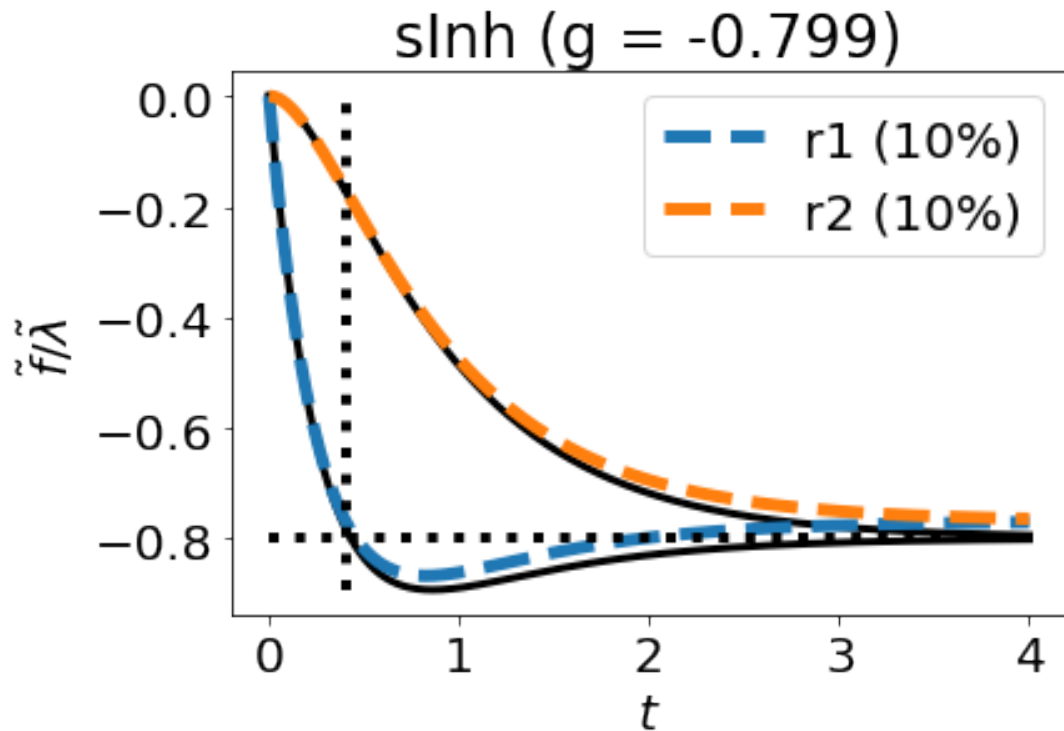

5.4.1 Vary λ

[109]: tau

[109]: 0.39992001599680055


```
[110]: inp = 'sInh'
outp = ['r2']
for lam in [1.01,1.1,2]:
    dat,y_lin,t,sys = simSensitivity(s,sc,sf,Sys,X_ss,V_ss,dX_ss,
                                   parameter=parameter,inp=[inp],outp=outp,
                                   lam=lam,t_last=t_last,lambdaIn=lambdaIn)

    # print(con.dcgain(sys))
    g = con.dcgain(sys)
    if Titles:
        plt.title(f'{inp} (g = {g:.3f})')
    plotSensitivity(dat,reactions=outp)
    plotLines()
Savefig('ecr_lambda')
```

Use lambda as input

Use lambda as input

Use lambda as input

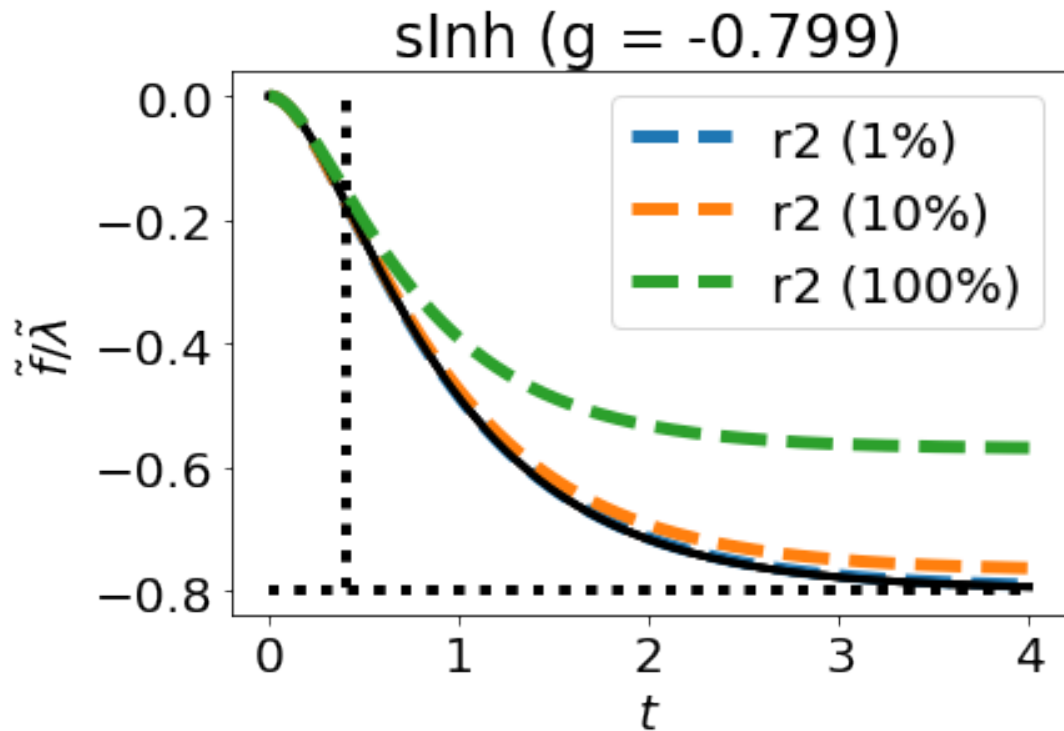

5.4.2 Sanity check on sensitivity system


```
[111]: Dat = {}
for lamIn in [False, True]:
    dat, y_lin, t, sys = simSensitivity(s, sc, sf, Sys, X_ss, V_ss, dX_ss,
                                     parameter=parameter, inp=['sr1'], outp=outp,
                                     lam=10, t_last=1, lambdaIn=lamIn)

    i_dat = s['reaction'].index('r2')
    f = dat['V'][:, i_dat]
    plt.plot(t, f, label=lamIn)
    Dat[lamIn] = f

    ## Difference
    f_diff = Dat[True] - Dat[False]
    plt.plot(t, f_diff, label='Difference')
    plt.legend()

    print(f'Error:, {np.linalg.norm(f_diff):.2e}')
```

Perturb parameter
Use lambda as input
Error:, 5.72e-12

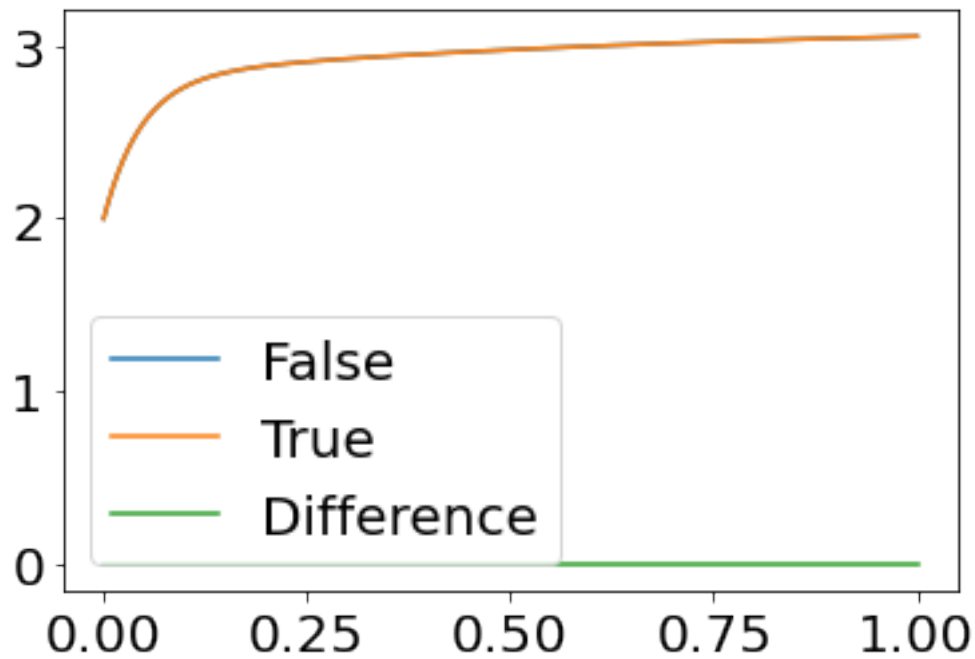

5.4.3 Show system transfer functions

```
[112]: ## Show system TFs
con.tf(syss['sAct'])
```

```
[112]:
```

$$\begin{bmatrix} \frac{3.999s+3.995}{s^2+5.001s+5.001} \\ \frac{-0.003999s+3.995}{s^2+5.001s+5.001} \end{bmatrix}$$

```
[113]: con.tf(syss['sInh'])
```

```
[113]:
```

$$\begin{bmatrix} \frac{-3.999s-3.995}{s^2+5.001s+5.001} \\ \frac{0.003999s-3.995}{s^2+5.001s+5.001} \end{bmatrix}$$

5.4.4 Test model reduction

```
[114]: ## Test model reduction - truncate
method = 'truncate'
sys = syss['sInh']
g,tau = tfProps(sys)
print(f'g = {g:.2f}, tau = {tau:.2f}')
sys1 = con.balred(sys,orders=1,method=method)
# print(con.dcgain(sys))
# print(con.dcgain(sys1))
con.tf(sys1)
g,tau = tfProps(sys1)
print(f'g = {g:.2f}, tau = {tau:.2f}')
```

```


t = np.linspace(0,5)
step = con.step_response(sys,T=t)
step1 = con.step_response(sys1,T=t)
plt.plot(t,step.outputs[:,0,:].T,label='System')
plt.plot(t,step1.outputs[:,0,:].T,label='Reduced')
plt.legend()
plt.grid()
plotLines()

```

```

g = -0.80, tau = 0.40
g = -1.16, tau = 0.40

```

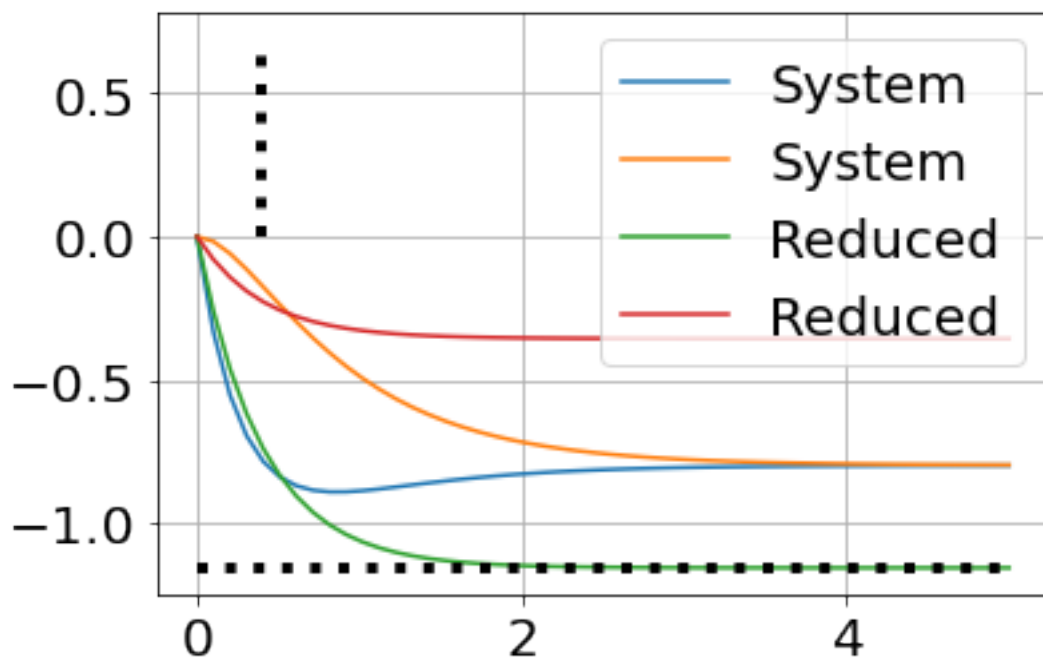

```


[115]: ## Test model reduction - matchdc
method = 'matchdc'
sys = syss['sInh']
g,tau = tfProps(sys)
print(f'g = {g:.2f}, tau = {tau:.2f}')
sys1 = con.balred(sys,orders=1,method=method)
# print(con.dcgain(sys))
# print(con.dcgain(sys1))
con.tf(sys1)
g,tau = tfProps(sys1)
print(f'g = {g:.2f}, tau = {tau:.2f}')

t = np.linspace(0,5)
step = con.step_response(sys,T=t)
step1 = con.step_response(sys1,T=t)
plt.plot(t,step.outputs[:,0,:].T,label='System')
plt.plot(t,step1.outputs[:,0,:].T,label='Reduced')

```

```
plt.legend()
plt.grid()
plotLines()
```

```
g = -0.80, tau = 0.40
g = -0.80, tau = 0.40
```


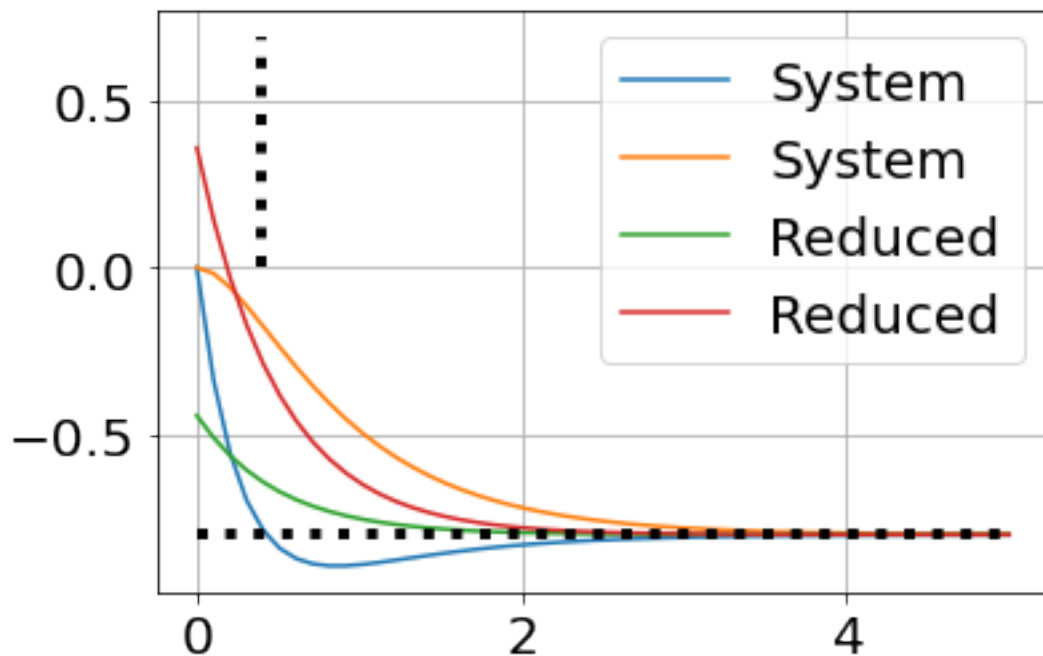




5.4.5 Simulate over flow range - quasi steady-state. Vary Activation and Inhibition.

```
[116]: QuasiSteadyState(Inp=['sAct', 'sInh'], points=100)
```

```
{'A': '(0.1 + 0.0001*(t-1000.0)*(1*(t>1000.0)))'}
```

Steady-state finder error: 7.85e-17

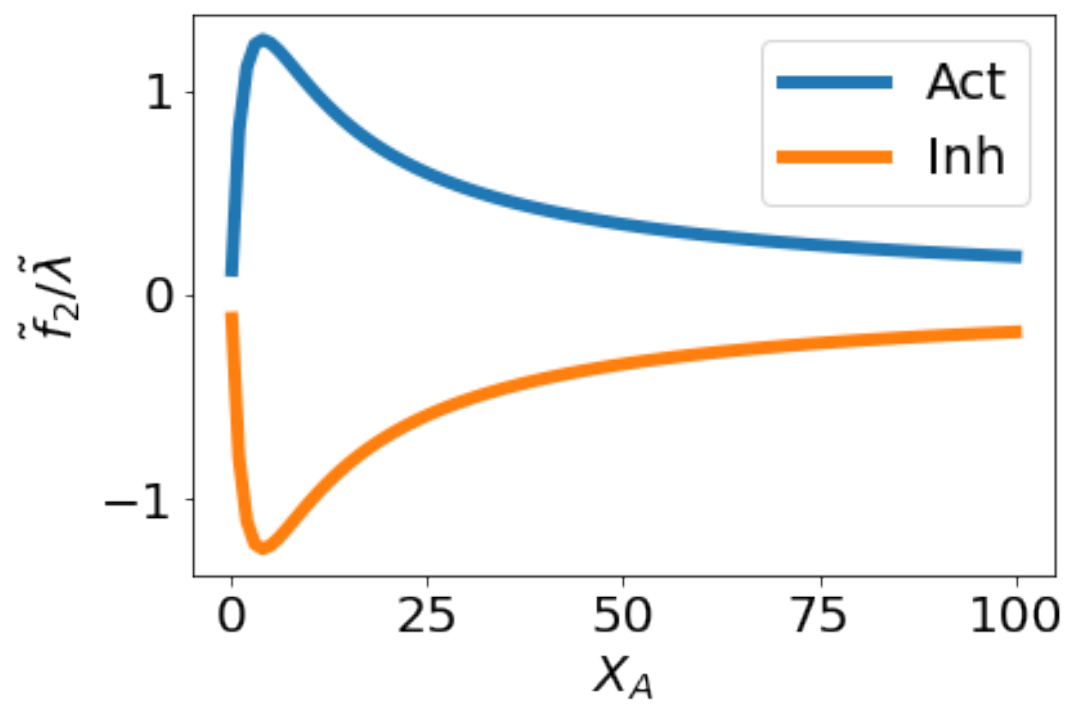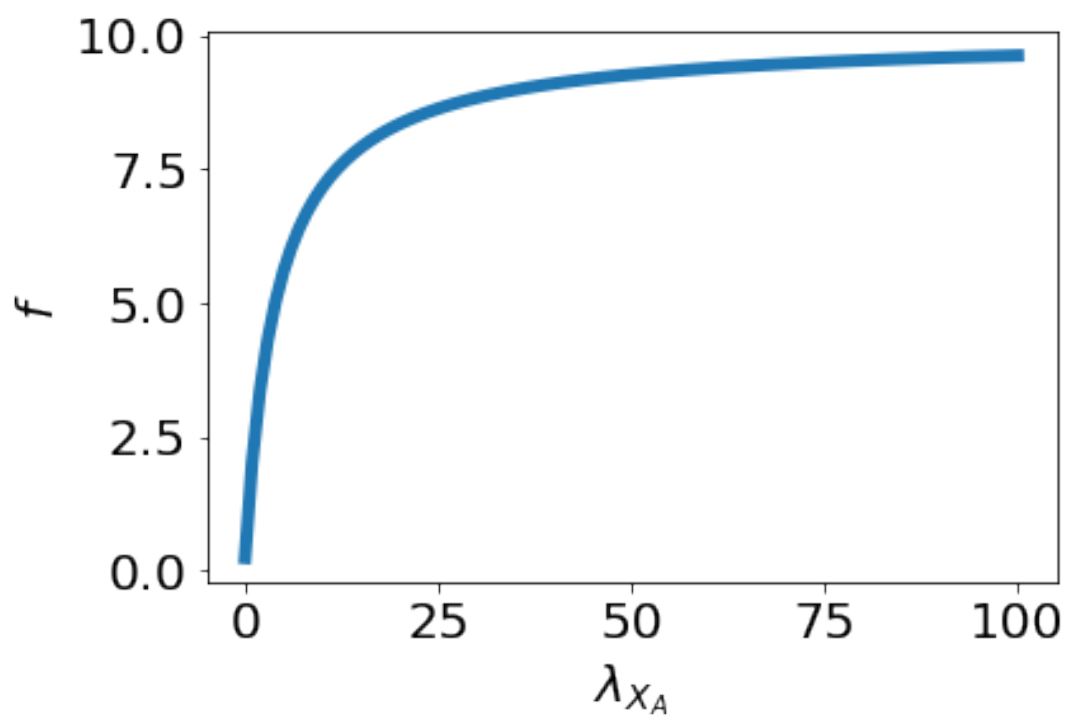

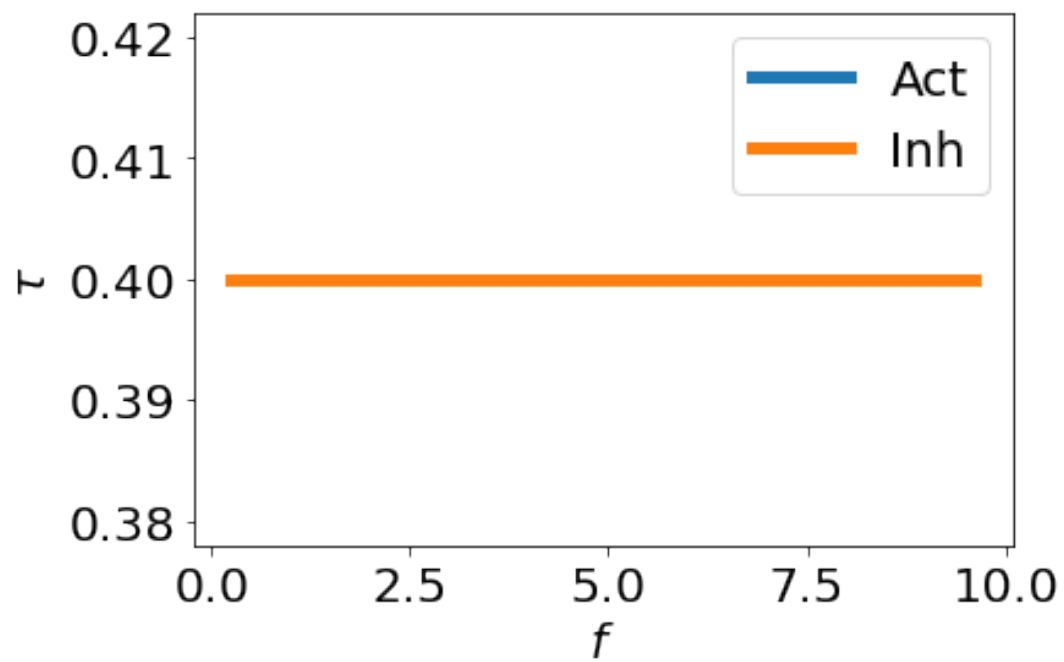
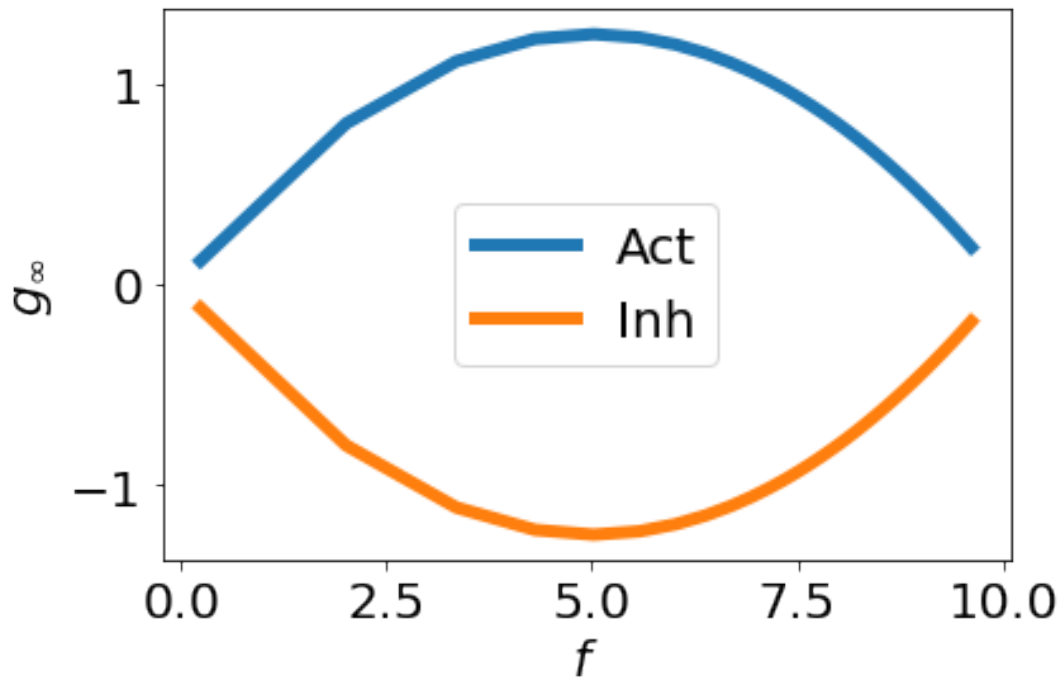




5.4.6 Simulate over flow range - quasi steady-state. Vary Re components

```
[117]: QuasiSteadyState(Inp=['sr1','sr2'],points=100)
```

```
{'A': '(0.1 + 0.0001*(t-1000.0)*(1*(t>1000.0)))'}
```

```
Steady-state finder error: 7.85e-17
```

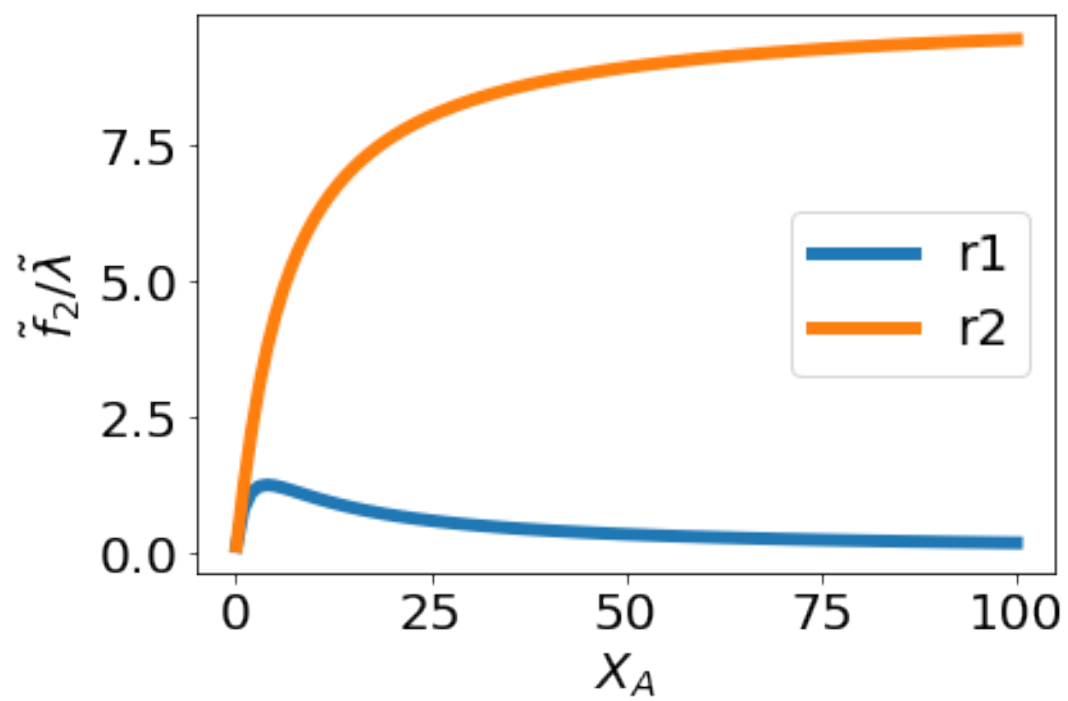
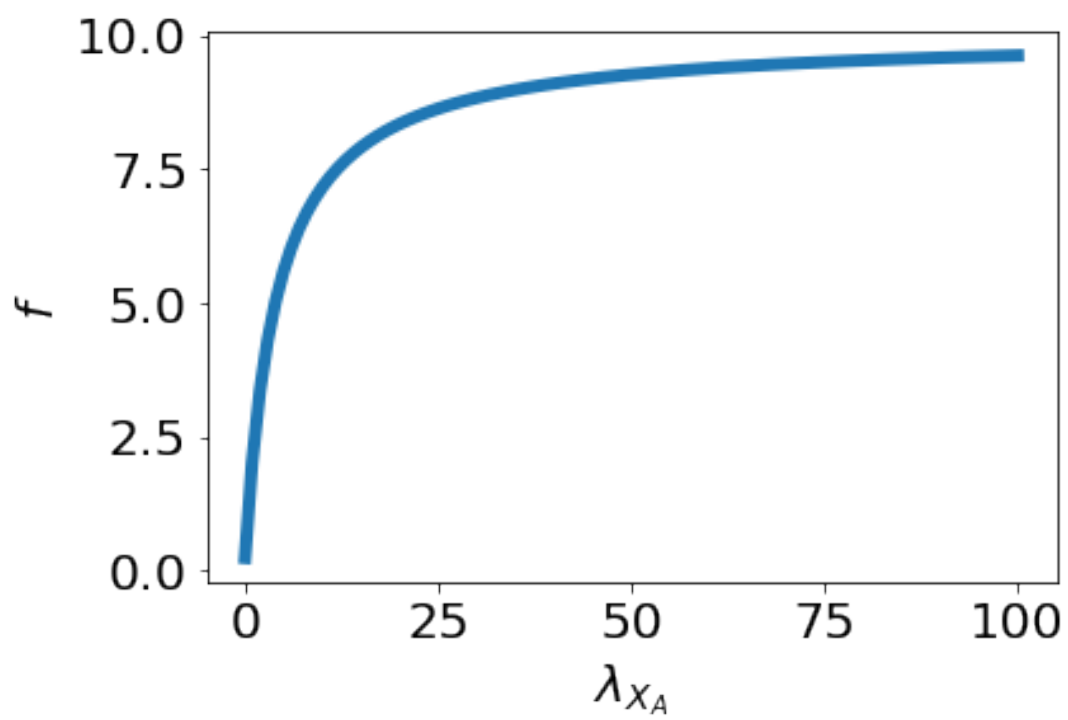


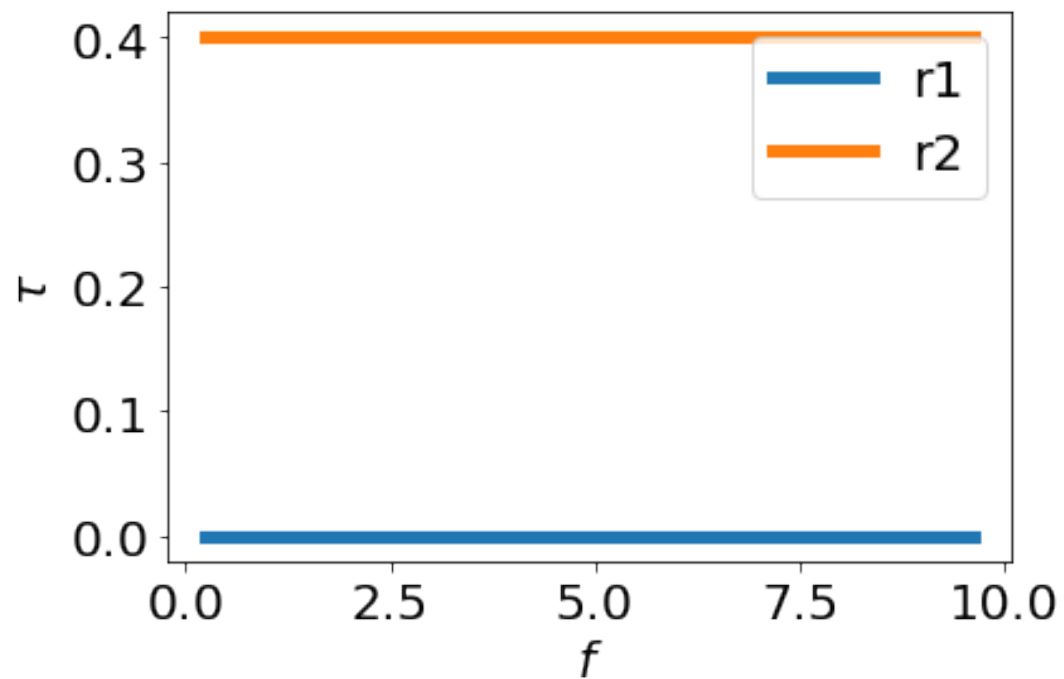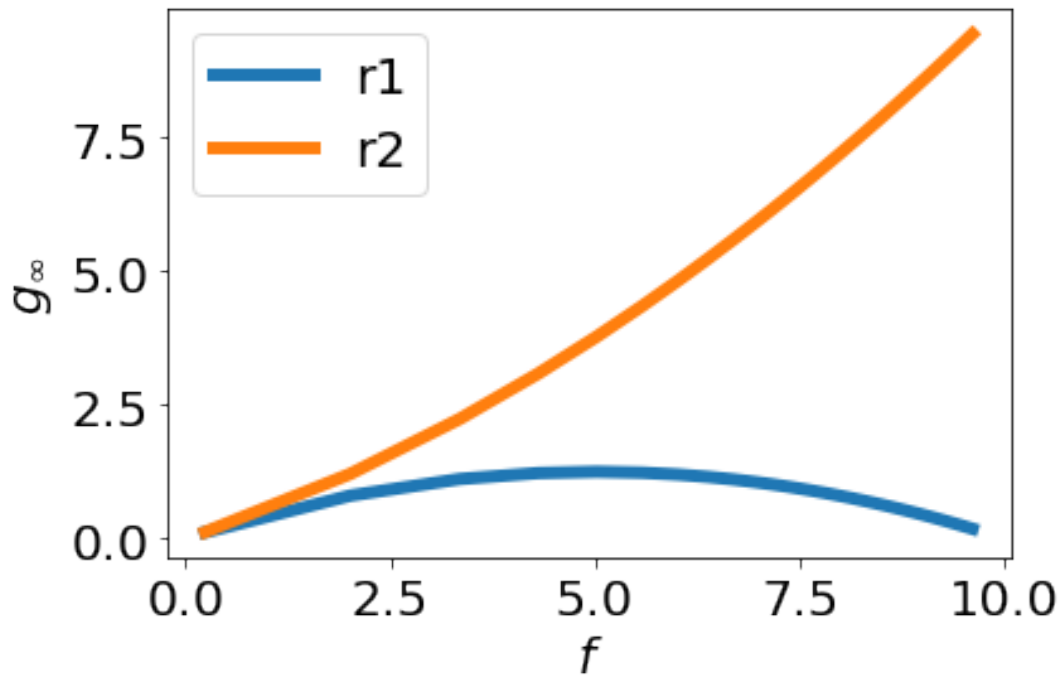
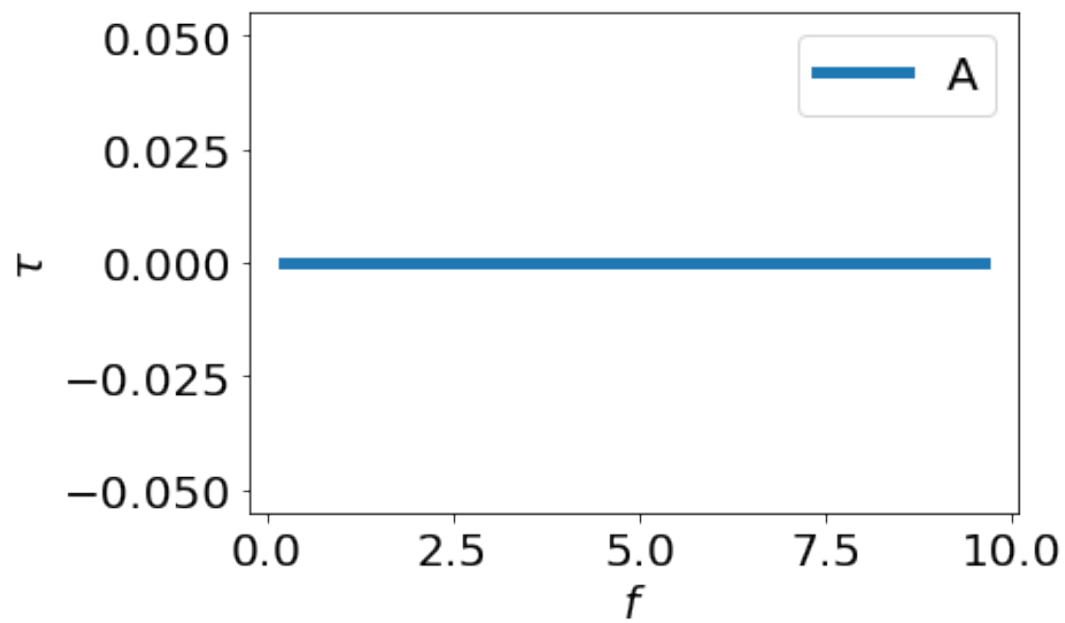
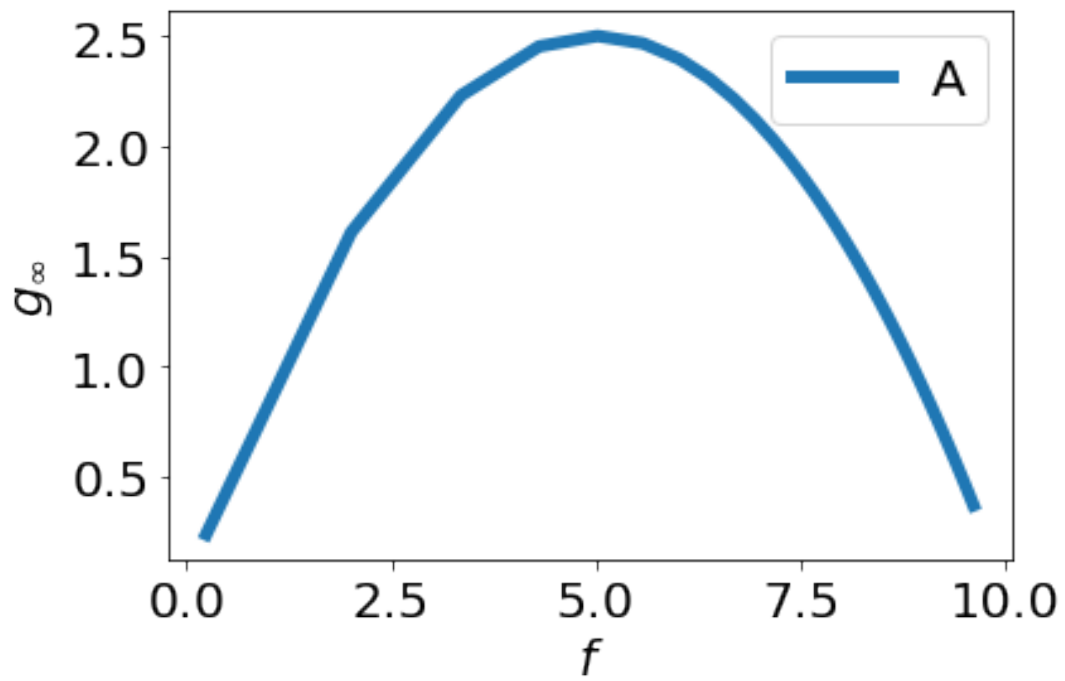


5.4.7 Simulate over flow range - quasi steady-state. Vary substrate concentration.

```
[118]: QuasiSteadyState(Inp=['sA'],points=100)

{'A': '(0.1 + 0.0001*(t-1000.0)*(1*(t>1000.0)))'}
Steady-state finder error: 7.85e-17
```

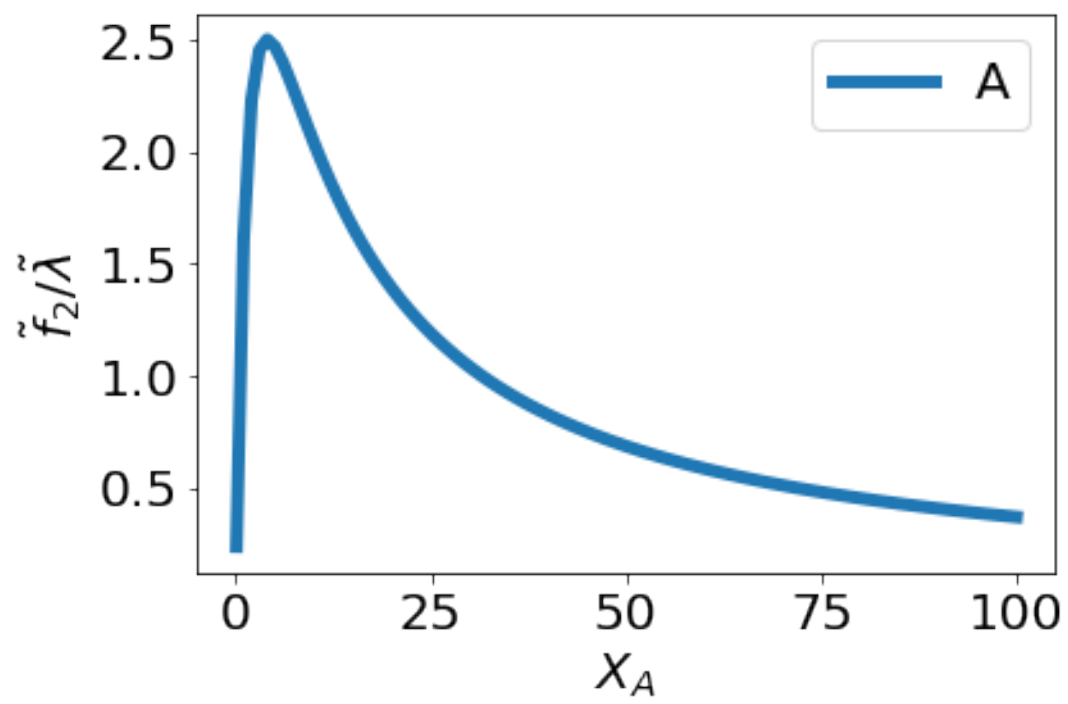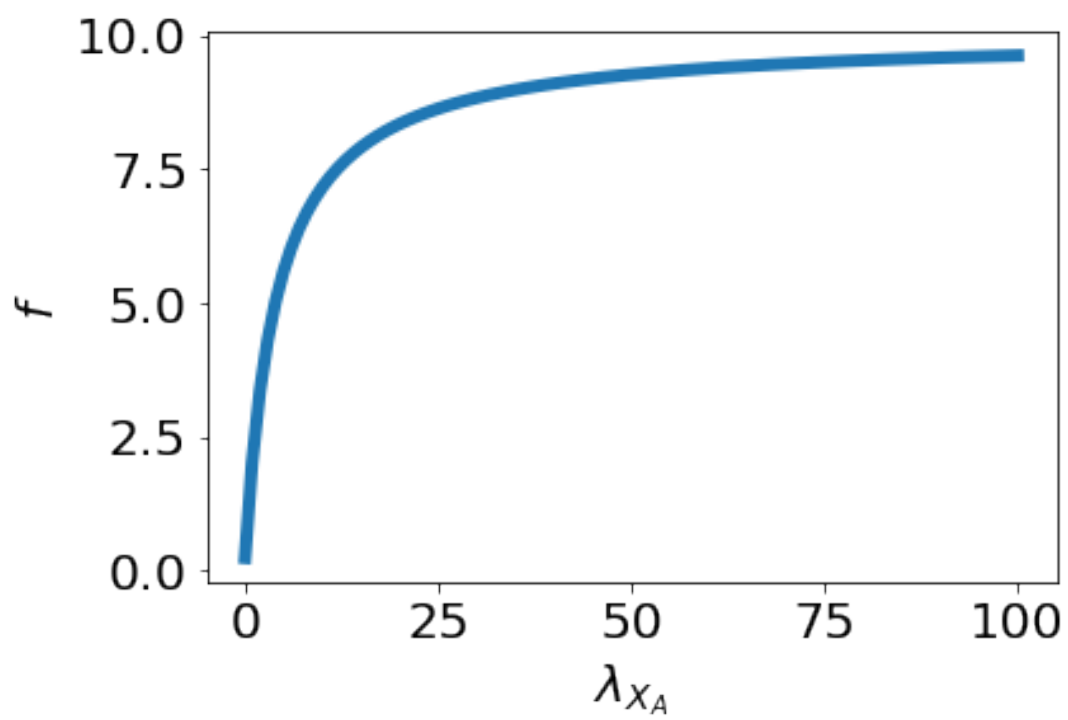



5.4.8 Sloppy parameters

```
[119]: imp.reload(slp)

for t_last in [4,1e2]:
    if t_last==0:
        t = None
```

```

else:
    t = np.linspace(0,t_last,100)

    sloppyBoth(Sys,['sr1','sr2'],['r1','r2'],t=t)
    sloppyBoth(Sys,['sE','sC'],['r1','r2'],t=t)
    sloppyBoth(Sys,['sA','sB'],['r1','r2'],t=t)


```

ecr

```

t_f = 4.00
H:
\sqrt{\sigma_1} \&= 2 \& V_1\Lambda \&= + 0.837 \lambda_{r2} + 0.548 \lambda_{r1}
\sqrt{\sigma_2} \&= 0.44 \& V_2\Lambda \&= + 0.837 \lambda_{r1} - 0.548 \lambda_{r2}
H_{ss}:
\sqrt{\sigma_1} \&= 2 \& V_1\Lambda \&= + 0.832 \lambda_{r2} + 0.555 \lambda_{r1}
\sqrt{\sigma_2} \&= 1e-06 \& V_2\Lambda \&= + 0.832 \lambda_{r1} - 0.555 \lambda_{r2}
Direct:
\sqrt{\sigma_1} \&= 1.4 \& V_1\Lambda \&= + 0.832 \lambda_{r2} + 0.555 \lambda_{r1}

```

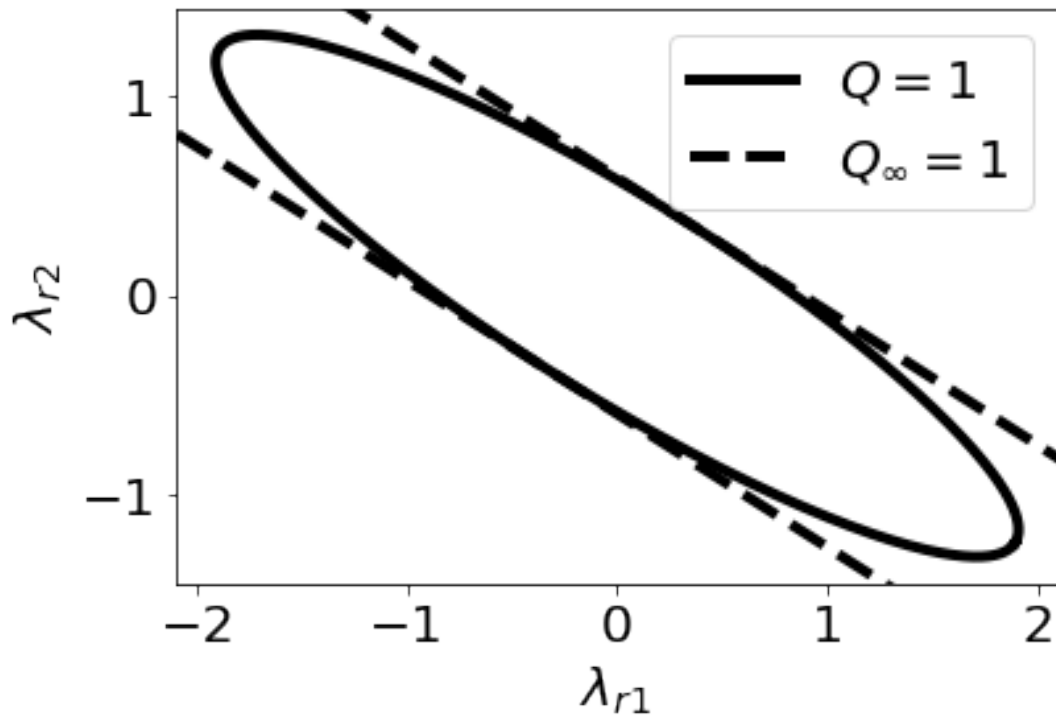

ecr

```


t_f = 4.00
H:
\sqrt{\sigma_1} \&= 1.5 \& V_1\Lambda \&= + 0.966 \lambda_{E} + 0.257 \lambda_{C}
\sqrt{\sigma_2} \&= 0.79 \& V_2\Lambda \&= + 0.966 \lambda_{C} - 0.257 \lambda_{E}
H_{ss}:

```

```

\sqrt{\sigma_1} \&= 1.3 \& V_1\Lambda \&= + 0.894 \lambda_{\{E\}} + 0.448 \lambda_{\{C\}}
\sqrt{\sigma_2} \&= 1e-06 \& V_2\Lambda \&= + 0.894 \lambda_{\{C\}} - 0.448 \lambda_{\{E\}}
Direct:
\sqrt{\sigma_1} \&= 0.89 \& V_1\Lambda \&= + 0.894 \lambda_{\{E\}} + 0.448 \lambda_{\{C\}}

```

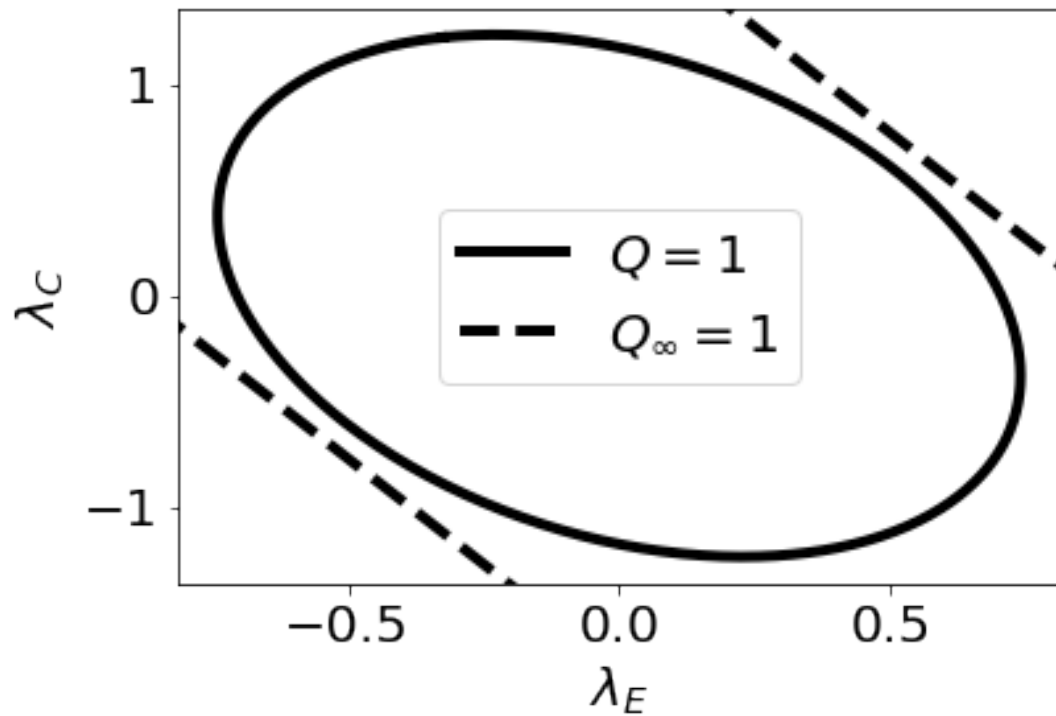


ecr

```

t_f = 4.00
H:
\sqrt{\sigma_1} \&= 2.4 \& V_1\Lambda \&= + 1.000 \lambda_{\{A\}} - 0.001 \lambda_{\{B\}}
\sqrt{\sigma_2} \&= 0.0015 \& V_2\Lambda \&= + 1.000 \lambda_{\{B\}} + 0.001 \lambda_{\{A\}}
H_ss:
\sqrt{\sigma_1} \&= 2.3 \& V_1\Lambda \&= + 1.000 \lambda_{\{A\}} - 0.001 \lambda_{\{B\}}
\sqrt{\sigma_2} \&= 1e-06 \& V_2\Lambda \&= + 1.000 \lambda_{\{B\}} + 0.001 \lambda_{\{A\}}
Direct:
\sqrt{\sigma_1} \&= 1.6 \& V_1\Lambda \&= + 1.000 \lambda_{\{A\}}

```

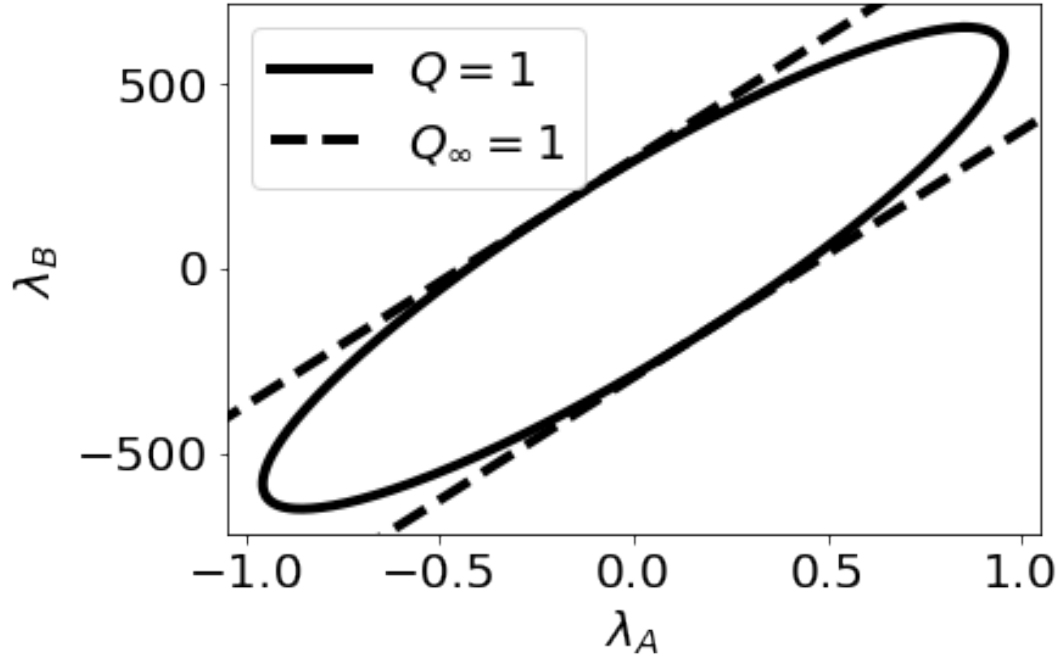

ecr

t_f = 100.00

H:

$\sqrt{\sigma_1} \approx 2 \ \& \ V_1 \backslash \Lambda \approx + 0.832 \ \lambda_{r2} + 0.555 \ \lambda_{r1}$

$\sqrt{\sigma_2} \approx 0.2 \ \& \ V_2 \backslash \Lambda \approx + 0.832 \ \lambda_{r1} - 0.555 \ \lambda_{r2}$


H_ss:

$\sqrt{\sigma_1} \approx 2 \ \& \ V_1 \backslash \Lambda \approx + 0.832 \ \lambda_{r2} + 0.555 \ \lambda_{r1}$

$\sqrt{\sigma_2} \approx 1e-06 \ \& \ V_2 \backslash \Lambda \approx + 0.832 \ \lambda_{r1} - 0.555 \ \lambda_{r2}$

Direct:

$\sqrt{\sigma_1} \approx 1.4 \ \& \ V_1 \backslash \Lambda \approx + 0.832 \ \lambda_{r2} + 0.555 \ \lambda_{r1}$

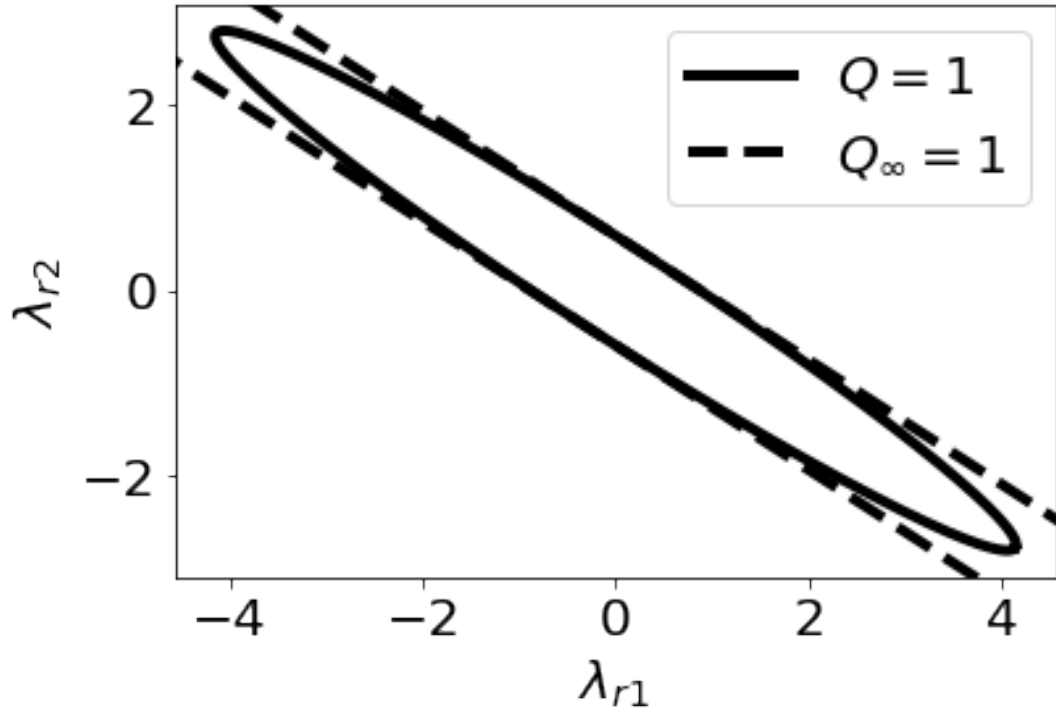

ecr

t_f = 100.00

H:

\sqrt{\sigma_1} \&= 1.3 \& V_1\Lambda \&= + 0.917 \lambda_E + 0.400 \lambda_C

\sqrt{\sigma_2} \&= 0.4 \& V_2\Lambda \&= + 0.917 \lambda_C - 0.400 \lambda_E


H_ss:

\sqrt{\sigma_1} \&= 1.3 \& V_1\Lambda \&= + 0.894 \lambda_E + 0.448 \lambda_C

\sqrt{\sigma_2} \&= 1e-06 \& V_2\Lambda \&= + 0.894 \lambda_C - 0.448 \lambda_E

Direct:

\sqrt{\sigma_1} \&= 0.89 \& V_1\Lambda \&= + 0.894 \lambda_E + 0.448 \lambda_C

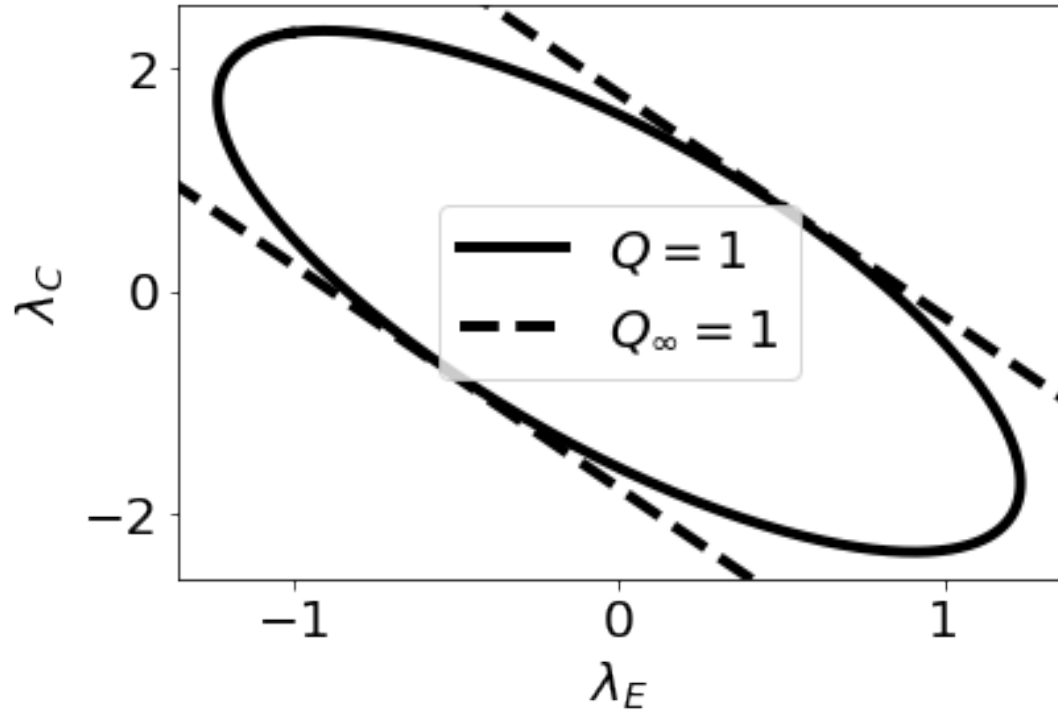

ecr

t_f = 100.00

H:

$\sqrt{\sigma_1} \approx 2.3 \ \& \ V_1 \backslash \text{Lambda} \approx + 1.000 \ \lambda_{\{A\}} - 0.001 \ \lambda_{\{B\}}$

$\sqrt{\sigma_2} \approx 0.00072 \ \& \ V_2 \backslash \text{Lambda} \approx + 1.000 \ \lambda_{\{B\}} + 0.001 \ \lambda_{\{A\}}$


H_ss:

$\sqrt{\sigma_1} \approx 2.3 \ \& \ V_1 \backslash \text{Lambda} \approx + 1.000 \ \lambda_{\{A\}} - 0.001 \ \lambda_{\{B\}}$

$\sqrt{\sigma_2} \approx 1e-06 \ \& \ V_2 \backslash \text{Lambda} \approx + 1.000 \ \lambda_{\{B\}} + 0.001 \ \lambda_{\{A\}}$

Direct:

$\sqrt{\sigma_1} \approx 1.6 \ \& \ V_1 \backslash \text{Lambda} \approx + 1.000 \ \lambda_{\{A\}}$

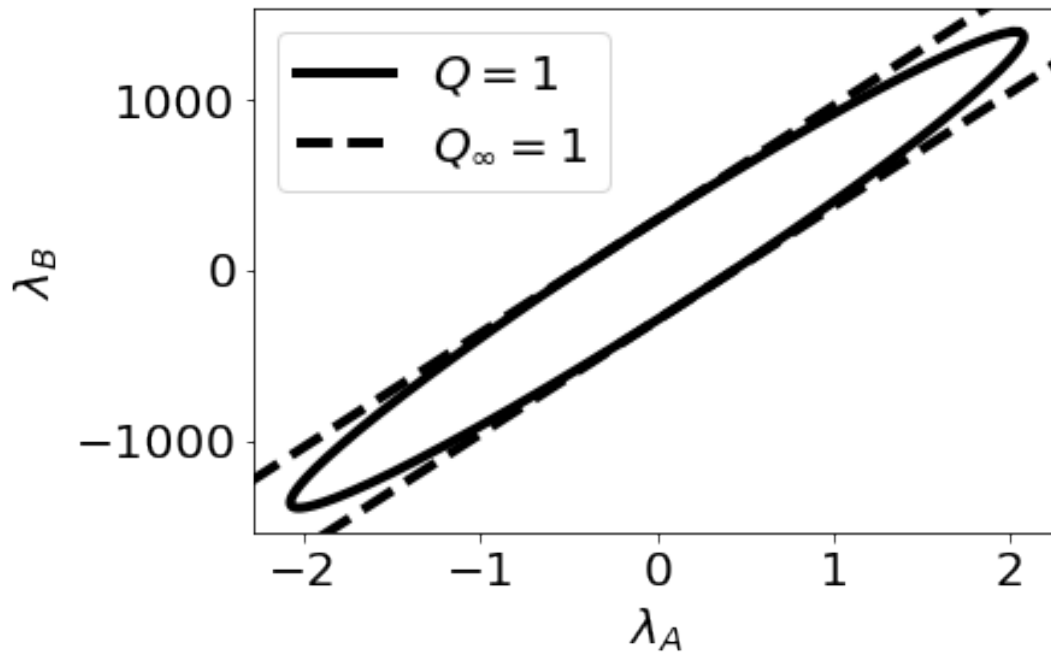

```
[120]: imp.reload(slp)
Outp = ['r1']
Inp_reac = ['sr1','sr2']
def PrintSloppy(Inp,Outp,GainOnly=True,tf=None):
    blurb = '\n*****\n'

    if tf is None:
        t = None
    else:
        t = np.linspace(0,tf)

    for outp in Outp:
        print(blurb,outp,blurb)
        sys = extractSubsystem(Sys,sc,sf,Inp,[outp])
        # print(con.dcgain(sys))
        gain = con.dcgain(sys)[0]
        norm = np.sum(gain*gain)
        ngain = gain/np.sqrt(norm)
        # print(norm,gain/np.sqrt(norm))
        H,eig,eigv,t = slp.Sloppy(sys,GainOnly=GainOnly,small=1e-10,t=tf)
        slp.SloppyPrint(eig,eigv,Inp,min_eig=0.0,min_eigv=0.05,max_eigs=2)
        if GainOnly:
            print('Direct')
            slp.SloppyPrint([norm],np.array([ngain]).T,Inp,min_eig=0.
→0,min_eigv=0.05,max_eigs=2)
        # print(eigv[:,0])
        # print(ngain)

    ## Reactions
```

```

for tf in [None,1e2]:
    for GainOnly in [True,False]:
        print('\nGainOnly =',GainOnly,'; tf =',tf)
        PrintSloppy(Inp_reac,Outp,GainOnly=GainOnly,tf=tf)

```

GainOnly = True ; tf = None

```

*****
r1
*****

```

```

\sqrt{\sigma_1} \&= 1.4 \& V_1\Lambda \&= + 0.832 \lambda_{r2} + 0.555 \lambda_{r1}
\sqrt{\sigma_2} \&= 1e-05 \& V_2\Lambda \&= + 0.832 \lambda_{r1} - 0.555 \lambda_{r2}
Direct
\sqrt{\sigma_1} \&= 1.4 \& V_1\Lambda \&= + 0.832 \lambda_{r2} + 0.555 \lambda_{r1}

```

GainOnly = False ; tf = None

```

*****
r1
*****

```

```

\sqrt{\sigma_1} \&= 1.4 \& V_1\Lambda \&= + 0.787 \lambda_{r2} + 0.617 \lambda_{r1}
\sqrt{\sigma_2} \&= 0.29 \& V_2\Lambda \&= + 0.787 \lambda_{r1} - 0.617 \lambda_{r2}

```

GainOnly = True ; tf = 100.0

```

*****
r1
*****

```

```

\sqrt{\sigma_1} \&= 1.4 \& V_1\Lambda \&= + 0.832 \lambda_{r2} + 0.555 \lambda_{r1}
\sqrt{\sigma_2} \&= 1e-05 \& V_2\Lambda \&= + 0.832 \lambda_{r1} - 0.555 \lambda_{r2}
Direct
\sqrt{\sigma_1} \&= 1.4 \& V_1\Lambda \&= + 0.832 \lambda_{r2} + 0.555 \lambda_{r1}

```

GainOnly = False ; tf = 100.0

```

*****
r1
*****

```

```

\sqrt{\sigma_1} \&= 1.4 \& V_1\Lambda \&= + 0.830 \lambda_{r2} + 0.558 \lambda_{r1}
\sqrt{\sigma_2} \&= 0.069 \& V_2\Lambda \&= + 0.830 \lambda_{r1} - 0.558 \lambda_{r2}

```

5.4.9 Initial condition sensitivity.

```
[121]: ## Set up deviation state for full system
n_X = sc['n_X']
sX0 = np.zeros(n_X)
spec = sc['species']
i_C = spec.index('C')
i_E = spec.index('E')
i_E0 = spec.index('E0')


sX0[i_E0] = 1
sX0[i_E] = -0.5
sX0[i_C] = -0.5

## Test conserved moiety compatability
G_c = sc['G']
error = np.linalg.norm(G_c@sX0)
print('Compatibility error =',error)

## Compare linear and non-linear
inp = 'sr1'
outp = ['r2']
for lam in [1.1,2,]:
    dat,y_lin,t,sys = simSensitivity(s,sc,sf,Sys,X_ss,V_ss,dX_ss,
                                   sX0=sX0,
                                   parameter=parameter,inp=[inp],outp=outp,
                                   lam=lam,t_last=10,lambdaIn=lambdaIn)

#     print(con.dcgain(sys))
g = con.dcgain(sys)
#     if Titles:
#         plt.title(f'{inp} (g = {g:.3f})')
plotSensitivity(dat,reactions=outp)
g=0;plotLines()
Savefig('ecr_IC')
```

Compatibility error = 0.0

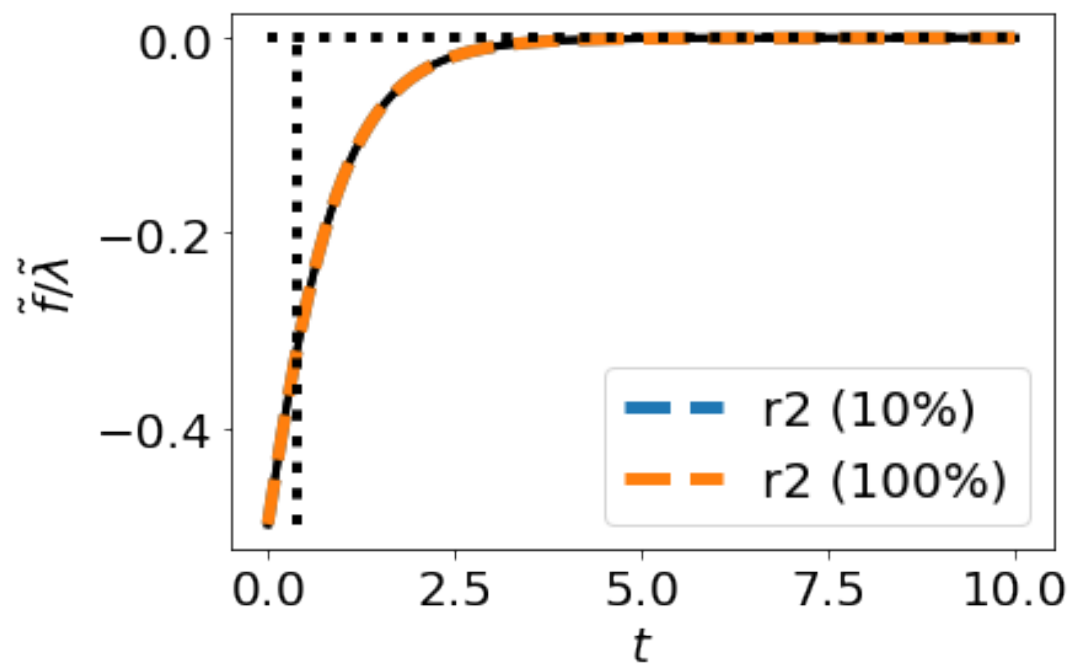

[]:

References