

Cucumber Report

Oct 19, 2022, 10:02:28 AM

Start : Oct 19, 10:02:10.839 AM

End : Oct 19, 10:02:26.461 AM

Duration : 15.622 s

Features

Scenarios

Steps

PASSED - 0

FAILED - 1

SKIPPED - 0

PASSED - 0

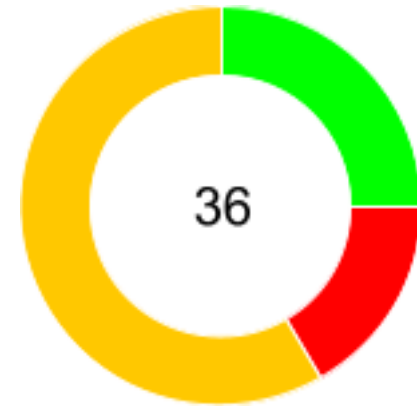
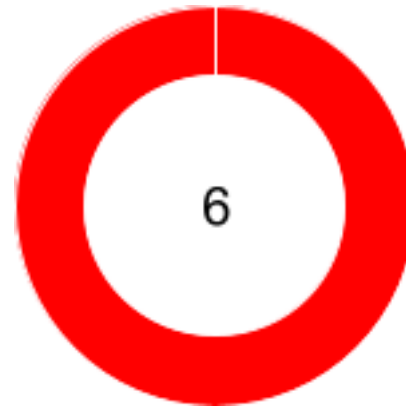
FAILED - 6

SKIPPED - 0

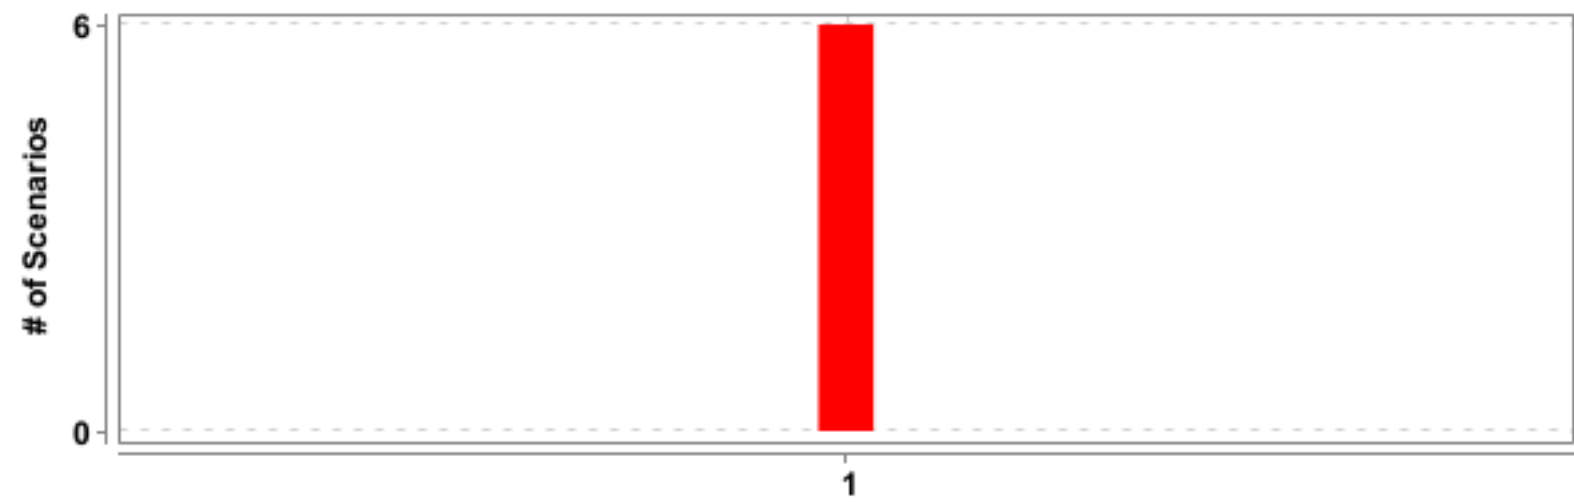
PASSED - 9

FAILED - 6

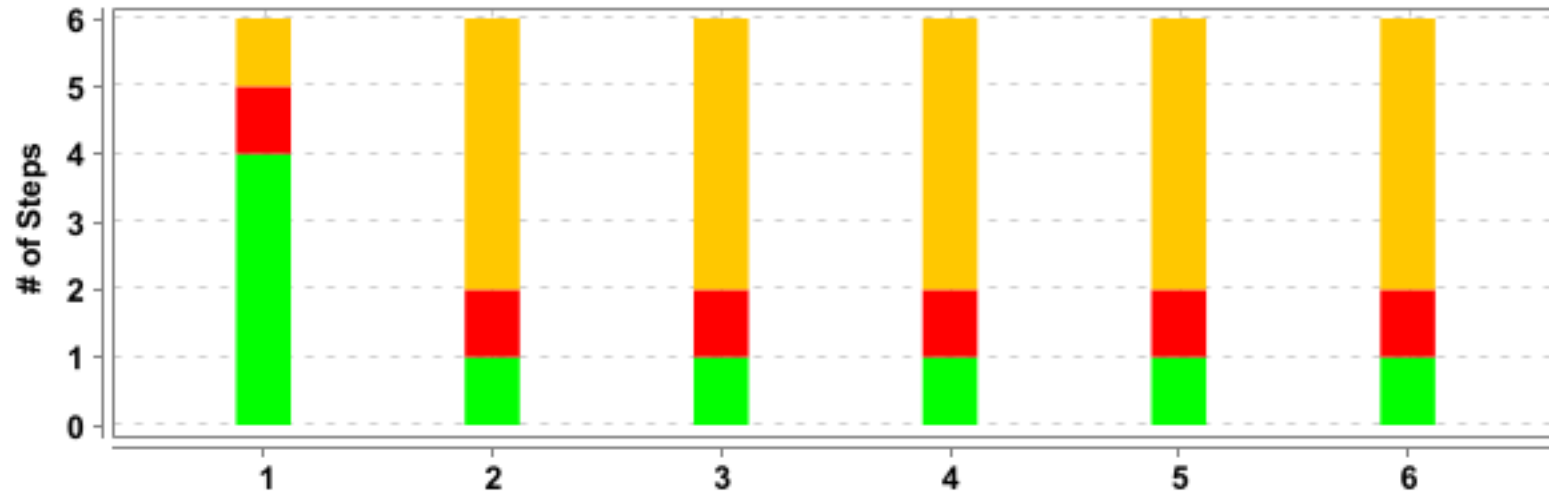
SKIPPED - 21



Feature		Scenario				Step			
Name	Duration	T	P	F	S	T	P	F	S
<u>Login</u>	15.622 s	6	0	6	0	36	9	6	21





#	Feature Name	T	P	F	S	Duration
1	Login	6	0	6	0	15.622 s

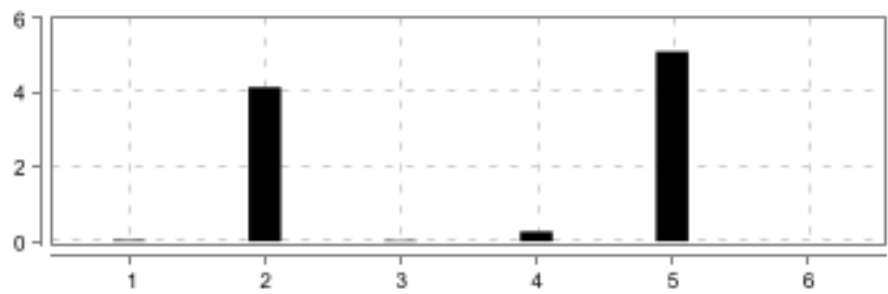



#	Feature Name	Scenario Name	T	P	F	S	Duration
1	<u>Login</u>	<u>Validating the Login functionality</u>	6	4	1	1	14.642 s
2	<u>Login</u>	<u>Validating the Login functionality</u>	6	1	1	4	0.117 s
3	<u>Login</u>	<u>Validating the Login functionality</u>	6	1	1	4	0.049 s
4	<u>Login</u>	<u>Validating the Login functionality</u>	6	1	1	4	0.037 s
5	<u>Login</u>	<u>Validating the Login functionality</u>	6	1	1	4	0.139 s
6	<u>Login</u>	<u>Validating the Login functionality</u>	6	1	1	4	0.250 s

Login

FAILED	DURATION - 15.622 s	Scenarios Total - 6 Pass - 0 Fail - 6 Skip - 0		Steps Total - 36 Pass - 9 Fail - 6 Skip - 21	
/ 10:02:10.839 AM // 10:02:26.461 AM /					

Validating the Login functionality

<div>FAILED</div> <div>DURATION - 14.642 s</div>		<div></div>	<div>Steps</div> <div>Total - 6</div> <div>Pass - 4</div> <div>Fail - 1</div> <div>Skip - 1</div>	<div></div>
/ 10:02:10.849 AM // 10:02:25.491 AM /				
Login				

#	Step / Hook Details	Status	Duration
1	Given User Launches Chrome Browser	PASSED	0.039 s
2	When user opens LMS portal link "https://lms-frontend-phase2.herokuapp.com/login"	PASSED	4.140 s
3	Then User should see the Login page title "LMS"	PASSED	0.028 s
4	When User enters Username as "" and Password as ""	PASSED	0.267 s
5	Then User clicks on Login button with expected status as "Both Fail"	FAILED	5.105 s
	org.openqa.selenium.remote.UnreachableBrowserException: Error communicating with the remote browser. It may have died. Build info: version: '4.4.0', revision: 'e5c75ed026a' System info: host: 'DESKTOP-HETC9O4', ip: '192.168.1.10', os.name: 'Windows 11', os.arch: 'amd64', os.version: '10.0', java.version: '17.0.3' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [2fc2feffafd280fa0069d9dfc3dcb28, findElements {using=id, value=loginstatus}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 106.0.5249.119, chrome: {chromedriverVersion: 106.0.5249.61 (511755355844..., userDataDir: C:\Users\19712\AppData\Loca...}, goog:chromeOptions: {debuggerAddress: localhost:63558}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: WINDOWS, proxy: Proxy(), se:cdp: ws://localhost:63558/devtoo..., se:cdpVersion: 106.0.5249.119, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true} Session ID: 2fc2feffafd280fa0069d9dfc3dcb28 at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:571) at org.openqa.selenium.remote.ElementLocation\$ElementFinder\$2.findElement(ElementLocation.java:179) at org.openqa.selenium.remote.ElementLocation.findElement(ElementLocation.java:108) at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:380)		

#	Step / Hook Details	Status	Duration
	<p>at org.openqa.selenium.remote.RemoteWebDriver.findElements(RemoteWebDriver.java:372)</p> <p>at pageObjects.LoginPage.GetLoginStatusMessage(LoginPage.java:92)</p> <p>at stepDefinitions.LoginSteps.user_clicks_on_login_button(LoginSteps.java:64)</p> <p>at ?.User clicks on Login button with expected status as "Both Fail"(file:///C:/Users/19712/eclipse-workspace/SampleCucumberPhase2/src/test/resources/features/login.feature:10)</p> <p>Caused by: java.io.UncheckedIOException: java.net.SocketException: Connection reset</p> <p>at org.openqa.selenium.remote.http.netty.NettyHttpHandler.makeCall(NettyHttpHandler.java:73)</p> <p>at org.openqa.selenium.remote.http.AddSeleniumUserAgent.lambda\$apply\$0(AddSeleniumUserAgent.java:42)</p> <p>at org.openqa.selenium.remote.http.Filter.lambda\$andFinally\$1(Filter.java:56)</p> <p>at org.openqa.selenium.remote.http.netty.NettyHttpHandler.execute(NettyHttpHandler.java:49)</p> <p>at org.openqa.selenium.remote.http.AddSeleniumUserAgent.lambda\$apply\$0(AddSeleniumUserAgent.java:42)</p> <p>at org.openqa.selenium.remote.http.Filter.lambda\$andFinally\$1(Filter.java:56)</p> <p>at org.openqa.selenium.remote.http.netty.NettyClient.execute(NettyClient.java:98)</p> <p>at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:181)</p> <p>at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:167)</p> <p>at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:142)</p> <p>at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:547)</p> <p>at org.openqa.selenium.remote.ElementLocation\$ElementFinder\$2.findElements(ElementLocation.java:179)</p> <p>at org.openqa.selenium.remote.ElementLocation.findElements(ElementLocation.java:108)</p> <p>at org.openqa.selenium.remote.RemoteWebDriver.findElements(RemoteWebDriver.java:380)</p> <p>at org.openqa.selenium.remote.RemoteWebDriver.findElements(RemoteWebDriver.java:372)</p> <p>at pageObjects.LoginPage.GetLoginStatusMessage(LoginPage.java:92)</p> <p>at stepDefinitions.LoginSteps.user_clicks_on_login_button(LoginSteps.java:64)</p> <p>at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke0(Native Method)</p> <p>at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke(NativeMethodAccessorImpl.java:77)</p> <p>at java.base/jdk.internal.reflect.DelegatingMethodAccessorImpl.invoke(DelegatingMethodAccessorImpl.java:43)</p> <p>at java.base/java.lang.reflect.Method.invoke(Method.java:568)</p> <p>at io.cucumber.java.Invoker.doInvoke(Invoker.java:66)</p> <p>at io.cucumber.java.Invoker.invoke(Invoker.java:24)</p> <p>at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47)</p> <p>at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29)</p> <p>at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66)</p> <p>at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63)</p> <p>at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10)</p> <p>at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:86)</p> <p>at io.cucumber.core.runner.TestStep.run(TestStep.java:57)</p> <p>at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51)</p> <p>at io.cucumber.core.runner.TestCase.run(TestCase.java:95)</p> <p>at io.cucumber.core.runner.Runner.runPickle(Runner.java:75)</p> <p>at io.cucumber.junit.PickleRunners\$NoStepDescriptions.lambda\$run\$0(PickleRunners.java:151)</p> <p>at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$3(CucumberExecutionContext.java:110)</p>		

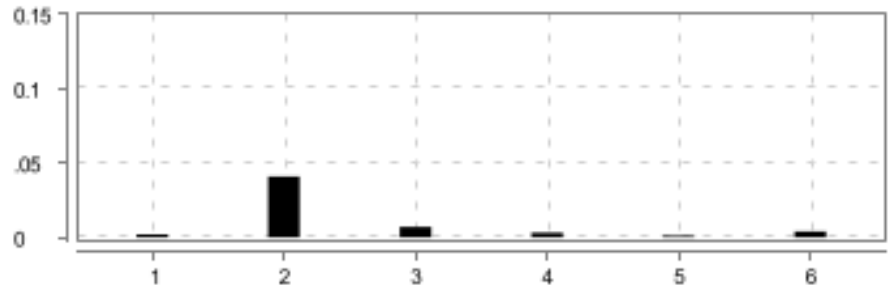

#	Step / Hook Details	Status	Duration
	<p> at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:110) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:148) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) at org.junit.runners.ParentRunner\$3.run(ParentRunner.java:238) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:63) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:236) at org.junit.runners.ParentRunner.access\$000(ParentRunner.java:53) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:229) at org.junit.runners.ParentRunner.run(ParentRunner.java:309) at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$3.run(ParentRunner.java:238) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:63) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:236) at org.junit.runners.ParentRunner.access\$000(ParentRunner.java:53) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:229) at io.cucumber.junit.Cucumber\$RunBeforeAllHooks.evaluate(Cucumber.java:266) at io.cucumber.junit.Cucumber\$RunAfterAllHooks.evaluate(Cucumber.java:281) at io.cucumber.junit.Cucumber\$StartTestRun.evaluate(Cucumber.java:233) at io.cucumber.junit.Cucumber\$FinishTestRun.evaluate(Cucumber.java:248) at org.junit.runners.ParentRunner.run(ParentRunner.java:309) at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210) Caused by: java.net.SocketException: Connection reset at java.base/sun.nio.ch.SocketChannelImpl.throwConnectionReset(SocketChannelImpl.java:394) at java.base/sun.nio.ch.SocketChannelImpl.read(SocketChannelImpl.java:426) at io.netty.buffer.PooledByteBuf.setBytes(PooledByteBuf.java:258) at io.netty.buffer.AbstractByteBuf.writeBytes(AbstractByteBuf.java:1132) at io.netty.channel.socket.nio.NioSocketChannel.doReadBytes(NioSocketChannel.java:357) at io.netty.channel.nio.AbstractNioByteChannel\$NioByteUnsafe.read(AbstractNioByteChannel.java:151) at io.netty.channel.nio.NioEventLoop.processSelectedKey(NioEventLoop.java:722) at io.netty.channel.nio.NioEventLoop.processSelectedKeysOptimized(NioEventLoop.java:658) at io.netty.channel.nio.NioEventLoop.processSelectedKeys(NioEventLoop.java:584) at io.netty.channel.nio.NioEventLoop.run(NioEventLoop.java:496) </p>		

#	Step / Hook Details	Status	Duration
	at io.netty.util.concurrent.SingleThreadEventExecutor\$4.run(SingleThreadEventExecutor.java:997) at io.netty.util.internal.ThreadExecutorMap\$2.run(ThreadExecutorMap.java:74) at io.netty.util.concurrent.FastThreadLocalRunnable.run(FastThreadLocalRunnable.java:30) at java.base/java.lang.Thread.run(Thread.java:833) * Not displayable characters are replaced by '?'.		
6	Then User should see the LMS Home page on successful login status "Both Fail"	SKIPPED	0.002 s
	AFTER - stepDefinitions.Hooks.tearDown(io.cucumber.java.Scenario) org.openqa.selenium.remote.UnreachableBrowserException: Error communicating with the remote browser. It may have died. Build info: version: '4.4.0', revision: 'e5c75ed026a' System info: host: 'DESKTOP-HETC9O4', ip: '192.168.1.10', os.name: 'Windows 11', os.arch: 'amd64', os.version: '10.0', java.version: '17.0.3' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [2fc2feffafd280fa0069d9dfc3dcb28, screenshot {}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 106.0.5249.119, chrome: {chromedriverVersion: 106.0.5249.61 (511755355844..., userDataDir: C:\Users\19712\AppData\Loca...}, goog:chromeOptions: {debuggerAddress: localhost:63558}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: WINDOWS, proxy: Proxy(), se:cdp: ws://localhost:63558/devtoo..., se:cdpVersion: 106.0.5249.119, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true} Session ID: 2fc2feffafd280fa0069d9dfc3dcb28 at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:571) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:602) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:606) at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:331) at stepDefinitions.Hooks.tearDown(Hooks.java:22) Caused by: java.io.UncheckedIOException: java.net.ConnectException: Connection refused: no further information: localhost/[0:0:0:0:0:0:1]:64866 at org.openqa.selenium.remote.http.netty.NettyHttpHandler.makeCall(NettyHttpHandler.java:73) at org.openqa.selenium.remote.http.AddSeleniumUserAgent.lambda\$apply\$0(AddSeleniumUserAgent.java:42) at org.openqa.selenium.remote.http.Filter.lambda\$andFinally\$1(Filter.java:56) at org.openqa.selenium.remote.http.netty.NettyHttpHandler.execute(NettyHttpHandler.java:49) at org.openqa.selenium.remote.http.AddSeleniumUserAgent.lambda\$apply\$0(AddSeleniumUserAgent.java:42) at org.openqa.selenium.remote.http.Filter.lambda\$andFinally\$1(Filter.java:56) at org.openqa.selenium.remote.http.netty.NettyClient.execute(NettyClient.java:98) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:181) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:167) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:142) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:547) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:602) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:606) at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:331) at stepDefinitions.Hooks.tearDown(Hooks.java:22) at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke0(Native Method) at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke(NativeMethodAccessorImpl.java:77) at java.base/jdk.internal.reflect.DelegatingMethodAccessorImpl.invoke(DelegatingMethodAccessorImpl.java:43)	FAILED	0.045 s

#	Step / Hook Details	Status	Duration
	at java.base/java.lang.reflect.Method.invoke(Method.java:568) at io.cucumber.java.Invoker.doInvoke(Invoker.java:66) at io.cucumber.java.Invoker.invokeStatic(Invoker.java:80) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:45) at io.cucumber.java.JavaHookDefinition.execute(JavaHookDefinition.java:64) at io.cucumber.core.runner.CoreHookDefinition.execute(CoreHookDefinition.java:46) at io.cucumber.core.runner.HookDefinitionMatch.runStep(HookDefinitionMatch.java:21) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:86) at io.cucumber.core.runner.TestStep.run(TestStep.java:57) at io.cucumber.core.runner.TestCase.run(TestCase.java:101) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.lambda\$run\$0(PickleRunners.java:151) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$3(CucumberExecutionContext.java:110) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:110) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:148) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) at org.junit.runners.ParentRunner\$3.run(ParentRunner.java:238) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:63) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:236) at org.junit.runners.ParentRunner.access\$000(ParentRunner.java:53) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:229) at org.junit.runners.ParentRunner.run(ParentRunner.java:309) at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$3.run(ParentRunner.java:238) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:63) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:236) at org.junit.runners.ParentRunner.access\$000(ParentRunner.java:53) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:229) at io.cucumber.junit.Cucumber\$RunBeforeAllHooks.evaluate(Cucumber.java:266) at io.cucumber.junit.Cucumber\$RunAfterAllHooks.evaluate(Cucumber.java:281) at io.cucumber.junit.Cucumber\$StartTestRun.evaluate(Cucumber.java:233) at io.cucumber.junit.Cucumber\$FinishTestRun.evaluate(Cucumber.java:248) at org.junit.runners.ParentRunner.run(ParentRunner.java:309) at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529)		

#	Step / Hook Details	Status	Duration
	<p>at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756)</p> <p>at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452)</p> <p>at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210)</p> <p>Caused by: java.net.ConnectException: Connection refused: no further information: localhost/[0:0:0:0:0:0:1]:64866</p> <p>at org.asynchttpclient.netty.channel.NettyConnectListener.onFailure(NettyConnectListener.java:179)</p> <p>at org.asynchttpclient.netty.channel.NettyChannelConnector\$1.onFailure(NettyChannelConnector.java:108)</p> <p>at org.asynchttpclient.netty.SimpleChannelFutureListener.operationComplete(SimpleChannelFutureListener.java:28)</p> <p>at org.asynchttpclient.netty.SimpleChannelFutureListener.operationComplete(SimpleChannelFutureListener.java:20)</p> <p>at io.netty.util.concurrent.DefaultPromise.notifyListener0(DefaultPromise.java:578)</p> <p>at io.netty.util.concurrent.DefaultPromise.notifyListeners0(DefaultPromise.java:571)</p> <p>at io.netty.util.concurrent.DefaultPromise.notifyListenersNow(DefaultPromise.java:550)</p> <p>at io.netty.util.concurrent.DefaultPromise.notifyListeners(DefaultPromise.java:491)</p> <p>at io.netty.util.concurrent.DefaultPromise.setValue0(DefaultPromise.java:616)</p> <p>at io.netty.util.concurrent.DefaultPromise.setFailure0(DefaultPromise.java:609)</p> <p>at io.netty.util.concurrent.DefaultPromise.tryFailure(DefaultPromise.java:117)</p> <p>at io.netty.channel.nio.AbstractNioChannel\$AbstractNioUnsafe.fulfillConnectPromise(AbstractNioChannel.java:321)</p> <p>at io.netty.channel.nio.AbstractNioChannel\$AbstractNioUnsafe.finishConnect(AbstractNioChannel.java:337)</p> <p>at io.netty.channel.nio.NioEventLoop.processSelectedKey(NioEventLoop.java:710)</p> <p>at io.netty.channel.nio.NioEventLoop.processSelectedKeysOptimized(NioEventLoop.java:658)</p> <p>at io.netty.channel.nio.NioEventLoop.processSelectedKeys(NioEventLoop.java:584)</p> <p>at io.netty.channel.nio.NioEventLoop.run(NioEventLoop.java:496)</p> <p>at io.netty.util.concurrent.SingleThreadEventExecutor\$4.run(SingleThreadEventExecutor.java:997)</p> <p>at io.netty.util.internal.ThreadExecutorMap\$2.run(ThreadExecutorMap.java:74)</p> <p>at io.netty.util.concurrent.FastThreadLocalRunnable.run(FastThreadLocalRunnable.java:30)</p> <p>at java.base/java.lang.Thread.run(Thread.java:833)</p> <p>Caused by: io.netty.channel.AbstractChannel\$AnnotatedConnectException: Connection refused: no further information: localhost/[0:0:0:0:0:0:1]:64866</p> <p>Caused by: java.net.ConnectException: Connection refused: no further information</p> <p>at java.base/sun.nio.ch.Net.pollConnect(Native Method)</p> <p>at java.base/sun.nio.ch.Net.pollConnectNow(Net.java:672)</p> <p>at java.base/sun.nio.ch.SocketChannelImpl.finishConnect(SocketChannelImpl.java:946)</p> <p>at io.netty.channel.socket.nio.NioSocketChannel.doFinishConnect(NioSocketChannel.java:337)</p> <p>at io.netty.channel.nio.AbstractNioChannel\$AbstractNioUnsafe.finishConnect(AbstractNioChannel.java:334)</p> <p>at io.netty.channel.nio.NioEventLoop.processSelectedKey(NioEventLoop.java:710)</p> <p>at io.netty.channel.nio.NioEventLoop.processSelectedKeysOptimized(NioEventLoop.java:658)</p> <p>at io.netty.channel.nio.NioEventLoop.processSelectedKeys(NioEventLoop.java:584)</p> <p>at io.netty.channel.nio.NioEventLoop.run(NioEventLoop.java:496)</p> <p>at io.netty.util.concurrent.SingleThreadEventExecutor\$4.run(SingleThreadEventExecutor.java:997)</p> <p>at io.netty.util.internal.ThreadExecutorMap\$2.run(ThreadExecutorMap.java:74)</p> <p>at io.netty.util.concurrent.FastThreadLocalRunnable.run(FastThreadLocalRunnable.java:30)</p> <p>at java.base/java.lang.Thread.run(Thread.java:833)</p>		

Validating the Login functionality

<div>FAILED</div> <div>DURATION - 0.117 s</div>		<div></div>	<div>Steps</div> <div>Total - 6</div> <div>Pass - 1</div> <div>Fail - 1</div> <div>Skip - 4</div>	<div></div>
/ 10:02:25.629 AM // 10:02:25.746 AM /				
Login				

#	Step / Hook Details	Status	Duration
1	Given User Launches Chrome Browser	PASSED	0.002 s
2	When user opens LMS portal link "https://lms-frontend-phase2.herokuapp.com/login" org.openqa.selenium.remote.UnreachableBrowserException: Error communicating with the remote browser. It may have died. Build info: version: '4.4.0', revision: 'e5c75ed026a' System info: host: 'DESKTOP-HETC9O4', ip: '192.168.1.10', os.name: 'Windows 11', os.arch: 'amd64', os.version: '10.0', java.version: '17.0.3' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [2fc2feffafd280fa0069d9dfc3dcb28, get {url=https://lms-frontend-phase2.herokuapp.com/login}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 106.0.5249.119, chrome: {chromedriverVersion: 106.0.5249.61 (511755355844..., userDataDir: C:\Users\19712\AppData\Loca...}, goog:chromeOptions: {debuggerAddress: localhost:63558}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: WINDOWS, proxy: Proxy(), se:cdp: ws://localhost:63558/devtoo..., se:cdpVersion: 106.0.5249.119, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true} Session ID: 2fc2feffafd280fa0069d9dfc3dcb28 at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:571) at org.openqa.selenium.remote.RemoteWebDriver.get(RemoteWebDriver.java:310) at utilities.Helper.openPage(Helper.java:23) at stepDefinitions.LoginSteps.user_opens_lms_portal_link(LoginSteps.java:19) at ?.user opens LMS portal link "https://lms-frontend-phase2.herokuapp.com/login"(file:///C:/Users/19712/eclipse-workspace/SampleCucumberPhase2/src/test/resources/features/login.feature:5) Caused by: java.io.UncheckedIOException: java.net.ConnectException: Connection refused: no further information: localhost/[0:0:0:0:0:0:1]:64866 at org.openqa.selenium.remote.http.netty.NettyHttpHandler.makeCall(NettyHttpHandler.java:73) at org.openqa.selenium.remote.http.AddSeleniumUserAgent.lambda\$apply\$0(AddSeleniumUserAgent.java:42) at org.openqa.selenium.remote.http.Filter.lambda\$andFinally\$1(Filter.java:56) at org.openqa.selenium.remote.http.netty.NettyHttpHandler.execute(NettyHttpHandler.java:49) at org.openqa.selenium.remote.http.AddSeleniumUserAgent.lambda\$apply\$0(AddSeleniumUserAgent.java:42) at org.openqa.selenium.remote.http.Filter.lambda\$andFinally\$1(Filter.java:56) at org.openqa.selenium.remote.http.netty.NettyClient.execute(NettyClient.java:98) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:181) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:167)	FAILED	0.041 s

#	Step / Hook Details	Status	Duration
	at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:142) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:547) at org.openqa.selenium.remote.RemoteWebDriver.get(RemoteWebDriver.java:310) at utilities.Helper.openPage(Helper.java:23) at stepDefinitions.LoginSteps.user_opens_lms_portal_link(LoginSteps.java:19) at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke0(Native Method) at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke(NativeMethodAccessorImpl.java:77) at java.base/jdk.internal.reflect.DelegatingMethodAccessorImpl.invoke(DelegatingMethodAccessorImpl.java:43) at java.base/java.lang.reflect.Method.invoke(Method.java:568) at io.cucumber.java.Invoker.doInvoke(Invoker.java:66) at io.cucumber.java.Invoker.invoke(Invoker.java:24) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29) at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66) at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:86) at io.cucumber.core.runner.TestStep.run(TestStep.java:57) at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) at io.cucumber.core.runner.TestCase.run(TestCase.java:95) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.lambda\$run\$0(PickleRunners.java:151) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$3(CucumberExecutionContext.java:110) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:110) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:148) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) at org.junit.runners.ParentRunner\$3.run(ParentRunner.java:238) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:63) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:236) at org.junit.runners.ParentRunner.access\$000(ParentRunner.java:53) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:229) at org.junit.runners.ParentRunner.run(ParentRunner.java:309) at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$3.run(ParentRunner.java:238) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:63) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:236) at org.junit.runners.ParentRunner.access\$000(ParentRunner.java:53)		

#	Step / Hook Details	Status	Duration
	<pre> at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:229) at io.cucumber.junit.Cucumber\$RunBeforeAllHooks.evaluate(Cucumber.java:266) at io.cucumber.junit.Cucumber\$RunAfterAllHooks.evaluate(Cucumber.java:281) at io.cucumber.junit.Cucumber\$StartTestRun.evaluate(Cucumber.java:233) at io.cucumber.junit.Cucumber\$FinishTestRun.evaluate(Cucumber.java:248) at org.junit.runners.ParentRunner.run(ParentRunner.java:309) at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210) Caused by: java.net.ConnectException: Connection refused: no further information: localhost/[0:0:0:0:0:0:1]:64866 at org.asynchttpclient.netty.channel.NettyConnectListener.onFailure(NettyConnectListener.java:179) at org.asynchttpclient.netty.channel.NettyChannelConnector\$1.onFailure(NettyChannelConnector.java:108) at org.asynchttpclient.netty.SimpleChannelFutureListener.operationComplete(SimpleChannelFutureListener.java:28) at org.asynchttpclient.netty.SimpleChannelFutureListener.operationComplete(SimpleChannelFutureListener.java:20) at io.netty.util.concurrent.DefaultPromise.notifyListener0(DefaultPromise.java:578) at io.netty.util.concurrent.DefaultPromise.notifyListeners0(DefaultPromise.java:571) at io.netty.util.concurrent.DefaultPromise.notifyListenersNow(DefaultPromise.java:550) at io.netty.util.concurrent.DefaultPromise.notifyListeners(DefaultPromise.java:491) at io.netty.util.concurrent.DefaultPromise.setValue0(DefaultPromise.java:616) at io.netty.util.concurrent.DefaultPromise.setFailure0(DefaultPromise.java:609) at io.netty.util.concurrent.DefaultPromise.tryFailure(DefaultPromise.java:117) at io.netty.channel.nio.AbstractNioChannel\$AbstractNioUnsafe.fulfillConnectPromise(AbstractNioChannel.java:321) at io.netty.channel.nio.AbstractNioChannel\$AbstractNioUnsafe.finishConnect(AbstractNioChannel.java:337) at io.netty.channel.nio.NioEventLoop.processSelectedKey(NioEventLoop.java:710) at io.netty.channel.nio.NioEventLoop.processSelectedKeysOptimized(NioEventLoop.java:658) at io.netty.channel.nio.NioEventLoop.processSelectedKeys(NioEventLoop.java:584) at io.netty.channel.nio.NioEventLoop.run(NioEventLoop.java:496) at io.netty.util.concurrent.SingleThreadEventExecutor\$4.run(SingleThreadEventExecutor.java:997) at io.netty.util.internal.ThreadExecutorMap\$2.run(ThreadExecutorMap.java:74) at io.netty.util.concurrent.FastThreadLocalRunnable.run(FastThreadLocalRunnable.java:30) at java.base/java.lang.Thread.run(Thread.java:833) Caused by: io.netty.channel.AbstractChannel\$AnnotatedConnectException: Connection refused: no further information: localhost/[0:0:0:0:0:0:1]:64866 Caused by: java.net.ConnectException: Connection refused: no further information at java.base/sun.nio.ch.Net.pollConnect(Native Method) at java.base/sun.nio.ch.Net.pollConnectNow(Net.java:672) at java.base/sun.nio.ch.SocketChannelImpl.finishConnect(SocketChannelImpl.java:946) at io.netty.channel.socket.nio.NioSocketChannel.doFinishConnect(NioSocketChannel.java:337) at io.netty.channel.nio.AbstractNioChannel\$AbstractNioUnsafe.finishConnect(AbstractNioChannel.java:334) </pre>		

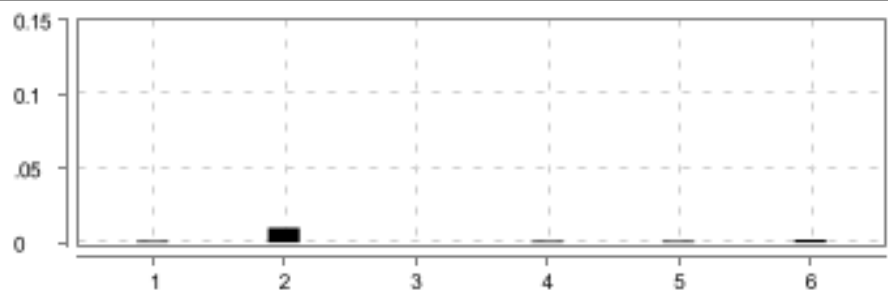

#	Step / Hook Details	Status	Duration
	at io.netty.channel.nio.NioEventLoop.processSelectedKey(NioEventLoop.java:710) at io.netty.channel.nio.NioEventLoop.processSelectedKeysOptimized(NioEventLoop.java:658) at io.netty.channel.nio.NioEventLoop.processSelectedKeys(NioEventLoop.java:584) at io.netty.channel.nio.NioEventLoop.run(NioEventLoop.java:496) at io.netty.util.concurrent.SingleThreadEventExecutor\$4.run(SingleThreadEventExecutor.java:997) at io.netty.util.internal.ThreadExecutorMap\$2.run(ThreadExecutorMap.java:74) at io.netty.util.concurrent.FastThreadLocalRunnable.run(FastThreadLocalRunnable.java:30) at java.base/java.lang.Thread.run(Thread.java:833) * Not displayable characters are replaced by '?'.		
3	Then User should see the Login page title "LMS"	SKIPPED	0.007 s
4	When User enters Username as "Valid" and Password as ""	SKIPPED	0.003 s
5	Then User clicks on Login button with expected status as "Missing Password"	SKIPPED	0.001 s
6	Then User should see the LMS Home page on successful login status "Missing Password"	SKIPPED	0.004 s
	AFTER - stepDefinitions.Hooks.tearDown(io.cucumber.java.Scenario) org.openqa.selenium.remote.UnreachableBrowserException: Error communicating with the remote browser. It may have died. Build info: version: '4.4.0', revision: 'e5c75ed026a' System info: host: 'DESKTOP-HETC9O4', ip: '192.168.1.10', os.name: 'Windows 11', os.arch: 'amd64', os.version: '10.0', java.version: '17.0.3' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [2fc2feffafd280fa0069d9dfc3dcb28, screenshot {}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 106.0.5249.119, chrome: {chromedriverVersion: 106.0.5249.61 (511755355844..., userDataDir: C:\Users\19712\AppData\Loca...}, goog:chromeOptions: {debuggerAddress: localhost:63558}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: WINDOWS, proxy: Proxy(), se:cdp: ws://localhost:63558/devtoo..., se:cdpVersion: 106.0.5249.119, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true} Session ID: 2fc2feffafd280fa0069d9dfc3dcb28 at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:571) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:602) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:606) at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:331) at stepDefinitions.Hooks.tearDown(Hooks.java:22) Caused by: java.io.UncheckedIOException: java.net.ConnectException: Connection refused: no further information: localhost/[0:0:0:0:0:0:1]:64866 at org.openqa.selenium.remote.http.netty.NettyHttpHandler.makeCall(NettyHttpHandler.java:73) at org.openqa.selenium.remote.http.AddSeleniumUserAgent.lambda\$apply\$0(AddSeleniumUserAgent.java:42) at org.openqa.selenium.remote.http.Filter.lambda\$andFinally\$1(Filter.java:56) at org.openqa.selenium.remote.http.netty.NettyHttpHandler.execute(NettyHttpHandler.java:49) at org.openqa.selenium.remote.http.AddSeleniumUserAgent.lambda\$apply\$0(AddSeleniumUserAgent.java:42) at org.openqa.selenium.remote.http.Filter.lambda\$andFinally\$1(Filter.java:56) at org.openqa.selenium.remote.http.netty.NettyClient.execute(NettyClient.java:98) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:181) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:167) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:142)	FAILED	0.011 s

#	Step / Hook Details	Status	Duration
	at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:547) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:602) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:606) at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:331) at stepDefinitions.Hooks.tearDown(Hooks.java:22) at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke0(Native Method) at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke(NativeMethodAccessorImpl.java:77) at java.base/jdk.internal.reflect.DelegatingMethodAccessorImpl.invoke(DelegatingMethodAccessorImpl.java:43) at java.base/java.lang.reflect.Method.invoke(Method.java:568) at io.cucumber.java.Invoker.doInvoke(Invoker.java:66) at io.cucumber.java.Invoker.invokeStatic(Invoker.java:80) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:45) at io.cucumber.java.JavaHookDefinition.execute(JavaHookDefinition.java:64) at io.cucumber.core.runner.CoreHookDefinition.execute(CoreHookDefinition.java:46) at io.cucumber.core.runner.HookDefinitionMatch.runStep(HookDefinitionMatch.java:21) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:86) at io.cucumber.core.runner.TestStep.run(TestStep.java:57) at io.cucumber.core.runner.TestCase.run(TestCase.java:101) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.lambda\$run\$0(PickleRunners.java:151) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$3(CucumberExecutionContext.java:110) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:110) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:148) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) at org.junit.runners.ParentRunner\$3.run(ParentRunner.java:238) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:63) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:236) at org.junit.runners.ParentRunner.access\$000(ParentRunner.java:53) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:229) at org.junit.runners.ParentRunner.run(ParentRunner.java:309) at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$3.run(ParentRunner.java:238) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:63) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:236) at org.junit.runners.ParentRunner.access\$000(ParentRunner.java:53) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:229)		

#	Step / Hook Details	Status	Duration
	<p>at io.cucumber.junit.Cucumber\$RunBeforeAllHooks.evaluate(Cucumber.java:266)</p> <p>at io.cucumber.junit.Cucumber\$RunAfterAllHooks.evaluate(Cucumber.java:281)</p> <p>at io.cucumber.junit.Cucumber\$StartTestRun.evaluate(Cucumber.java:233)</p> <p>at io.cucumber.junit.Cucumber\$FinishTestRun.evaluate(Cucumber.java:248)</p> <p>at org.junit.runners.ParentRunner.run(ParentRunner.java:309)</p> <p>at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93)</p> <p>at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40)</p> <p>at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529)</p> <p>at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756)</p> <p>at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452)</p> <p>at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210)</p> <p>Caused by: java.net.ConnectException: Connection refused: no further information: localhost/[0:0:0:0:0:0:1]:64866</p> <p>at org.asynchttpclient.netty.channel.NettyConnectListener.onFailure(NettyConnectListener.java:179)</p> <p>at org.asynchttpclient.netty.channel.NettyChannelConnector\$1.onFailure(NettyChannelConnector.java:108)</p> <p>at org.asynchttpclient.netty.SimpleChannelFutureListener.operationComplete(SimpleChannelFutureListener.java:28)</p> <p>at org.asynchttpclient.netty.SimpleChannelFutureListener.operationComplete(SimpleChannelFutureListener.java:20)</p> <p>at io.netty.util.concurrent.DefaultPromise.notifyListener0(DefaultPromise.java:578)</p> <p>at io.netty.util.concurrent.DefaultPromise.notifyListeners0(DefaultPromise.java:571)</p> <p>at io.netty.util.concurrent.DefaultPromise.notifyListenersNow(DefaultPromise.java:550)</p> <p>at io.netty.util.concurrent.DefaultPromise.notifyListeners(DefaultPromise.java:491)</p> <p>at io.netty.util.concurrent.DefaultPromise.setValue0(DefaultPromise.java:616)</p> <p>at io.netty.util.concurrent.DefaultPromise.setFailure0(DefaultPromise.java:609)</p> <p>at io.netty.util.concurrent.DefaultPromise.tryFailure(DefaultPromise.java:117)</p> <p>at io.netty.channel.nio.AbstractNioChannel\$AbstractNioUnsafe.fulfillConnectPromise(AbstractNioChannel.java:321)</p> <p>at io.netty.channel.nio.AbstractNioChannel\$AbstractNioUnsafe.finishConnect(AbstractNioChannel.java:337)</p> <p>at io.netty.channel.nio.NioEventLoop.processSelectedKey(NioEventLoop.java:710)</p> <p>at io.netty.channel.nio.NioEventLoop.processSelectedKeysOptimized(NioEventLoop.java:658)</p> <p>at io.netty.channel.nio.NioEventLoop.processSelectedKeys(NioEventLoop.java:584)</p> <p>at io.netty.channel.nio.NioEventLoop.run(NioEventLoop.java:496)</p> <p>at io.netty.util.concurrent.SingleThreadEventExecutor\$4.run(SingleThreadEventExecutor.java:997)</p> <p>at io.netty.util.internal.ThreadExecutorMap\$2.run(ThreadExecutorMap.java:74)</p> <p>at io.netty.util.concurrent.FastThreadLocalRunnable.run(FastThreadLocalRunnable.java:30)</p> <p>at java.base/java.lang.Thread.run(Thread.java:833)</p> <p>Caused by: io.netty.channel.AbstractChannel\$AnnotatedConnectException: Connection refused: no further information: localhost/[0:0:0:0:0:0:1]:64866</p> <p>Caused by: java.net.ConnectException: Connection refused: no further information</p> <p>at java.base/sun.nio.ch.Net.pollConnect(Native Method)</p> <p>at java.base/sun.nio.ch.Net.pollConnectNow(Net.java:672)</p> <p>at java.base/sun.nio.ch.SocketChannelImpl.finishConnect(SocketChannelImpl.java:946)</p> <p>at io.netty.channel.socket.nio.NioSocketChannel.doFinishConnect(NioSocketChannel.java:337)</p> <p>at io.netty.channel.nio.AbstractNioChannel\$AbstractNioUnsafe.finishConnect(AbstractNioChannel.java:334)</p> <p>at io.netty.channel.nio.NioEventLoop.processSelectedKey(NioEventLoop.java:710)</p>		

#	Step / Hook Details	Status	Duration
	at io.netty.channel.nio.NioEventLoop.processSelectedKeysOptimized(NioEventLoop.java:658) at io.netty.channel.nio.NioEventLoop.processSelectedKeys(NioEventLoop.java:584) at io.netty.channel.nio.NioEventLoop.run(NioEventLoop.java:496) at io.netty.util.concurrent.SingleThreadEventExecutor\$4.run(SingleThreadEventExecutor.java:997) at io.netty.util.internal.ThreadExecutorMap\$2.run(ThreadExecutorMap.java:74) at io.netty.util.concurrent.FastThreadLocalRunnable.run(FastThreadLocalRunnable.java:30) at java.base/java.lang.Thread.run(Thread.java:833)		

Validating the Login functionality

<div>FAILED</div> <div>DURATION - 0.049 s</div>		<div></div>	<div>Steps</div> <div>Total - 6</div> <div>Pass - 1</div> <div>Fail - 1</div> <div>Skip - 4</div>	<div></div>
<div>/ 10:02:25.799 AM // 10:02:25.848 AM /</div>				
<div>Login</div>				

#	Step / Hook Details	Status	Duration
1	Given User Launches Chrome Browser	PASSED	0.001 s
2	When user opens LMS portal link "https://lms-frontend-phase2.herokuapp.com/login" org.openqa.selenium.remote.UnreachableBrowserException: Error communicating with the remote browser. It may have died. Build info: version: '4.4.0', revision: 'e5c75ed026a' System info: host: 'DESKTOP-HETC9O4', ip: '192.168.1.10', os.name: 'Windows 11', os.arch: 'amd64', os.version: '10.0', java.version: '17.0.3' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [2fc2feffafd280fa0069d9dfc3dcb28, get {url=https://lms-frontend-phase2.herokuapp.com/login}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 106.0.5249.119, chrome: {chromedriverVersion: 106.0.5249.61 (511755355844..., userDataDir: C:\Users\19712\AppData\Loca...}, goog:chromeOptions: {debuggerAddress: localhost:63558}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: WINDOWS, proxy: Proxy(), se.cdp: ws://localhost:63558/devtoo..., se.cdpVersion: 106.0.5249.119, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true} Session ID: 2fc2feffafd280fa0069d9dfc3dcb28 at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:571) at org.openqa.selenium.remote.RemoteWebDriver.get(RemoteWebDriver.java:310) at utilities.Helper.openPage(Helper.java:23) at stepDefinitions.LoginSteps.user_opens_lms_portal_link(LoginSteps.java:19) at ? user opens LMS portal link "https://lms-frontend-phase2.herokuapp.com/login"(file:///C:/Users/19712/eclipse-workspace/SampleCucumberPhase2/src/test/resources/features/login.feature:5) Caused by: java.io.UncheckedIOException: java.net.ConnectException: Connection refused: no further information: localhost/[0:0:0:0:0:0:1]:64866	FAILED	0.010 s

#	Step / Hook Details	Status	Duration
	at org.openqa.selenium.remote.http.netty.NettyHttpHandler.makeCall(NettyHttpHandler.java:73) at org.openqa.selenium.remote.http.AddSeleniumUserAgent.lambda\$apply\$0(AddSeleniumUserAgent.java:42) at org.openqa.selenium.remote.http.Filter.lambda\$andFinally\$1(Filter.java:56) at org.openqa.selenium.remote.http.netty.NettyHttpHandler.execute(NettyHttpHandler.java:49) at org.openqa.selenium.remote.http.AddSeleniumUserAgent.lambda\$apply\$0(AddSeleniumUserAgent.java:42) at org.openqa.selenium.remote.http.Filter.lambda\$andFinally\$1(Filter.java:56) at org.openqa.selenium.remote.http.netty.NettyClient.execute(NettyClient.java:98) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:181) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:167) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:142) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:547) at org.openqa.selenium.remote.RemoteWebDriver.get(RemoteWebDriver.java:310) at utilities.Helper.openPage(Helper.java:23) at stepDefinitions.LoginSteps.user_opens_lms_portal_link(LoginSteps.java:19) at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke0(Native Method) at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke(NativeMethodAccessorImpl.java:77) at java.base/jdk.internal.reflect.DelegatingMethodAccessorImpl.invoke(DelegatingMethodAccessorImpl.java:43) at java.base/java.lang.reflect.Method.invoke(Method.java:568) at io.cucumber.java.Invoker.doInvoke(Invoker.java:66) at io.cucumber.java.Invoker.invoke(Invoker.java:24) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29) at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66) at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:86) at io.cucumber.core.runner.TestStep.run(TestStep.java:57) at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) at io.cucumber.core.runner.TestCase.run(TestCase.java:95) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.lambda\$run\$0(PickleRunners.java:151) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$3(CucumberExecutionContext.java:110) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:110) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:148) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) at org.junit.runners.ParentRunner\$3.run(ParentRunner.java:238) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:63) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:236) at org.junit.runners.ParentRunner.access\$000(ParentRunner.java:53)		

#	Step / Hook Details	Status	Duration
	<pre> at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:229) at org.junit.runners.ParentRunner.run(ParentRunner.java:309) at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$3.run(ParentRunner.java:238) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:63) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:236) at org.junit.runners.ParentRunner.access\$000(ParentRunner.java:53) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:229) at io.cucumber.junit.Cucumber\$RunBeforeAllHooks.evaluate(Cucumber.java:266) at io.cucumber.junit.Cucumber\$RunAfterAllHooks.evaluate(Cucumber.java:281) at io.cucumber.junit.Cucumber\$StartTestRun.evaluate(Cucumber.java:233) at io.cucumber.junit.Cucumber\$FinishTestRun.evaluate(Cucumber.java:248) at org.junit.runners.ParentRunner.run(ParentRunner.java:309) at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210) Caused by: java.net.ConnectException: Connection refused: no further information: localhost/[0:0:0:0:0:0:1]:64866 at org.asynchttpclient.netty.channel.NettyConnectListener.onFailure(NettyConnectListener.java:179) at org.asynchttpclient.netty.channel.NettyChannelConnector\$1.onFailure(NettyChannelConnector.java:108) at org.asynchttpclient.netty.SimpleChannelFutureListener.operationComplete(SimpleChannelFutureListener.java:28) at org.asynchttpclient.netty.SimpleChannelFutureListener.operationComplete(SimpleChannelFutureListener.java:20) at io.netty.util.concurrent.DefaultPromise.notifyListener0(DefaultPromise.java:578) at io.netty.util.concurrent.DefaultPromise.notifyListeners0(DefaultPromise.java:571) at io.netty.util.concurrent.DefaultPromise.notifyListenersNow(DefaultPromise.java:550) at io.netty.util.concurrent.DefaultPromise.notifyListeners(DefaultPromise.java:491) at io.netty.util.concurrent.DefaultPromise.setValue0(DefaultPromise.java:616) at io.netty.util.concurrent.DefaultPromise.setFailure0(DefaultPromise.java:609) at io.netty.util.concurrent.DefaultPromise.tryFailure(DefaultPromise.java:117) at io.netty.channel.nio.AbstractNioChannel\$AbstractNioUnsafe.fulfillConnectPromise(AbstractNioChannel.java:321) at io.netty.channel.nio.AbstractNioChannel\$AbstractNioUnsafe.finishConnect(AbstractNioChannel.java:337) at io.netty.channel.nio.NioEventLoop.processSelectedKey(NioEventLoop.java:710) at io.netty.channel.nio.NioEventLoop.processSelectedKeysOptimized(NioEventLoop.java:658) at io.netty.channel.nio.NioEventLoop.processSelectedKeys(NioEventLoop.java:584) at io.netty.channel.nio.NioEventLoop.run(NioEventLoop.java:496) at io.netty.util.concurrent.SingleThreadEventExecutor\$4.run(SingleThreadEventExecutor.java:997) at io.netty.util.internal.ThreadExecutorMap\$2.run(ThreadExecutorMap.java:74) </pre>		

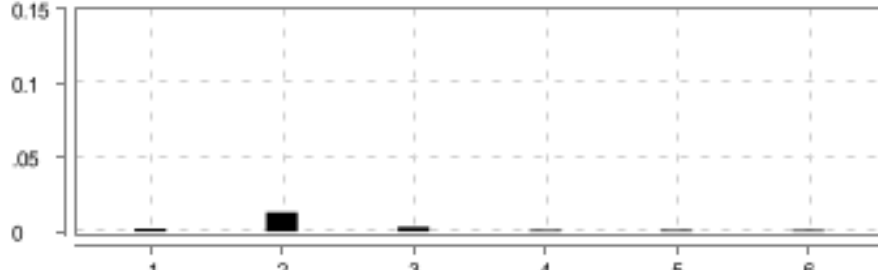

#	Step / Hook Details	Status	Duration
	<p>at io.netty.util.concurrent.FastThreadLocalRunnable.run(FastThreadLocalRunnable.java:30) at java.base/java.lang.Thread.run(Thread.java:833) Caused by: io.netty.channel.AbstractChannel\$AnnotatedConnectException: Connection refused: no further information: localhost/[0:0:0:0:0:0:1]:64866 Caused by: java.net.ConnectException: Connection refused: no further information at java.base/sun.nio.ch.Net.pollConnect(Native Method) at java.base/sun.nio.ch.Net.pollConnectNow(Net.java:672) at java.base/sun.nio.ch.SocketChannelImpl.finishConnect(SocketChannelImpl.java:946) at io.netty.channel.socket.nio.NioSocketChannel.doFinishConnect(NioSocketChannel.java:337) at io.netty.channel.nio.AbstractNioChannel\$AbstractNioUnsafe.finishConnect(AbstractNioChannel.java:334) at io.netty.channel.nio.NioEventLoop.processSelectedKey(NioEventLoop.java:710) at io.netty.channel.nio.NioEventLoop.processSelectedKeysOptimized(NioEventLoop.java:658) at io.netty.channel.nio.NioEventLoop.processSelectedKeys(NioEventLoop.java:584) at io.netty.channel.nio.NioEventLoop.run(NioEventLoop.java:496) at io.netty.util.concurrent.SingleThreadEventExecutor\$4.run(SingleThreadEventExecutor.java:997) at io.netty.util.internal.ThreadExecutorMap\$2.run(ThreadExecutorMap.java:74) at io.netty.util.concurrent.FastThreadLocalRunnable.run(FastThreadLocalRunnable.java:30) at java.base/java.lang.Thread.run(Thread.java:833) * Not displayable characters are replaced by '?'. </p>		
3	Then User should see the Login page title "LMS"	SKIPPED	0.000 s
4	When User enters Username as "" and Password as "Valid"	SKIPPED	0.001 s
5	Then User clicks on Login button with expected status as "Please enter your user name"	SKIPPED	0.001 s
6	Then User should see the LMS Home page on successful login status "Please enter your user name"	SKIPPED	0.002 s
	<p>AFTER - stepDefinitions.Hooks.tearDown(io.cucumber.java.Scenario)</p> <p>org.openqa.selenium.remote.UnreachableBrowserException: Error communicating with the remote browser. It may have died. Build info: version: '4.4.0', revision: 'e5c75ed026a' System info: host: 'DESKTOP-HETC9O4', ip: '192.168.1.10', os.name: 'Windows 11', os.arch: 'amd64', os.version: '10.0', java.version: '17.0.3' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [2fc2feffafd280fa0069d9dfc3dcb28, screenshot {}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 106.0.5249.119, chrome: {chromedriverVersion: 106.0.5249.61 (511755355844..., userDataDir: C:\Users\19712\AppData\Loca...}, goog:chromeOptions: {debuggerAddress: localhost:63558}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: WINDOWS, proxy: Proxy(), se:cdp: ws://localhost:63558/devtoo..., se:cdpVersion: 106.0.5249.119, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true} Session ID: 2fc2feffafd280fa0069d9dfc3dcb28 at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:571) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:602) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:606) at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:331) at stepDefinitions.Hooks.tearDown(Hooks.java:22) Caused by: java.io.UncheckedIOException: java.net.ConnectException: Connection refused: no further information: localhost/[0:0:0:0:0:0:1]:64866 at org.openqa.selenium.remote.http.netty.NettyHttpHandler.makeCall(NettyHttpHandler.java:73) </p>	FAILED	0.027 s

#	Step / Hook Details	Status	Duration
	at org.openqa.selenium.remote.http.AddSeleniumUserAgent.lambda\$apply\$0(AddSeleniumUserAgent.java:42) at org.openqa.selenium.remote.http.Filter.lambda\$andFinally\$1(Filter.java:56) at org.openqa.selenium.remote.http.netty.NettyHttpHandler.execute(NettyHttpHandler.java:49) at org.openqa.selenium.remote.http.AddSeleniumUserAgent.lambda\$apply\$0(AddSeleniumUserAgent.java:42) at org.openqa.selenium.remote.http.Filter.lambda\$andFinally\$1(Filter.java:56) at org.openqa.selenium.remote.http.netty.NettyClient.execute(NettyClient.java:98) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:181) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:167) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:142) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:547) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:602) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:606) at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:331) at stepDefinitions.Hooks.tearDown(Hooks.java:22) at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke0(Native Method) at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke(NativeMethodAccessorImpl.java:77) at java.base/jdk.internal.reflect.DelegatingMethodAccessorImpl.invoke(DelegatingMethodAccessorImpl.java:43) at java.base/java.lang.reflect.Method.invoke(Method.java:568) at io.cucumber.java.Invoker.doInvoke(Invoker.java:66) at io.cucumber.java.Invoker.invokeStatic(Invoker.java:80) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:45) at io.cucumber.java.JavaHookDefinition.execute(JavaHookDefinition.java:64) at io.cucumber.core.runner.CoreHookDefinition.execute(CoreHookDefinition.java:46) at io.cucumber.core.runner.HookDefinitionMatch.runStep(HookDefinitionMatch.java:21) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:86) at io.cucumber.core.runner.TestStep.run(TestStep.java:57) at io.cucumber.core.runner.TestCase.run(TestCase.java:101) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.lambda\$run\$0(PickleRunners.java:151) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$3(CucumberExecutionContext.java:110) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:110) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:148) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) at org.junit.runners.ParentRunner\$3.run(ParentRunner.java:238) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:63) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:236) at org.junit.runners.ParentRunner.access\$000(ParentRunner.java:53) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:229)		

#	Step / Hook Details	Status	Duration
	<pre> at org.junit.runners.ParentRunner.run(ParentRunner.java:309) at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$3.run(ParentRunner.java:238) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:63) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:236) at org.junit.runners.ParentRunner.access\$000(ParentRunner.java:53) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:229) at io.cucumber.junit.Cucumber\$RunBeforeAllHooks.evaluate(Cucumber.java:266) at io.cucumber.junit.Cucumber\$RunAfterAllHooks.evaluate(Cucumber.java:281) at io.cucumber.junit.Cucumber\$StartTestRun.evaluate(Cucumber.java:233) at io.cucumber.junit.Cucumber\$FinishTestRun.evaluate(Cucumber.java:248) at org.junit.runners.ParentRunner.run(ParentRunner.java:309) at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210) Caused by: java.net.ConnectException: Connection refused: no further information: localhost/[0:0:0:0:0:0:1]:64866 at org.asynchttpclient.netty.channel.NettyConnectListener.onFailure(NettyConnectListener.java:179) at org.asynchttpclient.netty.channel.NettyChannelConnector\$1.onFailure(NettyChannelConnector.java:108) at org.asynchttpclient.netty.SimpleChannelFutureListener.operationComplete(SimpleChannelFutureListener.java:28) at org.asynchttpclient.netty.SimpleChannelFutureListener.operationComplete(SimpleChannelFutureListener.java:20) at io.netty.util.concurrent.DefaultPromise.notifyListener0(DefaultPromise.java:578) at io.netty.util.concurrent.DefaultPromise.notifyListeners0(DefaultPromise.java:571) at io.netty.util.concurrent.DefaultPromise.notifyListenersNow(DefaultPromise.java:550) at io.netty.util.concurrent.DefaultPromise.notifyListeners(DefaultPromise.java:491) at io.netty.util.concurrent.DefaultPromise.setValue0(DefaultPromise.java:616) at io.netty.util.concurrent.DefaultPromise.setFailure0(DefaultPromise.java:609) at io.netty.util.concurrent.DefaultPromise.tryFailure(DefaultPromise.java:117) at io.netty.channel.nio.AbstractNioChannel\$AbstractNioUnsafe.fulfillConnectPromise(AbstractNioChannel.java:321) at io.netty.channel.nio.AbstractNioChannel\$AbstractNioUnsafe.finishConnect(AbstractNioChannel.java:337) at io.netty.channel.nio.NioEventLoop.processSelectedKey(NioEventLoop.java:710) at io.netty.channel.nio.NioEventLoop.processSelectedKeysOptimized(NioEventLoop.java:658) at io.netty.channel.nio.NioEventLoop.processSelectedKeys(NioEventLoop.java:584) at io.netty.channel.nio.NioEventLoop.run(NioEventLoop.java:496) at io.netty.util.concurrent.SingleThreadEventExecutor\$4.run(SingleThreadEventExecutor.java:997) at io.netty.util.internal.ThreadExecutorMap\$2.run(ThreadExecutorMap.java:74) at io.netty.util.concurrent.FastThreadLocalRunnable.run(FastThreadLocalRunnable.java:30) </pre>		

#	Step / Hook Details	Status	Duration
	<pre> at java.base/java.lang.Thread.run(Thread.java:833) Caused by: io.netty.channel.AbstractChannel\$AnnotatedConnectException: Connection refused: no further information: localhost/[0:0:0:0:0:0:0:0:1]:64866 Caused by: java.net.ConnectException: Connection refused: no further information at java.base/sun.nio.ch.Net.pollConnect(Native Method) at java.base/sun.nio.ch.Net.pollConnectNow(Net.java:672) at java.base/sun.nio.ch.SocketChannelImpl.finishConnect(SocketChannelImpl.java:946) at io.netty.channel.socket.nio.NioSocketChannel.doFinishConnect(NioSocketChannel.java:337) at io.netty.channel.nio.AbstractNioChannel\$AbstractNioUnsafe.finishConnect(AbstractNioChannel.java:334) at io.netty.channel.nio.NioEventLoop.processSelectedKey(NioEventLoop.java:710) at io.netty.channel.nio.NioEventLoop.processSelectedKeysOptimized(NioEventLoop.java:658) at io.netty.channel.nio.NioEventLoop.processSelectedKeys(NioEventLoop.java:584) at io.netty.channel.nio.NioEventLoop.run(NioEventLoop.java:496) at io.netty.util.concurrent.SingleThreadEventExecutor\$4.run(SingleThreadEventExecutor.java:997) at io.netty.util.internal.ThreadExecutorMap\$2.run(ThreadExecutorMap.java:74) at io.netty.util.concurrent.FastThreadLocalRunnable.run(FastThreadLocalRunnable.java:30) at java.base/java.lang.Thread.run(Thread.java:833) </pre>		

Validating the Login functionality

FAILED	DURATION - 0.037 s		Steps Total - 6 Pass - 1 Fail - 1 Skip - 4	
/ 10:02:25.898 AM // 10:02:25.935 AM /				
Login				

#	Step / Hook Details	Status	Duration
1	Given User Launches Chrome Browser	PASSED	0.002 s
2	When user opens LMS portal link "https://lms-frontend-phase2.herokuapp.com/login" <pre> org.openqa.selenium.remote.UnreachableBrowserException: Error communicating with the remote browser. It may have died. Build info: version: '4.4.0', revision: 'e5c75ed026a' System info: host: 'DESKTOP-HETC9O4', ip: '192.168.1.10', os.name: 'Windows 11', os.arch: 'amd64', os.version: '10.0', java.version: '17.0.3' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [2fc2feffafd280fa0069d9dfc3dcb28, get {url=https://lms-frontend-phase2.herokuapp.com/login}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 106.0.5249.119, chrome: {chromedriverVersion: 106.0.5249.61 (511755355844..., userDataDir: C:\Users\19712\AppData\Loca...}, goog:chromeOptions: {debuggerAddress: localhost:63558}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: WINDOWS, proxy: Proxy(), se.cdp: ws://localhost:63558/devtoo..., se.cdpVersion: 106.0.5249.119, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, </pre>	FAILED	0.013 s

#	Step / Hook Details	Status	Duration
	<p>webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true} Session ID: 2fc2feffafd280fa0069d9dffc3dcb28</p> <p>at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:571) at org.openqa.selenium.remote.RemoteWebDriver.get(RemoteWebDriver.java:310) at utilities.Helper.openPage(Helper.java:23) at stepDefinitions.LoginSteps.user_opens_lms_portal_link(LoginSteps.java:19) at ?.user opens LMS portal link "https://lms-frontend-phase2.herokuapp.com/login"(file:///C:/Users/19712/eclipse-workspace/SampleCucumberPhase2/src/test/resources/features/login.feature:5) Caused by: java.io.UncheckedIOException: java.net.ConnectException: Connection refused: no further information: localhost/[0:0:0:0:0:0:1]:64866</p> <p>at org.openqa.selenium.remote.http.netty.NettyHttpHandler.makeCall(NettyHttpHandler.java:73) at org.openqa.selenium.remote.http.AddSeleniumUserAgent.lambda\$apply\$0(AddSeleniumUserAgent.java:42) at org.openqa.selenium.remote.http.Filter.lambda\$andFinally\$1(Filter.java:56) at org.openqa.selenium.remote.http.netty.NettyHttpHandler.execute(NettyHttpHandler.java:49) at org.openqa.selenium.remote.http.AddSeleniumUserAgent.lambda\$apply\$0(AddSeleniumUserAgent.java:42) at org.openqa.selenium.remote.http.Filter.lambda\$andFinally\$1(Filter.java:56) at org.openqa.selenium.remote.http.netty.NettyClient.execute(NettyClient.java:98) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:181) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:167) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:142) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:547) at org.openqa.selenium.remote.RemoteWebDriver.get(RemoteWebDriver.java:310) at utilities.Helper.openPage(Helper.java:23) at stepDefinitions.LoginSteps.user_opens_lms_portal_link(LoginSteps.java:19) at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke0(Native Method) at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke(NativeMethodAccessorImpl.java:77) at java.base/jdk.internal.reflect.DelegatingMethodAccessorImpl.invoke(DelegatingMethodAccessorImpl.java:43) at java.base/java.lang.reflect.Method.invoke(Method.java:568) at io.cucumber.java.Invoker.doInvoke(Invoker.java:66) at io.cucumber.java.Invoker.invoke(Invoker.java:24) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29) at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66) at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:86) at io.cucumber.core.runner.TestStep.run(TestStep.java:57) at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) at io.cucumber.core.runner.TestCase.run(TestCase.java:95) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.lambda\$run\$0(PickleRunners.java:151)</p>		

#	Step / Hook Details	Status	Duration
	<p> at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$3(CucumberExecutionContext.java:110) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:110) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:148) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) at org.junit.runners.ParentRunner\$3.run(ParentRunner.java:238) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:63) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:236) at org.junit.runners.ParentRunner.access\$000(ParentRunner.java:53) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:229) at org.junit.runners.ParentRunner.run(ParentRunner.java:309) at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$3.run(ParentRunner.java:238) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:63) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:236) at org.junit.runners.ParentRunner.access\$000(ParentRunner.java:53) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:229) at io.cucumber.junit.Cucumber\$RunBeforeAllHooks.evaluate(Cucumber.java:266) at io.cucumber.junit.Cucumber\$RunAfterAllHooks.evaluate(Cucumber.java:281) at io.cucumber.junit.Cucumber\$StartTestRun.evaluate(Cucumber.java:233) at io.cucumber.junit.Cucumber\$FinishTestRun.evaluate(Cucumber.java:248) at org.junit.runners.ParentRunner.run(ParentRunner.java:309) at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210) Caused by: java.net.ConnectException: Connection refused: no further information: localhost/[0:0:0:0:0:0:1]:64866 at org.asynchttpclient.netty.channel.NettyConnectListener.onFailure(NettyConnectListener.java:179) at org.asynchttpclient.netty.channel.NettyChannelConnector\$1.onFailure(NettyChannelConnector.java:108) at org.asynchttpclient.netty.SimpleChannelFutureListener.operationComplete(SimpleChannelFutureListener.java:28) at org.asynchttpclient.netty.SimpleChannelFutureListener.operationComplete(SimpleChannelFutureListener.java:20) at io.netty.util.concurrent.DefaultPromise.notifyListener0(DefaultPromise.java:578) at io.netty.util.concurrent.DefaultPromise.notifyListeners0(DefaultPromise.java:571) at io.netty.util.concurrent.DefaultPromise.notifyListenersNow(DefaultPromise.java:550) at io.netty.util.concurrent.DefaultPromise.notifyListeners(DefaultPromise.java:491) at io.netty.util.concurrent.DefaultPromise.setValue0(DefaultPromise.java:616) </p>		

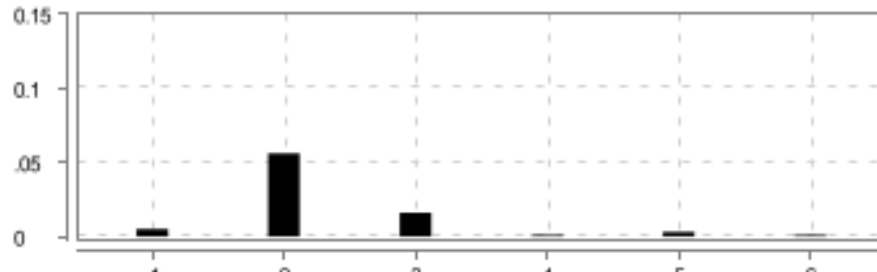

#	Step / Hook Details	Status	Duration
	<pre> at io.netty.util.concurrent.DefaultPromise.setFailure0(DefaultPromise.java:609) at io.netty.util.concurrent.DefaultPromise.tryFailure(DefaultPromise.java:117) at io.netty.channel.nio.AbstractNioChannel\$AbstractNioUnsafe.fulfillConnectPromise(AbstractNioChannel.java:321) at io.netty.channel.nio.AbstractNioChannel\$AbstractNioUnsafe.finishConnect(AbstractNioChannel.java:337) at io.netty.channel.nio.NioEventLoop.processSelectedKey(NioEventLoop.java:710) at io.netty.channel.nio.NioEventLoop.processSelectedKeysOptimized(NioEventLoop.java:658) at io.netty.channel.nio.NioEventLoop.processSelectedKeys(NioEventLoop.java:584) at io.netty.channel.nio.NioEventLoop.run(NioEventLoop.java:496) at io.netty.util.concurrent.SingleThreadEventExecutor\$4.run(SingleThreadEventExecutor.java:997) at io.netty.util.internal.ThreadExecutorMap\$2.run(ThreadExecutorMap.java:74) at io.netty.util.concurrent.FastThreadLocalRunnable.run(FastThreadLocalRunnable.java:30) at java.base/java.lang.Thread.run(Thread.java:833) </pre> <p>Caused by: io.netty.channel.AbstractChannel\$AnnotatedConnectException: Connection refused: no further information: localhost/[0:0:0:0:0:0:1]:64866 Caused by: java.net.ConnectException: Connection refused: no further information</p> <pre> at java.base/sun.nio.ch.Net.pollConnect(Native Method) at java.base/sun.nio.ch.Net.pollConnectNow(Net.java:672) at java.base/sun.nio.ch.SocketChannelImpl.finishConnect(SocketChannelImpl.java:946) at io.netty.channel.socket.nio.NioSocketChannel.doFinishConnect(NioSocketChannel.java:337) at io.netty.channel.nio.AbstractNioChannel\$AbstractNioUnsafe.finishConnect(AbstractNioChannel.java:334) at io.netty.channel.nio.NioEventLoop.processSelectedKey(NioEventLoop.java:710) at io.netty.channel.nio.NioEventLoop.processSelectedKeysOptimized(NioEventLoop.java:658) at io.netty.channel.nio.NioEventLoop.processSelectedKeys(NioEventLoop.java:584) at io.netty.channel.nio.NioEventLoop.run(NioEventLoop.java:496) at io.netty.util.concurrent.SingleThreadEventExecutor\$4.run(SingleThreadEventExecutor.java:997) at io.netty.util.internal.ThreadExecutorMap\$2.run(ThreadExecutorMap.java:74) at io.netty.util.concurrent.FastThreadLocalRunnable.run(FastThreadLocalRunnable.java:30) at java.base/java.lang.Thread.run(Thread.java:833) </pre> <p>* Not displayable characters are replaced by '?'. </p>		
3	Then User should see the Login page title "LMS"	SKIPPED	0.003 s
4	When User enters Username as "Valid" and Password as "Invalid"	SKIPPED	0.001 s
5	Then User clicks on Login button with expected status as "Invalid username and password Please try again"	SKIPPED	0.001 s
6	Then User should see the LMS Home page on successful login status "Invalid username and password Please try again"	SKIPPED	0.001 s
	<p>AFTER - stepDefinitions.Hooks.tearDown(io.cucumber.java.Scenario)</p> <pre> org.openqa.selenium.remote.UnreachableBrowserException: Error communicating with the remote browser. It may have died. Build info: version: '4.4.0', revision: 'e5c75ed026a' System info: host: 'DESKTOP-HETC9O4', ip: '192.168.1.10', os.name: 'Windows 11', os.arch: 'amd64', os.version: '10.0', java.version: '17.0.3' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [2fc2feffafd280fa0069d9dffc3dcb28, screenshot {}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 106.0.5249.119, chrome: {chromedriverVersion: 106.0.5249.61 (511755355844..., userDataDir: C:\Users\19712\AppData\Loca...}, goog:chromeOptions: {debuggerAddress: localhost:63558}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: WINDOWS, proxy: Proxy(), se:cdp: ws://localhost:63558/devtoo..., se:cdpVersion: 106.0.5249.119, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, </pre>	FAILED	0.007 s

#	Step / Hook Details	Status	Duration
	<p>pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true} Session ID: 2fc2feffafd280fa0069d9dfc3dcb28</p> <p>at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:571) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:602) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:606) at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:331) at stepDefinitions.Hooks.tearDown(Hooks.java:22)</p> <p>Caused by: java.io.UncheckedIOException: java.net.ConnectException: Connection refused: no further information: localhost/[0:0:0:0:0:0:1]:64866</p> <p>at org.openqa.selenium.remote.http.netty.NettyHttpHandler.makeCall(NettyHttpHandler.java:73) at org.openqa.selenium.remote.http.AddSeleniumUserAgent.lambda\$apply\$0(AddSeleniumUserAgent.java:42) at org.openqa.selenium.remote.http.Filter.lambda\$andFinally\$1(Filter.java:56) at org.openqa.selenium.remote.http.netty.NettyHttpHandler.execute(NettyHttpHandler.java:49) at org.openqa.selenium.remote.http.AddSeleniumUserAgent.lambda\$apply\$0(AddSeleniumUserAgent.java:42) at org.openqa.selenium.remote.http.Filter.lambda\$andFinally\$1(Filter.java:56) at org.openqa.selenium.remote.http.netty.NettyClient.execute(NettyClient.java:98) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:181) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:167) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:142) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:547) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:602) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:606) at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:331) at stepDefinitions.Hooks.tearDown(Hooks.java:22) at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke0(Native Method) at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke(NativeMethodAccessorImpl.java:77) at java.base/jdk.internal.reflect.DelegatingMethodAccessorImpl.invoke(DelegatingMethodAccessorImpl.java:43) at java.base/java.lang.reflect.Method.invoke(Method.java:568) at io.cucumber.java.Invoker.doInvoke(Invoker.java:66) at io.cucumber.java.Invoker.invokeStatic(Invoker.java:80) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:45) at io.cucumber.java.JavaHookDefinition.execute(JavaHookDefinition.java:64) at io.cucumber.core.runner.CoreHookDefinition.execute(CoreHookDefinition.java:46) at io.cucumber.core.runner.HookDefinitionMatch.runStep(HookDefinitionMatch.java:21) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:86) at io.cucumber.core.runner.TestStep.run(TestStep.java:57) at io.cucumber.core.runner.TestCase.run(TestCase.java:101) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.lambda\$run\$0(PickleRunners.java:151) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$3(CucumberExecutionContext.java:110)</p>		

#	Step / Hook Details	Status	Duration
	<pre> at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:110) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:148) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) at org.junit.runners.ParentRunner\$3.run(ParentRunner.java:238) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:63) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:236) at org.junit.runners.ParentRunner.access\$000(ParentRunner.java:53) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:229) at org.junit.runners.ParentRunner.run(ParentRunner.java:309) at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$3.run(ParentRunner.java:238) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:63) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:236) at org.junit.runners.ParentRunner.access\$000(ParentRunner.java:53) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:229) at io.cucumber.junit.Cucumber\$RunBeforeAllHooks.evaluate(Cucumber.java:266) at io.cucumber.junit.Cucumber\$RunAfterAllHooks.evaluate(Cucumber.java:281) at io.cucumber.junit.Cucumber\$StartTestRun.evaluate(Cucumber.java:233) at io.cucumber.junit.Cucumber\$FinishTestRun.evaluate(Cucumber.java:248) at org.junit.runners.ParentRunner.run(ParentRunner.java:309) at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210) Caused by: java.net.ConnectException: Connection refused: no further information: localhost/[0:0:0:0:0:0:1]:64866 at org.asynchttpclient.netty.channel.NettyConnectListener.onFailure(NettyConnectListener.java:179) at org.asynchttpclient.netty.channel.NettyChannelConnector\$1.onFailure(NettyChannelConnector.java:108) at org.asynchttpclient.netty.SimpleChannelFutureListener.operationComplete(SimpleChannelFutureListener.java:28) at org.asynchttpclient.netty.SimpleChannelFutureListener.operationComplete(SimpleChannelFutureListener.java:20) at io.netty.util.concurrent.DefaultPromise.notifyListener0(DefaultPromise.java:578) at io.netty.util.concurrent.DefaultPromise.notifyListeners0(DefaultPromise.java:571) at io.netty.util.concurrent.DefaultPromise.notifyListenersNow(DefaultPromise.java:550) at io.netty.util.concurrent.DefaultPromise.notifyListeners(DefaultPromise.java:491) at io.netty.util.concurrent.DefaultPromise.setValue0(DefaultPromise.java:616) at io.netty.util.concurrent.DefaultPromise.setFailure0(DefaultPromise.java:609) </pre>		

#	Step / Hook Details	Status	Duration
	<pre> at io.netty.util.concurrent.DefaultPromise.tryFailure(DefaultPromise.java:117) at io.netty.channel.nio.AbstractNioChannel\$AbstractNioUnsafe.fulfillConnectPromise(AbstractNioChannel.java:321) at io.netty.channel.nio.AbstractNioChannel\$AbstractNioUnsafe.finishConnect(AbstractNioChannel.java:337) at io.netty.channel.nio.NioEventLoop.processSelectedKey(NioEventLoop.java:710) at io.netty.channel.nio.NioEventLoop.processSelectedKeysOptimized(NioEventLoop.java:658) at io.netty.channel.nio.NioEventLoop.processSelectedKeys(NioEventLoop.java:584) at io.netty.channel.nio.NioEventLoop.run(NioEventLoop.java:496) at io.netty.util.concurrent.SingleThreadEventExecutor\$4.run(SingleThreadEventExecutor.java:997) at io.netty.util.internal.ThreadExecutorMap\$2.run(ThreadExecutorMap.java:74) at io.netty.util.concurrent.FastThreadLocalRunnable.run(FastThreadLocalRunnable.java:30) at java.base/java.lang.Thread.run(Thread.java:833) Caused by: io.netty.channel.AbstractChannel\$AnnotatedConnectException: Connection refused: no further information: localhost/ [0:0:0:0:0:0:1]:64866 Caused by: java.net.ConnectException: Connection refused: no further information at java.base/sun.nio.ch.Net.pollConnect(Native Method) at java.base/sun.nio.ch.Net.pollConnectNow(Net.java:672) at java.base/sun.nio.ch.SocketChannelImpl.finishConnect(SocketChannelImpl.java:946) at io.netty.channel.socket.nio.NioSocketChannel.doFinishConnect(NioSocketChannel.java:337) at io.netty.channel.nio.AbstractNioChannel\$AbstractNioUnsafe.finishConnect(AbstractNioChannel.java:334) at io.netty.channel.nio.NioEventLoop.processSelectedKey(NioEventLoop.java:710) at io.netty.channel.nio.NioEventLoop.processSelectedKeysOptimized(NioEventLoop.java:658) at io.netty.channel.nio.NioEventLoop.processSelectedKeys(NioEventLoop.java:584) at io.netty.channel.nio.NioEventLoop.run(NioEventLoop.java:496) at io.netty.util.concurrent.SingleThreadEventExecutor\$4.run(SingleThreadEventExecutor.java:997) at io.netty.util.internal.ThreadExecutorMap\$2.run(ThreadExecutorMap.java:74) at io.netty.util.concurrent.FastThreadLocalRunnable.run(FastThreadLocalRunnable.java:30) at java.base/java.lang.Thread.run(Thread.java:833) </pre>		

Validating the Login functionality

<div>FAILED</div> <div>DURATION - 0.139 s</div>		<div></div>	<div>Steps</div> <div>Total - 6</div> <div>Pass - 1</div> <div>Fail - 1</div> <div>Skip - 4</div>	<div></div>
/ 10:02:26.006 AM // 10:02:26.145 AM /				
Login				

#	Step / Hook Details	Status	Duration
1	Given User Launches Chrome Browser	PASSED	0.005 s
2	<p>When user opens LMS portal link "https://lms-frontend-phase2.herokuapp.com/login"</p> <pre> org.openqa.selenium.remote.UnreachableBrowserException: Error communicating with the remote browser. It may have died. Build info: version: '4.4.0', revision: 'e5c75ed026a' System info: host: 'DESKTOP-HETC9O4', ip: '192.168.1.10', os.name: 'Windows 11', os.arch: 'amd64', os.version: '10.0', java.version: '17.0.3' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [2fc2feffafd280fa0069d9dfc3dcb28, get {url=https://lms-frontend-phase2.herokuapp.com/login}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 106.0.5249.119, chrome: {chromedriverVersion: 106.0.5249.61 (511755355844..., userDataDir: C:\Users\19712\AppData\Loca...}, goog:chromeOptions: {debuggerAddress: localhost:63558}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: WINDOWS, proxy: Proxy(), se:cdp: ws://localhost:63558/devtoo..., se:cdpVersion: 106.0.5249.119, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true} Session ID: 2fc2feffafd280fa0069d9dfc3dcb28 at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:571) at org.openqa.selenium.remote.RemoteWebDriver.get(RemoteWebDriver.java:310) at utilities.Helper.openPage(Helper.java:23) at stepDefinitions.LoginSteps.user_opens_lms_portal_link(LoginSteps.java:19) at ?user opens LMS portal link "https://lms-frontend-phase2.herokuapp.com/login"(file:///C:/Users/19712/eclipse-workspace/ SampleCucumberPhase2/src/test/resources/features/login.feature:5) Caused by: java.io.UncheckedIOException: java.net.ConnectException: Connection refused: no further information: localhost/ [0:0:0:0:0:0:1]:64866 at org.openqa.selenium.remote.http.netty.NettyHttpHandler.makeCall(NettyHttpHandler.java:73) at org.openqa.selenium.remote.http.AddSeleniumUserAgent.lambda\$apply\$0(AddSeleniumUserAgent.java:42) at org.openqa.selenium.remote.http.Filter.lambda\$andFinally\$1(Filter.java:56) at org.openqa.selenium.remote.http.netty.NettyHttpHandler.execute(NettyHttpHandler.java:49) at org.openqa.selenium.remote.http.AddSeleniumUserAgent.lambda\$apply\$0(AddSeleniumUserAgent.java:42) at org.openqa.selenium.remote.http.Filter.lambda\$andFinally\$1(Filter.java:56) at org.openqa.selenium.remote.http.netty.NettyClient.execute(NettyClient.java:98) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:181) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:167) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:142) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:547) at org.openqa.selenium.remote.RemoteWebDriver.get(RemoteWebDriver.java:310) at utilities.Helper.openPage(Helper.java:23) at stepDefinitions.LoginSteps.user_opens_lms_portal_link(LoginSteps.java:19) at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke0(Native Method) at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke(NativeMethodAccessorImpl.java:77) at java.base/jdk.internal.reflect.DelegatingMethodAccessorImpl.invoke(DelegatingMethodAccessorImpl.java:43) at java.base/java.lang.reflect.Method.invoke(Method.java:568) at io.cucumber.java.Invoker.doInvoke(Invoker.java:66) at io.cucumber.java.Invoker.invoke(Invoker.java:24) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) </pre>	FAILED	0.056 s

#	Step / Hook Details	Status	Duration
	at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29) at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66) at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:86) at io.cucumber.core.runner.TestStep.run(TestStep.java:57) at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) at io.cucumber.core.runner.TestCase.run(TestCase.java:95) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.lambda\$run\$0(PickleRunners.java:151) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$3(CucumberExecutionContext.java:110) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:110) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:148) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) at org.junit.runners.ParentRunner\$3.run(ParentRunner.java:238) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:63) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:236) at org.junit.runners.ParentRunner.access\$000(ParentRunner.java:53) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:229) at org.junit.runners.ParentRunner.run(ParentRunner.java:309) at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$3.run(ParentRunner.java:238) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:63) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:236) at org.junit.runners.ParentRunner.access\$000(ParentRunner.java:53) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:229) at io.cucumber.junit.Cucumber\$RunBeforeAllHooks.evaluate(Cucumber.java:266) at io.cucumber.junit.Cucumber\$RunAfterAllHooks.evaluate(Cucumber.java:281) at io.cucumber.junit.Cucumber\$StartTestRun.evaluate(Cucumber.java:233) at io.cucumber.junit.Cucumber\$FinishTestRun.evaluate(Cucumber.java:248) at org.junit.runners.ParentRunner.run(ParentRunner.java:309) at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210)		

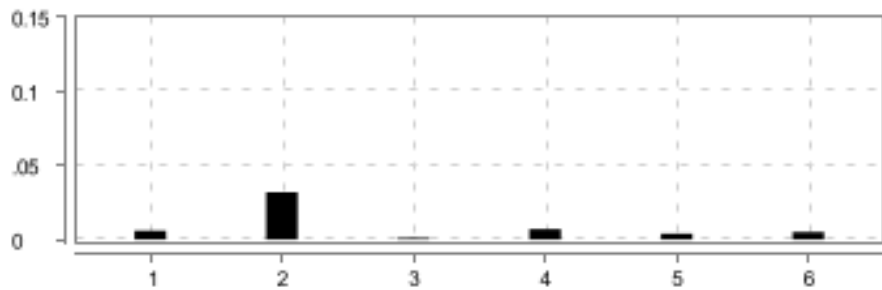

#	Step / Hook Details	Status	Duration
	<p>Caused by: java.net.ConnectException: Connection refused: no further information: localhost/[0:0:0:0:0:0:1]:64866 at org.asynchttpclient.netty.channel.NettyConnectListener.onFailure(NettyConnectListener.java:179) at org.asynchttpclient.netty.channel.NettyChannelConnector\$1.onFailure(NettyChannelConnector.java:108) at org.asynchttpclient.netty.SimpleChannelFutureListener.operationComplete(SimpleChannelFutureListener.java:28) at org.asynchttpclient.netty.SimpleChannelFutureListener.operationComplete(SimpleChannelFutureListener.java:20) at io.netty.util.concurrent.DefaultPromise.notifyListener0(DefaultPromise.java:578) at io.netty.util.concurrent.DefaultPromise.notifyListeners0(DefaultPromise.java:571) at io.netty.util.concurrent.DefaultPromise.notifyListenersNow(DefaultPromise.java:550) at io.netty.util.concurrent.DefaultPromise.notifyListeners(DefaultPromise.java:491) at io.netty.util.concurrent.DefaultPromise.setValue0(DefaultPromise.java:616) at io.netty.util.concurrent.DefaultPromise.setFailure0(DefaultPromise.java:609) at io.netty.util.concurrent.DefaultPromise.tryFailure(DefaultPromise.java:117) at io.netty.channel.nio.AbstractNioChannel\$AbstractNioUnsafe.fulfillConnectPromise(AbstractNioChannel.java:321) at io.netty.channel.nio.AbstractNioChannel\$AbstractNioUnsafe.finishConnect(AbstractNioChannel.java:337) at io.netty.channel.nio.NioEventLoop.processSelectedKey(NioEventLoop.java:710) at io.netty.channel.nio.NioEventLoop.processSelectedKeysOptimized(NioEventLoop.java:658) at io.netty.channel.nio.NioEventLoop.processSelectedKeys(NioEventLoop.java:584) at io.netty.channel.nio.NioEventLoop.run(NioEventLoop.java:496) at io.netty.util.concurrent.SingleThreadEventExecutor\$4.run(SingleThreadEventExecutor.java:997) at io.netty.util.internal.ThreadExecutorMap\$2.run(ThreadExecutorMap.java:74) at io.netty.util.concurrent.FastThreadLocalRunnable.run(FastThreadLocalRunnable.java:30) at java.base/java.lang.Thread.run(Thread.java:833)</p> <p>Caused by: io.netty.channel.AbstractChannel\$AnnotatedConnectException: Connection refused: no further information: localhost/[0:0:0:0:0:0:1]:64866 Caused by: java.net.ConnectException: Connection refused: no further information at java.base/sun.nio.ch.Net.pollConnect(Native Method) at java.base/sun.nio.ch.Net.pollConnectNow(Net.java:672) at java.base/sun.nio.ch.SocketChannelImpl.finishConnect(SocketChannelImpl.java:946) at io.netty.channel.socket.nio.NioSocketChannel.doFinishConnect(NioSocketChannel.java:337) at io.netty.channel.nio.AbstractNioChannel\$AbstractNioUnsafe.finishConnect(AbstractNioChannel.java:334) at io.netty.channel.nio.NioEventLoop.processSelectedKey(NioEventLoop.java:710) at io.netty.channel.nio.NioEventLoop.processSelectedKeysOptimized(NioEventLoop.java:658) at io.netty.channel.nio.NioEventLoop.processSelectedKeys(NioEventLoop.java:584) at io.netty.channel.nio.NioEventLoop.run(NioEventLoop.java:496) at io.netty.util.concurrent.SingleThreadEventExecutor\$4.run(SingleThreadEventExecutor.java:997) at io.netty.util.internal.ThreadExecutorMap\$2.run(ThreadExecutorMap.java:74) at io.netty.util.concurrent.FastThreadLocalRunnable.run(FastThreadLocalRunnable.java:30) at java.base/java.lang.Thread.run(Thread.java:833)</p> <p>* Not displayable characters are replaced by '?'. </p>		
3	Then User should see the Login page title "LMS"	SKIPPED	0.016 s
4	When User enters Username as "Invalid" and Password as "Valid"	SKIPPED	0.001 s

#	Step / Hook Details	Status	Duration
5	Then User clicks on Login button with expected status as "Invalid username and password Please try again"	SKIPPED	0.003 s
6	Then User should see the LMS Home page on successful login status "Invalid username and password Please try again"	SKIPPED	0.001 s
	<p>AFTER - stepDefinitions.Hooks.tearDown(io.cucumber.java.Scenario)</p> <p>org.openqa.selenium.remote.UnreachableBrowserException: Error communicating with the remote browser. It may have died. Build info: version: '4.4.0', revision: 'e5c75ed026a' System info: host: 'DESKTOP-HETC9O4', ip: '192.168.1.10', os.name: 'Windows 11', os.arch: 'amd64', os.version: '10.0', java.version: '17.0.3' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [2fc2feffafd280fa0069d9dffc3dcb28, screenshot {}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 106.0.5249.119, chrome: {chromedriverVersion: 106.0.5249.61 (511755355844..., userDataDir: C:\Users\19712\AppData\Loca...}, goog:chromeOptions: {debuggerAddress: localhost:63558}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: WINDOWS, proxy: Proxy(), se:cdp: ws://localhost:63558/devtoo..., se:cdpVersion: 106.0.5249.119, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true} Session ID: 2fc2feffafd280fa0069d9dffc3dcb28</p> <p>at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:571) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:602) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:606) at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:331) at stepDefinitions.Hooks.tearDown(Hooks.java:22)</p> <p>Caused by: java.io.UncheckedIOException: java.net.ConnectException: Connection refused: no further information: localhost/[0:0:0:0:0:0:1]:64866</p> <p>at org.openqa.selenium.remote.http.netty.NettyHttpHandler.makeCall(NettyHttpHandler.java:73) at org.openqa.selenium.remote.http.AddSeleniumUserAgent.lambda\$apply\$0(AddSeleniumUserAgent.java:42) at org.openqa.selenium.remote.http.Filter.lambda\$andFinally\$1(Filter.java:56) at org.openqa.selenium.remote.http.netty.NettyHttpHandler.execute(NettyHttpHandler.java:49) at org.openqa.selenium.remote.http.AddSeleniumUserAgent.lambda\$apply\$0(AddSeleniumUserAgent.java:42) at org.openqa.selenium.remote.http.Filter.lambda\$andFinally\$1(Filter.java:56) at org.openqa.selenium.remote.http.netty.NettyClient.execute(NettyClient.java:98) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:181) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:167) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:142) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:547) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:602) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:606) at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:331) at stepDefinitions.Hooks.tearDown(Hooks.java:22) at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke0(Native Method) at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke(NativeMethodAccessorImpl.java:77) at java.base/jdk.internal.reflect.DelegatingMethodAccessorImpl.invoke(DelegatingMethodAccessorImpl.java:43) at java.base/java.lang.reflect.Method.invoke(Method.java:568) at io.cucumber.java.Invoker.doInvoke(Invoker.java:66) at io.cucumber.java.Invoker.invokeStatic(Invoker.java:80) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:45)</p>	FAILED	0.019 s

#	Step / Hook Details	Status	Duration
	<pre> at io.cucumber.java.JavaHookDefinition.execute(JavaHookDefinition.java:64) at io.cucumber.core.runner.CoreHookDefinition.execute(CoreHookDefinition.java:46) at io.cucumber.core.runner.HookDefinitionMatch.runStep(HookDefinitionMatch.java:21) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:86) at io.cucumber.core.runner.TestStep.run(TestStep.java:57) at io.cucumber.core.runner.TestCase.run(TestCase.java:101) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.lambda\$run\$0(PickleRunners.java:151) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$3(CucumberExecutionContext.java:110) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:110) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:148) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) at org.junit.runners.ParentRunner\$3.run(ParentRunner.java:238) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:63) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:236) at org.junit.runners.ParentRunner.access\$000(ParentRunner.java:53) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:229) at org.junit.runners.ParentRunner.run(ParentRunner.java:309) at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$3.run(ParentRunner.java:238) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:63) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:236) at org.junit.runners.ParentRunner.access\$000(ParentRunner.java:53) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:229) at io.cucumber.junit.Cucumber\$RunBeforeAllHooks.evaluate(Cucumber.java:266) at io.cucumber.junit.Cucumber\$RunAfterAllHooks.evaluate(Cucumber.java:281) at io.cucumber.junit.Cucumber\$StartTestRun.evaluate(Cucumber.java:233) at io.cucumber.junit.Cucumber\$FinishTestRun.evaluate(Cucumber.java:248) at org.junit.runners.ParentRunner.run(ParentRunner.java:309) at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210) </pre> <p>Caused by: java.net.ConnectException: Connection refused: no further information: localhost/[0:0:0:0:0:0:1]:64866</p>		

#	Step / Hook Details	Status	Duration
	<pre> at org.asynchttpclient.netty.channel.NettyConnectListener.onFailure(NettyConnectListener.java:179) at org.asynchttpclient.netty.channel.NettyChannelConnector\$1.onFailure(NettyChannelConnector.java:108) at org.asynchttpclient.netty.SimpleChannelFutureListener.operationComplete(SimpleChannelFutureListener.java:28) at org.asynchttpclient.netty.SimpleChannelFutureListener.operationComplete(SimpleChannelFutureListener.java:20) at io.netty.util.concurrent.DefaultPromise.notifyListener0(DefaultPromise.java:578) at io.netty.util.concurrent.DefaultPromise.notifyListeners0(DefaultPromise.java:571) at io.netty.util.concurrent.DefaultPromise.notifyListenersNow(DefaultPromise.java:550) at io.netty.util.concurrent.DefaultPromise.notifyListeners(DefaultPromise.java:491) at io.netty.util.concurrent.DefaultPromise.setValue0(DefaultPromise.java:616) at io.netty.util.concurrent.DefaultPromise.setFailure0(DefaultPromise.java:609) at io.netty.util.concurrent.DefaultPromise.tryFailure(DefaultPromise.java:117) at io.netty.channel.nio.AbstractNioChannel\$AbstractNioUnsafe.fulfillConnectPromise(AbstractNioChannel.java:321) at io.netty.channel.nio.AbstractNioChannel\$AbstractNioUnsafe.finishConnect(AbstractNioChannel.java:337) at io.netty.channel.nio.NioEventLoop.processSelectedKey(NioEventLoop.java:710) at io.netty.channel.nio.NioEventLoop.processSelectedKeysOptimized(NioEventLoop.java:658) at io.netty.channel.nio.NioEventLoop.processSelectedKeys(NioEventLoop.java:584) at io.netty.channel.nio.NioEventLoop.run(NioEventLoop.java:496) at io.netty.util.concurrent.SingleThreadEventExecutor\$4.run(SingleThreadEventExecutor.java:997) at io.netty.util.internal.ThreadExecutorMap\$2.run(ThreadExecutorMap.java:74) at io.netty.util.concurrent.FastThreadLocalRunnable.run(FastThreadLocalRunnable.java:30) at java.base/java.lang.Thread.run(Thread.java:833) Caused by: io.netty.channel.AbstractChannel\$AnnotatedConnectException: Connection refused: no further information: localhost/ [0:0:0:0:0:0:1]:64866 Caused by: java.net.ConnectException: Connection refused: no further information at java.base/sun.nio.ch.Net.pollConnect(Native Method) at java.base/sun.nio.ch.Net.pollConnectNow(Net.java:672) at java.base/sun.nio.ch.SocketChannelImpl.finishConnect(SocketChannelImpl.java:946) at io.netty.channel.socket.nio.NioSocketChannel.doFinishConnect(NioSocketChannel.java:337) at io.netty.channel.nio.AbstractNioChannel\$AbstractNioUnsafe.finishConnect(AbstractNioChannel.java:334) at io.netty.channel.nio.NioEventLoop.processSelectedKey(NioEventLoop.java:710) at io.netty.channel.nio.NioEventLoop.processSelectedKeysOptimized(NioEventLoop.java:658) at io.netty.channel.nio.NioEventLoop.processSelectedKeys(NioEventLoop.java:584) at io.netty.channel.nio.NioEventLoop.run(NioEventLoop.java:496) at io.netty.util.concurrent.SingleThreadEventExecutor\$4.run(SingleThreadEventExecutor.java:997) at io.netty.util.internal.ThreadExecutorMap\$2.run(ThreadExecutorMap.java:74) at io.netty.util.concurrent.FastThreadLocalRunnable.run(FastThreadLocalRunnable.java:30) at java.base/java.lang.Thread.run(Thread.java:833) </pre>		

Validating the Login functionality

<div>FAILED</div> <div>DURATION - 0.250 s</div>		<div></div>	<div>Steps</div> <div>Total - 6</div> <div>Pass - 1</div> <div>Fail - 1</div> <div>Skip - 4</div>	<div></div>
/ 10:02:26.211 AM // 10:02:26.461 AM /				
Login				

#	Step / Hook Details	Status	Duration
1	Given User Launches Chrome Browser	PASSED	0.006 s
2	When user opens LMS portal link "https://lms-frontend-phase2.herokuapp.com/login" org.openqa.selenium.remote.UnreachableBrowserException: Error communicating with the remote browser. It may have died. Build info: version: '4.4.0', revision: 'e5c75ed026a' System info: host: 'DESKTOP-HETC9O4', ip: '192.168.1.10', os.name: 'Windows 11', os.arch: 'amd64', os.version: '10.0', java.version: '17.0.3' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [2fc2feffafd280fa0069d9dfc3dcb28, get {url=https://lms-frontend-phase2.herokuapp.com/login}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 106.0.5249.119, chrome: {chromedriverVersion: 106.0.5249.61 (511755355844..., userDataDir: C:\Users\19712\AppData\Loca...}, goog:chromeOptions: {debuggerAddress: localhost:63558}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: WINDOWS, proxy: Proxy(), se:cdp: ws://localhost:63558/devtoo..., se:cdpVersion: 106.0.5249.119, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true} Session ID: 2fc2feffafd280fa0069d9dfc3dcb28 at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:571) at org.openqa.selenium.remote.RemoteWebDriver.get(RemoteWebDriver.java:310) at utilities.Helper.openPage(Helper.java:23) at stepDefinitions.LoginSteps.user_opens_lms_portal_link(LoginSteps.java:19) at ?.user opens LMS portal link "https://lms-frontend-phase2.herokuapp.com/login"(file:///C:/Users/19712/eclipse-workspace/SampleCucumberPhase2/src/test/resources/features/login.feature:5) Caused by: java.io.UncheckedIOException: java.net.ConnectException: Connection refused: no further information: localhost/[0:0:0:0:0:0:1]:64866 at org.openqa.selenium.remote.http.netty.NettyHttpHandler.makeCall(NettyHttpHandler.java:73) at org.openqa.selenium.remote.http.AddSeleniumUserAgent.lambda\$apply\$0(AddSeleniumUserAgent.java:42) at org.openqa.selenium.remote.http.Filter.lambda\$andFinally\$1(Filter.java:56) at org.openqa.selenium.remote.http.netty.NettyHttpHandler.execute(NettyHttpHandler.java:49) at org.openqa.selenium.remote.http.AddSeleniumUserAgent.lambda\$apply\$0(AddSeleniumUserAgent.java:42) at org.openqa.selenium.remote.http.Filter.lambda\$andFinally\$1(Filter.java:56) at org.openqa.selenium.remote.http.netty.NettyClient.execute(NettyClient.java:98) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:181) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:167) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:142) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:547)	FAILED	0.032 s

#	Step / Hook Details	Status	Duration
	<pre> at org.openqa.selenium.remote.RemoteWebDriver.get(RemoteWebDriver.java:310) at utilities.Helper.openPage(Helper.java:23) at stepDefinitions.LoginSteps.user_opens_lms_portal_link(LoginSteps.java:19) at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke0(Native Method) at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke(NativeMethodAccessorImpl.java:77) at java.base/jdk.internal.reflect.DelegatingMethodAccessorImpl.invoke(DelegatingMethodAccessorImpl.java:43) at java.base/java.lang.reflect.Method.invoke(Method.java:568) at io.cucumber.java.Invoker.doInvoke(Invoker.java:66) at io.cucumber.java.Invoker.invoke(Invoker.java:24) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29) at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66) at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:86) at io.cucumber.core.runner.TestStep.run(TestStep.java:57) at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) at io.cucumber.core.runner.TestCase.run(TestCase.java:95) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.lambda\$run\$0(PickleRunners.java:151) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$3(CucumberExecutionContext.java:110) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:110) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:148) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) at org.junit.runners.ParentRunner\$3.run(ParentRunner.java:238) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:63) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:236) at org.junit.runners.ParentRunner.access\$000(ParentRunner.java:53) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:229) at org.junit.runners.ParentRunner.run(ParentRunner.java:309) at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$3.run(ParentRunner.java:238) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:63) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:236) at org.junit.runners.ParentRunner.access\$000(ParentRunner.java:53) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:229) at io.cucumber.junit.Cucumber\$RunBeforeAllHooks.evaluate(Cucumber.java:266) </pre>		

#	Step / Hook Details	Status	Duration
	<p> at io.cucumber.junit.Cucumber\$RunAfterAllHooks.evaluate(Cucumber.java:281) at io.cucumber.junit.Cucumber\$StartTestRun.evaluate(Cucumber.java:233) at io.cucumber.junit.Cucumber\$FinishTestRun.evaluate(Cucumber.java:248) at org.junit.runners.ParentRunner.run(ParentRunner.java:309) at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210) Caused by: java.net.ConnectException: Connection refused: no further information: localhost/[0:0:0:0:0:1]:64866 at org.asynchttpclient.netty.channel.NettyConnectListener.onFailure(NettyConnectListener.java:179) at org.asynchttpclient.netty.channel.NettyChannelConnector\$1.onFailure(NettyChannelConnector.java:108) at org.asynchttpclient.netty.SimpleChannelFutureListener.operationComplete(SimpleChannelFutureListener.java:28) at org.asynchttpclient.netty.SimpleChannelFutureListener.operationComplete(SimpleChannelFutureListener.java:20) at io.netty.util.concurrent.DefaultPromise.notifyListener0(DefaultPromise.java:578) at io.netty.util.concurrent.DefaultPromise.notifyListeners0(DefaultPromise.java:571) at io.netty.util.concurrent.DefaultPromise.notifyListenersNow(DefaultPromise.java:550) at io.netty.util.concurrent.DefaultPromise.notifyListeners(DefaultPromise.java:491) at io.netty.util.concurrent.DefaultPromise.setValue0(DefaultPromise.java:616) at io.netty.util.concurrent.DefaultPromise.setFailure0(DefaultPromise.java:609) at io.netty.util.concurrent.DefaultPromise.tryFailure(DefaultPromise.java:117) at io.netty.channel.nio.AbstractNioChannel\$AbstractNioUnsafe.fulfillConnectPromise(AbstractNioChannel.java:321) at io.netty.channel.nio.AbstractNioChannel\$AbstractNioUnsafe.finishConnect(AbstractNioChannel.java:337) at io.netty.channel.nio.NioEventLoop.processSelectedKey(NioEventLoop.java:710) at io.netty.channel.nio.NioEventLoop.processSelectedKeysOptimized(NioEventLoop.java:658) at io.netty.channel.nio.NioEventLoop.processSelectedKeys(NioEventLoop.java:584) at io.netty.channel.nio.NioEventLoop.run(NioEventLoop.java:496) at io.netty.util.concurrent.SingleThreadEventExecutor\$4.run(SingleThreadEventExecutor.java:997) at io.netty.util.internal.ThreadExecutorMap\$2.run(ThreadExecutorMap.java:74) at io.netty.util.concurrent.FastThreadLocalRunnable.run(FastThreadLocalRunnable.java:30) at java.base/java.lang.Thread.run(Thread.java:833) Caused by: io.netty.channel.AbstractChannel\$AnnotatedConnectException: Connection refused: no further information: localhost/[0:0:0:0:0:1]:64866 Caused by: java.net.ConnectException: Connection refused: no further information at java.base/sun.nio.ch.Net.pollConnect(Native Method) at java.base/sun.nio.ch.Net.pollConnectNow(Net.java:672) at java.base/sun.nio.ch.SocketChannelImpl.finishConnect(SocketChannelImpl.java:946) at io.netty.channel.socket.nio.NioSocketChannel.doFinishConnect(NioSocketChannel.java:337) at io.netty.channel.nio.AbstractNioChannel\$AbstractNioUnsafe.finishConnect(AbstractNioChannel.java:334) at io.netty.channel.nio.NioEventLoop.processSelectedKey(NioEventLoop.java:710) at io.netty.channel.nio.NioEventLoop.processSelectedKeysOptimized(NioEventLoop.java:658) </p>		

#	Step / Hook Details	Status	Duration
	at io.netty.channel.nio.NioEventLoop.processSelectedKeys(NioEventLoop.java:584) at io.netty.channel.nio.NioEventLoop.run(NioEventLoop.java:496) at io.netty.util.concurrent.SingleThreadEventExecutor\$4.run(SingleThreadEventExecutor.java:997) at io.netty.util.internal.ThreadExecutorMap\$2.run(ThreadExecutorMap.java:74) at io.netty.util.concurrent.FastThreadLocalRunnable.run(FastThreadLocalRunnable.java:30) at java.base/java.lang.Thread.run(Thread.java:833) * Not displayable characters are replaced by '?'.		
3	Then User should see the Login page title "LMS"	SKIPPED	0.001 s
4	When User enters Username as "Valid" and Password as "Valid"	SKIPPED	0.007 s
5	Then User clicks on Login button with expected status as "Pass"	SKIPPED	0.004 s
6	Then User should see the LMS Home page on successful login status "Pass"	SKIPPED	0.005 s
	AFTER - stepDefinitions.Hooks.tearDown(io.cucumber.java.Scenario) org.openqa.selenium.remote.UnreachableBrowserException: Error communicating with the remote browser. It may have died. Build info: version: '4.4.0', revision: 'e5c75ed026a' System info: host: 'DESKTOP-HETC9O4', ip: '192.168.1.10', os.name: 'Windows 11', os.arch: 'amd64', os.version: '10.0', java.version: '17.0.3' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [2fc2feffafd280fa0069d9dfc3dcb28, screenshot {}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 106.0.5249.119, chrome: {chromedriverVersion: 106.0.5249.61 (511755355844..., userDataDir: C:\Users\19712\AppData\Loca...}, goog:chromeOptions: {debuggerAddress: localhost:63558}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: WINDOWS, proxy: Proxy(), se:cdp: ws://localhost:63558/devtoo..., se:cdpVersion: 106.0.5249.119, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true} Session ID: 2fc2feffafd280fa0069d9dfc3dcb28 at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:571) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:602) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:606) at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:331) at stepDefinitions.Hooks.tearDown(Hooks.java:22) Caused by: java.io.UncheckedIOException: java.net.ConnectException: Connection refused: no further information: localhost/[0:0:0:0:0:0:1]:64866 at org.openqa.selenium.remote.http.netty.NettyHttpHandler.makeCall(NettyHttpHandler.java:73) at org.openqa.selenium.remote.http.AddSeleniumUserAgent.lambda\$apply\$0(AddSeleniumUserAgent.java:42) at org.openqa.selenium.remote.http.Filter.lambda\$andFinally\$1(Filter.java:56) at org.openqa.selenium.remote.http.netty.NettyHttpHandler.execute(NettyHttpHandler.java:49) at org.openqa.selenium.remote.http.AddSeleniumUserAgent.lambda\$apply\$0(AddSeleniumUserAgent.java:42) at org.openqa.selenium.remote.http.Filter.lambda\$andFinally\$1(Filter.java:56) at org.openqa.selenium.remote.http.netty.NettyClient.execute(NettyClient.java:98) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:181) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:167) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:142) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:547) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:602)	FAILED	0.152 s

#	Step / Hook Details	Status	Duration
	at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:606) at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:331) at stepDefinitions.Hooks.tearDown(Hooks.java:22) at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke0(Native Method) at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke(NativeMethodAccessorImpl.java:77) at java.base/jdk.internal.reflect.DelegatingMethodAccessorImpl.invoke(DelegatingMethodAccessorImpl.java:43) at java.base/java.lang.reflect.Method.invoke(Method.java:568) at io.cucumber.java.Invoker.doInvoke(Invoker.java:66) at io.cucumber.java.Invoker.invokeStatic(Invoker.java:80) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:45) at io.cucumber.java.JavaHookDefinition.execute(JavaHookDefinition.java:64) at io.cucumber.core.runner.CoreHookDefinition.execute(CoreHookDefinition.java:46) at io.cucumber.core.runner.HookDefinitionMatch.runStep(HookDefinitionMatch.java:21) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:86) at io.cucumber.core.runner.TestStep.run(TestStep.java:57) at io.cucumber.core.runner.TestCase.run(TestCase.java:101) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.lambda\$run\$0(PickleRunners.java:151) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$3(CucumberExecutionContext.java:110) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:110) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:148) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) at org.junit.runners.ParentRunner\$3.run(ParentRunner.java:238) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:63) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:236) at org.junit.runners.ParentRunner.access\$000(ParentRunner.java:53) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:229) at org.junit.runners.ParentRunner.run(ParentRunner.java:309) at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$3.run(ParentRunner.java:238) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:63) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:236) at org.junit.runners.ParentRunner.access\$000(ParentRunner.java:53) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:229) at io.cucumber.junit.Cucumber\$RunBeforeAllHooks.evaluate(Cucumber.java:266) at io.cucumber.junit.Cucumber\$RunAfterAllHooks.evaluate(Cucumber.java:281)		

#	Step / Hook Details	Status	Duration
	<p> at io.cucumber.junit.Cucumber\$StartTestRun.evaluate(Cucumber.java:233) at io.cucumber.junit.Cucumber\$FinishTestRun.evaluate(Cucumber.java:248) at org.junit.runners.ParentRunner.run(ParentRunner.java:309) at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210) Caused by: java.net.ConnectException: Connection refused: no further information: localhost/[0:0:0:0:0:0:1]:64866 at org.asynchttpclient.netty.channel.NettyConnectListener.onFailure(NettyConnectListener.java:179) at org.asynchttpclient.netty.channel.NettyChannelConnector\$1.onFailure(NettyChannelConnector.java:108) at org.asynchttpclient.netty.SimpleChannelFutureListener.operationComplete(SimpleChannelFutureListener.java:28) at org.asynchttpclient.netty.SimpleChannelFutureListener.operationComplete(SimpleChannelFutureListener.java:20) at io.netty.util.concurrent.DefaultPromise.notifyListener0(DefaultPromise.java:578) at io.netty.util.concurrent.DefaultPromise.notifyListeners0(DefaultPromise.java:571) at io.netty.util.concurrent.DefaultPromise.notifyListenersNow(DefaultPromise.java:550) at io.netty.util.concurrent.DefaultPromise.notifyListeners(DefaultPromise.java:491) at io.netty.util.concurrent.DefaultPromise.setValue0(DefaultPromise.java:616) at io.netty.util.concurrent.DefaultPromise.setFailure0(DefaultPromise.java:609) at io.netty.util.concurrent.DefaultPromise.tryFailure(DefaultPromise.java:117) at io.netty.channel.nio.AbstractNioChannel\$AbstractNioUnsafe.fulfillConnectPromise(AbstractNioChannel.java:321) at io.netty.channel.nio.AbstractNioChannel\$AbstractNioUnsafe.finishConnect(AbstractNioChannel.java:337) at io.netty.channel.nio.NioEventLoop.processSelectedKey(NioEventLoop.java:710) at io.netty.channel.nio.NioEventLoop.processSelectedKeysOptimized(NioEventLoop.java:658) at io.netty.channel.nio.NioEventLoop.processSelectedKeys(NioEventLoop.java:584) at io.netty.channel.nio.NioEventLoop.run(NioEventLoop.java:496) at io.netty.util.concurrent.SingleThreadEventExecutor\$4.run(SingleThreadEventExecutor.java:997) at io.netty.util.internal.ThreadExecutorMap\$2.run(ThreadExecutorMap.java:74) at io.netty.util.concurrent.FastThreadLocalRunnable.run(FastThreadLocalRunnable.java:30) at java.base/java.lang.Thread.run(Thread.java:833) Caused by: io.netty.channel.AbstractChannel\$AnnotatedConnectException: Connection refused: no further information: localhost/[0:0:0:0:0:0:1]:64866 Caused by: java.net.ConnectException: Connection refused: no further information at java.base/sun.nio.ch.Net.pollConnect(Native Method) at java.base/sun.nio.ch.Net.pollConnectNow(Net.java:672) at java.base/sun.nio.ch.SocketChannelImpl.finishConnect(SocketChannelImpl.java:946) at io.netty.channel.socket.nio.NioSocketChannel.doFinishConnect(NioSocketChannel.java:337) at io.netty.channel.nio.AbstractNioChannel\$AbstractNioUnsafe.finishConnect(AbstractNioChannel.java:334) at io.netty.channel.nio.NioEventLoop.processSelectedKey(NioEventLoop.java:710) at io.netty.channel.nio.NioEventLoop.processSelectedKeysOptimized(NioEventLoop.java:658) at io.netty.channel.nio.NioEventLoop.processSelectedKeys(NioEventLoop.java:584) </p>		

#	Step / Hook Details	Status	Duration
	at io.netty.channel.nio.NioEventLoop.run(NioEventLoop.java:496) at io.netty.util.concurrent.SingleThreadEventExecutor\$4.run(SingleThreadEventExecutor.java:997) at io.netty.util.internal.ThreadExecutorMap\$2.run(ThreadExecutorMap.java:74) at io.netty.util.concurrent.FastThreadLocalRunnable.run(FastThreadLocalRunnable.java:30) at java.base/java.lang.Thread.run(Thread.java:833)		