

PCM - HUB

---

# Complete manual

Linguists + Administrators

Parametric Comparison Method · Università di Modena e Reggio Emilia  
2026-05-21

# Contents

---

|                                                |    |
|------------------------------------------------|----|
| 1. What is PCM-Hub                             | 6  |
| The three roles                                | 6  |
| 2. Logging in                                  | 7  |
| First access                                   | 7  |
| Accepting the Terms of Use and Privacy Notice  | 7  |
| Changing the password                          | 7  |
| Forgot the password?                           | 8  |
| Session expired                                | 8  |
| Failed-login limit                             | 8  |
| 3. Getting around: sidebar, topbar, breadcrumb | 9  |
| Sidebar (left)                                 | 9  |
| Topbar (top)                                   | 10 |
| Footer                                         | 10 |
| 4. The Dashboard                               | 11 |
| User dashboard                                 | 11 |
| Admin dashboard                                | 11 |
| 5. Shared pages                                | 13 |
| Glossary (`/glossary`)                         | 13 |
| Instructions (`/instructions`)                 | 14 |
| How to cite (`/how-to-cite`)                   | 15 |
| My Account (`/me`)                             | 16 |
| Manual (`/manual`)                             | 16 |
| 6. The Languages page                          | 17 |
| Filters (they stay at the top)                 | 17 |
| The table                                      | 19 |
| Notes on the map                               | 20 |
| 7. Compiling a language                        | 21 |
| Language header                                | 21 |
| Status banner (below the header)               | 21 |
| Parameter wizard (the squares)                 | 23 |
| A parameter's block                            | 24 |
| Questions                                      | 24 |
| Example clipboard                              | 25 |
| Saving a parameter block                       | 26 |
| Switching parameter without saving             | 26 |
| Submit / Reopen / workflow                     | 26 |
| What an admin sees in addition                 | 27 |

|                                                                                       |    |
|---------------------------------------------------------------------------------------|----|
| 8. ADMIN ONLY — Parameters                                                            | 28 |
| Parameter list                                                                        | 28 |
| Edit parameter                                                                        | 29 |
| Deactivating a parameter                                                              | 30 |
| Implicational condition (notes)                                                       | 30 |
| Parameters Graph (`/admin/parameters/graph`)                                          | 31 |
| 9. ADMIN ONLY — Questions                                                             | 32 |
| Question list                                                                         | 32 |
| Edit/Add question                                                                     | 32 |
| Destructive changes: the archive                                                      | 33 |
| 10. ADMIN ONLY — Motivations                                                          | 34 |
| List                                                                                  | 34 |
| Edits                                                                                 | 34 |
| 11. ADMIN ONLY — Taxonomy                                                             | 35 |
| 12. ADMIN ONLY — Accounts                                                             | 36 |
| Account list                                                                          | 36 |
| Add account                                                                           | 37 |
| Safeguards                                                                            | 37 |
| Reassigning languages                                                                 | 38 |
| 13. ADMIN ONLY — Table A                                                              | 39 |
| Modes                                                                                 | 39 |
| Filters                                                                               | 39 |
| Search                                                                                | 40 |
| Manual selection                                                                      | 40 |
| Exports and analyses                                                                  | 40 |
| 14. ADMIN ONLY — Filters (Queries Q1–Q11)                                             | 41 |
| Q3 — the richest                                                                      | 42 |
| Q10 — answers and examples                                                            | 42 |
| 15. ADMIN ONLY — History, Backups, Migration, Backup Restore, Import Excel, Recompute | 43 |
| History & Backups (`/admin/history`)                                                  | 43 |
| Migration Import (`/admin/migration-import`) — super-admin only, dangerous            | 47 |
| Backup Restore (`/admin/backup-restore`) — super-admin only                           | 48 |
| Import from Excel (`/admin/import-excel`)                                             | 49 |
| Recompute final values                                                                | 49 |
| Legal Documents (`/admin/legal-documents`)                                            | 50 |
| 16. Common errors and what to do                                                      | 51 |
| "Form locked by the current language status"                                          | 51 |
| "Question X needs at least 2 valid examples when answering YES or UNSURE"             | 51 |
| "This block has been modified by another session..."                                  | 51 |

|                                                               |    |
|---------------------------------------------------------------|----|
| "Wrong email or password"                                     | 51 |
| "Too Many Requests" at login                                  | 51 |
| "Invalid email format"                                        | 51 |
| "You cannot delete your own account"                          | 51 |
| "You cannot delete the last remaining administrator"          | 51 |
| The "Submit for approval" button is missing                   | 51 |
| The site logged me out unexpectedly                           | 51 |
| I changed the taxonomy but languages still show the old names | 52 |
| 17. Quick interface glossary                                  | 53 |



Practical guide to using the **PCM-Hub** website ( [hub.parametriccomparison.unimore.it](http://hub.parametriccomparison.unimore.it) ). This manual is for daily users: linguists who compile their assigned languages, and administrators who manage parameters, questions, accounts and cross-language analyses.

**You'll find what you need faster** if you know your role:

- **Linguist (User)** → read sections 1-7 and jump straight to §7 (Compiling a language).
  - **Administrator (Admin)** → read everything: admins see all User functionality plus a dozen extra tools (sections 8-15).
-

# 1. What is PCM-Hub

---

The **Parametric Comparison Method** (PCM, Longobardi & Guardiano 2009) compares different languages using a set of **universal syntactic parameters**. Every language is “compiled” by a linguist who, for each parameter, answers a set of questions (mostly yes/no) and provides linguistic examples to support the answers.

From the data collected, the website automatically produces:

- consolidated parameter values for each language (+, −, 0, ?);
- comparative matrices across languages;
- Hamming, Jaccard and geographic distances;
- dendrograms and cluster maps;
- PCA analyses, Mantel tests.

This makes it possible to study phylogenetic relationships, divergences and convergences across languages from different families.

## The three roles

| Role                                   | What they can do                                                                                                                                                   |
|----------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Public</b> (visitor, not logged in) | sees only the home page with the interactive map and the How to cite page                                                                                          |
| <b>User</b> (assigned linguist)        | compiles their assigned languages, accesses glossary, instructions, language list, personal dashboard                                                              |
| <b>Admin</b>                           | everything a User does, plus: parameters/questions/motivations/taxonomy management, account creation, TableA, queries Q1-Q10, history/backup, migration, recompute |

## 2. Logging in

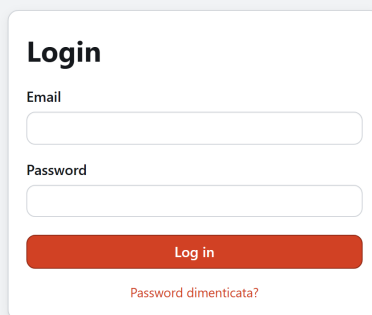
---

### First access

The administrator who created your account will give you:

- the **email** of your account;
- a **temporary password** (at least 8 characters).

Go to the site URL → click **Login** from the home page (or go straight to `/login`) → enter the credentials → **Log in**.

A screenshot of a login form titled "Login". It features two input fields: "Email" and "Password". Below the "Password" field is a red button labeled "Log in". At the bottom of the form, there is a link that says "Password dimenticata?". The form is centered on a light gray background.

On your first login **we recommend changing your password**: top-right click **MyAccount** → **Change password**.

---

### Accepting the Terms of Use and Privacy Notice

The first time you log in — and again whenever a new version of the legal documents is published — a modal pops up asking you to **review and accept the Terms of Use and the Privacy Notice** (with a separate checkbox for the “vexatious clauses”, where the law requires it). Until you tick the box(es) and click **Accept**, the only alternative is **Logout**: acceptance is mandatory to use the site. The documents are linked inside the modal so you can read them before accepting.

---

### Changing the password

From the **My Account** page you have two blocks:

- **Profile:** name, surname, email (if you change the email it becomes the new login credential).
  - **Change password:** requires the current password + the new one twice. Minimum 8 characters.
- 

## Forgot the password?

**Email reset is now active.** On the login page click **Forgot password?** → enter your account email → you'll receive an email with a reset link (valid for 30 minutes). Open it, set a new password, and log in. For privacy, if the address isn't registered the site replies the same way ("if the address exists you'll receive an email"), so it never reveals which addresses exist.

If the email doesn't arrive (check your spam folder) or the link has expired, request a new one or contact an administrator.

---

## Session expired

The session stays valid for a long time, so in day-to-day use you won't be logged out. If it does expire, protected pages automatically send you back to the login. Nothing is broken — just log in again.

---

## Failed-login limit

For security: **after 5 failed login attempts from the same connection within 1 minute**, the system replies with a "Too Many Requests" error for a few seconds. Wait a moment and retry.

---

## 3. Getting around: sidebar, topbar, breadcrumb

Once logged in, the interface has 3 fixed elements:

### Sidebar (left)

All the main pages. The visible items depend on your role:

| Item                              | User | Admin                              |
|-----------------------------------|------|------------------------------------|
| Dashboard                         | ✓    | ✓                                  |
| Citation Guidelines / How to cite | ✓    | ✓                                  |
| Languages                         | ✓    | ✓                                  |
| Parameters                        | —    | ✓                                  |
| Parameters Graph                  | —    | ✓                                  |
| Questions                         | —    | ✓                                  |
| Motivations                       | —    | ✓                                  |
| Taxonomy                          | —    | ✓                                  |
| Table A                           | —    | ✓                                  |
| Filters                           | —    | ✓                                  |
| Accounts                          | —    | ✓                                  |
| History & Backups                 | —    | ✓                                  |
| Legal Documents                   | —    | ✓                                  |
| Migration Import                  | —    | super-admin only (red = dangerous) |
| Backup Restore                    | —    | super-admin only                   |
| Instructions                      | ✓    | ✓                                  |
| Manual                            | ✓    | ✓                                  |
| Glossary                          | ✓    | ✓                                  |

**Super-admin:** two destructive tools — **Migration Import** and **Backup Restore** — are reserved for administrators flagged as *super-admin*. A normal admin doesn't see these two items at all.

The **button at the top of the sidebar** collapses/expands it (useful to gain horizontal space, especially in TableA). The preference is remembered.

## Topbar (top)

- **Breadcrumb** on the left: shows the page path (e.g. `Dashboard / Languages / Italian / Data`). Items in **blue** are clickable; items in **grey** are informational only (e.g. dynamic IDs).
  - **MyAccount** on the right: shortcut to the profile page.
  - **Theme switch (Light/Dark)**: switches the visual theme. The preference is remembered too.
  - **Logout**: ends the session and brings you back to the public home.
- 

## Footer

At the bottom of every page:

- PCM-Hub citation (CC BY 4.0);
  - links to Privacy Policy, Disclaimer, lab contact email ( `pcm_lab@unimore.it` );
  - link to the institutional PCM Unimore project website;
  - **Role badge** (bottom right): tells you whether you are “Admin Access”, “User Access” or “Public View”.
-

## 4. The Dashboard

It's the first page you see after login.

### User dashboard

Shows **the languages assigned to you**. For each language:

- ID and full name (e.g. **ITA – Italian**);
- **status** ( **Pending** , **Waiting** , **Approved** , **Rejected** );
- **progress bar** (number of answers given / total questions, percentage);
- **Fill in** button (or **View rejection and reopen** if the language was rejected) leading to the compilation page.

If the language is **Rejected** , below you'll also see the **admin's note** explaining why it was rejected.

### Admin dashboard

**The PCM Hub** Dashboard MyAccount Dark Logout

**Welcome, Gb**

**WAITING FOR APPROVAL**  
**21**  
 → Review Gargano  
 → Review Greek Calabria A  
 → Review Greek  
 → Review Afrikaans  
 → Review Basque Central

**LANGUAGES BY STATUS**  
**58** PENDING **21** WAITING **50** APPROVED **0** REJECTED  
 Total: 129

**FLAGGED/UNSURE PARAMETERS**  
 Unsure or partially compiled (empty parameters excluded).  
**415**  
 Levantine Arabic 2  
 Swedish 3  
 Tunisian Arabic 1  
 French 10  
 Portuguese 1  
 ...

**LATEST CHANGES**

| Param | Note                                                                          | By                 | Date       |
|-------|-------------------------------------------------------------------------------|--------------------|------------|
| CGB   | [Question CGB_Qb] Corretto refuso nell'esempio di CGB_Qa inserendo il dato... | Marco Longhin      | 19/05/2026 |
| FGT   | [Question FGT_QSa] Test edit. n                                               | Cristina Guardiano | 16/05/2026 |
| ACM   | [Question ACM_Qc] New: Primo tentativo                                        | Cristina Guardiano | 15/05/2026 |
| ACM   | [Question ACM_Qb] Questa question diventerà una stop question nel nuovo...    | Cristina Guardiano | 15/05/2026 |
| ACM   | [Question ACM_Qa] Questa question diventerà una stop question nel nuovo...    | Cristina Guardiano | 15/05/2026 |
| NGL   | Cambiata implicational condition (da ACM, che diventerà NCM: CAMBIARE)        | Cristina Guardiano | 15/05/2026 |
| GFH   | [Question GFH_Qb] New: Aggiunta                                               | Cristina Guardiano | 14/05/2026 |
| GFH   | [Question GFH_Qa] New: Aggiunta                                               | Cristina Guardiano | 14/05/2026 |

3+1 card layout:

- **Waiting for Approval:** count of languages awaiting review + quick links to open them.
- **Languages by Status:** clickable counters **Pending** / **Waiting** / **Approved** / **Rejected** . Clicking a counter expands a panel listing the languages in that status.
- **Flagged/Unsure Parameters:** count of "red" parameters (partial compilation or marked Unsure) grouped by language, with totals.
- **Latest Changes** (right): table with the most recent parameter changes (who, when, what, note).

From here an admin can quickly open languages that need attention.

---



## 5. Shared pages

### Glossary ( /glossary )

The PCM Hub

Dashboard
How to cite (edit)

DATA & TOOLS

Languages
Parameters
Parameters Graph
Questions
Motivations
Taxonomy
Table A
Filters
Accounts
History & Backups
Legal Documents
Migration Import
Backup Restore
Instructions
Manual

Dashboard / Glossary

MyAccount Dark Logout

Glossary

Search by term or description... Add Term

| Term                            | Description                                                                                                                                                                                                                 | Actions     |
|---------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------|
| (morphological) Case            | In nominal morphology it is important to have a demarcation criterion between inflectional (lato sensu, i.e. including agglutinative morphology) Case proper and pre-/post-positional words. Two criteria...                | Edit Delete |
| Article                         | It is used to refer to a determiner that does not express any meaning other than (in)definiteness or just phi-features, and sometimes even less interpretable content (expletive articles). In some languages, articles ... | Edit Delete |
| Atomizing                       | The process shifting the interpretation of a nominal argument from an unbounded reading (a free variable, indirectly bound) to a bounded one (a variable bound by a specific determiner).                                   | Edit Delete |
| Bare noun                       | A noun (or its extended maximal phrase) not introduced by any overt determiner in the canonical Determiner position nor with a determiner-like (atomizing) interpretation derived at a distance from other elemen...        | Edit Delete |
| Bounded vs. unbounded reading   | A nominal argument will be said to have an unbounded reading when it is at the same time obligatorily indefinite, scopeless, and atelic. This reading is typically instantiated in European languages by bare plural ...    | Edit Delete |
| Case suffixes vs. postpositions | How to distinguish case suffixes from postpositions in postpositional languages: \n1. the case suffix occurs on a head noun or adjective before some other phrase-internal word (another adjective, a relative ...          | Edit Delete |

Alphabetical list of technical terms used in the project, with descriptions.

- All users can **search** (search field at the top).
- Admin only: **Add term**, **Edit** and **Delete** buttons on rows.

## Instructions ( /instructions )

The PCM Hub Dashboard / Instructions MyAccount Dark Logout

**Instructions** Edit

### General instructions for entering data

1. **Read** the question carefully.
2. **Identify** the corresponding structure in your language (you may refer to the illustrative examples for guidance).
3. If your language:
  - **has examples** of this structure, select **YES** and provide **at least two examples** in the relevant boxes;
  - **has no examples** of this structure, select **NO**. If possible, provide an ungrammatical example; otherwise, select the appropriate motivation(s) in the checkbox.

In the **Comments** field, you can add any note, clarification, or issue related to your answer and data.

4. **After completing each parameter, save** your answer and data by selecting one of the two confidence buttons:
  - **green**: the data are complete and require no further revision;
  - **red**: you are not sure the data match your answer.

Once you click one of these buttons, your answers (and data) are saved and will **remain available** after you log out. You can modify them anytime you log in again, until final submission.

5. Click **Submit** only after **all data** have been entered. After submission, you can still view your entries, but **you will no longer be able to modify** them.

### Specific instructions for writing glosses

Be aware that we are not requesting an exhaustive analysis of every word in your example: **gloss as little as possible**, just focusing on what is **relevant** with respect to the question you are answering.

Whenever possible, use the glosses provided in the list below. If you need further instructions/details, check the [Leipzig Glossing Rules](#).

If your example comes from a published source, you may keep the original glosses unchanged. Please cite your source in the references box.

| Gloss | Meaning |
|-------|---------|
|-------|---------|

Editable HTML document (powered by TinyMCE) with the compilation guidelines. The default version includes:

- general rules (read → identify → answer YES/NO → save → submit);
- specific instructions for **linguistic glosses** with a symbol table (ACC, NOM, GEN, etc.);
- glossing examples.

Admin only: **Edit** button at top right → a visual editor (you see the result as you type) with formatting, tables, and raw HTML if needed. **Save** persists the document for everyone.

## How to cite ( /how-to-cite )

The screenshot shows the PCM Hub interface. The top navigation bar includes 'The PCM Hub', 'Dashboard / How to cite', 'MyAccount', 'Dark', and 'Logout'. The left sidebar contains a list of tools and data options: Dashboard, How to cite (edit), DATA & TOOLS, Languages, Parameters, Parameters Graph, Questions, Motivations, Taxonomy, Table A, Filters, Accounts, History & Backups, Legal Documents, Migration Import, Backup Restore, Instructions, and Manual. The main content area is titled 'Citation Guidelines' and contains two cards. The first card, 'Parameters & Manifestations', is for Admins and Users and provides a citation example for a journal article. The second card, 'Updated language list & map, analyses, graphs and scripts', is for Public and Admins and provides a citation example for the PCM Hub itself. Both cards include a 'Copy' button and an 'Edit reference' button.

Two cards:

- **Parameters & Manifestations:** how to cite the PCM Hub parameters/questions (recommended for User and Admin).
- **Database** (linguistic data): how to cite the linguistic data collected.

Below each card there is a **Copy** button that copies the full citation to the system clipboard.

Admin only: **Edit** button opens the TinyMCE editor for the citation text.

## My Account ( /me )

The PCM Hub 

Dashboard / My Account MyAccount Dark Logout

### My Account

**Profile**

Name

Surname

Email

[Save Profile](#)

**Change Password**

Current Password

New Password (min 8 characters)

Confirm New Password

[Update Password](#)

**The PCM Hub**

The Hub of the **Parametric Comparison Method** collects and organizes syntactic data from natural languages.

 Licensed under CC BY 4.0 International

**Resources**

[Privacy Policy](#)

[Disclaimer](#)

Get in touch:  
[pcm\\_lab@unimore.it](mailto:pcm_lab@unimore.it)

**PARENT PROJECT**

DHisGram - Syntax out of Africa. Deep history through human grammars.

[Visit the PCM website →](#)

© 2026 – The PCM Hub. All rights reserved. Admin Access

- **Profile:** name, surname, email. **Save** writes directly to your profile.
- **Change password:** old password + new one twice. Minimum 8 characters. If the two new copies don't match, the system rejects.

⚠ If you change the email, the **new email becomes your login credential**. Memorize it well (or use a password manager).

## Manual ( /manual )

The page where you download the PDF manuals of PCM-Hub. The list adapts to your role: linguists see the **User manual**, administrators see the **Complete manual** (linguists + administrators), each in **English and Italian**. Every entry has a download button — or a “coming soon” label until that PDF has been published.

## 6. The Languages page

The list of all the languages in the project. **Above** the table there is an **interactive map** (OpenStreetMap) with a pin for each georeferenced language.

### Filters (they stay at the top)

The screenshot shows the 'Languages' page in the PCM Hub. The sidebar on the left includes links to Dashboard, How to cite (edit), Languages (highlighted), Parameters, Parameters Graph, Questions, Motivations, Taxonomy, Table A, Filters, Accounts, History & Backups, Legal Documents, Migration Import, Backup Restore, Instructions, and Manual. The main content area has a breadcrumb 'Dashboard / Languages' and user controls 'MyAccount', 'Dark', and 'Logout'. The 'Languages' section features a search bar, filters for TOP FAMILY, SUBFAMILY, GROUP, and HISTORICAL, a STATUS dropdown, and a counter '129 of 129 languages'. Below these are buttons for Reset, Download Data, Full Languages Backup, Recompute final values, Import from Excel, and Add Language. At the bottom is a world map with colored pins representing different language families, with a legend below it.

- **Search** global text (ID, name, family, top family, group, status, rejection note).
- **Top Family / Subfamily / Group**: hierarchical multi-select. Choosing a top-family narrows the available subfamilies, and so on.
- **Historical**: all / only historical / only non-historical.
- **Status**: any / Pending / Waiting / Approved / Rejected.

To the right of the filters: counter “X of Y languages”, and the buttons:

- **Reset**: clears filters.
- **Clear exclusions** (appears if you’ve manually excluded languages).
- **Download Data** ▾ (admin): opens a menu to export data for the **currently filtered, non-excluded** languages:
  - **Export language metadata (.xlsx)** — ID, name, family, coordinates, etc.
  - **Export backup (.zip)** — full bundle with all answers and examples for the selected languages (this runs in the background: a small notification box at the bottom-right shows progress).
  - **Map (.png)** — the current map as an image.
  - **Geographic distances (.txt)** — GCD km matrix between the selected languages.

- **+ Full Languages Backup** (admin): creates a DB-side snapshot of **all** languages (asks for an optional note). You'll find it later under History & Backups → Full backups.
  - **Recompute final values** (admin): re-runs the implicational DAG for **all** languages. It runs in the background, with a progress bar. Use after important changes to implicational conditions, or after an import.
  - **Import from Excel** (admin): structured import page.
  - **Add Language** (admin): create a new language manually.
-

## The table

The PCM Hub

Dashboard
How to cite (edit)

DATA & TOOLS

Languages
Parameters
Parameters Graph
Questions
Motivations
Taxonomy
Table A
Filters
Accounts
History & Backups
Legal Documents
Migration Import
Backup Restore
Instructions
Manual

Dashboard / Languages
MyAccount
Dark
Logout

### Languages

SEARCH

TOP FAMILY

SUBFAMILY

GROUP

HISTORICAL

All

All

All

Both

STATUS

Any status

129 of 129 languages

Reset
Download Data
+ Full Languages Backup
Recompute final values
Import from Excel
Add Language

© OpenStreetMap contributors.

COLORING BY TOP-FAMILY

- Arawakan (1)
- Atlantic (1)
- Austronesian (4)
- Basque (2)
- Carib (1)
- Dravidian (3)
- Eskimo-Aleut (1)
- Guaicuruan (1)
- Indo-European (79)
- Japanic (1)
- Koreanic (1)
- Macro-Je (1)
- Mongolic (1)
- Muskogean (1)
- NE-Caucasian (2)
- Quechuan (1)
- Semitic (7)
- Sino-Tibetan (2)
- Tai-Kadai (1)
- Tungusic (3)
- Turkic (5)
- Uralic (9)
- Yukaghir (1)

| <input checked="" type="checkbox"/> | ID  | Name                          | Status   | Top family    | Subfamily    | Group                         | Actions                          |
|-------------------------------------|-----|-------------------------------|----------|---------------|--------------|-------------------------------|----------------------------------|
| <input checked="" type="checkbox"/> | Afk | Afrikaans                     | Waiting  | Indo-European | Germanic     | West Germanic                 | Data Duplicate Debug Edit Delete |
| <input checked="" type="checkbox"/> | Aid | Aidone                        | Approved | Indo-European | Romance      | Gallo-Italic of Sicily        | Data Duplicate Debug Edit Delete |
| <input checked="" type="checkbox"/> | Ar  | Arabic                        | Approved | Semitic       | West Semitic | —                             | Data Duplicate Debug Edit Delete |
| <input checked="" type="checkbox"/> | Arc | Archi                         | Pending  | NE-Caucasian  | Lezgian      | —                             | Data Duplicate Debug Edit Delete |
| <input checked="" type="checkbox"/> | BA  | Bari                          | Approved | Indo-European | Romance      | Apulo-Barese (Upper Southern) | Data Duplicate Debug Edit Delete |
| <input checked="" type="checkbox"/> | Bar | Barletta                      | Approved | Indo-European | Romance      | Apulo-Barese (Upper Southern) | Data Duplicate Debug Edit Delete |
| <input checked="" type="checkbox"/> | cB  | Basque Central                | Waiting  | Basque        | Guipuzcoan   | —                             | Data Duplicate Debug Edit Delete |
| <input checked="" type="checkbox"/> | wB  | Basque Western                | Waiting  | Basque        | Biskayan     | —                             | Data Duplicate Debug Edit Delete |
| <input checked="" type="checkbox"/> | Bot | Botrugno                      | Approved | Indo-European | Romance      | Extreme Southern (Salentino)  | Data Duplicate Debug Edit Delete |
| <input checked="" type="checkbox"/> | BPs | Brazilian Portuguese (Spoken) | Pending  | Indo-European | Romance      | Ibero-Romance                 | Data Duplicate Debug Edit Delete |
| <input checked="" type="checkbox"/> | BPt | Brazilian                     | Pending  | Indo-         | Romance      | Ibero-                        | Data Duplicate Debug Edit Delete |

- **Left checkbox:** includes / excludes the language from the effective set (map, distances, exports). Ticking the box in the header row excludes/includes all visible languages at once.
- **ID, Name, Status, Top family, Subfamily, Group.**
- **Actions:**

- **Data**: opens the compilation page (regular users and admins).
- **Duplicate** (admin): duplicates the language with all answers and examples (useful as a template). The copy is created with a derived ID that you can change afterwards from **Edit**.
- **Debug** (admin): opens a page showing `init` / `final` values of every parameter for the language, with the option to **Apply implicational condition(s)** (re-runs the DAG on this single language).
- **Edit** (admin): edits the language metadata (name, coordinates, family, etc.). The **ID itself can be renamed** here: when you change it, the old ID is kept as a *historical alias*, so future backup restores and Excel imports that reference the old ID still match this language.
- **Delete** (admin): permanently removes the language. A safety prompt asks you to **type the exact language ID** to confirm. It deletes all of the language's operative data (answers, examples, motivation links, parameter values, its own saved backups and historical ID aliases). It does **not** touch the History audit log (a "delete" event is recorded there), the shared Motivations dictionary, or archived answers from removed questions.

---

## Notes on the map

Markers are colored by **top-family**. The legend below the map lists every top-family with its color: hovering a label dims the others (useful to visually isolate a family).

---



## 7. Compiling a language

This is the **heart of the site**: where a linguist enters and answers the questions for a language. You get here from:

- Dashboard → click on an assigned language;
- Languages → row → **Data** button.

The URL is `/languages/<id>/data`.

### Language header

The screenshot shows the PCM Hub interface for the 'Italian (It)' language. The sidebar on the left contains navigation links: Dashboard, How to cite (edit), DATA & TOOLS, Languages (selected), Parameters, Parameters Graph, Questions, Motivations, Taxonomy, Table A, Filters, Accounts, History & Backups, Legal Documents, Migration Import, Backup Restore, Instructions, and Manual. The main content area has a breadcrumb trail: Dashboard / Languages / It / Data. The language name 'Italian (It)' is displayed at the top. Below it is a table of metadata:

|                  |               |             |       |
|------------------|---------------|-------------|-------|
| TOP-LEVEL FAMILY | Indo-European | LOCATION    | Rome  |
| SUBFAMILY        | Romance       | LATITUDE    | 41.90 |
| GROUP            | Italo-Romance | LONGITUDE   | 12.50 |
| HISTORICAL       | No            | SUPERVISOR  | —     |
| ISO CODE         | ita           | INFORMANT   | —     |
| GLOTTOCODE       | ital1282      | SOURCE      | —     |
|                  |               | ASSIGNED TO | —     |

Below the metadata table is a status banner indicating 'Approved' and 'The form is locked.' with buttons for 'Apply implicational condition(s)' and 'Change Status'. At the bottom is a grid of language codes (FGP, FSP, FGN, etc.) and a grid of language codes (ARR, GFP, GP3, etc.).

At the top you see:

- **Name and ID** of the language;
- **Export parametric data (.xlsx)** button (admin) or **Export examples (.xlsx)** (user) to download an Excel with the data you've entered;
- a grid with the language **metadata** (top-family, family, group, ISO/Glottocode, coordinates, supervisor, informant, source, etc.). Only admins also see the assigned user.

### Status banner (below the header)

Shows the current status of the language, a short description and the available workflow buttons. The 4 possible statuses:

| Status                      | Meaning                          | What you can do (assigned User)                                                                             |
|-----------------------------|----------------------------------|-------------------------------------------------------------------------------------------------------------|
| <b>Pending</b>              | Being compiled, editable         | write/edit freely; when done click <b>Submit for approval</b>                                               |
| <b>Waiting for approval</b> | Submitted, awaiting admin review | the form is <b>locked</b> , you have to wait. The admin will receive the language in their Dashboard widget |
| <b>Approved</b>             | Approved, frozen                 | the form is <b>locked</b> read-only. The language joins the official dataset.                               |
| <b>Rejected</b>             | Rejected, needs revision         | read the admin's note, click <b>Reopen</b> to put the language back into <b>Pending</b> and resume editing  |

⚠ **Admins instead** can always edit regardless of status (they see a purple “Admin override” banner indicating this). Admins also have a **Change Status** ▾ dropdown that lets them force the language to any status (Approve/Reject/Pending/Waiting), bypassing the normal workflow.

---

## Parameter wizard (the squares)

The PCM Hub

Dashboard
How to cite (edit)

DATA & TOOLS

Languages
Parameters
Parameters Graph
Questions
Motivations
Taxonomy
Table A
Filters
Accounts
History & Backups
Legal Documents
Migration Import
Backup Restore
Instructions
Manual

Dashboard / Languages / It / Data
MyAccount
Dark
Logout

Italian (It)

Export parametric data

TOP-LEVEL FAMILY Indo-European
SUBFAMILY Romance
GROUP Italo-Romance
HISTORICAL No
ISO CODE ita
GLOTTOCODE ital1282

LOCATION Rome
LATITUDE 41.90
LONGITUDE 12.50
SUPERVISOR —
INFORMANT —
SOURCE —
ASSIGNED TO —

Approved

Approved. The form is locked.

Admin actions

Apply implicational condition(s)

Change Status

Admin override: you are editing a language in approved state. Your changes are saved immediately but the status does not change automatically.

FGP FSP FGN MRR FSN GDP FGG FSG FGK CGB DGR PGA CGR NWD DGD DPQ DCN DNN DIN FGC FGE FCN

ARR GFP GP3 GAD GUN LKO LKP DMP GIT GFH GFL GCN CAL FFP CSE ALP UST GPC PSC PCA PMN RHM

FRC NRC DOR NUP NUD NUC NM1 NM2 NUA ACM NGL DSN DSA DOC NEX PDC PCL APO WAP AGE OPK TSP

TDC TSA TND TDA TLC TNL FBN FNN FVP FVN DPP GMD GMC PEX FEX CEX GGH PGL PPK POK PGE FPO

LPO PKE PKP TPP SCO FGT FPC HMP GSI FGM FGA SPK DGP LKA DMG GFN GEI EAL PNP EAF DSS TDP

TAR

FGP — grammaticalized Person

Distinguishes languages that express Person distinctions on categories other than pronouns from languages that do not (e.g., Japanese).

Everything ready and verified?

Confident -> Next

Any doubts? Save for later.

Unsure -> Next

ADMIN NOTES

FGP\_Qa

Do you find morphological alternations on the verb that depend on the speech role of the subject?

Example YES

1.1. I am leaving

1.2. you are leaving

1.3. Mary/she is leaving

2.1. I/you leave

2.2. (s)he leaves

Answer

YES

Examples

Example #1

Copy Remove

Example text

1. io mangio

Transliteration

Gloss

Example #2

Copy Remove

Example text

2. tu mangi

Transliteration

Gloss

Below the status banner there is a **row of small squares**, one per active parameter. Clicking a square jumps to **that parameter's question block**.

Squares are colored by progress:

- **Grey (empty)** — no answers yet.
- **Yellow (in progress)** — some questions answered but not all, or parameter marked as “Unsure”.
- **Green (complete)** — every question has a valid answer ( `yes` or `no` ; `unsure` does not count as completed).

Tip: use the colors as a visual to-do list. All green = ready to submit.

## A parameter's block

The screenshot shows the 'The PCM Hub' interface. The left sidebar has a 'Motivations' button highlighted in red. The main content area is titled 'Motivations' and contains a table with the following data:

| Code   | Description (Label)                                                                                                                                                                | Linked Questions | Actions     |
|--------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------|-------------|
| MOT001 | The language has no personal/relative pronouns                                                                                                                                     | FGK_Qa           | Edit Delete |
| MOT002 | There are no differences in the morphology of personal/relative pronouns depending on their syntactic function                                                                     | FGK_Qa           | Edit Delete |
| MOT003 | The language has no Case morphology on nouns                                                                                                                                       | DFQ_Qa           | Edit Delete |
| MOT004 | The language has Case morphology on nouns, but there are no morphological Case distinctions expressing spatial relations more complex than stative location, direction, and source | SPK_Qa           | Edit Delete |
| MOT008 | The language has no speech role designating items                                                                                                                                  | FGP_Qf           | Edit Delete |
| MOT009 | Speech role designating items occur to the right of Adjectives/Numerals                                                                                                            | FGP_Qf           | Edit Delete |
| MOT010 | The language has no pronominal Adjectives/Numerals                                                                                                                                 | FGP_Qf           | Edit Delete |
| MOT011 | The language has articles                                                                                                                                                          | FGP_Qg           | Edit Delete |
| MOT012 | The order of cardinal numerals and possessives/adjectives meaning 'other', 'same/even' or 'unique'/the noun itself is fixed                                                        | FGP_Qg           | Edit Delete |
| MOT016 | The language has no group markers                                                                                                                                                  | GDP_Qa SCO_Qa    | Edit Delete |

When you click a square you see:

- header with **ID and name** of the parameter, plus a `short_description` ;
- (admin only) collapsible **Admin notes** area where the admin can write a free-text note for this (language, parameter) pair. The note is not visible to Users and is not exported.
- **one card per question** in the parameter;
- at the bottom-right a **floating toolbar** (it stays in view as you scroll) with two save buttons: **Confident** → **Next** (green) and **Unsure** → **Next** (red). See below.

## Questions

Each question shows:

- a header with the **ID and text** of the question;
- a **More info** button (if there is help text, expandable);
- **Instructions**: general instruction, always visible;
- **Example YES**: an illustrative example, always visible (decorative only, you don't fill it);

- **Instructions (YES) or Instructions (NO):** specific instructions, shown only after you select the corresponding answer;
- **Answer** (dropdown): – select –, YES, NO, UNSURE. This is your answer.

Depending on the chosen answer, the card expands differently:

### You selected NO

The **Motivations** section appears: a list of checkboxes with predefined reasons why this question is “No” for this language (e.g. “no corresponding structure”, “marginal phenomenon”). Tick one or more. If the question has no associated motivations, you’ll see an italic message.

### You selected YES or UNSURE

The **Examples** block appears: here you must enter **at least 2 linguistic examples** illustrating the answer. For each example:

- **Example text:** the sentence in the language (e.g. *Mario ha letto il libro nuovo che gli ho consigliato*);
- **Transliteration:** transliteration if needed (e.g. for non-Latin alphabets);
- **Gloss:** morpheme-by-morpheme gloss (e.g. *book.M.SG.NOM*);
- **English Translation:** English translation;
- **Reference:** source (e.g. *Hauser, M. 1992. p. 12*).

Useful buttons:

- **+ Add another example:** adds a fresh empty card for a new example.
- **Remove:** deletes an example.
- **Copy:** copies the example to the **internal clipboard** (see below).
- **+ Import example from another answer...:** a search through the examples already written for other questions/languages. Find the example (by text / translation / gloss), click it, and it gets **copied as a new example** in this question. **The imported example is an independent copy:** you can edit it freely without affecting the original.

⚠ **Important rule:** if you answer YES or UNSURE, you **must** provide **at least 2 non-empty examples**. If you try to save with fewer than 2, the system blocks the save with a warning and **highlights** the offending card in red. Same constraint applies to UNSURE.

### Comments

At the bottom of each card there is a **Comments** field (free text) for unstructured notes/explanations/doubts.

## Example clipboard

Handy utility to avoid retyping the same example in multiple questions of the same language:

1. In any example card, click **Copy** at the top-right → the example goes into the internal clipboard (a red dashed banner appears below your current examples).
2. Move to another question of the same language → you’ll see the same banner.

3. Click **Paste here** → the example is added as a **new** example in this question. The clipboard stays full so you can paste into more questions in a row.
4. **Clear** on the banner empties the clipboard.

⚠ The clipboard is **language-specific**. If you switch to a different language, the clipboard is automatically cleared to avoid carrying around an “orphan” example.

## Saving a parameter block

At the bottom-right of the current block you see a **floating toolbar** (it stays in view as you scroll) with two buttons:

| Button                             | When to use it                                                                                  |
|------------------------------------|-------------------------------------------------------------------------------------------------|
| <b>Confident → Next</b><br>(green) | Data is complete and verified. The parameter square turns green.                                |
| <b>Unsure → Next</b> (red)         | You have doubts and want to save for later review. The parameter square stays yellow (flagged). |

Both buttons **save all data of the current block** (answers + examples + motivations + comments + admin note if you’re an admin) and then **automatically advance to the next parameter**.

If the save succeeds: no special feedback, you find yourself on the next parameter.

If the save fails, it can be one of these reasons:

- **400 missing examples**: you put YES or UNSURE on a question with fewer than 2 examples → an alert pops up and the offending card flashes red for a few seconds.
- **409 stale block**: meanwhile someone else (usually an admin) modified the same block. The system warns you and automatically reloads the page so you can review the other person’s changes before retrying.
- **Network error**: generic alert, retry later.

## Switching parameter without saving

If you’ve changed something and click another square without saving, the site **asks for confirmation** before discarding the current block’s changes. Same if you close the tab or navigate away via breadcrumb: automatic protection.

## Submit / Reopen / workflow

Once all the parameters you cared about are compiled, **and** the status is **Pending** Or **Rejected** :

- **Submit for approval**: the language goes to **Waiting for approval**. The form **locks** and the admin receives the language in their dashboard.

When the status is **Rejected** :

- **Reopen:** the language goes back to `Pending` (after reading the rejection note). You can resume editing.

Remember: an admin can force the language status at any time and in any direction, via the *Admin override* banner and the **Change Status** dropdown (see *What an admin sees in addition*, below).

---

## What an admin sees in addition

Beyond the purple “Admin override” banner and the **Change Status ▾** dropdown, an admin opening a language has:

- **Apply implicational condition(s)** (link at the top): opens the **Debug** page showing all init/final parameter values for the language, with the option to re-run the DAG just for this language.
  - **Admin notes** inside each parameter block: free-text note for (language, parameter). It is not exported and not visible to Users.
-

## 8. ADMIN ONLY — Parameters

Page: **Sidebar > Parameters** ( `/admin/parameters` ).

### Parameter list

The PCM Hub

Dashboard

How to cite (edit)

DATA & TOOLS

Languages

**Parameters**

Parameters Graph

Questions

Motivations

Taxonomy

Table A

Filters

Accounts

History & Backups

Legal Documents

Migration Import

Backup Restore

Instructions

Manual

Dashboard / Parameters

MyAccountDarkLogout

Parameter Management

SEARCH

SCHEMA

TYPE

LEVEL

ACTIVE

Search every field...

All

All

All

All

111 of 111 parameters

Reset

Download parameters info (.pdf)

+ Full Parameters Backup

Add Parameter

| ID  | Name                                   | Schema             | Type         | Level                         | #Q | #QS | Status | Actions       |
|-----|----------------------------------------|--------------------|--------------|-------------------------------|----|-----|--------|---------------|
| FGP | grammaticalized Person                 | Grammaticalization | Asymmetrical | Crisma et al (2025) - UPDATED | 11 | 1   | Active | PDFBackupEdit |
| FSP | semantic Person                        | Availability       | Subsetting   | Crisma et al (2025) - UPDATED | 2  | 0   | Active | PDFBackupEdit |
| FGN | grammaticalized Number                 | Grammaticalization | Asymmetrical | Crisma et al (2025)           | 6  | 1   | Active | PDFBackupEdit |
| FSN | Number spread to N                     | Spread             | Asymmetrical | Crisma et al (2025)           | 2  | 1   | Active | PDFBackupEdit |
| MRR | multiple reference reduplication       | Availability       | —            | Nuovi - 2026                  | 1  | 0   | Active | PDFBackupEdit |
| GDP | grammaticalized distributive plurality | Spread             | Asymmetrical | Crisma et al (2025) - UPDATED | 1  | 1   | Active | PDFBackupEdit |
| FGG | grammaticalized Gender                 | Grammaticalization | Asymmetrical | Crisma et al (2025)           | 2  | 1   | Active | PDFBackupEdit |
| FSG | semantic Gender                        | Availability       | Asymmetrical | Crisma et al (2025)           | 1  | 1   | Active | PDFBackupEdit |
| FGK | grammaticalized                        | Grammaticalization | Asymmetrical | Crisma et al (2025)           | 2  | 1   | Active | PDFBackupEdit |

Table with: ID, name, position, schema, type, level of comparison, counters `questions_count` (regular questions) and `stop_count` (stop questions), active/inactive status.

At the top: search field, **Add parameter** button, **Export PDF (all)** (generates a PDF with all parameters).

Drag & drop to reorder parameters ( `position` is saved automatically).



## Edit parameter

The PCM Hub

Dashboard
How to cite (edit)

DATA & TOOLS

Languages
Parameters
Parameters Graph
Questions
Motivations
Taxonomy
Table A
Filters
Accounts
History & Backups
Legal Documents
Migration Import
Backup Restore
Instructions
Manual

Dashboard / Parameters / FGP / Edit
MyAccount
Dark
Logout

Edit Parameter: FGP

Download PDF

Parameter ID

FGP

Position

5

Name

grammaticalized Person

Schema

Grammaticalization

Type

Asymmetrical

Level

Crisma et al (2025) - UPDATED

New...

+

⚙

New...

+

⚙

New...

+

⚙

Short Description

Distinguishes languages that express Person distinctions on categories other than pronouns (e.g., English, German, Hungarian, Hebrew) from languages that do not (e.g., Japanese).

Long Description

Extended description of the parameter (optional)

Implicational Condition(s)

e.g. (+FGM | -ABC)

Explanation of the Implicational Condition(s)

Textual explanation (optional)

☒ Active Parameter

Deactivate Parameter...

Locked by dependencies

Brief summary of changes

Download PDF

No changes detected. Edit at least one field to enable saving and to add a note.

Describe the reason for the change...

☐  Mark as test edit

Latest Recorded Changes

11/05/2026: [Question FGP\_Qg] Test edit. Eliminata una motivazione

11/05/2026: [Question FGP\_QSa] RICORDARSI DI MODIFICARE QUESTA QUESTION TENENDO CONTO

Save Parameter

Cancel

Questions

Questions

FGP\_Qg Do articleless nominal arguments with a cardinal numeral following a possessive, an adjective meaning 'other', 'same/even'

Edit

Deactivate

Stop questions

FGP\_QSa Do you find "indicative" (modus realis) clauses where the verb is invariable with respect to Person and the subject is null?

Edit

Deactivate

Where Used

Other parameters that depend on this one.

FGN: grammaticalized Number

FSP: semantic Person

FCN: Person spread to predicate nouns

GFN: Person controlled marking

FGC: unpronounced classifier

NGL: N under GenL

NUD: NP under D

NUP: NP under adpositional arguments

PCL: clitic possessives

MRR: multiple reference reduplication

Click the **Edit** button on a row → edit page with:

- ID (read-only, cannot be changed after creation);
- Name, position, schema, type, level of comparison;
- **Short description** (shown during compilation);

- **Long description** (shown in PDFs);
- **Implicational condition**: string with syntax like `+SPK & -DEM` (see §8.1);
- **Description of the implicational condition**: textual description;
- **Active**: active/inactive switch (an inactive parameter is not offered for compilation and does not show in TableA);
- **Change note** (mandatory): why are you making this change. Goes to History.

To the left of the form you also see:

- the list of the parameter's **questions** with reorder drag & drop, and the option to open the question edit panel directly from here;
- the history of **change notes** (ParameterChangeLog) with author and date.

## Deactivating a parameter

**Deactivate** button: asks for confirmation + the **current admin's password** (safeguard). Once deactivated, the parameter is no longer offered for compilation and doesn't contribute to TableA / DAG / exports. Historical answers remain in the DB.

## Implicational condition (notes)

The target parameter is "comparable" only if its `implicational_condition` is satisfied by the cited "ref" parameters.

- `+P` means: parameter `P` has value `+` for the language;
- `-P` : value `-` ;
- `∅P` : value `∅` (neutralized);
- `&` = AND, `|` = OR, `~` = NOT, `( )` = grouping.

Example: `+SPK & -DEM` means "parameter SPK is `+` AND parameter DEM is `-`". If false, the target parameter is forced to `∅` (with warning).

The condition is **syntactically validated** at save time: if malformed, the system rejects with an error message. If it cites non-existent or inactive parameters, it is **silently ignored** by the DAG (but the save goes through).

## Parameters Graph ( /admin/parameters/graph )

The PCM Hub

Dashboard
How to cite (edit)

DATA & TOOLS

Languages
Parameters
Parameters Graph
Questions
Motivations
Taxonomy
Table A
Filters
Accounts
History & Backups
Legal Documents
Migration Import
Backup Restore
Instructions
Manual

Dashboard / Parameters / Graph

MyAccount Dark Logout

Parameters Graph

Implicational dependencies between parameters. Click a node to inspect its chain; double-click to open it for editing.

Language: none Schema: All Type: All Level: All Show inactive

Search ID or name... Fit all Reload

CHAIN (on click)  
selected  
antecedent  
consequent

No node selected  
Click a node in the graph to see its dependency chain.

Implicational condition

Visualization of the **implicational DAG graph** in an interactive diagram. Useful to understand which parameters depend on which. Each node is a parameter, edges go from `ref` → `target`.

## 9. ADMIN ONLY — Questions

Page: **Sidebar > Questions** ( `/admin/questions` ).

### Question list

The screenshot displays the 'Questions' management interface. On the left, a sidebar titled 'The PCM Hub' contains various navigation links. The 'Questions' link is highlighted. The main area shows a list of questions with their IDs, text snippets, and types. Each question has 'Edit' and 'Delete' buttons. The first question, FGP\_QSa, is marked as a 'Stop' question.

| ID      | Text Snippet                                                              | Type     | Actions     |
|---------|---------------------------------------------------------------------------|----------|-------------|
| FGP_QSa | Do you find "indicative" (modus realis) clauses where the verb is inva... | Stop     | Edit Delete |
| FGP_Qa  | Do you find morphological alternations on the verb that depend on the ... | Standard | Edit Delete |
| FGP_Qb  | Do you find speech-role sensitive clitics that double the subject of t... | Standard | Edit Delete |
| FGP_Qc  | Do you find overt expletive items in subject function?                    | Standard | Edit Delete |
| FGP_Qd  | Do you find overt resumptive items in (direct or indirect) object func... | Standard | Edit Delete |
| FGP_Qe  | Do you find items that can occur as referentially independent pronouns... | Standard | Edit Delete |
| FGP_Qf  | Do speech role designating items precede adjectives that are prenomina... | Standard | Edit Delete |
| FGP_Qg  | Do articleless nominal arguments with a cardinal numeral following a p... | Standard | Edit Delete |
| FGP_Qh  | Do you find speech-role designating morphemes alternating between a st... | Standard | Edit Delete |
| FGP_Qi  | Can common nouns occur bare in non-argument function while the same no... | Standard | Edit Delete |
| FGP_Qj  | Can proper names occur bare in non-argument fuction, while the same pr... | Standard | Edit Delete |
| FGP_Qk  | Are nominal arguments with understood maximality denotation (definiten... | Standard | Edit Delete |

All questions in the system (across all parameters). Filters by parameter, template\_type, active/inactive, stop question. "Stop" questions are those that close a parameter's block.

### Edit/Add question

To create a question, you must first choose its **parent parameter** (ID).

Main fields:

- **ID** (e.g. `FGM_01`, convention `<param_id>_<NN>`);
- **Text**: the question text shown to the linguist;
- **Template type**: classifies the question (useful for statistical filters);
- **Instruction** (always visible during compilation);
- **Instruction YES** (visible only if the answer is YES or UNSURE);
- **Instruction NO** (visible only if the answer is NO);
- **Example YES**: an illustrative example always visible to the linguist as reference;
- **Help info**: long text shown behind a "More info" button;
- **Is stop question**: tick if it closes the parameter;
- **Active**: tick to make it available for compilation;

- **Allowed motivations:** list of motivations selectable by the linguist when answering NO. Only the motivations ticked here appear in the compilation checkbox.
- 

## Destructive changes: the archive

⚠ Modifying a question can **invalidate** answers already given. Typical examples:

- changing `template_type` from `boolean` to something else;
- deleting the question;
- removing motivations from the “allowed” list.

In these cases, the system **does not lose** the data: it automatically moves the related

`Answer` / `Example` / `AnswerMotivation` to the **question archive** ([History](#) → [Old questions archive](#)). They remain readable read-only there, with a snapshot of the question as it was before the change.

---

## 10. ADMIN ONLY — Motivations

Page: **Sidebar > Motivations** ( `/admin/motivations` ).

The screenshot shows the PCM Hub Admin interface. The sidebar on the left has a 'The PCM Hub' header and a list of navigation items: Dashboard, How to cite (edit), DATA & TOOLS, Languages, Parameters, Parameters Graph, Questions, **Motivations** (highlighted), Taxonomy, Table A, Filters, Accounts, History & Backups, Legal Documents, Migration Import, Backup Restore, Instructions, and Manual. The main content area is titled 'Motivations' and includes a search bar 'Search every field (code, label, ...)' and an 'Add Motivation' button. Below this is a table with the following data:

| Code   | Description (Label)                                                                                                                                                                | Linked Questions | Actions     |
|--------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------|-------------|
| MOT001 | The language has no personal/relative pronouns                                                                                                                                     | FGK_Qa           | Edit Delete |
| MOT002 | There are no differences in the morphology of personal/relative pronouns depending on their syntactic function                                                                     | FGK_Qa           | Edit Delete |
| MOT003 | The language has no Case morphology on nouns                                                                                                                                       | DEQ_Qa           | Edit Delete |
| MOT004 | The language has Case morphology on nouns, but there are no morphological Case distinctions expressing spatial relations more complex than stative location, direction, and source | SPK_Qa           | Edit Delete |
| MOT008 | The language has no speech role designating items                                                                                                                                  | FGP_Qf           | Edit Delete |
| MOT009 | Speech role designating items occur to the right of Adjectives/Numerals                                                                                                            | FGP_Qf           | Edit Delete |
| MOT010 | The language has no pronominal Adjectives/Numerals                                                                                                                                 | FGP_Qf           | Edit Delete |
| MOT011 | The language has articles                                                                                                                                                          | FGP_Qg           | Edit Delete |
| MOT012 | The order of cardinal numerals and possessives/adjectives meaning 'other', 'same/even' or 'unique'/the noun itself is fixed                                                        | FGP_Qg           | Edit Delete |
| MOT016 | The language has no group markers                                                                                                                                                  | GDP_Qa SCO_Qa    | Edit Delete |

The **motivations** are the predefined reasons a linguist can tick when answering NO to a question. Example: “no corresponding structure”, “marginal phenomenon”, “phonetically reduced”.

### List

Each motivation has:

- **Code:** unique identifier (e.g. `NO_STRUCT`);
- **Label:** the text shown to the linguist (can be long, multiline).

### Edits

Standard add / edit / delete. Motivations are never fully “deleted”: if used by some answer, their snapshot stays in the archive.

Motivations are **linked to questions** from the [Questions](#) page (field **Allowed motivations**), not from here.

# 11. ADMIN ONLY — Taxonomy

Page: **Sidebar > Taxonomy** (`/admin/taxonomy`).

The screenshot shows the PCM Hub Taxonomy editor. The sidebar on the left contains navigation links: Dashboard, How to cite (edit), DATA & TOOLS, Languages, Parameters, Parameters Graph, Questions, Motivations, Taxonomy (highlighted), Table A, Filters, Accounts, History & Backups, Legal Documents, Migration Import, Backup Restore, Instructions, and Manual. The main content area is titled 'Taxonomy' and includes a breadcrumb 'Dashboard / Taxonomy'. It features three panels: 'Top-Families' (listing Arawakan, Atlantic, Austronesian, Basque, Carib, Dravidian, Eskimo-Aleut, Guaicuruan, and Indo-European with their respective subfamily and language counts), 'Unassigned Subfamilies' (currently empty), and 'Unassigned Groups' (currently empty). Each family entry has 'Edit' and 'Delete' buttons. A '+ New' button is present for each panel. A note at the top of the main area states: 'Click an item to view its children. Drag to reassign its parent. Renaming updates all linked languages.'

Editor of the **language family hierarchy**:

```

Top Family (e.g. Indo-European)
├── Family / Subfamily (e.g. Romance)
│   ├── Group (e.g. Italian-Romance)
    
```

Drag & drop across levels to reorder. Click a name to edit, "+" to add a child, trash to delete.

⚠ The three strings `top_level_family`, `family`, `grp` on Languages are a **stored copy**: they're copied from the taxonomy when the language is saved. Editing the taxonomy **does not** automatically rename the strings on existing languages — you have to reopen and re-save the language to propagate the change.

## 12. ADMIN ONLY — Accounts

Page: **Sidebar > Accounts** ( `/admin/accounts` ).

### Account list

The screenshot displays the 'Accounts' management interface. On the left, the 'The PCM Hub' sidebar contains navigation links. The main area shows a search bar and an 'Add Account' button. Below are three tables: 'Administrators' with two entries, 'Users' with one entry, and 'Public Users' which is currently empty.

| Email           | Name      | Languages | Actions                |
|-----------------|-----------|-----------|------------------------|
| admin@pcm.local | Admin PCM | All       | <a href="#">Delete</a> |
| admin@test.com  | Admin     | All       | <a href="#">Delete</a> |

| Email         | Name      | Languages  | Actions                                             |
|---------------|-----------|------------|-----------------------------------------------------|
| user@test.com | user user | 3 assigned | <a href="#">Assign Langs</a> <a href="#">Delete</a> |

| Email | Name | Languages | Actions |
|-------|------|-----------|---------|
|-------|------|-----------|---------|

Table with: email, name, surname, role ( `admin/user/public` ), number of assigned languages.

Buttons:

- **Add account** ( `/admin/accounts/add` ): create a new account.
- **Assign languages** on the row: opens a panel to select the language pool to assign to a user (multi-select).
- **Delete** on the row.



## Add account

The PCM Hub 🔍

Dashboard / Accounts / Add

MyAccount 🌙 Dark Logout

### Create New Account

Name  Surname

Email

Temporary Password (min 8 characters)  Role Standard User ▼

Cancel Create Account

**The PCM Hub**

The Hub of the **Parametric Comparison Method** collects and organizes syntactic data from natural languages.

Licensed under [CC BY 4.0 International](#)

**Resources**

[Privacy Policy](#)  
[Disclaimer](#)

Get in touch:  
[pcm\\_lab@unimore.it](mailto:pcm_lab@unimore.it)

**PARENT PROJECT**

DHisGram - Syntax out of Africa. Deep history through human grammars.

[Visit the PCM website →](#)

© 2026 – The PCM Hub. All rights reserved. Admin Access

Form with: name, surname, email, temporary password (min 8 chars), **role** (dropdown: User / Admin / Public).

After creation, share the credentials with the user; on first login they should change the password.

⚠ Email validation: the system rejects with “Invalid email format” if the email is malformed (e.g. missing `.it`, double `@`, spaces). This prevents creating accounts that then can’t log in.

## Safeguards

- **You cannot delete yourself** (have another admin do it).
- **You cannot delete the last admin** (the site would be left without an administrator).

## Reassigning languages

The **Assign languages** action **replaces** the current pool: if a user had 3 languages assigned and you tick only the other 2 keeping them in the new 5, the original 3 go back to “unassigned” (assignable to another user).

---

## 13. ADMIN ONLY — Table A

Page: **Sidebar > Table A** ( /tablea ).

The screenshot shows the 'Table A' dashboard in the PCM Hub. The sidebar on the left contains navigation links: Dashboard, How to cite (edit), DATA & TOOLS, Languages, Parameters, Parameters Graph, Questions, Motivations, Taxonomy, **Table A**, Filters, Accounts, History & Backups, Legal Documents, Migration Import, Backup Restore, Instructions, and Manual. The main content area is titled 'Table A' and has two tabs: 'Parameters View' (selected) and 'Questions View'. Below the tabs are two filter sections: 'LANGUAGE FILTERS' and 'PARAMETERS FILTERS'. The 'LANGUAGE FILTERS' section includes checkboxes for specific languages (Afrikaans, Aidone, Arabic, Archi) and dropdowns for TOP FAMILY, SUBFAMILY, GROUP, and HISTORICAL. The 'PARAMETERS FILTERS' section includes dropdowns for SCHEMA and TYPE, and a LEVEL dropdown. Below the filters are 'Apply Filters', 'Reset', and 'Download Data' buttons. At the bottom, there is a search bar and a table with 111 rows. The table has columns for ID, Parameter Name, Implicational conditions, and 16 language columns (ArL, ArE, ArM, ArT, Ku, Ck, Ga, Qui, Swe, Yaa, Ka, Inu, etc.). The first row shows 'FGP' (grammaticalized Person) with values: +, +, +, +, ?, ?, ?, ?, +, ?, ?, ?. The second row shows 'FSP' (semantic Person) with values: 0, 0, 0, 0, ?, ?, ?, ?, 0, ?, ?, ?.

**TableA** is the project's flagship matrix: **one language per column, one parameter (or question) per row**, with the consolidated value in each cell ( + , - , 0 , ? ).

### Modes

- **Params** (default): rows = parameters.
- **Questions**: rows = individual questions.

Switch at the top.

### Filters

- **Languages**: top family / family / group / historical / specific (per-language checkboxes in the lower section);
- **Parameters**: schema, type, level of comparison;
- **Questions**: template, stop question (visible only in Questions mode).

After choosing filters, click **Apply** (or equivalent) to recompute the matrix.

## Search

Above the matrix there is a **text search** box that filters the visible rows (parameters or questions) instantly as you type, on top of the filters you applied above. Handy to jump to a specific parameter/question ID or label without changing the active filters. Clearing the box — or switching between Params and Questions mode — resets the search.

---

## Manual selection

Beyond filters, **each table row** has a checkbox: lets you further restrict the analysis to a subset of parameters/questions.

---

## Exports and analyses

**Download / Analysis** ▾ dropdown at the top:

- **XLSX (parameters)** — Excel with citation header.
- **CSV (transposed)** — standard analytical format.
- **Distance matrices (.txt)** — Hamming and Jaccard matrices.
- **Geographic distances (.zip)** — GCD km matrix.
- **Dendrograms (.png)** — UPGMA dendrograms.
- **Cluster map (.html)** — interactive HTML map of geographic clusters.
- **PCA (.png)** — principal components analysis.
- **Mantel test (.zip)** — modal with three checkboxes (GCD, Hamming, Jaccard) to choose which matrices to correlate. Output: correlation tables + plots.

⚠ Distances and clusters are meaningful only on sufficiently large and homogeneous sets. Languages without coordinates are excluded from geographic distances, and the export reports which ones were skipped.

---

## 14. ADMIN ONLY — Filters (Queries Q1–Q11)

Page: **Sidebar > Filters** ( /queries ).

The screenshot shows the 'Filters & Queries' section of the PCM Hub. On the left is a sidebar with a menu including 'Dashboard', 'How to cite (edit)', 'DATA & TOOLS', 'Languages', 'Parameters', 'Parameters Graph', 'Questions', 'Motivations', 'Taxonomy', 'Table A', 'Filters' (highlighted), 'Accounts', 'History & Backups', 'Legal Documents', 'Migration Import', 'Backup Restore', 'Instructions', and 'Manual'. The main content area is titled 'Filters & Queries' and contains a 'Queries Configuration' section with 11 predefined queries. To the right of this section is a search bar labeled 'PARAMETER' with a dropdown menu 'Select Parameter...' and a 'Search' button.

11 predefined views to query the database in a focused way. Menu on the left (collapsible), main area on the right.

| Query      | Question                                                    |
|------------|-------------------------------------------------------------|
| <b>Q1</b>  | Show implicational condition(s) (per parameter)             |
| <b>Q2</b>  | Show parameter values for all languages (per parameter)     |
| <b>Q3</b>  | Show <b>why</b> a parameter is neutralized (per language) ★ |
| <b>Q4</b>  | Parameters with value + (per language)                      |
| <b>Q5</b>  | Parameters with value − (per language)                      |
| <b>Q6</b>  | Parameters with value 0 (per language)                      |
| <b>Q7</b>  | Comparable parameters (per pair of languages)               |
| <b>Q8</b>  | Question with answer YES (per language)                     |
| <b>Q9</b>  | Question with answer NO (per language)                      |
| <b>Q10</b> | Show answers and examples (per question)                    |
| <b>Q11</b> | Question without an answer (per language)                   |

### Q3 — the richest

It's the **DAG debug view**: pick a language and a neutralized parameter, and you get:

- the parameter's implicational condition;
- for each `ref` cited in the condition, what its value is ( `value_eval` if present, else `value_orig` );
- whether the condition is satisfied or not;
- the list of linguist Answers that contributed to each ref's `value_orig`.

Each `ref` is also tagged with its **state**. A special **"NO ANSWERS"** tag marks the refs that have *no contributing answers at all*, so you can tell apart "neutralized because the ref is genuinely `- / 0`" from "we simply don't have data on that ref yet".

Useful to understand **why** a particular parameter is not being compared in a particular language.

---

### Q10 — answers and examples

Q10 has 2 optional filters (language + parameter) to **restrict the dropdown of available questions**. Leaving them empty, the dropdown shows all the ~N hundreds of system questions.

---

## 15. ADMIN ONLY — History, Backups, Migration, Backup Restore, Import Excel, Recompute

Everything related to **audit, snapshots, mass import/export**.

### History & Backups ( /admin/history )

The site's **audit hub**. The page has **4 tabs** at the top: each one answers a different question (“who changed what”, “who answered what”, “do I have a complete snapshot somewhere”, “what happened to the old version of a question?”). The tabs share the same filter-table layout but populate different data.

#### “Change history” tab

The screenshot shows the PCM Hub interface. The sidebar on the left contains navigation links: Dashboard, How to cite (edit), DATA & TOOLS, Languages, Parameters, Parameters Graph, Questions, Motivations, Taxonomy, Table A, Filters, Accounts, History & Backups (highlighted), Legal Documents, Migration Import, Backup Restore, Instructions, and Manual. The main content area is titled 'History & Backups' and has four tabs: Change history (selected), Answer changes, Full backups (languages & parameters), and Old questions archive. Below the tabs are filters for ENTITY TYPE (All), ENTITY ID (e.g. FGM, FGM\_01...), OPERATION (All), SOURCE (All), USER (All), and FROM (DAY) (dd/mm/yyyy). There are also fields for TO (INCLUSIVE) and TEXT SEARCH. A 'Reset' button and an 'Apply filters' button are present. Below the filters, it says '939 total versions'. A table displays the history of changes with columns: When, What, Op., Source, Author, Note, and Detail. The table shows several rows of changes, all marked as 'Updated' by Cristina Guardiano. Each row has an 'Open' button in the Detail column.

| When                 | What                                     | Op.     | Source | Author             | Note | Detail |
|----------------------|------------------------------------------|---------|--------|--------------------|------|--------|
| 20/05/2026, 17:36:37 | Language<br>It — Italian                 | Updated | Manual | Cristina Guardiano | —    | Open   |
| 20/05/2026, 10:33:58 | Language<br>Lat_Sat — Latin_Satyricon    | Updated | Manual | Cristina Guardiano | —    | Open   |
| 20/05/2026, 10:32:57 | Language<br>Lat_It — Latin_Itinerarium   | Updated | Manual | Cristina Guardiano | —    | Open   |
| 20/05/2026, 10:32:38 | Language<br>Lat_It — Latin_Itinerarium   | Updated | Manual | Cristina Guardiano | —    | Open   |
| 20/05/2026, 10:29:49 | Language<br>Lat_Ca — Latin_Cato          | Updated | Manual | Cristina Guardiano | —    | Open   |
| 20/05/2026, 10:27:21 | Language<br>Lat_NTL — Latin_NewTestament | Updated | Manual | Cristina Guardiano | —    | Open   |

Table of **all changes** to *non-Answer* entities in the system: **parameter**, **question**, **motivation**, **language**. Designed to answer “who modified parameter FGM and why”, “when was motivation MOT042 created?”, “who deleted language XYZ last month?”.

Available filters: **Entity type** (dropdown), **Entity ID** (e.g. **FGM**, **FGM\_01**), **Operation** (create / update / delete), **Source** (manual = panel edit, excel\_import = arrived from an Excel import, system = generated by the app), **User** (who did it), **From / To** (date range), **Text search** (searches the ID or note). The **Reset** button clears all filters, **Apply filters** re-runs the query.

Click **Open** on a row (or the row itself) → a **side panel** slides in with a **before/after comparison**: for each modified field, the old value in red on the left and the new in green on the right, plus a collapsible full snapshot at the bottom.

## “Answer changes” tab

The PCM Hub

Dashboard
How to cite (edit)

DATA & TOOLS

Languages
Parameters
Parameters Graph
Questions
Motivations
Taxonomy
Table A
Filters
Accounts
**History & Backups**
Legal Documents
Migration Import
Backup Restore
Instructions
Manual

Dashboard / History & Backups

MyAccount Dark Logout

History & Backups

Change history
**Answer changes**
Full backups (languages & parameters)
Old questions archive

ENTITY ID

e.g. FGM, FGM\_01...

OPERATION

All

SOURCE

All

USER

All

FROM (DAY)

dd/mm/yyyy

TO (INCLUSIVE)

dd/mm/yyyy

TEXT SEARCH

Search ID and note...

19025 total versions

Reset Apply filters

| When                 | What                   | Op.     | Source | Author             | Note | Detail |
|----------------------|------------------------|---------|--------|--------------------|------|--------|
| 19/05/2026, 17:43:49 | Answer<br>mMB:RHM_QSa  | Updated | Manual | Emanuela Li Destri | —    | Open   |
| 19/05/2026, 17:43:49 | Answer<br>mMB:RHM_Qa   | Updated | Manual | Emanuela Li Destri | —    | Open   |
| 19/05/2026, 17:43:44 | Answer<br>mMB2:RHM_QSa | Updated | Manual | Emanuela Li Destri | —    | Open   |
| 19/05/2026, 17:43:43 | Answer<br>mMB2:RHM_Qa  | Updated | Manual | Emanuela Li Destri | —    | Open   |
| 19/05/2026, 17:37:16 | Answer<br>Rm:TSA_Qj    | Updated | Manual | Emanuela Li Destri | —    | Open   |
| 19/05/2026, 17:37:16 | Answer<br>Rm:TSA_Qi    | Updated | Manual | Emanuela Li Destri | —    | Open   |
| 19/05/2026, 17:37:16 | Answer<br>Rm:TSA_Qk    | Updated | Manual | Emanuela Li Destri | —    | Open   |

The “Answer-focused” version of the same table. Every time a linguist (or admin) clicks **Confident** → **Next** or **Unsure** → **Next** in a parameter block, a row appears here for every touched answer. Designed to answer “when did user X put YES on question FGM\_Qb for Italian?” or “who changed the French answer for parameter SPK on day Y?”.

Same experience as the other tab: filters, table, click a row → side panel with the comparison. The split exists only because Answers change much more frequently than other entities (every block save) and mixing them with parameters/questions would make the “Change history” tab unreadable.



## “Full backups (languages & parameters)” tab

**The PCM Hub**

Dashboard / History & Backups

MyAccount Dark Logout

### History & Backups

Change history Answer changes **Full backups (languages & parameters)** Old questions archive

Languages Parameters

#### Create global languages backup

Snapshot of **every language** with answers and examples. Useful before major changes — backups remain until they are explicitly deleted.

Note (optional)  

+ Create languages backup now

| Date                 | Note         | Languages | Admin                         | Actions                               |
|----------------------|--------------|-----------|-------------------------------|---------------------------------------|
| 20/05/2026, 17:54:32 | May 20, 2026 | 129       | cristina.guardiano@unimore.it | <span>Open</span> <span>Delete</span> |
| 17/05/2026, 19:04:21 | May16_2026   | 125       | cristina.guardiano@unimore.it | <span>Open</span> <span>Delete</span> |
| 15/05/2026, 00:52:17 | May15_00:52  | 125       | cristina.guardiano@unimore.it | <span>Open</span> <span>Delete</span> |

List of **complete snapshots** of the system, grouped by date and time. Sub-tabs **Languages** or **Parameters** (switch at the top), selecting two different snapshot types:

- **Language backups** are created from **Languages** → **+ Full Languages Backup** and contain all languages with answers and examples at the moment of capture.
- **Parameter backups** are created from **Parameters** → **+ Full Parameters Backup** and contain the state of all parameters (definitions, implicational conditions, descriptions) at capture time.

You can also **create one on the fly** from here: the top card has an optional **Note** field and a **+ Create languages backup now** (or **+ Create parameters backup now** on the other sub-tab) button. Clicking a row in the table opens the backup detail, with the option to download an Excel of all data for audit or external restore.

## “Old questions archive” tab

The screenshot displays the PCM Hub interface. On the left is a sidebar titled 'The PCM Hub' with a menu of options: Dashboard, How to cite (edit), DATA & TOOLS (Languages, Parameters, Parameters Graph, Questions, Motivations, Taxonomy, Table A, Filters, Accounts), History & Backups (highlighted in red), Legal Documents, Migration Import, Backup Restore, Instructions, and Manual. The top bar shows 'Dashboard / History & Backups', 'MyAccount', 'Dark' theme toggle, and 'Logout'.

The main content area is titled 'History & Backups' and contains four tabs: 'Change history', 'Answer changes', 'Full backups (languages & parameters)', and 'Old questions archive' (selected). Below the tabs is a text box explaining that each row groups archived versions of a single question, created when a question is saved with the 'Save and delete the linked data' button. A search bar is provided with the placeholder 'Search by question ID, parameter, archived text or note...'. Below the search bar is a table with the following structure:

| Question ID               | Parameter | Archived versions | Latest archive | Actions |
|---------------------------|-----------|-------------------|----------------|---------|
| No archived question yet. |           |                   |                |         |

When a question is modified destructively (see §9 — `template_type` change, deletion, removal of motivations) or deleted, its Answers/Examples/AnswerMotivations are **not lost**: they are moved here to the archive together with a snapshot of the question text as it was.

Each row in the table groups **all archived versions of the same question** (e.g. if FGM\_Qa was “broken” 3 times, you see 3 versions here). The **Show versions** button opens the detail: for each version you see the original text, the motivations allowed at the time, and all historical answers from every language to that version of the question.

Useful when you have to demonstrate to a reviewer “the original linguistic data still exists, even if the question has since been modified”.

## Migration Import ( /admin/migration-import ) — super-admin only, dangerous

The PCM Hub

Dashboard
How to cite (edit)

DATA & TOOLS

Languages
Parameters
Parameters Graph
Questions
Motivations
Taxonomy
Table A
Filters
Accounts
History & Backups
Legal Documents
**Migration Import**
Backup Restore
Instructions
Manual

Dashboard / Migration Import
MyAccount
Dark
Logout

### Restore Database

Carica il **Migration Bundle ZIP** generato dal vecchio sito per popolare il nuovo DB con lingue, parametri, domande, motivazioni e risposte già compilate.

**⚠ Operazione distruttiva**

- Con wipe attivo, vengono **cancellate tutte le tabelle dati** (lingue, parametri, domande, risposte, esempi, motivazioni, glossario, snapshots, change logs, tassonomia).
- Gli utenti esistenti NON vengono toccati. Viene comunque (ri)creato l'admin di default con le credenziali da env ADMIN\_EMAIL/ADMIN\_PASSWORD (default: admin@pcm.local/admin).
- Tutte le risposte importate sono salvate come **pending** e il DAG viene eseguito per ogni lingua a fine import (Tabella A e dashboard saranno subito popolate).
- Pensato per essere usato **una sola volta** al primo avvio del nuovo sito. Dopo, nascondi/rimuovi questo bottone.

**Contenuto atteso del bundle**

```

PCM_migration<ts>.zip
├─ 00_languages.xlsx           (anagrafica + family/top/group)
├─ 01_motivations.xlsx        (ID, Code, Label)
├─ 02_parameters.xlsx         (ID, Position, Name, ...)
├─ 03_questions.xlsx          (ID, Parameter ID, Text, ...)
├─ 04_question_allowed_motivations.xlsx (Question ID, Motivation Code)
├─ 06_glossary.xlsx           (Word, Description) [opzionale]
├─ 08_unsure_flags.xlsx       (Language ID, Parameter ID) [opzionale]
└─ data/
   └─ <Lingual>.xlsx          (foglio Database_model)
   └─ ...

```

**Bundle ZIP (max 200 MB)**

No file chosen

☒ **Wipe completo** prima dell'import (consigliato per la prima migrazione)

Per confermare il wipe, scrivi **WIPE** qui sotto:

**The PCM Hub**

The Hub of the **Parametric Comparison Method** collects and organizes syntactic data from natural languages.

 Licensed under [CC BY 4.0 International](#)

**Resources**

[Privacy Policy](#)

[Disclaimer](#)

Get in touch:  
[pcm\\_lab@unimore.it](mailto:pcm_lab@unimore.it)

**PARENT PROJECT**

DHISGram - Syntax out of Africa. Deep history through human grammars.

© 2026 – The PCM Hub. All rights reserved.

⚠ Visible **only to super-admins**, and shown in **red** in the sidebar because it can **wipe the database**.

Used to import the **legacy site's ZIP bundle** (Django legacy) during go-live. Typical procedure (see `DEPLOY_PROCEDURA.txt`):

1. Download the bundle from the legacy site.
2. Go to Migration Import.

3. Select the ZIP file.
4. Tick **wipe = true** to clean the DB before importing.
5. Click **Import**.
6. Wait (can take minutes, there are progress indicators).

After import the admin password is **reset to** `ADMIN_PASSWORD` from the Portainer env vars (change the password **after** the import, not before).

Validation: the ZIP is capped at 200 MB and goes through safety checks on its size and on the names of the files inside it.

## Backup Restore ( /admin/backup-restore ) — super-admin only

The PCM Hub

Dashboard

How to cite (edit)

DATA & TOOLS

Languages

Parameters

Parameters Graph

Questions

Motivations

Taxonomy

Table A

Filters

Accounts

History & Backups

Legal Documents

Migration Import

Backup Restore

Instructions

Manual

Dashboard / Backup Restore

MyAccount Dark Logout

Backup & Restore

Download a complete site backup for disaster recovery, or upload a backup zip to restore schema, languages, glossary, compilation data and (when present) site content / submissions / archived questions.

Export full backup

Generates a `PCM_full_backup_*.zip` with everything the standard backup contains plus the site's satellite data: editable site content, submission history, parameter submission snapshots and archived questions. Users are **not** included (manage them via your DB tooling).

What's the difference vs the standard backup?

Download full backup (.zip)

How to get the bundle for restore

1. Use the **Download full backup** button above for a disaster-recovery snapshot, or open the [Languages](#) page and pick **Download Data** → **Export backup (.zip)** for the lighter linguistic-data-only snapshot.
2. Save the `PCM_*.backup_*.zip` file and upload it below.

Files contained in the zip (technical reference)

Backup ZIP file

Choose File No file chosen

☐ **Wipe data tables before restore** (destructive)

Start restore

← Need Migration Import instead?

The PCM Hub

The Hub of the **Parametric Comparison Method** collects and organizes syntactic data from natural languages.

Licensed under  
CC BY 4.0 International

Resources

[Privacy Policy](#)  
[Disclaimer](#)  
 Get in touch:  
[pcm\\_lab@unimore.it](mailto:pcm_lab@unimore.it)

PARENT PROJECT

DHisGram - Syntax out of Africa. Deep history through human grammars.

Visit the PCM website →

© 2026 – The PCM Hub. All rights reserved.

Admin Access

Restore of a **ZIP bundle exported** from [Languages](#) → [Download Data](#) → [Export backup \(.zip\)](#). Lets you restore a specific set of languages from a previous snapshot, without wiping the DB.

## Import from Excel ( </admin/import-excel> )

The screenshot displays the 'Import from Excel' page in the PCM Hub. The interface includes a sidebar on the left with navigation options like Dashboard, Languages, Parameters, and Migration Import. The main content area is titled 'Import from Excel' and contains a 'Strategy' section with bullet points explaining the import process. Below this is a 'File Excel (.xlsx, max 50 MB)' section with a file upload button and 'Start Import'/'Cancel' buttons. The footer contains project information, resources, and a 'Parent Project' section.

**The PCM Hub** 13

Dashboard / Import Excel MyAccount Dark Logout

### Import from Excel

Upload an Excel file to import schema (Motivations, Parameters, Questions, QAM) and/or filled-in data of a single language (sheet `Database_model`).

**Strategy**

- **Schema** (Motivations / Parameters / Questions / QAM): *strict update*. If the `id` exists in the DB, the fields are replaced with the value from the file. If the `id` does not exist, the row is an error (skipped, included in the report). Entities not mentioned in the file remain untouched.
- **Database\_model**: *full replace* of the language. All answers/examples/motivations for the language are deleted, then only valid rows are inserted. Invalid rows remain empty (unanswered) and are included in the report.
- **Cascading errors**: if a motivation/question fails, the dependent rows generate an explicit error (never silent).

**File Excel (.xlsx, max 50 MB)**

Choose File No file chosen

Start Import Cancel

**The PCM Hub**

The Hub of the **Parametric Comparison Method** collects and organizes syntactic data from natural languages.

Licensed under [CC BY 4.0 International](#)

**Resources**

[Privacy Policy](#)  
[Disclaimer](#)

Get in touch:  
[pcm\\_lab@unimore.it](mailto:pcm_lab@unimore.it)

**PARENT PROJECT**

DHisGram - Syntax out of Africa. Deep history through human grammars.

[Visit the PCM website →](#)

© 2026 – The PCM Hub. All rights reserved. Admin Access

Structured Excel import. 50 MB cap on the file. The sheet must follow the same format produced by the site's Excel export ( `Database_model` sheet).

## Recompute final values

⚠ Reached **from Languages** → **Recompute final values**, no dedicated page.

Re-runs the **implicational DAG** for **all** languages in the system. Use:

- after important changes to implicational conditions;
- after a bulk import;

- if you suspect some `value_eval` is stale.

It runs in the background (it can take a few minutes on large datasets). A small notification box at the bottom-right shows progress. When done: “Recompute complete” message, or “Recompute completed with N error(s) over M language(s). See server logs for details” if some language has problems.

---

## Legal Documents ( `/admin/legal-documents` )

Where an admin manages the versions of the **Terms of Use** and the **Privacy Notice**. Uploading a new PDF for a document type publishes it as the **current** version for everyone — and triggers, on their next login, the acceptance modal described in §2.

The page has:

- two **upload** cards, one per document type (Terms of Use, Privacy Notice);
- an **All versions** table listing every version with its **Type**, **Version**, **Published** date, **Status** (current / superseded) and a link to the **File**.

Older versions are kept (never overwritten), so the record of “who accepted which version” stays intact.

---

## 16. Common errors and what to do

---

### “Form locked by the current language status”

The language status is `Waiting for approval` or `Approved`, and you are not an admin. Wait for the decision, or (if you are the assigned user and the language is `Rejected`) click **Reopen**.

### “Question X needs at least 2 valid examples when answering YES or UNSURE”

You picked YES or UNSURE on a question with fewer than 2 non-empty examples. Add/complete the examples and retry.

### “This block has been modified by another session...”

Another user (usually an admin) modified the same block while you were working on it. The page automatically reloads: review the other person’s changes before retrying your save.

### “Wrong email or password”

Wrong credentials. If you don’t remember the password, use **Forgot password?** on the login page to receive a reset link by email.

### “Too Many Requests” at login

You typed the wrong password 5 times within a minute. Wait 1 minute and retry.

### “Invalid email format”

You’re creating an account or changing email with an invalid value (e.g. missing `.it`, space, double `@`). Fix it.

### “You cannot delete your own account”

Have another admin do it.

### “You cannot delete the last remaining administrator”

Create a second admin **before** deleting the existing one.

### The “Submit for approval” button is missing

- Language status is already `Waiting for approval` or `Approved`: nothing to do.
- Status is `Rejected`: see **Reopen**, not Submit.
- You’re not the assigned user for this language: only the assigned user can Submit.
- You’re an admin: admins don’t submit (they go directly through approve/reject).

### The site logged me out unexpectedly

Your session expired. Just log in again. (Sessions are long-lived, so this happens rarely.)

## **I changed the taxonomy but languages still show the old names**

The `top_family` / `family` / `group` strings on languages are a stored copy taken from the taxonomy. Reopen each affected language and Save (even without changing anything) to propagate the new names. To do this in bulk: use Excel export/import.

---



## 17. Quick interface glossary

| Term                                           | Meaning                                                                                                                                           |
|------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Wizard / squares</b>                        | the row of small buttons at the top of the compilation page, one per parameter                                                                    |
| <b>Block / parameter block</b>                 | the set of all questions of a parameter for one language                                                                                          |
| <b>Confident / Unsure</b>                      | the two save buttons of the block. Confident = everything verified; Unsure = I have doubts, will recheck                                          |
| <b>Stale block (409)</b>                       | a block that was modified by another session while you were editing                                                                               |
| <b>Submit for approval</b>                     | sending the language to the admin for review                                                                                                      |
| <b>Reopen</b>                                  | bringing a <code>Rejected</code> language back to <code>Pending</code>                                                                            |
| <b>Approved / Rejected / Pending / Waiting</b> | the 4 states of a language                                                                                                                        |
| <b>Admin override</b>                          | the purple banner reminding the admin they're editing a locked language                                                                           |
| <b>Force status</b>                            | the admin dropdown to override a language's status bypassing the workflow                                                                         |
| <b>Super-admin</b>                             | an administrator with extra privileges — the only role that can access Migration Import and Backup Restore                                        |
| <b>Implicational DAG</b>                       | the parameter dependency graph ( <code>+SPK &amp; -DEM</code> ) deciding whether a value should be neutralized                                    |
| <b>value_orig vs value_eval</b>                | <code>orig</code> = aggregated from the linguist's answers; <code>eval</code> = <code>orig</code> post-DAG (can be <code>0</code> if neutralized) |
| <b>Comparable</b>                              | a parameter is "comparable" between two languages if both have a non-null <code>value_eval</code>                                                 |
| <b>Implicational condition</b>                 | the string like <code>+SPK &amp; -DEM</code> that triggers neutralization                                                                         |
| <b>Neutralized</b>                             | a parameter forced to <code>0</code> because its implicational condition is not satisfied                                                         |
| <b>Flagged / Unsure parameter</b>              | parameter marked "uncertain" by the linguist (yellow square)                                                                                      |
| <b>Red parameter</b>                           | in the Admin Dashboard, "red" parameters = unsure or incomplete                                                                                   |
| <b>Hamming / Jaccard distance</b>              | distance metrics between languages based on parameter values                                                                                      |
| <b>GCD</b>                                     | Geographic Distance, kilometric distance computed from lat/long                                                                                   |
| <b>Mantel test</b>                             | statistical test measuring correlation between distance matrices                                                                                  |
| <b>Top family / Family / Group</b>             | the 3 levels of the linguistic taxonomy                                                                                                           |

|                     |                                                            |
|---------------------|------------------------------------------------------------|
| <b>Instructions</b> | the page with compilation guidelines                       |
| <b>How to cite</b>  | the page with the PCM Hub bibliographic citations          |
| <b>ZIP bundle</b>   | the compressed archive used for migration / backup-restore |
| <b>Recompute</b>    | the job that re-runs the DAG over all languages            |

---

*For doubts, suggestions or bug reports: write to [pcm\\_Lab@unimore.it](mailto:pcm_Lab@unimore.it) (link at the bottom of every page on the site).*