

Analisis and Verification of Program Project 2014

Gianluca Barbon
gbarbon@dsi.unive.it

Cristian De Zotti
cdezotti@dsi.unive.it

Marco Moscardo
mmoscardo@dsi.unive.it

Abstract

Your Abstract Text Goes Here. Just a few facts. Whet our appetites.

1 Introduction

The aim of this analysis is to verify if the application variables contain confidential data, as a result of the use of certain methods that they have saved their results. In this paper we purpose an analysis to find all variables which are classified as potential exported variables using the notion of Class Control Flow Graph. First of all we explain the idea of this analysis applying it to simplified object oriented programs and then using it to extended object oriented language which are the same of the language used by the Android platform. Note: we use the abbreviation “confidential methods” for methods that generate data containing confidential information and “confidential data” to indicate the data generated by confidential methods. We use the verb “export” to indicate all the possible ways to save/export confidential data. Now the main question becomes: in an application that generates sensitive data, are these data exported?

1.1 Data Definition

Data can be classified in three different classes: *personal*, *confidential* or *sensitive*. The main difference between these types of data is the kind of information which are related.

Personal data is ‘data which relates to a living individual who can be identified from those data OR from those data and other information which is in the possession of or is likely to come into the possession of the data controller (e.g. University) and includes any expression of opinion about the individual’ - Data Protection Act (1998).

Confidential data is data that can be connected to the person providing them or that could lead to the identification of a person referred to, such as names, address, etc. This information, which are not in the public domain, are given in confidence, or with data agreed to be kept ‘*confidential*’ (namely secret) between two parties.

Sensitive data is ‘data on a person’s race, ethnic origin, political opinion, religious or similar beliefs, trade union membership, physical or mental health or condition, sexual life, commission or alleged commission of an offence, proceedings for an offence (alleged to have been) committed, disposal of such proceedings or the sentence of any court in such proceedings - Data Protection Act (1998)

In this paper we are only focused on the confidential data that is the most exported data without authorization.

2 Safeness Analysis Formal Definition

Our analysis will be based on the Data Flow analysis techniques, and will be named *Safeness Analysis*. As said before, it will identify exported elements that contains confidential data. This analysis will determine exported and possibly confidential variables at the entry and exit point of each node. We will consider the collection of values composed of $\{x, x[y, z, \dots], n\}$ where x is the exported variable, $[y, z, \dots]$ is the chain of variables used in the definition of x and n is the involved node. Moreover, we will consider $\{x, y, n\}$ as the variable x equal to y in node n (possibly, we can use node number n in association with the name of class, separated by a comma, in case the program has more than one class). Please notice that this last statement has different meanings depending on the fact that the variable consist in an object or in a primitive element, but we will see this later in a more precise way.

Thus, variable x and its chain are exported and potentially confidential if:

- a path p from n to m exists
- variable x is exported and potentially confidential in n
- variable x is never re-defined in p

We have to consider that our *Safeness Analysis* is taking place in an Object Oriented environment. Anyway, we will deal later with complex concepts from O. O. programming, like inheritance and interfaces. On the other hand, we will first start from a simple pseudo-code version of an object oriented programming paradigm. That's to say, an o.o. programming language similar to Java that will use only classes, methods and creators, in order to "make it simple".

2.1 Gen/Kill

Let's consider operations that generate and kill information:

$$gen_{SA}[B] = \{element\ is\ exported\}$$

$$kill_{SA}[B] = \{element\ is\ not\ created\ by\ a\ confidential\ method\}$$

A more precise definition of *gen* and *kill* could be made considering also variable that are not exported directly, but are used in the definition of exported variable. But we decided to have simple *gen* and *kill* definition, and to improve it later for specific cases (please refer to section 2.3).

In order to collect only variables that are exported, our analysis will start from the end of the program. Thus, it will be a *Backward Analysis*. This behaviour is similar to the *Live Variables Analysis* [5] one. We can now specify the features of our analysis.

Analysis direction: backward

Confluence operator: union

$$out[B] = \cup in[S], \text{ over the successor } S \text{ of } B$$

Initialization: empty set, \emptyset

It is now possible to define the equations of the analysis.

2.2 Safeness Analysis equations

$$SA_{exit}(p) = \begin{cases} \emptyset & \text{if } p \text{ is a final point} \\ \cup \{SA_{entry}(q) \mid q \text{ follows } p \text{ in the CFG}\} & \end{cases}$$

$$SA_{entry}(p) = gen_{SA}(p) \cup (SA_{exit}(p) \setminus kill_{SA}(p))$$

At the end of the analysis we will have two possible states:

- no more variables collected in our tables
- some variables are still present in our tables

The first state means that the examined program is *SAFE*. Indeed, if no variables are present in our analysis memory, all the variables considered possibly unsafe have been removed because they are certified as non confidential data.

On the other side, the second state means that the program is *UNSAFE*. This is due to the fact that some variables remains in our analysis memory, confirming that these variables contain confidential data. Thus, our analysis is also capable of locating unsafe variables.

2.3 Difference between objects and primitive data types

The definitions given so far are not sufficient to describe our analysis. Indeed *gen* and *kill* are more complicated. We have to deal with different problems related to the object oriented paradigm. First of all, we have to consider that also variables used in the definition of elements that will be exported may contain confidential data. So a complete analysis has to consider also these variables. Second, it is important to divide variables into two subsets:

- primitive variables
- objects

This necessary distinction comes from various assumptions. First of all, in an object oriented programming language objects are passed by reference, while primitive variables are passed by copy. In example, in Java a variable that uses a class as type does not actually contain an object of that class. Instead, it only stores the position of the object in the system memory [4]. So we present the different cases in a more precise way.

Primitive Variables

export (x)

Variable x is exported with a method. In this case the *gen* step will add the record $\{x, n\}$ in the table into the *gen* column.

x = y

The variable is copied from another one, and we know that it will be exported (notice that, in order to make this *gen* step sound, we also have to know that variable x will not change its value in the path between the copy and the exportation points). In

this case the *gen* step will add the record $\{x, y, n\}$ in the table into the *gen* column. A later *kill* (going backward after this statement) of the copied variable *y* will remove the information added with this *gen* step, and also the information related to the exportation of the *x* variable.

x = method(y)

The variable is used in the creation of another one, and the last one is exported. In this case the *gen* step will add the record $\{x, x[y], n\}$ in the table into the *gen* column. If the primitive variables involved as parameter are more than one, we will have a record like this: $\{x, x[y, x, \dots], n\}$. A later *kill* of the referred variable *y* will remove the information added with this *gen* step, but will not delete the information related to the exportation of the first variable *x*. This is because, even if *y* variable is *SAFE*, the method that generates the first one may make use of confidential information, like other methods or variables belonging to its class, and so we cannot trust variable *x*. In order to check the safeness of variable *x*, we must expand the *CFG* of this method.

x = method()

The variable *x* is generated. If, by expanding and inspecting the *CFG* of this method, we find out (or we already know) that it's *not confidential*, we can perform a *kill* step. Otherwise, no steps are performed.

Objects

x.export()

Object *x* is exported with a method. In this case the *gen* step will add the record $\{x, n\}$ in the table into the *gen* column.

CClass x = y

The object is referred from another one, and the last one is exported. In this case the *gen* step will add the record $\{x, y, n\}$ in the table into the *gen* column. A later *kill* of the referred object (*y*) will remove the information added with this *gen* step, and also the information related to the exportation of the first object (*x*).

CClass x = new CClass(y)

The object is used in the creation of another one, and the last one is exported. In this case the *gen* step will add the record $\{x, x[y], n\}$ in the table into the *gen* column. A later *kill* of the referred object *y* will remove the information added with this *gen* step, but will not delete the information related to the exportation of the first object (*x*). This is because, even if *y* object is *SAFE*, the creator of the

first one may make use of confidential information, and so we cannot trust the *x* object. In order to check the safeness of the *x* object, we must expand the *CFG* of its constructor.

CClass x = new CClass()

The object *x* is created. We cannot make any *kill* step, because we don't know if the constructor of this object is *SAFE*. As said for the previous case, we must expand and inspect its *CFG*.

As we have just seen, primitive variables and objects have different behaviour in the *gen* and *kill* steps. Anyway, the syntax used in the tables of the analysis is quite similar. Furthermore, it's important to remark that a class may declare confidential variables, anyway if we don't have methods that export these variables, the object is *SAFE*. More precisely, objects may contain methods that exports confidential data, but if these methods are not used in the analysed application, these objects can be considered *SAFE*.

2.4 CCFG: Class Control Flow Graph [3]

For the construction of our Control Flow Graph, we must use a different technique in object-oriented language with respect to an imperative language. This is due to the fact that in the object-oriented language multiple classes exist within the same application, and thus our graph must be able to represent the application in its entirety, including the relationship between the various classes given by method calls.

It has been developed an algorithm that allows the construction of CCFG of the application, considering also the relationships between the various classes. The algorithm consists of four steps:

- The first step is to create the *CFG* of the class in question.
- In the second step, however, for each method inside the class, the class of the method is added to ours, and we are replacing the node that contains the method invocation, with the corresponding *CFG*. This operation continues until all the methods contained within the application are covered, including those present in the interior of the classes that are added in the course of work.
- In the third step the update of the various edges of CCFG is made, so that they are connected in an appropriate manner on all sides.
- In the fourth step, the final one, once finished all the above steps, the algorithm returns the CCFG application.

2.4.1 CCFG Constructor Algorithm

```
algorithm: ConstructorCCFG(C):G
input: C a class
output: G a CCFG of C

begin ConstructCCFG

  /* Step1: Construct the class call
  graph for the class C*/
  G = Construct the CFG of C

  /* Step2: Replace each call graph node
  with the corresponding CFG */
  foreach method M in C do
    Add M class to C
    Replace M node in G with CFG of M class

  /* Step3: Connect every individual
  CFG */
  Update edges appropriately

  /* Step4: Return the completed
  CCFG of G */
  return G

end ConstructCCFG
```

2.5 Safeness Analysis Algorithm

The following section shows the algorithm used to perform the safeness analysis, which was derived from the equations introduced in Section 2.2, applied to the CCFG of the application:

```
for each node n in CCFG
  in[n] :=  $\emptyset$ ; out[n] :=  $\emptyset$ ;
repeat
  for each node n in CCFG in reverse topsort order
    in'[n] := in[n];
    out'[n] := out[n];
    out[n] :=  $\cup \{in[m] \mid m \in succ[n]\}$ ;
    in[n] := gen[n]  $\cup$  (out[n]-kill[n]);
until (in'[n] = in[n] && out'[n] = out[n] for all n)
```

3 Examples

We now apply our analysis to some examples written with the proposed simple version of an object oriented programming language.

3.1 Example 1

3.1.1 Code

```
1 CustomClass x = new CustomClass();
2 CustomClass y = x;
3 y.export();
```

3.1.2 Description

This example has been created in order to show how important can be a Class Constructor in considering a variable confidential or not. We first notice that we can have various possibilities when creating a new object:

- constructor doesn't make use of confidential data
- constructor USES confidential data
- parameters used in the constructor invocation contain confidential data

If we apply our analysis to this example, we will have the following steps:

1. gen step for object y (with export method)
2. object y results as a reference to x, so also x is added in the table
3. the kill step of x and y depends on the results of the analysis of the constructor method and of the CustomClass class (notice that variables declared in the class may be obtained as results of confidential methods)

We can see that it is important to expand completely a CCFG in order to discover all the interesting path. So, by expanding the CCFG of *CustomClass* we can have two cases:

- constructor USES confidential data, so variables x and y cannot be killed, thus the application is *UNSAFE*
- constructor doesn't make use of confidential data, so variables x and y are both killed and the application is *SAFE*

3.1.3 CCFG



3.1.4 Tables

We present here two possible version of tables. The first one show the case in which the constructor is *UNSAFE*.

n	gen	kill
3	{y}	
2	{y, x}	
1		{x}

n	entry	exit
3	{y}	
2	{y, x}	{y}
1	{y, x}	{y, x}

While the second one show the case in which the constructor is *SAFE*. As we can see in the tables below, the variables under suspicion are killed and the application is considered *SAFE*.

n	gen	kill
3	{y}	
2	{y, x}	
1		{x, y}

n	entry	exit
3	{y}	
2	{y, x}	{y}
1		{y, x}

3.2 Example 2

In this example we will see a very simple application that uses two class.

3.2.1 Code

```

. class MClass{
.
1   void main (String[] args) {
2       Text t = new Text("Hello!");
3       exportMethod(t);
.   }
.
4   void exportMethod(Text t) {
5       ...
.       //this method exports
.       //confidential values
.   }
. }
  
```

We now have to consider Text class:


```

. class Text {
1   string s;
.
2   Text(string b) { //constructor
3       string c = confidentialMethod();
4       this.s = b;
5       this.s = this.s + c;
.   }
.
6   string confidentialMethod(){
.       //creates confidential values
7       string confidentialVariable;
8       return confidentialVariable;
.   }
. }
  
```

3.2.2 Description

By only looking at *MClass* object *t* seems to be not confidential. Anyway, we must investigate also *Text* class, because the constructor may contains methods that create confidential data in the new object. In order to do this, we can expand the CCFG of the *Text* constructor. In this way, we will see that the constructor makes use of *ConfidentialMethod*, a method that generates confidential data. So, the object *t* will be considered *UNSAFE* and consequently also the application will be believed as *UNSAFE*.

3.2.3 CCFG

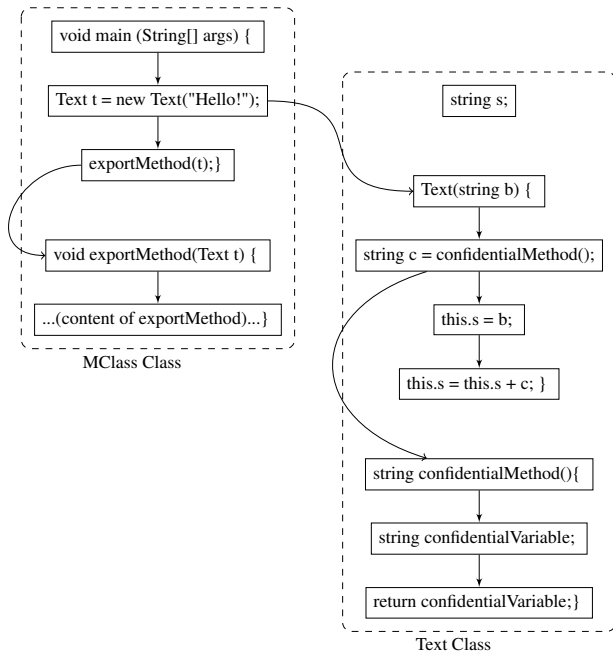

3.2.4 Tables

n	classname	gen	kill
3	MClass	{t,,3, MClass}	
5	Text	{t,t[c],5, Text}	
4	Text	{t,t[c,b],4, Text}	
8	Text		
7	Text		
6	Text		
3	Text		
2	Text		
2	MClass		
1	MClass		
			{b,2,MClass}

n	classname	entry	exit
3	MClass	{t}	
5	Text	{t, c}	{t}
4	Text	{t, c, b}	{t, c}
8	Text	{t, c, b}	{t, c, b}
7	Text	{t, c, b}	{t, c, b}
6	Text	{t, c, b}	{t, c, b}
3	Text	{t, c, b}	{t, c, b}
2	Text	{t, c, b}	{t, c, b}
2	MClass	{t, c}	{t, c, b}
1	MClass	{t, c}	{t, c}

4 Issues with a real Object Oriented Language

This section will explore some specific features of the object oriented programming languages applied to our analysis, in order to see whether it works or it should be expanded. When necessary and possible, we propose a solution to extend the analysis to these feature. Descriptions may make use of examples with the basic pseudocode already used in section 3, expanded with the required object oriented features.

4.1 Interfaces

An interface is used in an object oriented language in order to specify a set of methods that classes must implement. In example, we can have the following interface:

```
public interface InterfaceI {
    int commonMethod();
}
```

It declares a method that will be used by classes that will implement this interface, i.e. classes A and B, that must also implement the given method. Notice that the interface only states the method signature. In this way, all classes can implement the method in a different way, and another class that uses both classes A and B, in example,

class C, will use only one method (and it can also use one type for both, the one of the interface).

Graphically, we will obtain this structure:



4.1.1 Polymorphism

In languages similar to Java a problem appears when more than one class implement the same interface. In this case, it seems difficult to choose the right method (declared in the interface) for a given object. This circumstance is related to a principle called *polymorphism*. Applied to interfaces, this concept states that the real type of an object can determine the correct method to call.

As for our analysis, it can be difficult to face this behaviour. Java does not solve it at compiling time, but only at execution time, by choosing the correct method using the *late binding* [4]. Let us take the previous example. Class C may do not want to know the correct type of an object, and use the interface type:

```
public class C {
    InterfaceI x;
    ...
    x = new A();
    x = new B();
    ...
    x.commonMethod();
}
```

What is the right implementation of commonMethod that we should use? The situation is simpler that one might think. Indeed, when the CCFG algorithm executes, it expands every method. If it runs into a variable with type of an interface, we know that sooner or later it will also find the correct constructor (the interface has no constructor). If we look at the examples, when we will meet *new A()* or *new B()* we will expand the CCFG also for the constructor, thus knowing the correct type of the variable. At the end, when we will meet commonMethod(), we will know that it refers to the last constructor used, so we will use the implementation given by class B.

4.1.2 Overloading

In object oriented programming we have principle similar to the polymorphism, called constructor and method overloading. It consists into functions with same name

but different parameters, that are invoked depending on the type of the parameters. Anyway, for us this is easier to face than polymorphism. Indeed, problems may only arise in the selection of the correct method during the construction of the CCFG. The CCFG algorithm must thus choose the right method by looking at its signature.

4.1.3 Inner Classes

Inner classes are classes declared and implemented internally to another one. As for our analysis, everything is solved during the execution of the CCFG algorithm by expanding the used methods in a way similar to normal classes.

4.2 Inheritance

In object oriented programming language, classes can be derived from other classes, thereby inheriting fields and methods from those classes.

A class that is derived from another class is called a subclass (also a derived class, extended class, or child class). The class from which the subclass is derived is called a superclass (also a base class or a parent class).

Classes can be derived from classes that are derived from classes that are derived from classes, and so on, and ultimately derived from the topmost class, Object. Such a class is said to be descended from all the classes in the inheritance chain stretching back to Object. The idea of inheritance is simple but powerful: When you want to create a new class and there is already a class that includes some of the code that you want, you can derive your new class from the existing class. In doing this, you can reuse the fields and methods of the existing class without having to write (and debug!) them yourself.

A subclass inherits all the members (fields, methods, and nested classes) from its superclass. Constructors are not members, so they are not inherited by subclasses, but the constructor of the superclass can be invoked from the subclass.

In our analysis, when we find an object belongs to a subclass, we know that it can be used also the method of the superclass and we have to pay attention because they can export the confidential information.

4.2.1 Polymorphism

Polymorphism is the ability of an object to take on many forms. The most common use of polymorphism in OOP occurs when a parent class reference is used to refer to a child class object.

It is important to know that the only possible way to access an object is through a reference variable. A reference variable can be of only one type. Once declared, the type of a reference variable cannot be changed.

The reference variable can be reassigned to other objects provided that it is not declared final. The type of the reference variable would determine the methods that it can invoke on the object.

A reference variable can refer to any object of its declared type or any subtype of its declared type. A reference variable can be declared as a class or interface type. For this reason if we don't know the real type of the object we don't know which method use if there is an overriding of a method.

In our analysis when we find a call to a method of an object we have to know if the method is a method of that object class or it is a superclass method. This information is given only when we find the definition of the object. Up to this point we do not know which method is referred to by the call.

Until the information is unknown, the object is inserted in the list of the unsafe variable with the possible another variable used in the call of the method. When we know the class membership then we expand the method using the CCFG and we search if the method exports the variable. In the case in which the method doesn't export variables, we eliminate the variable from the list. If inside the function/procedure we find another class method, we apply this recursively.

4.2.2 Overriding

If a class inherits a method from its super class, then there is a chance to override the method provided that it is not marked final.

The benefit of overriding is: ability to define a behavior that's specific to the subclass type which means a subclass can implement a parent class method based on its requirement.

In object-oriented terms, overriding means to override the functionality of an existing method.

In our analysis when we find a call of an object's method override or not, we have to expand the method using CCFG and look for if the method in such way exports confidential informations. Thus when we find a method, we put inside the list of the unsafe variable the object and all the variable that are used by the method in the call. The element that will be inserted in the list will be like this:

```
[ name_object, var_method, ...]
```

where the point can indicate that in the method can be called other method. So, there are no differences between the idea used for overriding method or not.

4.3 Recursion

The recursion is used when we can see that our problem can be reduced to a simpler problem that can be

solved after further reduction.

Every recursion should have the following characteristics:

- A simple base case for which we have a solution and a return value.
- A way of getting our problem closer to the base case. I.e. a way to chop out part of the problem to get a somewhat simpler problem.
- A recursive call which passes the simpler problem back into the method.

Example:

```
void myMethod(int counter)
{
    if(counter == 0)
        return;
    else
    {
        System.out.println(""+counter);
        myMethod(--counter);
        return;
    }
}
```

In the case of recursion, our analysis works well and does not need to change, because once analyzed the code of the recursive method and seen if it is safe or not, there are no additional steps.

Caution, however, must be made at the time of the construction of CCFG. This is because in the case of recursion, the control flow graph of the method must occur only once, adding an edge that creates the cycle, without having to replicate the CFG for each call. Indeed, if the method is analyzed only once we do not need to repeat the analysis. In this way we avoid the possibility of incurring into an infinite replication, or otherwise having a CCFG of large dimensions that in the end would be too heavy and useless.

4.4 Data Structures

The data structures provided by the Java utility package are very powerful and perform a wide range of functions. These data structures consist of the following interface and classes:

- **Enumeration:** The Enumeration interface isn't itself a data structure, but it is very important within the context of other data structures. The Enumeration interface defines a means to retrieve successive elements from a data structure.

- **BitSet:** The BitSet class implements a group of bits or flags that can be set and cleared individually.
- **Vector:** The Vector class is similar to a traditional Java array, except that it can grow as necessary to accommodate new elements.
- **Stack:** The Stack class implements a last-in-first-out (LIFO) stack of elements.
- **Dictionary:** The Dictionary class is an abstract class that defines a data structure for mapping keys to values.
- **Hashtable:** The Hashtable class provides a means of organizing data based on some user-defined key structure.
- **Properties:** Properties is a subclass of Hashtable. It is used to maintain lists of values in which the key is a String and the value is also a String.

The Safeness Analysis in Data Structures should only pay attention to the methods applied to the various elements of the structure, and verify that they are safe or not, so as applies to simple variables / objects, it works in the same way for the elements of a data structure.

5 Android Environment

Android is not a hardware platform, but a software environment designed specifically for mobile phone or more generally for mobile devices. In general, the platform includes an operating system based on Linux, a rich toolkit of graphical interfaces, a development environment, multimedia support and more.

5.1 Differences between our language (simil-Java) and Android

The runtime environment of Android platform, consists instead of a core library and a virtual machine (VM): together constitute the development platform for Android. The VM of Android is a particular version of the Java Virtual Machine (called Dalvik), specially designed and optimized to run on hardware not performing, such as mobile phones in fact.

User applications are written in Java and run each in its JVM. Are developed with the integration of the package provided by the Android APIs that provide for interaction with the bluetooth, location or telephone, or for the management of the graphic interface and gestures, thus creating a layer of abstraction also on components hardware. Note that the distribution is not what Java ME is performed, but a version specially developed for Dalvik: Java code is compiled and translated it into byte code,

then undergoes further processing in a file format called dex. This additional step allowed us to optimize the code for the JVM, and to disengage from legal problems with Oracle.

5.1.1 Android app peculiarities [2]

Android app are different from a normal java application. First of all, they use different libraries written specifically for the Android environment. Anyway, there are many other differences.

- One of the main concepts in an Android program is the Activity. An activity is responsible for the application lifecycle. Every application can define more activities, one for each phase of its execution. Every activity has 5 states: starting, running, paused, stopped, destroyed.
- Intents are used to describe specific actions. More formally, they are abstract descriptions of operations to be performed. They are used in the launch of an activity [1]
- An Android app makes large use of xml files. The most important one is the AndroidManifest. This file is located into the root of an Android project and describes all the activities performed in the app. Moreover, it also defines some constraints for the application which state the permissions. In example, a permission is needed to use location related methods and libraries.
Other important xml files are the main.xml file in the layout directory, that describes objects containers and their behaviour on the screen, and the various variables files, like string.xml, that contains useful variables for the application.
- R class is automatically created in each project and is used to link all the assets described in the xml files (layout, values, ...) to the other program classes.

5.2 Analysis adaptation to Android Environment

Our analysis needs some adaptation in order to be Applied to Android applications. First, we must consider the various libraries provided by Android. In Safety Analysis all methods that come from the Android libraries and create and/or modify objects are defined SAFE. All methods that do not comply with this rule, so methods that export confidential data, are considered UNSAFE and they cause a *gen* step when they are collected by the SA.

Second, we must consider applications that use confidential data where this behaviour is allowed by the AndroidManifest. As explained in the previous section, all the activities of an app are contained into that xml file. Anyway we do not need to check activity that are not present in the Manifest, because an activity like these will not be executed by the application and will possibly cause an exception (thus a developer normally delete this possibility during the testing phase).

The AndroidManifest also defines the permissions of the application. Methods whose behaviour is not allowed by the permissions are not executed, and the application will be stopped. Anyway, this can lead to unexpected behaviour. In example, we may have a gaming application and allow internet connections in the manifest, in order to send/receive data for place ourself in an on-line rank after each match. But, this game may be a malicious application that also sends outside confidential data that we do not want to share, thanks to the permission in the manifest. This means that we will check all the methods allowed by the Manifest.

5.3 Methods and data structure selection

metodi per salvare dati in file: classe FileOutputStream you can call openFileOutput() to get a FileOutputStream that writes to a file in your internal directory classe File metodo write classe File metodo getTempFile(Context context, String url) the following method extracts the file name from a URL and creates a file with that name in your app's internal cache directory

file esterni: getExternalStorageState() : If the returned state is equal to MEDIA_MOUNTED, then you can read and write your files.

If you want to save public files on the external storage, use the getExternalStoragePublicDirectory() method to get a File representing the appropriate directory on the external storage. The method takes an argument specifying the type of file you want to save so that they can be logically organized with other public files, such as DIRECTORY_MUSIC or DIRECTORY_PICTURES

If you want to save files that are private to your app, you can acquire the appropriate directory by calling getExternalFilesDir() and passing it a name indicating the type of directory you'd like. Each directory created this way is added to a parent directory that encapsulates all your app's external storage files, which the system deletes when the user uninstalls your app.

classe FileProvider metodo getUriForFile

```
// Use the FileProvider to get a content URI
fileUri = FileProvider.getUriForFile(
    MainActivity.this,
    "com.example.myapp.fileprovider",
    requestFile);
```

```

    classe LocationManager
//Define the criteria how to select the
matodo requestLocationUpdates(provider,
metodo provider = locationManager.getBest
Location location = locationManager.

    classe Location double getLatitude() Get the latitude,
in degrees. double getLongitude() Get the longitude, in
degrees. float distanceTo(Location dest) Returns the ap-
proximate distance in meters between this location and
the given location.
    MediaMetadataRetriever class:
        • void setDataSource(String path)
            This method is used to set the media file source path
            in string format.
        • string extractMetadata(int keyCode)
            This method is used to extract metadata as per keys
            selected that are mentioned above.
        • byte[] getEmbeddedPicture()
            This method is used to extract album art associated
            with media file.
    classe ExifInterface
method getAttribute(String tag(vedi http://developer.android.com/reference/android/media/Ex
getLatLong(float[] output):Stores the latitude and longitude value in a float array.

interface GpsStatus.Listener
public method onGpsStatusChanged(int even

```

getPremises() Returns the premises of the address, or null if it is unknown. **String getSubAdminArea()** Returns the sub-administrative area name of the address, for example, "Santa Clara County", or null if it is unknown. **String getSubLocality()** Returns the sub-locality of the address, or null if it is unknown. **String getSubThoroughfare()** Returns the sub-thoroughfare name of the address, which may be null. **String getThoroughfare()** Returns the thoroughfare name of the address, for example, "1600 Ampitheater Parkway", which may be null. **CLASS GEOCODER List<Address> getFromLocation(double latitude, double longitude, int maxResults)** Returns an array of Addresses that are known to describe the area immediately surrounding the given latitude and longitude. **List<Address> getFromLocationName(String locationName, int maxResults, double lowerLeftLatitude, double lowerLeftLongitude, double upperRightLatitude, double upperRightLongitude)** Returns an array of Addresses that are known to describe the named location, which may be a place name such as "Dalvik, Iceland", an address such as "1600 Amphitheatre Parkway, Mountain View, CA", an airport code such as "SFO", etc.. **List<Address> getFromLocationName(String locationName, int maxResults)** Returns an array of Addresses that are known to describe the named location, which may be a place name such as "Dalvik, Iceland", an address such as "1600 Amphitheatre Parkway, Mountain View, CA", an airport code such as "SFO", etc..

CLASS ADDRESS **String getAddressLine(int index)** Returns a line of the address numbered by the given index (starting at 0), or null if no such line is present. **String getAdminArea()** Returns the administrative area name of the address, for example, "CA", or null if it is unknown. **String getCountryCode()** Returns the country code of the address, for example "US", or null if it is unknown. **String getCountryName()** Returns the localized country name of the address, for example "Iceland", or null if it is unknown. **Bundle getExtras()** Returns additional provider-specific information about the address as a Bundle. **String getFeatureName()** Returns the feature name of the address, for example, "Golden Gate Bridge", or null if it is unknown. **double getLatitude()** Returns the latitude of the address if known. **Locale getLocale()** Returns the Locale associated with this address. **String getLocality()** Returns the locality of the address, for example "Mountain View", or null if it is unknown. **double getLongitude()** Returns the longitude of the address if known. **String getPhone()** Returns the phone number of the address if known, or null if it is unknown. **String getPostalCode()** Returns the postal code of the address, for example "94110", or null if it is unknown. **String**

5.4 : Android App Example

This section is devoted to an example applied to a real Android application. This application has been created and tested specifically for this project with Eclipse IDE.

5.4.1 Code

Please refer to Appendix A (p. 13) for the code of the example.

5.4.2 Description

We implemented a simple application that show the instantaneous position of the device. The position is given by the latitude and the longitude. When the position changes, it is automatically updated. Now we explain how works this app.

The first schermate that we find is a simple schermate with a button that when we press it, it redirect us to the second schermate that shows the current location of the device. The localization is done implementing the LocationListener interface and the data of longitude and latitude are given from the method getLongitude() and getLatitude(), respectively. The aim of the implemented

class is to show the current position of the device, so when the device change its locantion the values of longitude and latitude are updated automatically.

The confidantial datas are contained in the variable longitude and latitude, then we have to pay attention if they are exported in some ways. Obviously if they are only modified and not exported in some way, the application is classified as 'safe'.

The expected result of the analysis is that there are no unsafe variable because there are no method that export the confidential data, namely the value of the longitude and the latitude. During the analysis in fact some variables are inserted into the list of unsafe variables as "possible unsafe variable" but in the end, all of them are deleted from it.

The first step of our analysis is done analysing the file AVPtest which contains the main class. Inside it we see that it calls a method that create the activity associated to GeoLocation class, so our attention is focused on this class. Thus We expand this class and analyze it.

In the GeoLocation class, we can see that there are a new call to the costructor LocationUpdateHandler() using the method requestLocationUpdates(...). With that, the program has created a listener that, every time that the position changes, it starts the function LocationUpdateHandler(), for this reason we expand this method. Inside it we can see that there are no method which export confidential data. Using this information we can eliminate the variable associated to the method LocationUpdateHandler() and requestLocationUpdates(...) from the list of possible unsafe variable.

In the end of our analysi we obtain the expect result.

Instead, if we are interested to an unsafe application, we have to modify the point in the application in which the position is updated. In this point we can insert a simple command that send the current position of the device to a malicious user or save its position in a file and sends it later (we can see some examples of method that save the information in a file and share it with other users in the section 'Methods and data structure selection').

5.4.3 CCFG

5.4.4 Tables

6 Conclusions

Blabla

6.1 Future developments



Blabla

References

- [1] ANDROID OPEN SOURCE PROJECT. Android Developers. <http://developer.android.com/>. Accessed: 2014-07-22.
- [2] BURNETTE, E. *Hello, Android: Introducing Google's Mobile Development Platform*, 3rd ed. Pragmatic Bookshelf, 2010.
- [3] HARROLD, M. J., AND ROTHERMEL, G. Performing data flow testing on classes. *Department of Computer Science Clemson University, Clemson*.
- [4] HORSTMANN, C. S. *Big Java*, 2nd ed. John Wiley & Sons, Inc., New York, NY, USA, 2008.
- [5] NIELSON, F., NIELSON, H. R., AND HANKIN, C. *Principles of Program Analysis*. Springer-Verlag New York, Inc., Secaucus, NJ, USA, 1999, ch. 2.1.4.

Notes

- ¹Remember to use endnotes, not footnotes!

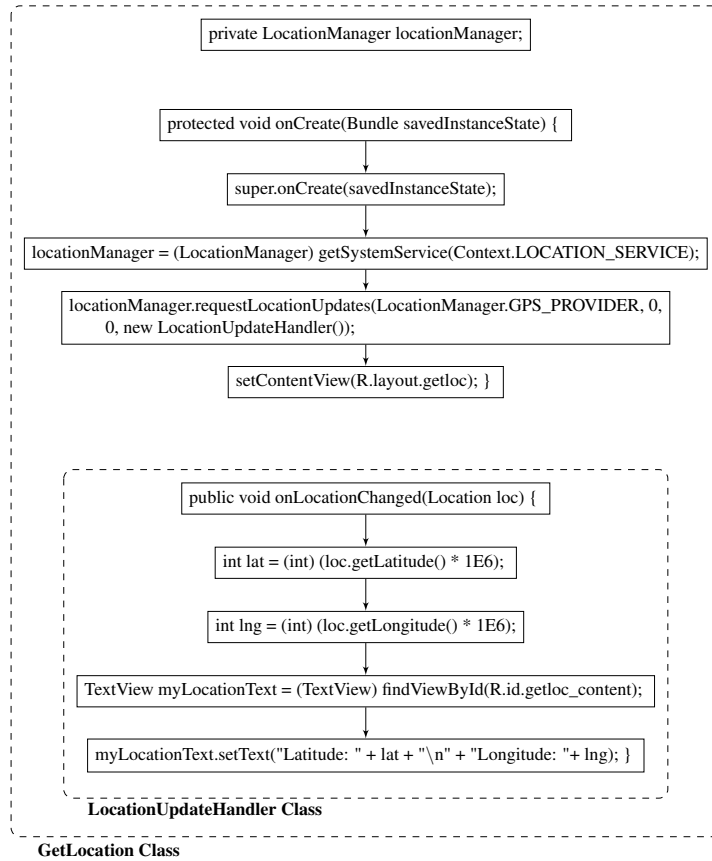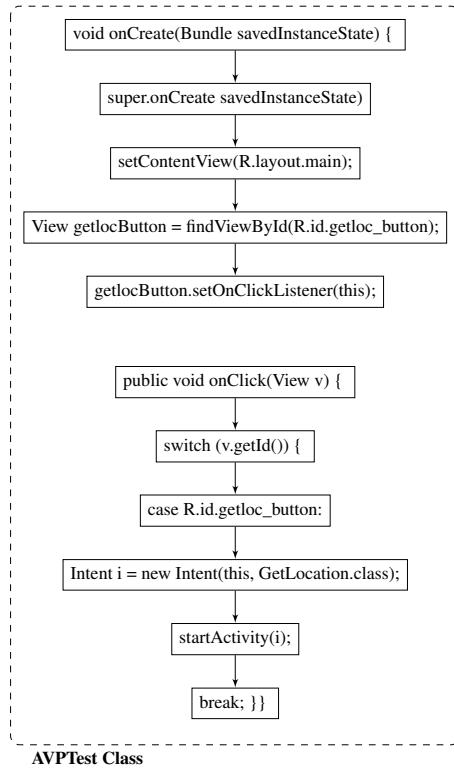

n	classname	gen	kill
n	NomeClasse		
n	NomeClasse		
n	NomeClasse		
n	NomeClasse		
n	NomeClasse		
n	NomeClasse		
n	NomeClasse		
n	NomeClasse		
n	NomeClasse		

n	classname	entry	exit
n	NomeClasse		
n	NomeClasse		
n	NomeClasse		
n	NomeClasse		
n	NomeClasse		
n	NomeClasse		
n	NomeClasse		
n	NomeClasse		
n	NomeClasse		

A Appendix: example code

A.1 Class AVPtest.java

```
package com.examples.avptest;

import android.app.Activity;
import android.os.Bundle;
import android.content.Intent;
import android.view.View;
import android.view.View.OnClickListener;

public class AVPtest extends Activity implements OnClickListener {

    @Override
    public void onCreate(Bundle savedInstanceState) {
        super.onCreate(savedInstanceState);

        setContentView(R.layout.main);

        View getlocButton = findViewById(R.id.getloc_button);
        getlocButton.setOnClickListener(this);
    }

    @Override
    public void onClick(View v) {
```

```

        switch (v.getId()) {
        case R.id.getloc_button:
            Intent i = new Intent(this, GetLocation.class);
            startActivity(i);
            break;
        // More buttons
        }
    }
}

```

A.2 Class GetLocation.java

```

package com.examples.avptest;

import android.app.Activity;
import android.content.Context;
import android.location.Location;
import android.location.LocationListener;
import android.location.LocationManager;
import android.os.Bundle;
import android.widget.TextView;

public class GetLocation extends Activity {

    private LocationManager locationManager;

    @Override
    protected void onCreate(Bundle savedInstanceState) {
        super.onCreate(savedInstanceState);

        locationManager = (LocationManager) getSystemService(Context.LOCATION_SERVICE);
        locationManager.requestLocationUpdates(LocationManager.GPS_PROVIDER, 0,
            0, new LocationUpdateHandler());

        setContentView(R.layout.getloc);
    }

    public class LocationUpdateHandler implements LocationListener {

        @Override
        public void onLocationChanged(Location loc) {
            int lat = (int) (loc.getLatitude() * 1E6);
            int lng = (int) (loc.getLongitude() * 1E6);

            TextView myLocationText = (TextView) findViewById(R.id.getloc_content);
            myLocationText.setText("Latitude:_ " + lat + "\n" + "Longitude:_ "
                + lng);
        }

        @Override
        public void onProviderDisabled(String provider) {
        }

        @Override
        public void onProviderEnabled(String provider) {
        }

        @Override
    }
}

```

```

        public void onStatusChanged(String provider, int status, Bundle extras) {
        }
    }
}

```

A.3 AndroidManifest.xml

```

<?xml version="1.0" encoding="utf-8"?>
<manifest xmlns:android="http://schemas.android.com/apk/res/android"
    package="com.examples.avptest" android:versionCode="1"
    android:versionName="1.0">

    <uses-sdk android:minSdkVersion="4" android:targetSdkVersion="10" />

    <uses-permission xmlns:android="http://schemas.android.com/apk/res/android"
        android:name="android.permission.ACCESS_FINE_LOCATION" />
    <uses-permission xmlns:android="http://schemas.android.com/apk/res/android"
        android:name="android.permission.ACCESS_MOCK_LOCATION" />

    <application android:icon="@drawable/icon" android:label="@string/app_name">
        <activity android:name=".AVPtest" android:label="@string/app_name">
            <intent-filter>
                <action android:name="android.intent.action.MAIN" />

                <category android:name="android.intent.category.LAUNCHER" />
            </intent-filter>
        </activity>
        <activity android:name=".GetLocation" android:label="@string/getloc_title" />
    </application>

</manifest>

```