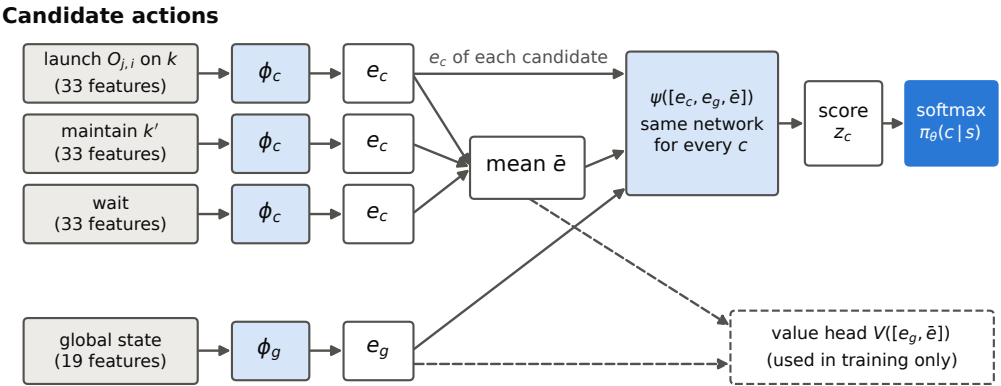
Candidate actions
launch $O_{j,i}$ on k
(33 features)
maintain k'
(33 features)
wait
(33 features)
global state
(19 features)
ϕ_c
ϕ_c
ϕ_c
ϕ_g
e_c
e_c
e_c
e_g
e_c of each candidate
mean $\bar{e}$
$\psi([e_c, e_g, \bar{e}])$
same network
for every c
score
z_c
softmax
$\pi_\theta(c \mid s)$
value head $V([e_g, \bar{e}])$
(used in training only)