

# DAY-27 PYTHON WITH MongoDB

Python is a backend technology and it can be connected with different data base applications. It can be connected to both SQL and noSQL databases. In this section, we connect Python with MongoDB database which is noSQL database.


## MongoDB

MongoDB is a NoSQL database. MongoDB stores data in a JSON like document which make MongoDB very flexible and scalable. Let us see the different terminologies of SQL and NoSQL databases. The following table will make the difference between SQL versus NoSQL databases.


## SQL versus NoSQL



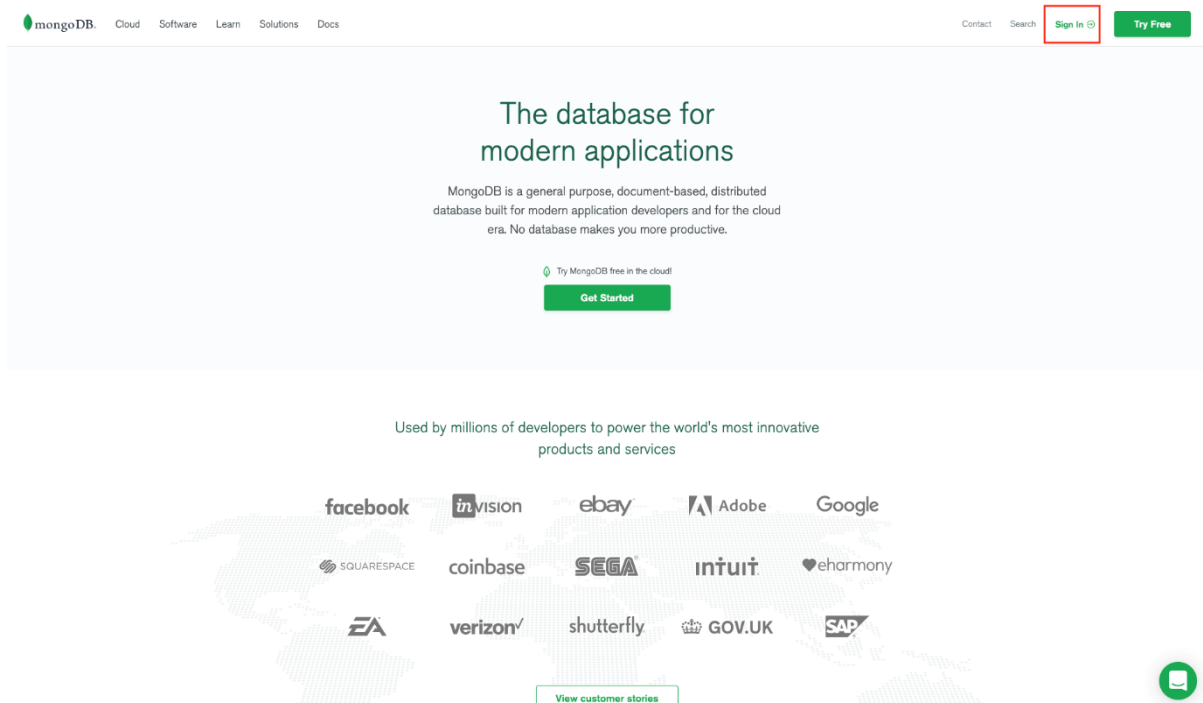

SQL	NoSQL
Database	Database
Tables	Collections
Rows	Documents
Columns	Fields
Index	Index
Join	Embedding and Linking
Group by	Aggregation
Primary Key	_id field

In this section, we will focus on a NoSQL database MongoDB. Lets sign up on [mongoDB](#) by click on the sign in button then click register on the next page.



Complete the fields and click continue



## Sign Up

Email Address

Password

✓ 8 characters minimum

First Name

Last Name

Phone Number

Company Name

Job Function

None Selected

Country


Select Country

☐ I agree to the [terms of service](#) and [privacy policy](#)

Already have an account? [Login](#)

Continue

## Select the free plan



MONGODB ATLAS

## Choose a path. Adjust anytime.

Available as a fully managed service across 60+ regions on AWS, Azure, and Google Cloud

### Starter Clusters

For teams learning MongoDB or developing small applications.

- ✓ Highly available auto-healing cluster
- ✓ End-to-end encryption
- ✓ Role-based access control
- ✗ No downtime scaling
- ✗ Network isolation
- ✗ Realtime performance metrics

Starting at  
**FREE**

Create a cluster

### Single-Region Clusters

For teams building applications that need advanced development and production-ready environments.

- ✓ Includes all features from Starter Clusters
- ✓ No downtime scaling
- ✓ Network isolation
- ✓ Realtime performance metrics

Starting at  
**\$0.08/hr\***

\*estimated cost \$50.96/month

Create a cluster

### Multi-Region Clusters

For teams developing world-class applications that require multi-region resiliency or ultra-low latency.

- ✓ Includes all features from Starter and Single-Region Clusters
- ✓ Replicate data across multiple regions
- Global Clusters ☐
- ✓ Globally distributed read and write operations
- ✓ Control data residency at the document level

Starting at  
**\$0.13/hr\***

\*estimated cost \$58.55/month

Create a cluster

Skip

Advanced Configuration Options

Choose the proximate free region and give any name for you cluster.

## Create a Starter Cluster

Welcome to MongoDB Atlas! We've recommended some of our most popular options, but feel free to customize your cluster to your needs. For more information, check our [documentation](#).

### Cloud Provider & Region

AWS, N. Virginia (us-east-1) ▾



Create a **free tier cluster** by selecting a region with **FREE TIER AVAILABLE** and choosing the **M0** cluster tier below.

★ Recommended region ⓘ

NORTH AMERICA	EUROPE	ASIA
<div> N. Virginia (us-east-1) ★ <b>FREE TIER AVAILABLE</b></div> <div> Oregon (us-west-2) ★ <b>FREE TIER AVAILABLE</b></div>	<div> Ireland (eu-west-1) ★ <b>FREE TIER AVAILABLE</b></div> <div> Frankfurt (eu-central-1) ★ <b>FREE TIER AVAILABLE</b></div>	<div> Singapore (ap-southeast-1) ★ <b>FREE TIER AVAILABLE</b></div> <div> Mumbai (ap-south-1) <b>FREE TIER AVAILABLE</b></div>
<b>AUSTRALIA</b>		
<div> Sydney (ap-southeast-2) ★ <b>FREE TIER AVAILABLE</b></div>		

### Cluster Tier

M0 Sandbox (Shared RAM, 512 MB Storage) >  
Encrypted

### Additional Settings

MongoDB 4.0, No Backup &gt;

### Cluster Name

30DaysOfPython ▾

One time only: once your cluster is created, you won't be able to change its name.

Cluster names can only contain ASCII letters, numbers, and hyphens.

**FREE**

Free forever! Your M0 cluster is ideal for experimenting in a limited sandbox. You can upgrade to a production cluster anytime.

[Back](#)[Create Cluster](#)

Now, a free sandbox is created

mongoDB Atlas All Clusters

CONTEXT Project 0

ATLAS Clusters

SECURITY Database Access Network Access Advanced

PROJECT Access Management Activity Feed Alerts Integrations Settings

SERVICES Charts Stitch

Connect to Atlas

Follow this checklist to get started.

20%

- ☒ Build your first cluster
- ☐ Create your first database user
- ☐ Whitelist your IP address
- ☐ Load Sample Data (Optional)
- ☐ Connect to your cluster

No thanks

Get Started

System Status: All Good Last Login: 84,348,208,222

©2019 MongoDB, Inc. Status Terms Privacy Atlas Blog Contact Sales

## All local host access

mongoDB Atlas All Clusters

CONTEXT Project 0

ATLAS Clusters

SECURITY Database Access Network Access Advanced

PROJECT Access Management Activity Feed Alerts Integrations Settings

SERVICES Charts Stitch

Network Access

IP Whitelist Peering Private Endpoint

IP Address

Add Whitelist Entry

Add a whitelist entry using either CIDR notation or a single IP address. [Learn more.](#)

☒ ADD CURRENT IP ADDRESS ☐ ALLOW ACCESS FROM ANYWHERE

Whitelist Entry: Enter IP Address or CIDR Notation

Comment: Optional comment describing this entry

☐ Save as temporary whitelist

Cancel Confirm


Configure which IP addresses can access your cluster. [Learn more](#)

Get Started


System Status: All Good Last Login: 84,348,208,222

©2019 MongoDB, Inc. Status Terms Privacy Atlas Blog Contact Sales


## Add user and password

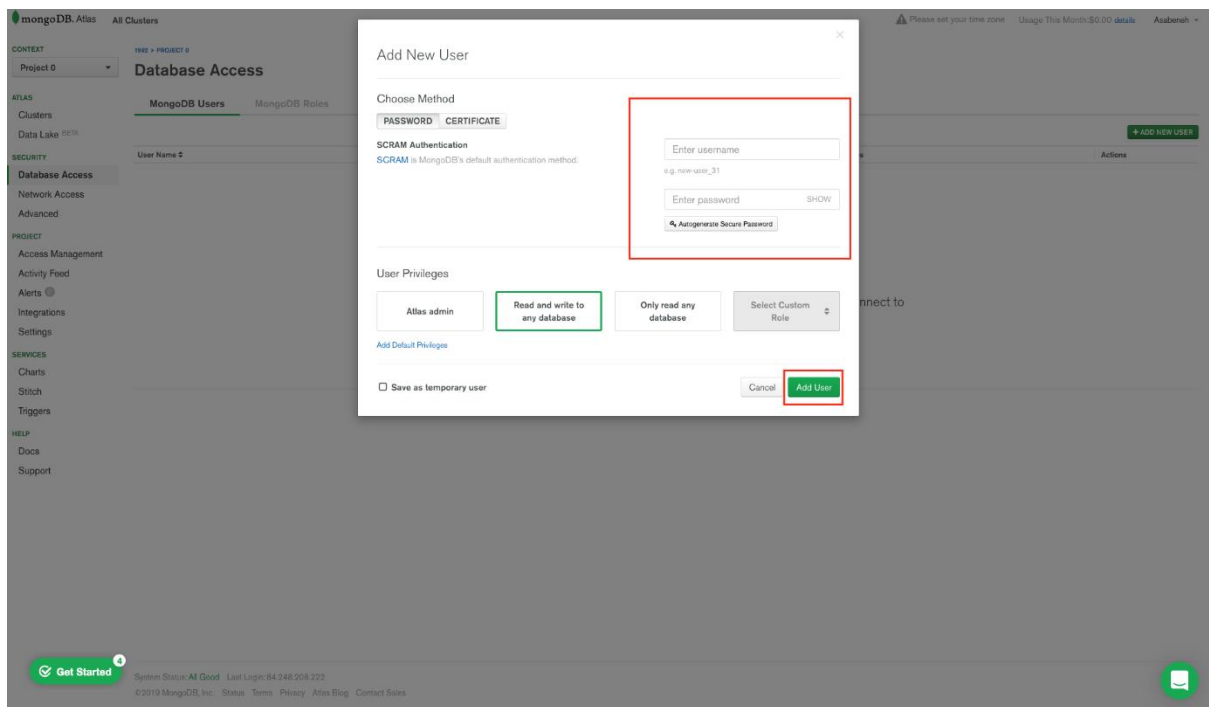

Create a mongoDB uri link

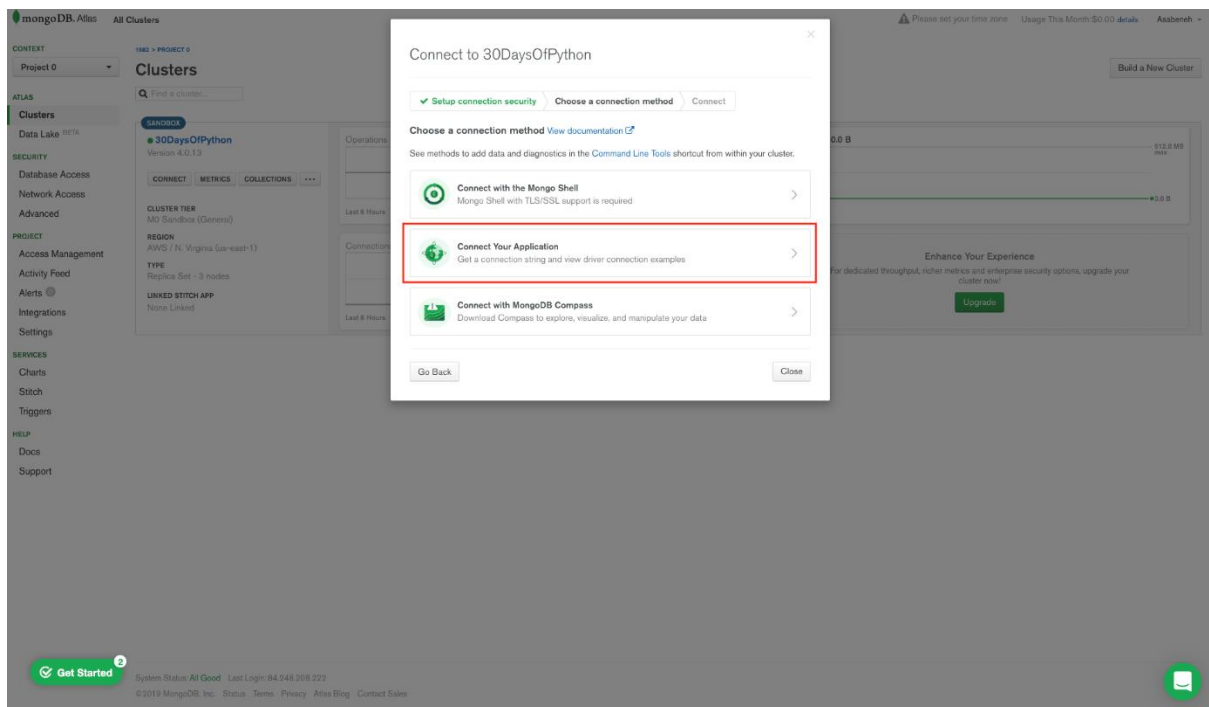

Select Python 3.6 or above driver

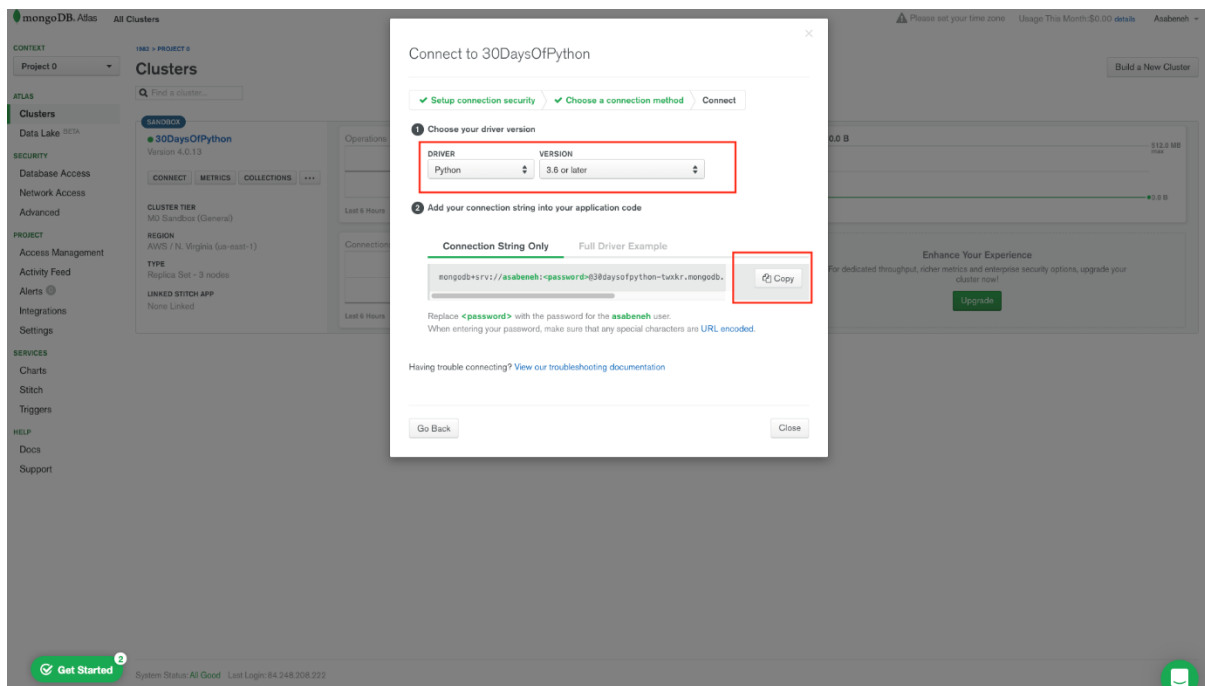

## Getting Connection String(MongoDB URI)

Copy the connection string link and you will get something like this:

```
mongodb+srv://asabeneh:<password>@30daysofpython-
twxkr.mongodb.net/test?retryWrites=true&w=majority
```

Do not worry about the url, it is a means to connect your application with mongoDB. Let us replace the password placeholder with the password you used to add a user.

### Example:

```
mongodb+srv://asabeneh:123123123@30daysofpython-
twxkr.mongodb.net/test?retryWrites=true&w=majority
```

Now, I replaced everything and the password is 123123 and the name of the database is *thirty\_days\_python*. This is just an example, your password must be stronger than the example password.

Python needs a mongoDB driver to access mongoDB database. We will use *pymongo* with *dnspython* to connect our application with mongoDB base . Inside your project directory install pymongo and dnspython.

```
pip install pymongo dnspython
```

The "dnspython" module must be installed to use mongodb+srv:// URIs. The dnspython is a DNS toolkit for Python. It supports almost all record types.

## Connecting Flask application to MongoDB Cluster

```
# let's import the flask
from flask import Flask, render_template
import os # importing operating system module
MONGODB_URI =
'mongodb+srv://asabeneh:your_password_goes_here@30daysofpython
-twxkr.mongodb.net/test?retryWrites=true&w=majority'
client = pymongo.MongoClient(MONGODB_URI)
print(client.list_database_names())

app = Flask(__name__)
if __name__ == '__main__':
    # for deployment we use the environ
    # to make it work for both production and development
    port = int(os.environ.get("PORT", 5000))
    app.run(debug=True, host='0.0.0.0', port=port)
```

When we run the above code we get the default mongoDB databases.

```
['admin', 'local']
```

## Creating a database and collection

Let us create a database, database and collection in mongoDB will be created if it doesn't exist. Let's create a data base name *thirty\_days\_of\_python* and *students* collection.

To create a database:

```
db = client.name_of_database # we can create a database like
this or the second way
db = client['name_of_database']
```

```
# let's import the flask
from flask import Flask, render_template
import os # importing operating system module
MONGODB_URI =
'mongodb+srv://asabeneh:your_password_goes_here@30daysofpython
-twxkr.mongodb.net/test?retryWrites=true&w=majority'
client = pymongo.MongoClient(MONGODB_URI)
# Creating database
db = client.thirty_days_of_python
# Creating students collection and inserting a document
db.students.insert_one({'name': 'Asabeneh', 'country':
'Finland', 'city': 'Helsinki', 'age': 250})
print(client.list_database_names())


app = Flask(__name__)
if __name__ == '__main__':
    # for deployment we use the environ
```

```
# to make it work for both production and development
port = int(os.environ.get("PORT", 5000))
app.run(debug=True, host='0.0.0.0', port=port)
```

After we create a database, we also created a students collection and we used *insert\_one()* method to insert a document. Now, the database *thirty\_days\_of\_python* and *students* collection have been created and the document has been inserted. Check your mongoDB cluster and you will see both the database and the collection. Inside the collection, there will be a document.

```
['thirty_days_of_python', 'admin', 'local']
```

If you see this on the mongoDB cluster, it means you have successfully created a database and a collection.

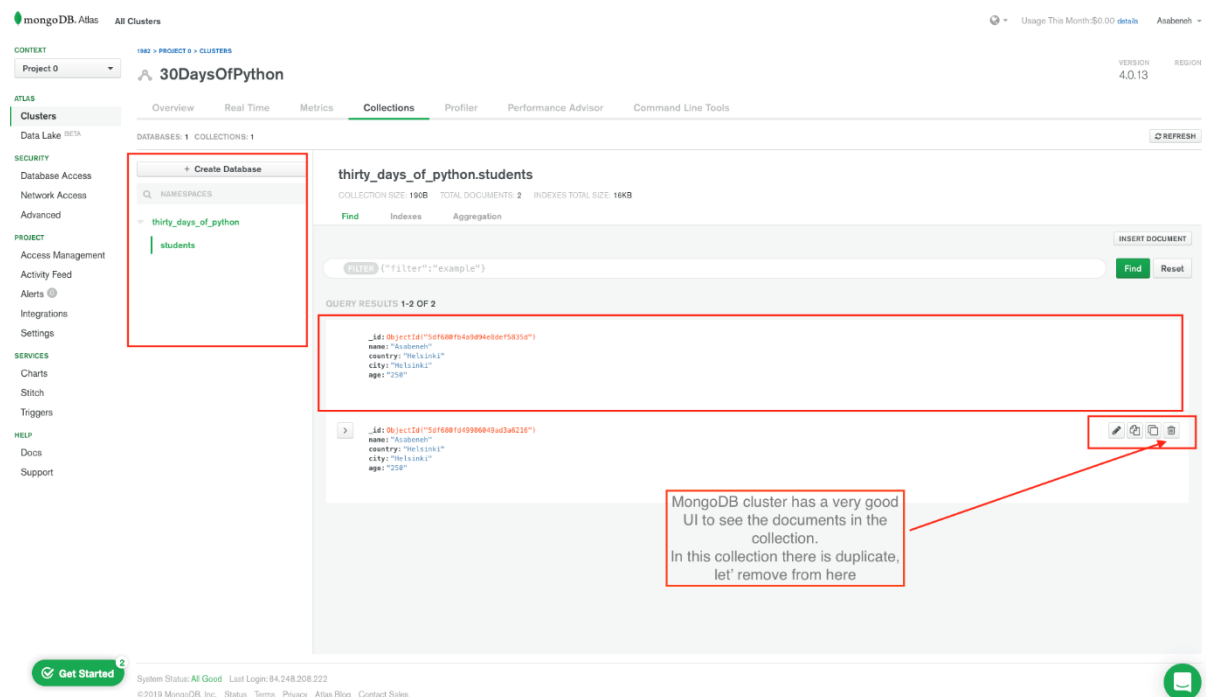

If you have seen on the figure, the document has been created with a long id which acts as a primary key. Every time we create a document mongoDB create and unique id for it.

## Inserting many documents to collection

The *insert\_one()* method inserts one item at a time if we want to insert many documents at once either we use *insert\_many()* method or for loop. We can use for loop to insert many documents at once.

```
# let's import the flask
```



```

from flask import Flask, render_template
import os # importing operating system module
MONGODB_URI =
'mongodb+srv://asabeneh:your_password_goes_here@30daysofpython
-twxkr.mongodb.net/test?retryWrites=true&w=majority'
client = pymongo.MongoClient(MONGODB_URI)

students = [

{'name':'David','country':'UK','city':'London','age':34},

{'name':'John','country':'Sweden','city':'Stockholm','age':28}
,

{'name':'Sami','country':'Finland','city':'Helsinki','age':25}
,

]
for student in students:
    db.students.insert_one(student)

app = Flask(__name__)
if __name__ == '__main__':
    # for deployment we use the environ
    # to make it work for both production and development
    port = int(os.environ.get("PORT", 5000))
    app.run(debug=True, host='0.0.0.0', port=port)

```

## MongoDB Find

The *find()* and *findOne()* methods are common method to find data in a collection in mongoDB database. It is similar to the SELECT statement in a MySQL database. Let us use the *find\_one()* method to get a document in a database collection.

- *\*find\_one({"\_id": ObjectId("id")})*: Gets the first occurrence if an id is not provided

```

# let's import the flask
from flask import Flask, render_template
import os # importing operating system module
MONGODB_URI =
'mongodb+srv://asabeneh:your_password_goes_here@30daysofpython
-twxkr.mongodb.net/test?retryWrites=true&w=majority'
client = pymongo.MongoClient(MONGODB_URI)
db = client['thirty_days_of_python'] # accessing the database
student = db.students.find_one()
print(student)

app = Flask(__name__)

```

```
if __name__ == '__main__':
    # for deployment we use the environ
    # to make it work for both production and development
    port = int(os.environ.get("PORT", 5000))
    app.run(debug=True, host='0.0.0.0', port=port)
```

```
{'_id': ObjectId('5df68a21f106fe2d315bbc8b'), 'name':
'Asabeneh', 'country': 'Helsinki', 'city': 'Helsinki', 'age':
250}
```

The above query returns the first entry but we can target specific document using specific `_id`. Let us do one example, use David's id to get David object.

`'_id':ObjectId('5df68a23f106fe2d315bbc8c')`

```
# let's import the flask
from flask import Flask, render_template
import os # importing operating system module
from bson.objectid import ObjectId # id object
MONGODB_URI =
'mongodb+srv://asabeneh:your_password_goes_here@30daysofpython
-twxkr.mongodb.net/test?retryWrites=true&w=majority'
client = pymongo.MongoClient(MONGODB_URI)
db = client['thirty_days_of_python'] # accessing the database
student =
db.students.find_one({'_id':ObjectId('5df68a23f106fe2d315bbc8c
')})
print(student)

app = Flask(__name__)
if __name__ == '__main__':
    # for deployment we use the environ
    # to make it work for both production and development
    port = int(os.environ.get("PORT", 5000))
    app.run(debug=True, host='0.0.0.0', port=port)
```

```
{'_id': ObjectId('5df68a23f106fe2d315bbc8c'), 'name': 'David',
'country': 'UK', 'city': 'London', 'age': 34}
```

We have seen, how to use `find_one()` using the above examples. Let's move one to `find()`

- `find()`: returns all the occurrence from a collection if we don't pass a query object. The object is `pymongo.cursor` object.

```
# let's import the flask
from flask import Flask, render_template
import os # importing operating system module

MONGODB_URI =
'mongodb+srv://asabeneh:your_password_goes_here@30daysofpython
-twxkr.mongodb.net/test?retryWrites=true&w=majority'
client = pymongo.MongoClient(MONGODB_URI)
db = client['thirty_days_of_python'] # accessing the database
students = db.students.find()
for student in students:
    print(student)

app = Flask(__name__)
if __name__ == '__main__':
    # for deployment we use the environ
    # to make it work for both production and development
    port = int(os.environ.get("PORT", 5000))
    app.run(debug=True, host='0.0.0.0', port=port)
```

```
{'_id': ObjectId('5df68a21f106fe2d315bbc8b'), 'name':
'Asabeneh', 'country': 'Finland', 'city': 'Helsinki', 'age':
250}
{'_id': ObjectId('5df68a23f106fe2d315bbc8c'), 'name': 'David',
'country': 'UK', 'city': 'London', 'age': 34}
{'_id': ObjectId('5df68a23f106fe2d315bbc8d'), 'name': 'John',
'country': 'Sweden', 'city': 'Stockholm', 'age': 28}
{'_id': ObjectId('5df68a23f106fe2d315bbc8e'), 'name': 'Sami',
'country': 'Finland', 'city': 'Helsinki', 'age': 25}
```

We can specify which fields to return by passing second object in the *find({}, {})*. 0 means not include and 1 means include but we can not mix 0 and 1, except for *\_id*.

```
# let's import the flask
from flask import Flask, render_template
import os # importing operating system module

MONGODB_URI =
'mongodb+srv://asabeneh:your_password_goes_here@30daysofpython
-twxkr.mongodb.net/test?retryWrites=true&w=majority'
client = pymongo.MongoClient(MONGODB_URI)
db = client['thirty_days_of_python'] # accessing the database
students = db.students.find({}, {"_id":0, "name": 1,
"country":1}) # 0 means not include and 1 means include
for student in students:
    print(student)
```

```

app = Flask(__name__)
if __name__ == '__main__':
    # for deployment we use the environ
    # to make it work for both production and development
    port = int(os.environ.get("PORT", 5000))
    app.run(debug=True, host='0.0.0.0', port=port)

```

```

{'name': 'Asabeneh', 'country': 'Finland'}
{'name': 'David', 'country': 'UK'}
{'name': 'John', 'country': 'Sweden'}
{'name': 'Sami', 'country': 'Finland'}

```

## Find with Query

In mongoDB find take a query object. We can pass a query object and we can filter the documents we like to filter out.

```

# let's import the flask
from flask import Flask, render_template
import os # importing operating system module

MONGODB_URI =
'mongodb+srv://asabeneh:your_password_goes_here@30daysofpython
-twxkr.mongodb.net/test?retryWrites=true&w=majority'
client = pymongo.MongoClient(MONGODB_URI)
db = client['thirty_days_of_python'] # accessing the database

query = {
    "country": "Finland"
}
students = db.students.find(query)

for student in students:
    print(student)

app = Flask(__name__)
if __name__ == '__main__':
    # for deployment we use the environ
    # to make it work for both production and development
    port = int(os.environ.get("PORT", 5000))
    app.run(debug=True, host='0.0.0.0', port=port)

```

```
{'_id': ObjectId('5df68a21f106fe2d315bbc8b'), 'name':  
'Asabeneh', 'country': 'Finland', 'city': 'Helsinki', 'age':  
250}  
{'_id': ObjectId('5df68a23f106fe2d315bbc8e'), 'name': 'Sami',  
'country': 'Finland', 'city': 'Helsinki', 'age': 25}
```

## Query with modifiers

```
# let's import the flask  
from flask import Flask, render_template  
import os # importing operating system module  
import pymongo  
  
MONGODB_URI =  
'mongodb+srv://asabeneh:your_password_goes_here@30daysofpython-  
-twxkr.mongodb.net/test?retryWrites=true&w=majority'  
client = pymongo.MongoClient(MONGODB_URI)  
db = client['thirty_days_of_python'] # accessing the database  
  
query = {  
    "city": "Helsinki"  
}  
students = db.students.find(query)  
for student in students:  
    print(student)  
  
app = Flask(__name__)  
if __name__ == '__main__':  
    # for deployment we use the environ  
    # to make it work for both production and development  
    port = int(os.environ.get("PORT", 5000))  
    app.run(debug=True, host='0.0.0.0', port=port)
```

```
{'_id': ObjectId('5df68a21f106fe2d315bbc8b'), 'name':  
'Asabeneh', 'country': 'Finland', 'city': 'Helsinki', 'age':  
250}  
{'_id': ObjectId('5df68a23f106fe2d315bbc8e'), 'name': 'Sami',  
'country': 'Finland', 'city': 'Helsinki', 'age': 25}
```

## Find query with modifier

```
# let's import the flask
from flask import Flask, render_template
import os # importing operating system module
import pymongo

MONGODB_URI =
'mongodb+srv://asabeneh:your_password_goes_here@30daysofpython
-twxkr.mongodb.net/test?retryWrites=true&w=majority'
client = pymongo.MongoClient(MONGODB_URI)
db = client['thirty_days_of_python'] # accessing the database
query = {
    "country": "Finland",
    "city": "Helsinki"
}
students = db.students.find(query)
for student in students:
    print(student)

app = Flask(__name__)
if __name__ == '__main__':
    # for deployment we use the environ
    # to make it work for both production and development
    port = int(os.environ.get("PORT", 5000))
    app.run(debug=True, host='0.0.0.0', port=port)
```

```
{ '_id': ObjectId('5df68a21f106fe2d315bbc8b'), 'name':
'Asabeneh', 'country': 'Finland', 'city': 'Helsinki', 'age':
250}
{ '_id': ObjectId('5df68a23f106fe2d315bbc8e'), 'name': 'Sami',
'country': 'Finland', 'city': 'Helsinki', 'age': 25}
```

## Query with modifiers

```
# let's import the flask
from flask import Flask, render_template
import os # importing operating system module
import pymongo

MONGODB_URI =
'mongodb+srv://asabeneh:your_password_goes_here@30daysofpython
-twxkr.mongodb.net/test?retryWrites=true&w=majority'
client = pymongo.MongoClient(MONGODB_URI)
db = client['thirty_days_of_python'] # accessing the database
query = {"age":{"$gt":30}}
students = db.students.find(query)
for student in students:
```

```

        print(student)

app = Flask(__name__)
if __name__ == '__main__':
    # for deployment we use the environ
    # to make it work for both production and development
    port = int(os.environ.get("PORT", 5000))
    app.run(debug=True, host='0.0.0.0', port=port)

{'_id': ObjectId('5df68a21f106fe2d315bbc8b'), 'name':
'Asabeneh', 'country': 'Finland', 'city': 'Helsinki', 'age':
250}
{'_id': ObjectId('5df68a23f106fe2d315bbc8c'), 'name': 'David',
'country': 'UK', 'city': 'London', 'age': 34}

# let's import the flask
from flask import Flask, render_template
import os # importing operating system module
import pymongo

MONGODB_URI =
'mongodb+srv://asabeneh:your_password_goes_here@30daysofpython
-twxkr.mongodb.net/test?retryWrites=true&w=majority'
client = pymongo.MongoClient(MONGODB_URI)
db = client['thirty_days_of_python'] # accessing the database
query = {"age":{"$gt":30}}
students = db.students.find(query)
for student in students:
    print(student)

{'_id': ObjectId('5df68a23f106fe2d315bbc8d'), 'name': 'John',
'country': 'Sweden', 'city': 'Stockholm', 'age': 28}
{'_id': ObjectId('5df68a23f106fe2d315bbc8e'), 'name': 'Sami',
'country': 'Finland', 'city': 'Helsinki', 'age': 25}

```

## Limiting documents

We can limit the number of documents we return using the *limit()* method.

```

# let's import the flask
from flask import Flask, render_template
import os # importing operating system module
import pymongo

MONGODB_URI =
'mongodb+srv://asabeneh:your_password_goes_here@30daysofpython
-twxkr.mongodb.net/test?retryWrites=true&w=majority'
client = pymongo.MongoClient(MONGODB_URI)
db = client['thirty_days_of_python'] # accessing the database

```

```
db.students.find().limit(3)
```

## Find with sort

By default, sort is in ascending order. We can change the sorting to descending order by adding -1 parameter.

```
# let's import the flask
from flask import Flask, render_template
import os # importing operating system module
import pymongo

MONGODB_URI =
'mongodb+srv://asabeneh:your_password_goes_here@30daysofpython
-twxkr.mongodb.net/test?retryWrites=true&w=majority'
client = pymongo.MongoClient(MONGODB_URI)
db = client['thirty_days_of_python'] # accessing the database
students = db.students.find().sort('name')
for student in students:
    print(student)

students = db.students.find().sort('name',-1)
for student in students:
    print(student)

students = db.students.find().sort('age')
for student in students:
    print(student)

students = db.students.find().sort('age',-1)
for student in students:
    print(student)

app = Flask(__name__)
if __name__ == '__main__':
    # for deployment we use the environ
    # to make it work for both production and development
    port = int(os.environ.get("PORT", 5000))
    app.run(debug=True, host='0.0.0.0', port=port)
```

## Ascending order

```
{'_id': ObjectId('5df68a21f106fe2d315bbc8b'), 'name':
'Asabeneh', 'country': 'Finland', 'city': 'Helsinki', 'age':
250}
{'_id': ObjectId('5df68a23f106fe2d315bbc8c'), 'name': 'David',
'country': 'UK', 'city': 'London', 'age': 34}
```



```
{'_id': ObjectId('5df68a23f106fe2d315bbc8d'), 'name': 'John',  
'country': 'Sweden', 'city': 'Stockholm', 'age': 28}  
{'_id': ObjectId('5df68a23f106fe2d315bbc8e'), 'name': 'Sami',  
'country': 'Finland', 'city': 'Helsinki', 'age': 25}
```

## Descending order

```
{'_id': ObjectId('5df68a23f106fe2d315bbc8e'), 'name': 'Sami',  
'country': 'Finland', 'city': 'Helsinki', 'age': 25}  
{'_id': ObjectId('5df68a23f106fe2d315bbc8d'), 'name': 'John',  
'country': 'Sweden', 'city': 'Stockholm', 'age': 28}  
{'_id': ObjectId('5df68a23f106fe2d315bbc8c'), 'name': 'David',  
'country': 'UK', 'city': 'London', 'age': 34}  
{'_id': ObjectId('5df68a21f106fe2d315bbc8b'), 'name':  
'Asabeneh', 'country': 'Finland', 'city': 'Helsinki', 'age':  
250}
```

## Update with query

We will use *update\_one()* method to update one item. It takes two object one is a query and the second is the new object. The first person, Asabeneh got a very implausible age. Let us update Asabeneh's age.

```
# let's import the flask  
from flask import Flask, render_template  
import os # importing operating system module  
import pymongo  
  
MONGODB_URI =  
'mongodb+srv://asabeneh:your_password_goes_here@30daysofpython  
-twxkr.mongodb.net/test?retryWrites=true&w=majority'  
client = pymongo.MongoClient(MONGODB_URI)  
db = client['thirty_days_of_python'] # accessing the database  
  
query = {'age':250}  
new_value = {'$set':{'age':38}}  
  
db.students.update_one(query, new_value)  
# lets check the result if the age is modified  
for student in db.students.find():  
    print(student)  
  
app = Flask(__name__)  
if __name__ == '__main__':  
    # for deployment we use the environ  
    # to make it work for both production and development  
    port = int(os.environ.get("PORT", 5000))
```

```
app.run(debug=True, host='0.0.0.0', port=port)
```

```
{'_id': ObjectId('5df68a21f106fe2d315bbc8b'), 'name':  
'Asabeneh', 'country': 'Finland', 'city': 'Helsinki', 'age':  
38}  
{'_id': ObjectId('5df68a23f106fe2d315bbc8c'), 'name': 'David',  
'country': 'UK', 'city': 'London', 'age': 34}  
{'_id': ObjectId('5df68a23f106fe2d315bbc8d'), 'name': 'John',  
'country': 'Sweden', 'city': 'Stockholm', 'age': 28}  
{'_id': ObjectId('5df68a23f106fe2d315bbc8e'), 'name': 'Sami',  
'country': 'Finland', 'city': 'Helsinki', 'age': 25}
```

When we want to update many documents at once we use *update\_many()* method.

## Delete Document

The method *delete\_one()* deletes one document. The *delete\_one()* takes a query object parameter. It only removes the first occurrence. Let us remove one John from the collection.

```
# let's import the flask  
from flask import Flask, render_template  
import os # importing operating system module  
import pymongo  
  
MONGODB_URI =  
'mongodb+srv://asabeneh:your_password_goes_here@30daysofpython-  
-twxkr.mongodb.net/test?retryWrites=true&w=majority'  
client = pymongo.MongoClient(MONGODB_URI)  
db = client['thirty_days_of_python'] # accessing the database  
  
query = {'name': 'John'}  
db.students.delete_one(query)  
  
for student in db.students.find():  
    print(student)  
# lets check the result if the age is modified  
for student in db.students.find():  
    print(student)  
  
app = Flask(__name__)  
if __name__ == '__main__':  
    # for deployment we use the environ  
    # to make it work for both production and development  
    port = int(os.environ.get("PORT", 5000))  
    app.run(debug=True, host='0.0.0.0', port=port)
```

```
{'_id': ObjectId('5df68a21f106fe2d315bbc8b'), 'name': 'Asabeneh', 'country': 'Finland', 'city': 'Helsinki', 'age': 38}
{'_id': ObjectId('5df68a23f106fe2d315bbc8c'), 'name': 'David', 'country': 'UK', 'city': 'London', 'age': 34}
{'_id': ObjectId('5df68a23f106fe2d315bbc8e'), 'name': 'Sami', 'country': 'Finland', 'city': 'Helsinki', 'age': 25}
```

As you can see John has been removed from the collection.

When we want to delete many documents we use *delete\_many()* method, it takes a query object. If we pass an empty query object to *delete\_many({})* it will delete all the documents in the collection.

## Drop a collection

Using the *drop()* method we can delete a collection from a database.

```
# let's import the flask
from flask import Flask, render_template
import os # importing operating system module
import pymongo

MONGODB_URI =
'mongodb+srv://asabeneh:your_password_goes_here@30daysofpython-
twxkr.mongodb.net/test?retryWrites=true&w=majority'
client = pymongo.MongoClient(MONGODB_URI)
db = client['thirty_days_of_python'] # accessing the database
db.students.drop()
```

Now, we have deleted the students collection from the database.

## Exercises: Day 27

 CONGRATULATIONS ! 