


K8s RBAC Concept – IAM user


AWS IAM: USER vs ROLE

Understand the Difference

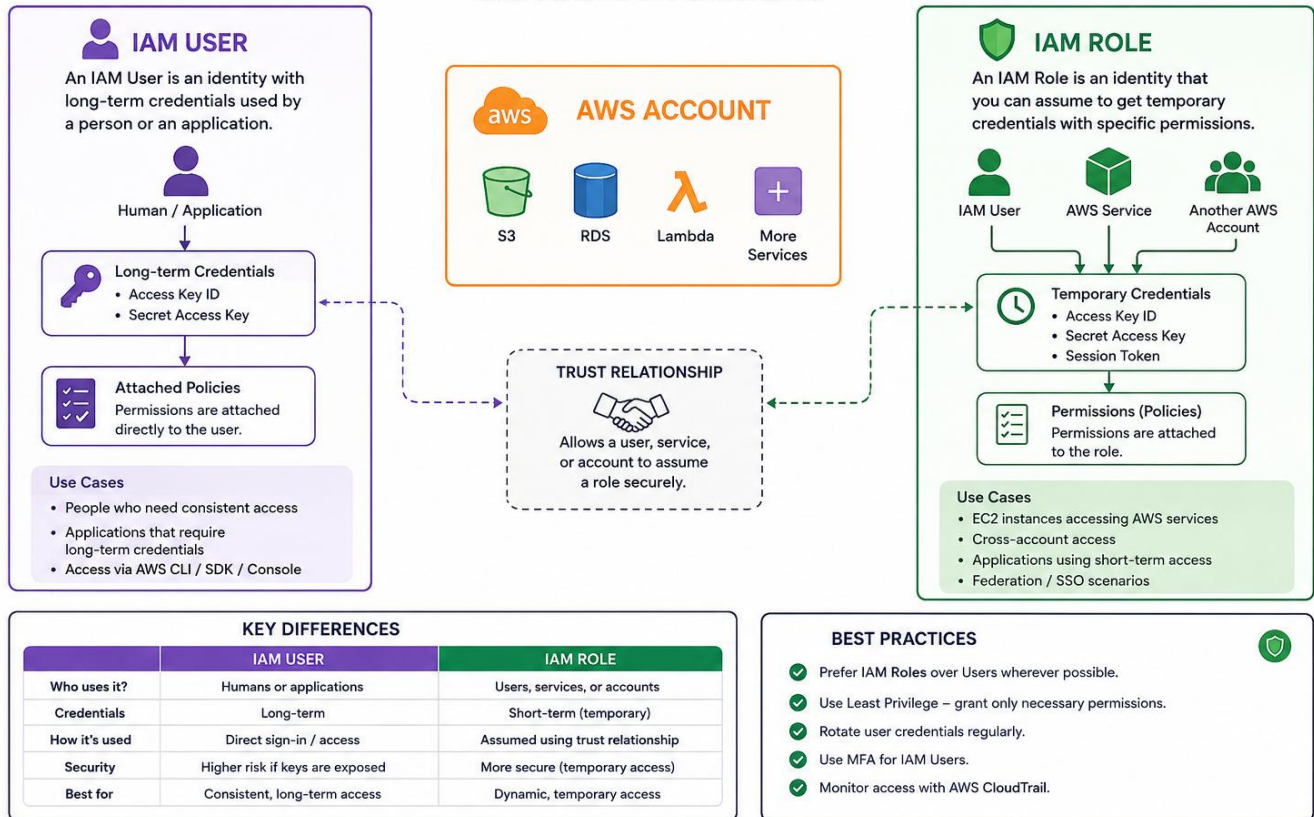

AWS IAM USERS TO EKS ACCESS – COMPLETE FLOW

IAM Users → Policies → Custom Policy → EKS → aws-auth ConfigMap → Kubernetes RBAC → Access



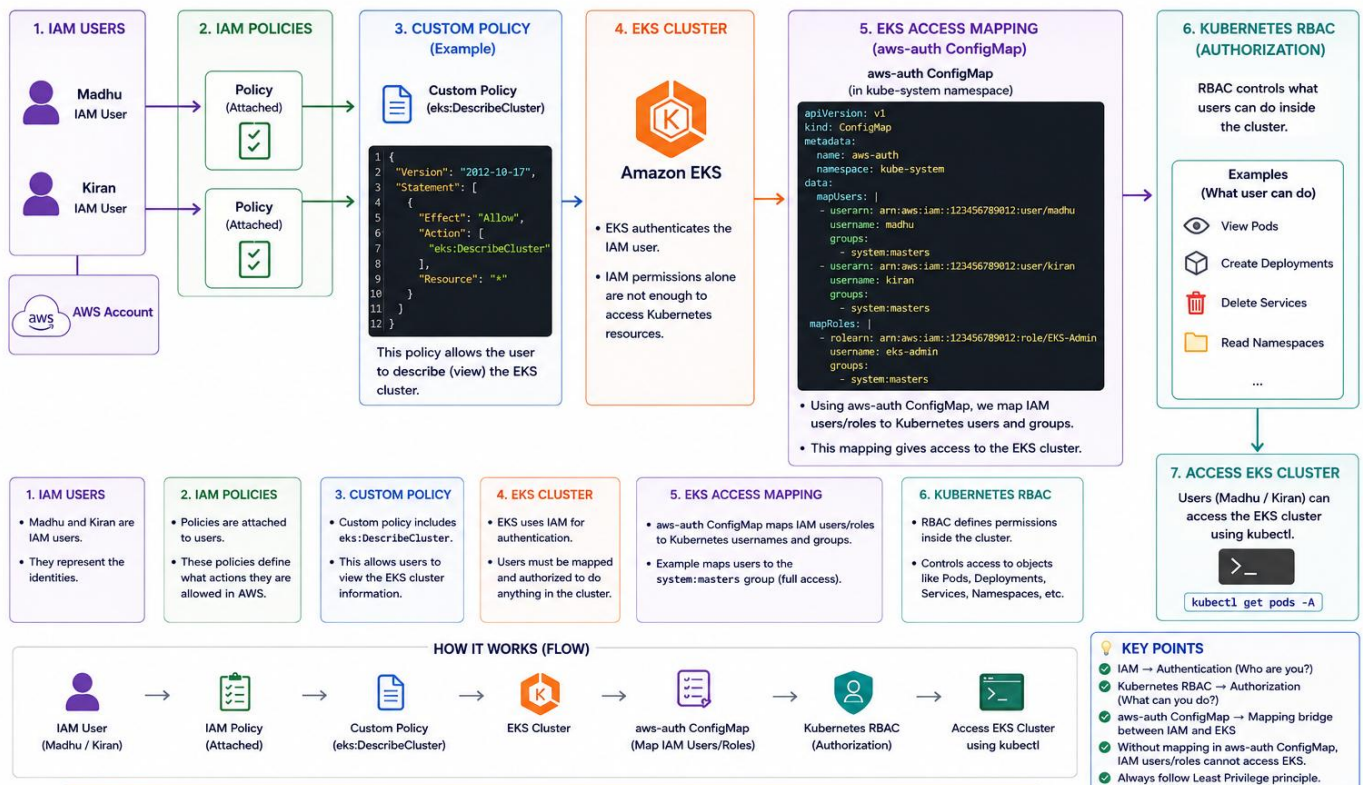


★ **KEY TAKEAWAY:** Users (Madhu, Kiran) have IAM policies for AWS access. A custom policy (eks:DescribeCluster) allows them to view the EKS cluster. Using aws-auth ConfigMap we add the users so that we map them to EKS. Kubernetes RBAC then controls what they can do inside the cluster.

```
Bhavana@LAPTOP-E0A1LIK MINGW64 ~/Downloads/Bhavana work/AWS Devops/AWS-Devops_MC_B17D/Kubernetes (main)
$ eksctl create cluster --name rbaciamcluster --nodegroup-name b17dng --node-type m7i-flex.large --nodes 3 --managed
```

```
Bhavana@LAPTOP-E0A1LIK MINGW64 ~/Downloads/Bhavana work/AWS Devops/AWS-Devops_MC_B17D/Kubernetes (main)
$ eksctl get cluster
NAME                REGION    EKSTCL CREATED
rbaciamcluster      us-east-1 True
```

```
Bhavana@LAPTOP-E0A1LIK MINGW64 ~/Downloads/Bhavana work/AWS Devops/AWS-Devops_MC_B17D/Kubernetes (main)
$ kubectl get nodes
NAME                                STATUS    ROLES    AGE    VERSION
ip-192-168-44-26.ec2.internal      Ready    <none>    18m    v1.34.9-eks-93b80c6
ip-192-168-5-127.ec2.internal      Ready    <none>    18m    v1.34.9-eks-93b80c6
ip-192-168-8-67.ec2.internal       Ready    <none>    18m    v1.34.9-eks-93b80c6
```

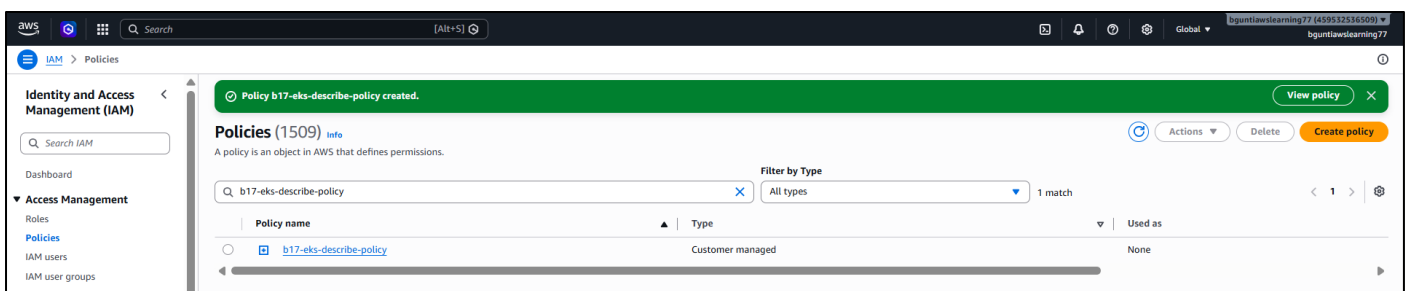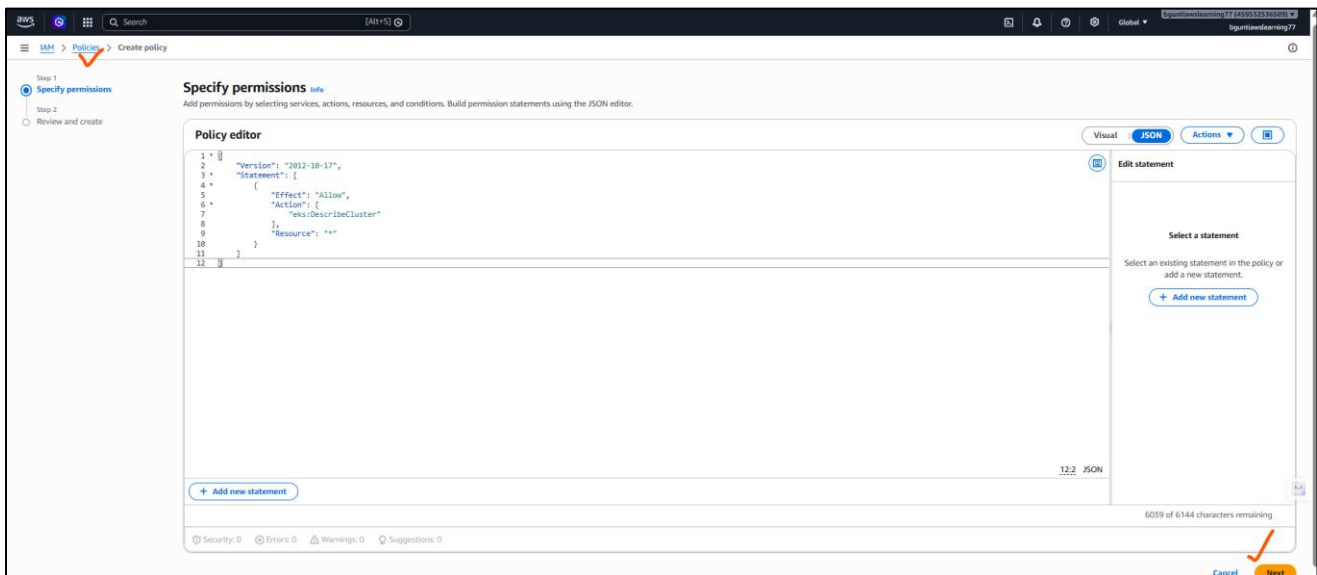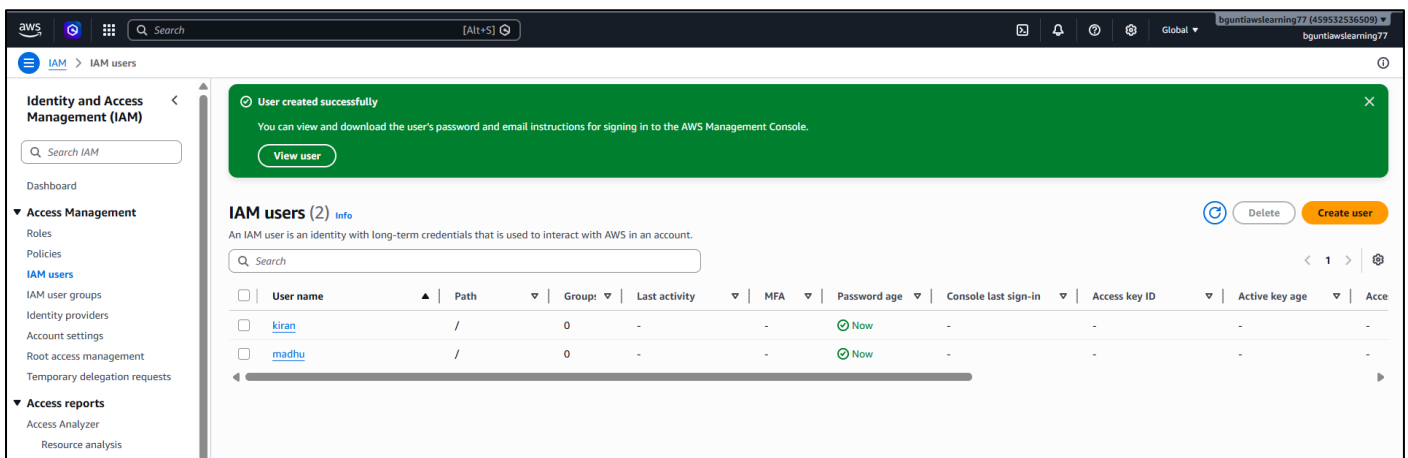

Identity and Access Management (IAM)

Search IAM

Dashboard

Access Management

Roles

Policies

IAM users

IAM user groups

Identity providers

Account settings

Root access management

Temporary delegation requests

Access reports

Access Analyzer

Resource analysis

Unused access

Unused access

madhu info

Summary

ARN: [arn:aws:iam:459532536509:user/madhu](#)

Created: June 23, 2026, 18:11 (UTC+05:30)

Console access: [Enabled without MFA](#)

Last console sign-in: [Never](#)

Access key 1: [Create access key](#)

Permissions policies (0)

Permissions are defined by policies attached to the user directly or through groups.

Filter by Type: All types

Policy name: Type: Attached via:

No resources to display

Buttons: Add permissions, Add permissions, Create inline policy

Identity and Access Management (IAM)

Search IAM

Dashboard

Access Management

Roles

Policies

IAM users

IAM user groups

Identity providers

Account settings

Root access management

Temporary delegation requests

Access reports

Access Analyzer

Resource analysis

Unused access

Analyzer settings

Credential report

Organization activity

madhu info

Summary

ARN: [arn:aws:iam:459532536509:user/madhu](#)

Created: June 23, 2026, 18:11 (UTC+05:30)

Console access: [Enabled without MFA](#)

Last console sign-in: [Never](#)

Access key 1: [Create access key](#)

Permissions policies (1)

Permissions are defined by policies attached to the user directly or through groups.

Filter by Type: All types

Policy name: Type: Attached via:

[b17-eks-describe-policy](#) Customer managed Directly

Buttons: Add permissions

Identity and Access Management (IAM)

Search IAM

Dashboard

Access Management

Roles

Policies

IAM users

IAM user groups

Identity providers

Account settings

Root access management

Temporary delegation requests

Access reports

Access Analyzer

Resource analysis

Unused access

Analyzer settings

Credential report

Organization activity

Service control policies

kiran info

Summary

ARN: [arn:aws:iam:459532536509:user/kiran](#)

Created: June 23, 2026, 18:11 (UTC+05:30)

Console access: [Enabled without MFA](#)

Last console sign-in: [Never](#)

Access key 1: [Create access key](#)

Permissions policies (1)

Permissions are defined by policies attached to the user directly or through groups.

Filter by Type: All types

Policy name: Type: Attached via:

[b17-eks-describe-policy](#) Customer managed Directly

Buttons: Add permissions

Identity and Access Management (IAM)

Search IAM

Dashboard

Access Management

Roles

Policies

IAM users

IAM user groups

Identity providers

Account settings

Root access management

Temporary delegation requests

Access reports

Access Analyzer

Resource analysis

Unused access

Analyzer settings

Credential report

Organization activity

Service control policies

Related consoles

[IAM Identity Center](#)

madhu info

Summary

ARN: [arn:aws:iam:459532536509:user/madhu](#)

Created: June 23, 2026, 18:11 (UTC+05:30)

Console access: [Enabled without MFA](#)

Last console sign-in: [Never](#)

Access key 1: [Create access key](#)

Permissions Groups Tags **Security credentials** Last Accessed

Console sign-in

Console sign-in link: [https://459532536509.signin.aws.amazon.com/console](#)

Console password: Updated 7 minutes ago (2026-06-23 18:11 GMT+5:30)

Last console sign-in: [Never](#)

Manage console access

Multi-factor authentication (MFA) (0)

Use MFA to increase the security of your AWS environment. Signing in with MFA requires an authentication code from an MFA device. Each user can have a maximum of 8 MFA devices assigned. [Learn more](#)

Type Identifier Certifications Created on

No MFA devices. Assign an MFA device to improve the security of your AWS environment

Assign MFA device

Access keys (0)

Create access key

Madhu – Access keys

Access key: AKIAWV7SGBK6TL4PLYMX

Secret access key: 2eCElt0BV/o6KlrrAAh5LqGaLi50dc2Y6gaMqN9Y

arn:aws:iam::459532536509:user/madhu

Kiran – Access keys

Access key: AKIAWV7SGBK654HOUCEH

Secret access key: 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

arn:aws:iam::459532536509:user/kiran

Bhavana@LAPTOP-E0A1LIK MINGW64 ~/Downloads/Bhavana work/AWS Devops/AWS-Devops_MC_B17D/kubernetes (main)

\$ kubectl get ns

NAME	STATUS	AGE
default	Active	44m
kube-node-lease	Active	44m
kube-public	Active	44m
kube-system	Active	44m

Bhavana@LAPTOP-E0A1LIK MINGW64 ~/Downloads/Bhavana work/AWS Devops/AWS-Devops_MC_B17D/kubernetes (main)

\$ aws sts get-caller-identity

```
{
  "UserId": "459532536509",
  "Account": "459532536509",
  "Arn": "arn:aws:iam::459532536509:root"
}
```

Bhavana@LAPTOP-E0A1LIK MINGW64 ~/Downloads/Bhavana work/AWS Devops/AWS-Devops_MC_B17D/kubernetes (main)

\$ kubectl get cm -n kube-system

NAME	DATA	AGE
amazon-vpc-cni	7	44m
aws-auth	1	41m
coredns	1	44m
extension-apiserver-authentication	6	47m
kube-apiserver-legacy-service-account-token-tracking	1	47m
kube-proxy	1	44m
kube-proxy-config	1	44m
kube-root-ca.crt	1	47m

Bhavana@LAPTOP-E0A1LIK MINGW64 ~/Downloads/Bhavana work/AWS Devops/AWS-Devops_MC_B17D/kubernetes (main)

\$ kubectl describe cm aws-auth -n kube-system

Name: aws-auth
Namespace: kube-system
Labels: <none>
Annotations: <none>

Data

====

mapRoles:

- rolearn: arn:aws:iam::459532536509:role/eksctl-rbaciamcluster-nodegroup-b1-NodeInstanceRole-AjDNGvT81NJK
- groups:
 - system:bootstrappers
 - system:nodes

```
username: system:node:{{EC2PrivateDNSName}}
```

BinaryData

====

Events: <none>

```
Bhavana@LAPTOP-E0A1LIK MINGW64 ~/Downloads/Bhavana work/AWS Devops/AWS-Devops_MC_B17D/Kubernetes (main)
```

```
$ kubectl edit cm aws-auth -n kube-system
```

```
Bhavana@LAPTOP-E0A1LIK MINGW64 ~/Downloads/Bhavana work/AWS Devops/AWS-Devops_MC_B17D/Kubernetes (main)
```

```
$ kubectl edit cm aws-auth -n kube-system
```

```
configmap/aws-auth edited
```

```
Bhavana@LAPTOP-E0A1LIK MINGW64 ~/Downloads/Bhavana work/AWS Devops/AWS-Devops_MC_B17D/Kubernetes (main)
```

```
$ kubectl describe cm aws-auth -n kube-system
```

```
Name:          aws-auth
Namespace:     kube-system
Labels:        <none>
Annotations:    <none>
```

Data

====

mapRoles:

```
- rolearn: arn:aws:iam::459532536509:role/eksctl-rbaciamcluster-nodegroup-b1-NodeInstanceRole-AjDNGVT81NJK
```

```
  groups:
```

- system:bootstrappers
- system:nodes

```
  username: system:node:{{EC2PrivateDNSName}}
```

mapUsers:

```
- userarn: arn:aws:iam::459532536509:user/madhu
```

```
  username: madhu
```

```
  groups:
```

- system:authenticated

```
- userarn: arn:aws:iam::459532536509:user/kiran
```

```
  username: kiran
```

```
  groups:
```

- system:authenticated

BinaryData

====

Events: <none>

```
Bhavana@LAPTOP-E0A1LIK MINGW64 ~/Downloads/Bhavana work/AWS Devops/AWS-Devops_MC_B17D/Kubernetes (main)
```

```
$ kubectl get configmap aws-auth -n kube-system -o yaml
```

```
apiVersion: v1
```

```
data:
```

```
  mapRoles: |
```

```
- rolearn: arn:aws:iam::459532536509:role/eksctl-rbaciamcluster-nodegroup-b1-NodeInstanceRole-AjDNGVT81NJK
```

```
  groups:
```

- system:bootstrappers


```

    - system:nodes
    username: system:node:{{EC2PrivateDNSName}}
mapUsers: |
  - userarn: arn:aws:iam::459532536509:user/madhu
    username: madhu
    groups:
      - system:authenticated

  - userarn: arn:aws:iam::459532536509:user/kiran
    username: kiran
    groups:
      - system:authenticated
kind: ConfigMap
metadata:
  creationTimestamp: "2026-06-23T12:13:52Z"
  name: aws-auth
  namespace: kube-system
  resourceVersion: "9931"
  uid: 4a955140-fd2d-4eaa-bc2d-72f61118b2a6

```

```

#2-madhu-edit-clusterrolebinding.yaml
---
apiVersion: rbac.authorization.k8s.io/v1
kind: ClusterRoleBinding
metadata:
  name: madhu-edit-clusterrolebinding
subjects:
  - kind: User
    name: madhu      # must match the username in aws-auth
    apiGroup: rbac.authorization.k8s.io
roleRef:
  kind: ClusterRole
  name: edit        # predefined
  apiGroup: rbac.authorization.k8s.io

```

```

Bhavana@LAPTOP-E0A1LIK MINGW64 ~/Downloads/Bhavana work/AWS Devops/AWS-
Devops_MC_B17D/Kubernetes (main)
$ cd practice/22_June-RBAC-IAM/

```

```

Bhavana@LAPTOP-E0A1LIK MINGW64 ~/Downloads/Bhavana work/AWS Devops/AWS-
Devops_MC_B17D/Kubernetes/practice/22_June-RBAC-IAM (main)
$ ll

```

```

total 3129
-rw-r--r-- 1 Bhavana 197121      930 Jun 23 18:32 1-.yaml
-rw-r--r-- 1 Bhavana 197121      388 Jun 23 18:35 2-madhu-edit-
clusterrolebinding.yaml
-rw-r--r-- 1 Bhavana 197121 1564733 Jun 23 18:04 IAM_USER_ROLE.png
-rw-r--r-- 1 Bhavana 197121 1629417 Jun 23 18:07 RBAC-IAM.png

```

```

Bhavana@LAPTOP-E0A1LIK MINGW64 ~/Downloads/Bhavana work/AWS Devops/AWS-
Devops_MC_B17D/Kubernetes/practice/22_June-RBAC-IAM (main)
$ kubectl apply -f 2-madhu-edit-clusterrolebinding.yaml
clusterrolebinding.rbac.authorization.k8s.io/madhu-edit-clusterrolebinding
created

```

```

Bhavana@LAPTOP-E0A1LIK MINGW64 ~/Downloads/Bhavana work/AWS Devops/AWS-
Devops_MC_B17D/Kubernetes/practice/22_June-RBAC-IAM (main)
$ aws configure
AWS Access Key ID [*****VURO]: AKIAWV7SGBK6TL4PLYMX
AWS Secret Access Key [*****vcyL]: 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
Default region name [us-east-1]:
Default output format [None]:

```

```
Bhavana@LAPTOP-E0A1LIK MINGW64 ~/Downloads/Bhavana work/AWS Devops/AWS-Devops_MC_B17D/Kubernetes/practice/22_June-RBAC-IAM (main)
$ aws sts get-caller-identity
{
  "UserId": "AIDAWV7SGBK67EK6PPSAU",
  "Account": "459532536509",
  "Arn": "arn:aws:iam::459532536509:user/madhu"
}
```

```
Bhavana@LAPTOP-E0A1LIK MINGW64 ~/Downloads/Bhavana work/AWS Devops/AWS-Devops_MC_B17D/Kubernetes/practice/22_June-RBAC-IAM (main)
$ kubectl run testpod1 --image nginx
pod/testpod1 created
```

```
Bhavana@LAPTOP-E0A1LIK MINGW64 ~/Downloads/Bhavana work/AWS Devops/AWS-Devops_MC_B17D/Kubernetes/practice/22_June-RBAC-IAM (main)
$ kubectl get po
NAME      READY   STATUS    RESTARTS   AGE
testpod1   1/1     Running   0           8s
```

```
Bhavana@LAPTOP-E0A1LIK MINGW64 ~/Downloads/Bhavana work/AWS Devops/AWS-Devops_MC_B17D/Kubernetes/practice/22_June-RBAC-IAM (main)
$ kubectl run testpod2 --image tomcat
pod/testpod2 created
```

```
Bhavana@LAPTOP-E0A1LIK MINGW64 ~/Downloads/Bhavana work/AWS Devops/AWS-Devops_MC_B17D/Kubernetes/practice/22_June-RBAC-IAM (main)
$ kubectl get po
NAME      READY   STATUS    RESTARTS   AGE
testpod1   1/1     Running   0           27s
testpod2   1/1     Running   0           5s
```

```
Bhavana@LAPTOP-E0A1LIK MINGW64 ~/Downloads/Bhavana work/AWS Devops/AWS-Devops_MC_B17D/Kubernetes/practice/22_June-RBAC-IAM (main)
$ kubectl exec -it testpod1 -- curl localhost:80
<!DOCTYPE html>
<html>
<head>
<title>welcome to nginx!</title>
<style>
html { color-scheme: light dark; }
body { width: 35em; margin: 0 auto;
font-family: Tahoma, Verdana, Arial, sans-serif; }
</style>
</head>
<body>
<h1>welcome to nginx!</h1>
<p>If you see this page, nginx is successfully installed and working.
Further configuration is required for the web server, reverse proxy,
API gateway, load balancer, content cache, or other features.</p>

<p>For online documentation and support please refer to
<a href="https://nginx.org/">nginx.org</a>.<br/>
To engage with the community please visit
<a href="https://community.nginx.org/">community.nginx.org</a>.<br/>
For enterprise grade support, professional services, additional
security features and capabilities please refer to
<a href="https://f5.com/nginx">f5.com/nginx</a>.</p>

<p><em>Thank you for using nginx.</em></p>
</body>
</html>
```

```
Bhavana@LAPTOP-E0A1LIK MINGW64 ~/Downloads/Bhavana work/AWS Devops/AWS-Devops_MC_B17D/Kubernetes/practice/22_June-RBAC-IAM (main)
$ kubectl delete po testpod1
pod "testpod1" deleted from default namespace
```

```
Bhavana@LAPTOP-E0A1LIK MINGW64 ~/Downloads/Bhavana work/AWS Devops/AWS-Devops_MC_B17D/Kubernetes/practice/22_June-RBAC-IAM (main)
```

```
$ kubectl get po
NAME      READY   STATUS    RESTARTS   AGE
testpod2  1/1     Running   0           57s
```

```
Bhavana@LAPTOP-E0A1LIK MINGW64 ~/Downloads/Bhavana work/AWS Devops/AWS-Devops_MC_B17D/Kubernetes/practice/22_June-RBAC-IAM (main)
```

```
$ aws configure
AWS Access Key ID [*****UCEH]: AKIAWV7SGBK6VZL2VURO
AWS Secret Access Key [*****v41b]:
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
Default region name [us-east-1]: us-east-1
Default output format [None]:
```

```
Bhavana@LAPTOP-E0A1LIK MINGW64 ~/Downloads/Bhavana work/AWS Devops/AWS-Devops_MC_B17D/Kubernetes/practice/22_June-RBAC-IAM (main)
```

```
$ aws sts get-caller-identity
{
  "UserId": "459532536509",
  "Account": "459532536509",
  "Arn": "arn:aws:iam::459532536509:root"
}
```

```
#3-kiran-view-clusterrolebinding.yaml
```

```
---
apiVersion: rbac.authorization.k8s.io/v1
kind: ClusterRoleBinding
metadata:
  name: kiran-view-clusterrolebinding
subjects:
- kind: User
  name: kiran      # must exactly match username in aws-auth
  apiGroup: rbac.authorization.k8s.io
roleRef:
  kind: ClusterRole
  name: view      #predefiend
  apiGroup: rbac.authorization.k8s.io
```

```
Bhavana@LAPTOP-E0A1LIK MINGW64 ~/Downloads/Bhavana work/AWS Devops/AWS-Devops_MC_B17D/Kubernetes/practice/22_June-RBAC-IAM (main)
```

```
$ kubectl apply -f 3-kiran-view-clusterrolebinding.yaml
clusterrolebinding.rbac.authorization.k8s.io/kiran-view-clusterrolebinding
created
```

```
Bhavana@LAPTOP-E0A1LIK MINGW64 ~/Downloads/Bhavana work/AWS Devops/AWS-Devops_MC_B17D/Kubernetes/practice/22_June-RBAC-IAM (main)
```

```
$ aws configure
AWS Access Key ID [*****VURO]: AKIAWV7SGBK654HOUCEH
AWS Secret Access Key [*****vcyL]:
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
Default region name [us-east-1]:
Default output format [None]:
```

```
Bhavana@LAPTOP-E0A1LIK MINGW64 ~/Downloads/Bhavana work/AWS Devops/AWS-Devops_MC_B17D/Kubernetes/practice/22_June-RBAC-IAM (main)
```

```
$ aws sts get-caller-identity
{
  "UserId": "AIDAWV7SGBK6YKIZQMZ67",
  "Account": "459532536509",
  "Arn": "arn:aws:iam::459532536509:user/kiran"
}
```


Bhavana@LAPTOP-E0A1LIK MINGW64 ~/Downloads/Bhavana work/AWS Devops/AWS-Devops_MC_B17D/Kubernetes/practice/22_June-RBAC-IAM (main)

```
$ kubectl get po
NAME      READY   STATUS    RESTARTS   AGE
testpod2  1/1     Running   0           10m
```

Bhavana@LAPTOP-E0A1LIK MINGW64 ~/Downloads/Bhavana work/AWS Devops/AWS-Devops_MC_B17D/Kubernetes/practice/22_June-RBAC-IAM (main)

```
$ kubectl delete po testpod2
Error from server (Forbidden): pods "testpod2" is forbidden: User "kiran"
cannot delete resource "pods" in API group "" in the namespace "default"
```

Bhavana@LAPTOP-E0A1LIK MINGW64 ~/Downloads/Bhavana work/AWS Devops/AWS-Devops_MC_B17D/Kubernetes/practice/22_June-RBAC-IAM (main)

```
$ aws configure
AWS Access Key ID [*****UCEH]: AKIAWV7SGBK6TL4PLYMX
AWS Secret Access Key [*****v41b]:
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
Default region name [us-east-1]:
Default output format [None]:
```

Bhavana@LAPTOP-E0A1LIK MINGW64 ~/Downloads/Bhavana work/AWS Devops/AWS-Devops_MC_B17D/Kubernetes/practice/22_June-RBAC-IAM (main)

```
$ aws sts get-caller-identity
{
  "UserId": "AIDAWV7SGBK67EK6PPSAU",
  "Account": "459532536509",
  "Arn": "arn:aws:iam::459532536509:user/madhu"
}
```

Bhavana@LAPTOP-E0A1LIK MINGW64 ~/Downloads/Bhavana work/AWS Devops/AWS-Devops_MC_B17D/Kubernetes/practice/22_June-RBAC-IAM (main)

```
$ kubectl create ns dev
Error from server (Forbidden): namespaces is forbidden: User "madhu" cannot
create resource "namespaces" in API group "" at the cluster scope
```

Bhavana@LAPTOP-E0A1LIK MINGW64 ~/Downloads/Bhavana work/AWS Devops/AWS-Devops_MC_B17D/Kubernetes/practice/22_June-RBAC-IAM (main)

```
$ aws configure
AWS Access Key ID [*****LYMX]: AKIAWV7SGBK6VZL2VURO
AWS Secret Access Key [*****qN9Y]:
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
Default region name [us-east-1]:
Default output format [None]:
```

Bhavana@LAPTOP-E0A1LIK MINGW64 ~/Downloads/Bhavana work/AWS Devops/AWS-Devops_MC_B17D/Kubernetes/practice/22_June-RBAC-IAM (main)

```
$ aws sts get-caller-identity
{
  "UserId": "459532536509",
  "Account": "459532536509",
  "Arn": "arn:aws:iam::459532536509:root"
}
```

Bhavana@LAPTOP-E0A1LIK MINGW64 ~/Downloads/Bhavana work/AWS Devops/AWS-Devops_MC_B17D/Kubernetes/practice/22_June-RBAC-IAM (main)

```
$ kubectl create ns dev
namespace/dev created
```

Bhavana@LAPTOP-E0A1LIK MINGW64 ~/Downloads/Bhavana work/AWS Devops/AWS-Devops_MC_B17D/Kubernetes/practice/22_June-RBAC-IAM (main)

```
$ kubectl apply -f 4-kiran-edit-nsbinding.yaml
rolebinding.rbac.authorization.k8s.io/kiran-dev-edit-binding created
```

```
Bhavana@LAPTOP-E0A1LIK MINGW64 ~/Downloads/Bhavana work/AWS Devops/AWS-Devops_MC_B17D/Kubernetes (main)
$ aws configure
AWS Access Key ID [*****VURO]: AKIAWV7SGBK654HOUCEH
AWS Secret Access Key [*****vcyL]: 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
Default region name [us-east-1]:
Default output format [None]:
```

```
Bhavana@LAPTOP-E0A1LIK MINGW64 ~/Downloads/Bhavana work/AWS Devops/AWS-Devops_MC_B17D/Kubernetes (main)
$ aws sts get-caller-identity
{
  "UserId": "AIDAWV7SGBK6YKIZQMZ67",
  "Account": "459532536509",
  "Arn": "arn:aws:iam::459532536509:user/kiran"
}
```

```
Bhavana@LAPTOP-E0A1LIK MINGW64 ~/Downloads/Bhavana work/AWS Devops/AWS-Devops_MC_B17D/Kubernetes (main)
$ kubectl get ns
NAME                STATUS    AGE
default             Active   82m
dev                 Active   6m22s
kube-node-lease     Active   82m
kube-public         Active   82m
kube-system         Active   82m
```

```
Bhavana@LAPTOP-E0A1LIK MINGW64 ~/Downloads/Bhavana work/AWS Devops/AWS-Devops_MC_B17D/Kubernetes (main)
$ kubectl run pod1 -n dev
error: required flag(s) "image" not set
```

```
Bhavana@LAPTOP-E0A1LIK MINGW64 ~/Downloads/Bhavana work/AWS Devops/AWS-Devops_MC_B17D/Kubernetes (main)
$ kubectl run pod1 --image tomcat -n dev
pod/pod1 created
```

```
Bhavana@LAPTOP-E0A1LIK MINGW64 ~/Downloads/Bhavana work/AWS Devops/AWS-Devops_MC_B17D/Kubernetes (main)
$ kubectl get po -n dev
NAME    READY   STATUS    RESTARTS   AGE
pod1    1/1     Running   0           13s
```

```
Bhavana@LAPTOP-E0A1LIK MINGW64 ~/Downloads/Bhavana work/AWS Devops/AWS-Devops_MC_B17D/Kubernetes (main)
$ kubectl delete po pod1 -n dev
pod "pod1" deleted from dev namespace
```

```
Bhavana@LAPTOP-E0A1LIK MINGW64 ~/Downloads/Bhavana work/AWS Devops/AWS-Devops_MC_B17D/Kubernetes (main)
$ kubectl get po -n dev
No resources found in dev namespace.
```

```
Bhavana@LAPTOP-E0A1LIK MINGW64 ~/Downloads/Bhavana work/AWS Devops/AWS-Devops_MC_B17D/Kubernetes (main)
$ aws sts get-caller-identity
{
  "UserId": "459532536509",
  "Account": "459532536509",
  "Arn": "arn:aws:iam::459532536509:root"
}
```

```
Bhavana@LAPTOP-E0A1LIK MINGW64 ~/Downloads/Bhavana work/AWS Devops/AWS-Devops_MC_B17D/Kubernetes (main)
$ kubectl auth can-i create pods --as madhu -n dev
yes
```

```
Bhavana@LAPTOP-E0A1LIK MINGW64 ~/Downloads/Bhavana work/AWS Devops/AWS-Devops_MC_B17D/Kubernetes (main)
$ kubectl auth can-i create pods --as kiran -n dev
yes
```