# ICE FIX
# TRADE CAPTURE (TC)
# REFERENCE MANUAL

## VERSION 4.17

26 July 2023

# TABLE OF CONTENTS


**1. REVISION HISTORY ..... 3**

**2. ABOUT THIS MANUAL ..... 7**

2.1. PURPOSE ..... 7
2.2. AUDIENCE ..... 7
2.3. FORMAT CONVENTIONS ..... 7
2.4. DATA TYPES ..... 8
2.4.1. INTEGER AND NUMINGROUP ..... 8
2.4.2. FLOATING POINT, QUANTITY, AND PRICE ..... 8
2.4.3. STRING ..... 8
2.4.4. CHARACTER AND BOOLEAN ..... 8
2.4.5. UTCDATE ..... 8
2.4.6. UTCTIMESTAMP ..... 8
2.4.7. LOCALMKTDATE AND MONTHYEAR ..... 9

**3. CONTACTING ICE CUSTOMER SUPPORT ..... 9**

**4. INTRODUCTION TO FIX TRADE CAPTURE ..... 10**

4.1. SUPPORTED PRODUCTS ..... 10
4.2. SYSTEM ARCHITECTURE ..... 11
4.2.1. EXCHANGE SILOS ..... 11
4.2.2. TC APPLICATION ARCHITECTURE ..... 11
4.3. CONNECTIVITY MANAGEMENT ..... 12
4.3.1. LOAD BALANCERS ..... 12
4.3.2. BANDWITH REQUIREMENTS ..... 13
4.3.3. FIX SESSION CONFIGURATION ..... 13
4.3.4. FIX SESSION STARTUP ..... 13
4.3.5. FIX SESSION RESET ..... 14

**5. FIX PROTOCOL BASICS ..... 14**

5.1. SUPPORTED ADMINISTRATIVE MESSAGE TYPES ..... 15
5.2. SUPPORTED APPLICATION MESSAGE TYPES ..... 15

**6. MESSAGE TYPE SPECIFICATIONS ..... 16**

6.1. COMMON MESSAGE COMPONENTS ..... 16
6.1.1. MESSAGE HEADER ..... 16
6.1.2. MESSAGE TRAILER ..... 17
6.2. ADMINISTRATIVE MESSAGES ..... 17
6.2.1. LOGON REQUEST [35=A] ..... 17
6.2.2. LOGON RESPONSE [35=A] ..... 19
6.2.3. HEARTBEAT [35=0] ..... 20
6.2.4. TEST REQUEST [35=1] ..... 20




© 2005-2023 Intercontinental Exchange, Inc. All rights reserved.

6.2.5. RESEND REQUEST [35=2] ..... 21
6.2.6. REJECT (SESSION LEVEL) [35=3] ..... 21
6.2.7. SEQUENCE RESET [35=4] ..... 22
6.2.8. LOGOUT REQUEST [35=5] ..... 23
6.2.9. LOGOUT RESPONSE [35=5] ..... 23
6.3. APPLICATION MESSAGES ..... 23
6.3.1. SECURITY DEFINITION REQUEST [35=c] ..... 23
6.3.2. SECURITY DEFINITION RESPONSE [35=d] ..... 25
6.3.3. DEFINED STRATEGY [35=UDS] ..... 34
6.3.4. NEWS [35=B] ..... 40
6.3.5. USER COMPANY REQUEST [35=UCP] ..... 40
6.3.6. USER COMPANY RESPONSE [35=UCR] ..... 41
6.3.7. TRADE CAPTURE REPORT REQUEST [35=AD] ..... 42
6.3.8. TRADE CAPTURE REPORT REQUEST ACK [35=AQ] ..... 44
6.3.10. TRADE CAPTURE REPORT [35=AE] ..... 46
6.3.11. ALLOCATION REPORT [35=AS] ..... 58

**7. CUSTOM FIELD DEFINITIONS ..... 62**

**8. SUPPORTED SECURITY TYPES ..... 63**

**9. APPENDIX A: PARTY ROLE DEFINITIONS ..... 64**

**APPENDIX B: ICE FIX TC REQUEST MATRIX ..... 66**



© 2005-2023 Intercontinental Exchange, Inc. All rights reserved.

# FIX TC REFERENCE MANUAL

## 1. REVISION HISTORY

| Version | Date | Description of Changes |
|---|---|---|
| - | Various | Previous revision history truncated to latest revisions. |
| 4.8 | 13 January 2020 | |
| *Section 6.2.1 Logon Request* | | • Updated description for `StrategyPreference` (Tag 9006) |
| *Section 6.3.2 Security Definition Response (Legacy)* | | • Highlighted section for removal |
| *Section 6.3.3 Security Definition Response (New)* | | • Updated description regarding `StrategyPreference` (Tag 9006) |
| 4.9 | 12 May 2020 | |
| *Section 6.2.1 Logon Request* | | • Updated description for `StrategyPreference` (Tag 9006) |
| *Section 6.3.2 Security Definition Response (Legacy)* | | • Removed section |
| *Section 6.3.2 (formerly 6.3.3) Security Definition Response* | | • Updated description regarding `StrategyPreference` (Tag 9006)<br>• Added `ScreenTickValue` (Tag 9133) and `BlockTickValue` (Tag 9134) |
| *Section 6.3.10 Trade Capture Report* | | • Updated datatype for `LegNumOfLots` (Tag 9019) |



© 2005-2023 Intercontinental Exchange, Inc. All rights reserved.

| | |
|---|---|
| *Section 6.3.11 Allocation Report* | • Added new value for AllocReportType (Tag 794)<br>• Updated supported values for `AllocTransType` (Tag 71)<br>• Removed the Reserved for Future use format from `BrokerCompID` (Tag 9065) |
| 4.10 | 19 August 2020 |
| *Section 6.3.4 News* | • Updated requirement for `UserName` (Tag 553) |
| *Section 6.3.10 Trade Capture Report* | • Updated requirement and comments for `LegNumOfLots` (Tag 9019) |
| 4.11 | 12 January 2021 |
| *Section 5.3.2 Security Definition* | • Updated supported values for `SecurityResponseType` (Tag 323) |
| *Section 5.3.3 Defined Strategy* | • Added `ScreenTickValue` (Tag 9133) and `BlockTickValue` (Tag 9134) |
| *Section 5.3.10 Trade Capture Report* | • Added `DealAdjustIndicator` (Tag 9124), `QuantityMax` (Tag 9512), `SelfMatchPreventionID` (Tag 9821), and `SelfMatchPreventionInstruction` (Tag 9822) |
| *Section 5.3.11 Allocation Report* | • Updated supported values for `AllocTransType` (Tag 71)<br>• Added `OptionsSymbol` (Tag 9403) |
| Multiple *Sections* | • Removed references to ICE Community links |
| 4.12 | 18 May 2021 |
| *Section 5.3.1 Security Definition Request* | • Added throttle rate. |
| *Section 5.3.5 User Company Request* | • Added throttle rate. |
| *Section 5.3.7 Trade Capture Report Request* | • Added throttle rate.<br>• Updated the section for off-exchange trades retrieval in FIXTC snapshot request |
| *Section 5.3.10 Trade Capture Report* | • Updated the FIA document link under `CustOrderHandlingInst` (Tag 1031) |



© 2005-2023 Intercontinental Exchange, Inc. All rights reserved.

| | |
|---|---|
| 4.13 | 08 September 2021 |
| *Section 5.3.11 Allocation Report* | • Updated the description of 828(TrdType) to reflect possible values are values from the clearing system<br>• Updated Tag 9060 name to `AcceptanceTime` |
| *Section 5.3.2 Security Definition* | • Updated data type for `UnderlyingCouponRate` (Tag 435) |
| *Section 5.3.10 Trade Capture Report* | • Added `OptolMinQuantity` (Tag 9513), `OptolMaxQuantity` (Tag 9514), `OptolPriceBasis` (Tag 9515), `OptolPriceBasisPeriod` (Tag 9516), and `OptolPrice` (Tag 9517) |
| 4.14 | 13 October 2021 |
| *Section 5.3.10 Trade Capture Report* | • Added `OptolPriceBasisSubLevel` (Tag 9518) |
| 4.15 | 30 March 2022 |
| *Section 5.3.10 Trade Capture Report* | • Updated MaxLength for `MemoField` (Tag 9121) |
| 4.16 | 27 September 2022 |
| *Section 5.3.10 Trade Capture Report* | • Added new supported value for `TrdType` (Tag 828). Please note that this impacts the values for `TrdType` (Tag 828) in allocations and `BlockDetailsTradeType` (Tag 9072) in security definitions as well<br>• Added new supported tags `PriceType` (Tag 423), `BenchmarkPrice` (Tag 662), and `BenchmarkPriceType` (Tag 663)<br>• Added new description for `LastParPx` (Tag 669).<br>• Reserved `LegPriceType` (Tag 686), `LegBenchmarkPrice` (Tag 679), and `LegBenchmarkPriceType` (Tag 680) for future usage |
| 4.16.1 | 25 October 2022 |
| *Section 5.3.2 Security Definition* | • Highlighted `CFICode` (Tag 461) value for removal |



© 2005-2023 Intercontinental Exchange, Inc. All rights reserved.

| 4.17 | TBD |
|---|---|
| *Section 5.3.10*<br>*Trade Capture Report* | • Added new supported values for `ClientAppType` (Tag 9413)<br>• Updated field name and comments related to<br>• `PlattsMinQuantity` (Tag 9513)<br>• `PlattsMaxQuantity` (Tag 9514)<br>• `PlattsTerms` (Tag 9516) |
| *Section 6.3.1*<br>*Security Definition Request* | • Added new supported tags Symbol (Tag 55),<br>• Updated the description of SecurityID (Tag 48)<br>• Updated the description of CFICode (Tag 461)<br>• Added note for future removal of a supported value for CFICode (Tag 461)d |
| *Section 6.3.2*<br>*Security Definition Response* | • Added MinPrice (Tag 9015) and MaxPrice (Tag 9016)<br>• Added ScreenLastTradeDate (Tag 9086)<br>• Added ContractSize (Tag 9087) |
| *Section 6.3.3*<br>*Defined Strategy* | • Added MinPrice (Tag 9015) and MaxPrice (Tag 9016) |
| *Section 6.2.1*<br>*Logon Request* | • Added future removal notes for TimeStampPreference (Tag 9007) and PublishMktCreationRealtime (Tag 9010)<br>• Marked note for removal in description of tag 9010. |



© 2005-2023 Intercontinental Exchange, Inc. All rights reserved.

# 2. ABOUT THIS MANUAL

## 2.1. PURPOSE

This reference manual provides details of the ICE FIX implementation and message specifications for using the ICE FIX TC API for trade notifications.

## 2.2. AUDIENCE

This reference manual is for developers, project managers, and/or business analysts interesting in using the ICE FIX TC API for trade notifications.

## 2.3. FORMAT CONVENTIONS

This manual uses a set of terms, symbols, and typographic conventions to categorize specific information. Familiarity with these conventions will help you use this documentation more effectively.

| Format Convention | Description and Notes |
|---|---|
| **Bold** | Indicates important information |
| **Bold Red** | Indicates extremely important information or warnings. |
| **Bold Green** | Indicates reservation for future use |
| Yellow Highlight | Indicates future deprecation |
| Green Highlight | Indicates addition in current specification version from previous version |
| ~~Red Highlight Strikethrough~~ | Indicates removal in current specification version from previous version |
| Blue Highlight | Indicates modification in current specification version from previous version |
| `Courier New` | Sample code, arguments, properties, methods, events, or values that must be typed exactly as it appears. |
| <VALUE> | Denotes values that are set and sent by the client application. |
| → Tag Number | Tag within a repeating group. |
| →→ Tag Number | Tag within a nested repeating group. |
| Y | Required Tag Column: Indicates that this tag is always required for the message. |
| C | Required Tag Column: Indicates that this tag is conditionally required for the message. |
| O | Required Tag Column: Indicates that this tag is optional for the message. |



© 2005-2023 Intercontinental Exchange, Inc. All rights reserved.

## 2.4. DATA TYPES

These are the supported data types for the FIX field definitions. Please note that these data types are largely based on the data types in the FIX.4.2 and FIX.4.4 FIX Protocol Specifications.

### 2.4.1. INTEGER AND NUMINGROUP

**Int:** Sequence of digits without commas or decimals and optional sign character (ASCII characters "-" and "0" - "9"). Note that Int values may contain leading zeros (e.g. “00042”= “42”).
**NumInGroup:** `Int` field representing the number of entries in a repeating group. Value must be > 0.

### 2.4.2. FLOATING POINT, QUANTITY, AND PRICE

**Float, Qty, and Price:** Sequence of digits with an optional decimal point and sign character (ASCII characters "-", "0" - "9" and "."). The absence of the decimal point within the string will be interpreted as the float representation of an integer value. Note that float values may contain leading zeros (e.g. “00042.42” = “42.42”) and may contain or omit trailing zeros after the decimal point (e.g. “42.0” = “42.0000” = “42”). Please note that values may be negative for some products.

### 2.4.3. STRING

**String:** Alpha-numeric free format strings, can include any character or punctuation except the delimiter, 0x01 (SOH). All string fields are case sensitive (i.e. brent ≠ Brent).

### 2.4.4. CHARACTER AND BOOLEAN

**Char:** Single character value, can include any alphanumeric character except the delimiter, 0x01 (SOH). All char fields are case sensitive (i.e. m ≠ M).
**Boolean:** `Char` field with two Supported value(s): “Y” = Yes and “N” = No

### 2.4.5. UTCDATE

**UTCDate:** Date represented in UTC (Universal Time Coordinated, also known as “GMT”) in YYYYMMDD format.

Supported value(s): YYYY = 0000-9999, MM = 01-12, DD = 01-31.

### 2.4.6. UTCTIMESTAMP

**UTCTimeStamp:** Time/date combination represented in UTC (Universal Time Coordinated, also known as “GMT”) in either YYYYMMDD-HH:MM:SS (whole seconds) or YYYYMMDD-HH:MM:SS.sss* format, colons, dash, and period required.



© 2005-2023 Intercontinental Exchange, Inc. All rights reserved.

Supported value(s): YYYY = 0000-9999, MM = 01-12, DD = 01-31, HH = 00-23, MM = 00-59, SS = 00-60 (60 only if UTC leap second), sss* = fractions of seconds. The fractions of seconds may be empty when no fractions of seconds are conveyed (in such a case the period is not conveyed), it may include 3 digits to convey milliseconds, 6 digits to convey microseconds, 9 digits to convey nanoseconds, 12 digits to convey picoseconds.

Example(s)

| | |
|---|---|
| Time stamp with seconds: | "20011217-09:30:47" |
| Time stamp with milliseconds: | "20011217-09:30:47.123" |
| Time stamp with microseconds: | "20011217-09:30:47.123456" |
| Time stamp with nanoseconds: | "20011217-09:30:47.123456789" |
| Time stamp with picoseconds: | "20011217-09:30:47.123456789123" |

### 2.4.7. LOCALMKTDATE AND MONTHYEAR

**LocalMktDate:** Date of Local Market (vs. UTC) in YYYYMMDD format.

Supported value(s): YYYY = 0000-9999, MM = 01-12, DD = 01-31.

**MonthYear:** String field representing month of a year. An optional day of the month can be appended. Valid formats: YYYYMM YYYYMMDD.

Supported value(s): YYYY = 0000-9999, MM = 01-12, DD = 01-31.

# 3. CONTACTING ICE CUSTOMER SUPPORT

**The ICE Helpdesk is the first point of contact for any production environment issues.** If necessary, issues will be escalated to the API Development Support Team.

| Contacts | | Available Hours |
|---|---|---|
| ***Production Support*** | | |
| ***Email*** | icehelpdesk@theice.com | From Sunday at 5:30pm EST through Friday at 6:30pm EST 24 hours/day |
| ***Phone*** | +1 (770) 738-2101 | |
| ***Website*** | https://www.theice.com/productguide/Search.shtml?tradingHours | |
| ***API Developer Support*** | | |



© 2005-2023 Intercontinental Exchange, Inc. All rights reserved.

| | | |
|---|---|---|
| ***ICE Service Community*** | All support requests must be entered using the "Create a case" feature on the ICE Service Community portal at https://service.theice.com. When a client sends a case, it is routed directly to the respective Support Team(s) improving response times to your inquiries and issue resolution. | From 4:00am EST to 5:30pm EST Monday through Friday |

# 4. INTRODUCTION TO FIX TRADE CAPTURE

The ICE FIX Trade Capture (FIX TC) API allows trading firms and clearing firms to connect to the ICE Trading System and request static data and receive historical and real-time deals.

**This service should not be considered a FIX drop copy service or a complete transactional reference for exchange activity, as it is intended to only provide historical and real-time trade data from the entire ICE Trading System.**

***TC Sessions for Clearing Firms and Brokers***

Access via Clearing Firm FIX Session:

Clearing firms can request a FIX TC ID for use with a single session. This FIX TC ID will be setup under the clearing firm and configured to receive all deal activity across all trading firms in which there is a clearing relationship. The Logon Message should include `UserType` (Tag 9001) with a value of '`2`'. Clearing firms will have administrative control for the FIX TC ID.

Access via Broker Firm FIX Session:

Broker firms can request a FIX TC ID for use with a single session. This FIX TC ID will be setup under the broker company and configured to receive all order and deal activity across all trading firms in which there is a brokered trade.

## 4.1. SUPPORTED PRODUCTS

| **Products** | **Available via FIX TC?** | | |
|---|---|---|---|
| ***Exchange*** | ***Futures*** | ***Options*** | ***Defined Strategies*** |
| ***ICE Futures Europe*** | Yes | Yes | Yes |
| ***ICE Futures US*** | Yes | Yes | Yes |
| ***ICE Futures Abu Dhabi*** | Yes | No | No |
| ***ICE Futures Netherlands*** | Yes | Yes | Yes |
| ***LIFFE Futures Europe*** | Yes | Yes | Yes |
| ***LIFFE Futures US*** | Yes | Yes | Yes |
| ***ICE OTC (Cleared)*** | Yes | Yes | N/A |



© 2005-2023 Intercontinental Exchange, Inc. All rights reserved.

| | | | |
|---|---|---|---|
| ***ICE OTC (Bilateral Only)*** | Yes | Yes | N/A |
| ***Eris*** | Yes | Yes | N/A |

## 4.2. SYSTEM ARCHITECTURE

### 4.2.1. EXCHANGE SILOS

With the acquisition of NYSE Euronext and the introduction of ENDEX 24/7 trading, we introduced Exchange Silos into our System Architecture and Connectivity Model. The three exchange silos are: ICE (Chicago, IL USA), LIFFE (Basildon, UK), and ENDEX (Chicago, IL USA).

Having three distinct Exchange Silos gives us the flexibility needed to meet the business, market, and connectivity needs of ICE customers. Customers will establish and maintain connections based on their market and trading preferences.

Each Exchange Silo is an individual, stand-alone environment with the same hardware configuration and specifications unless otherwise noted. Please see the *ICE Firewall and Proxy Requirements* (*https://service.theice.com/s/article/firewall-proxy-requirements-20002*) for connectivity information.

### 4.2.2. TC APPLICATION ARCHITECTURE

The FIX TC application architecture within each silo consists of multiple FIX engines with each one functioning independently on separate hardware with the same configuration and specifications. Client connections are made to FIX TC through a virtual IP address, or VIP, that services the connection via a hardware load balancer. The load balancer manages the connections to the available pool of FIX TC applications. The following figure illustrates the high level architecture of the ICE FIX system within a silo.



© 2005-2023 Intercontinental Exchange, Inc. All rights reserved.




## 4.3. CONNECTIVITY MANAGEMENT

### 4.3.1. LOAD BALANCERS

The Primary VIP manages and load balances connections based on the `SenderCompID` (Tag 49) and `SenderSubID` (Tag 50) of the client application within each Exchange Silo. The host connection IP address and port will be given to a FIX client to use as the target IP and port for their application. Each FIX client must initiate a TCP/IP socket connection to establish the communication link between the client application and the FIX TC application. The load balancer will manage new client connections across the available FIX TC applications.

The combination of the `SenderCompID` (Tag 49) and `SenderSubID` (Tag 50) for each logon must be unique for all connected FIX sessions. Logon requests using the same `SenderCompID` (Tag 49) and `SenderSubID` (Tag 50) combination as an existing FIX session will be rejected. Once a client establishes a FIX session, the details of the connection and session information will persist unless the client is disconnected for more than 60 minutes.

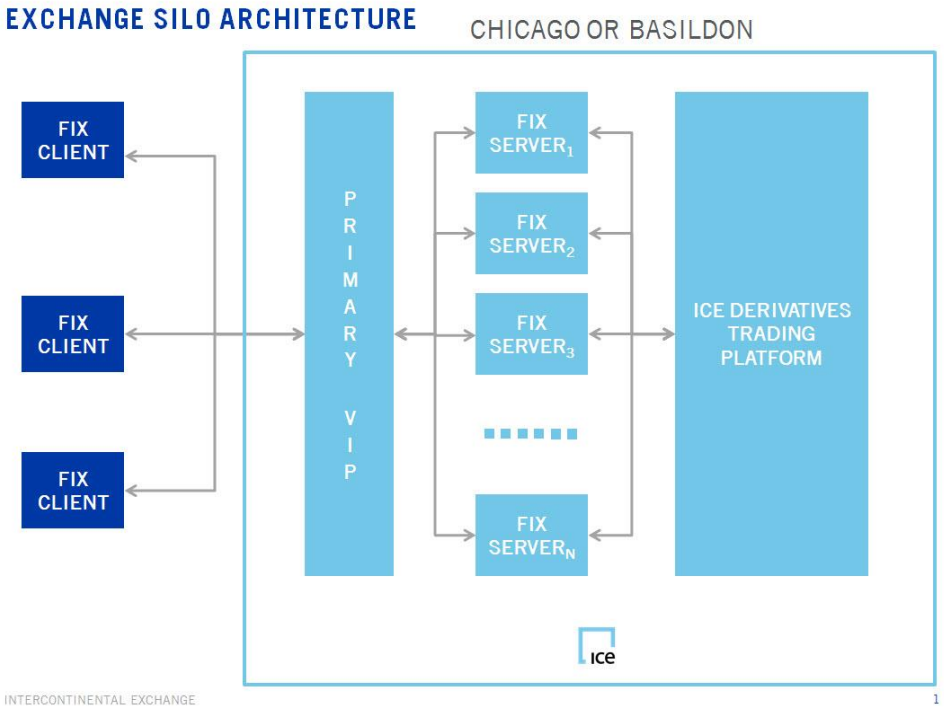FIX client connections will be monitored by sending and receiving `Heartbeat` (Tag 35=0) messages to ensure the connectivity between both parties. The default heartbeat message interval is 30 seconds; however, this value can be set by the FIX client on the Logon Request Message.



© 2005-2023 Intercontinental Exchange, Inc. All rights reserved.

**NOTE: If a client loses its TCP/IP connection and reconnects, the client must reset the inbound and outbound message sequence numbers to '1' and send the next Logon Message with `ResetSeqNumFlag` (Tag 141) = 'Y' to reset the session on the FIX host side.**

### 4.3.2. BANDWITH REQUIREMENTS

The bandwidth requirements for FIX TC sessions are dependent on the number of orders sent and deals consummated by a trading participant(s). A minimum of 48 Mbps is recommended for trading participants and clearing member firms. 160 Mbps is suggested for growth and volume spikes. Applications should have high processing performance and throughput. **FIX TC Clearing Firm sessions that exceed a message queue of 250k messages will be disconnected. Other connections that exceed a message queue of 100k messages will be disconnected.**

### 4.3.3. FIX SESSION CONFIGURATION

For new customers, it is necessary to first complete initial business and legal agreements by contacting *sponsorship@theice.com*. After Sponsorship approval and completion of required legal agreements, customers can request one or many FIX sessions based on their development, conformance, and testing needs. Each FIX session will be identified the `SenderCompID` (Tag 49), `SenderSubID` (Tag 50), and `TargetCompID` (Tag 56) which is always set to '`ICE`'.

### 4.3.4. FIX SESSION STARTUP

#### *4.3.4.1. FIX SESSION LOGON*

To startup a FIX session, the FIX client has to connect to FIX TC via TCP/IP by using a given IP address and port based on the environment and/or Exchange Silo. Please see the *ICE Firewall and Proxy Requirements* (*https://service.theice.com/s/article/firewall-proxy-requirements-20002*) for connectivity information.

Immediately after establishing the TCP/IP session, the FIX client should send a Logon Request (35=A) message with the required tags. The FIX TC requires the username and password to authenticate the FIX client session. The FIX client Logon Request message should include the `SenderCompID` (Tag 49) set to <CompanyID>, `SenderSubID` (Tag 50) set to <SenderSubID>, `TargetCompID` (Tag 56) set to '`ICE`', `UserName` (Tag 553) set to <TradeCaptureID>, `Password` (Tag 554) set to <Password> and may include any of the optional tags listed in the Logon Request message.

If the FIX TC accepts the Logon Request message, then in response, FIX TC will send a FIX Logon Response message with `HeartbeatInt` (Tag 108). If the Logon Request message is rejected, the FIX TC will send a Logout Response message with `Text` (Tag 58) or drop the TCP/IP session depending on the reason for the reject.



© 2005-2023 Intercontinental Exchange, Inc. All rights reserved.

**Please note that there is a throttle limit of 1 Logon Request per 15 seconds. Any other logon attempts within 15 seconds will be rejected.**




### 4.3.5. FIX SESSION RESET

All FIX sessions will be reset at the end of the trading day during daily and weekend maintenance windows. As a result, each day all FIX clients have to reset their inbound and outbound message sequence numbers to '`1`'. Clients can also reset FIX sessions during the day by sending the Logon Request message with `ResetSeqNumFlag` (Tag 141) set to '`Y`' and `MsgSeqNum` (Tag 34) set to '`1`'. Please see *Regular Trading & Support Hours and Holiday Hours* (*https://www.theice.com/productguide/Search.shtml?tradingHours*) for hours and details.

# 5. FIX PROTOCOL BASICS

If you are not familiar with the FIX protocol basics, we strongly recommend that you review the *FIX Protocol 4.4 version* (*https://www.fixtrading.org/standards/fix-4-4/*) before proceeding. The FIX TC supports a subset of tags, values, and message types based on the FIX protocol implementation of the *FIX Protocol 4.4* protocol version. In some cases, we adapt tags, values, and/or messages from later versions of the protocol and highlight those deviations within this manual. Additionally, ICE FIX TC supports several custom exchange-defined messages and tags.

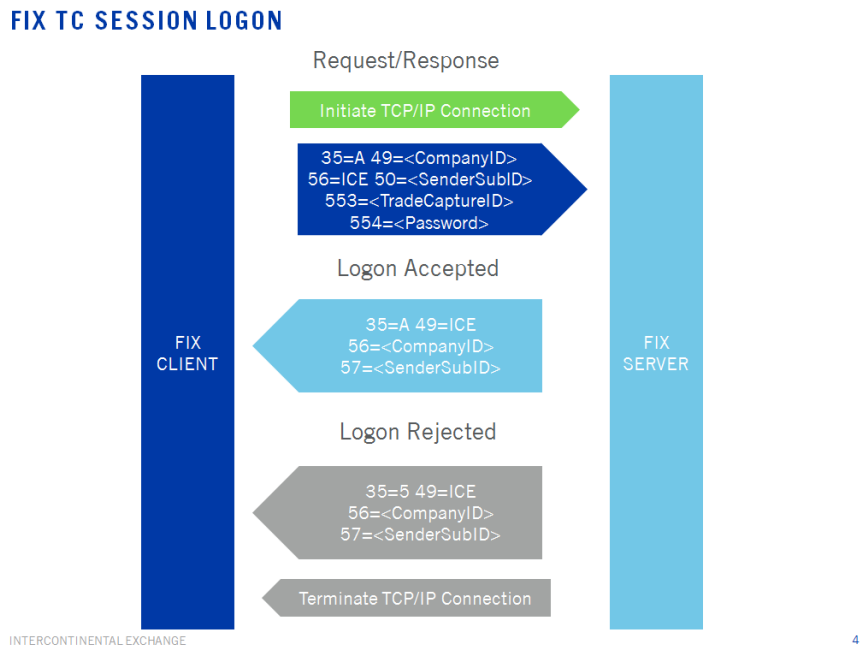

© 2005-2023 Intercontinental Exchange, Inc. All rights reserved.

## 5.1. SUPPORTED ADMINISTRATIVE MESSAGE TYPES

| Message | MsgType (Tag 35) | Message Direction |
|---|---|---|
| ***Logon Message*** | A | FIX Client ←→ FIX TC |
| ***Heartbeat Message*** | 0 | FIX Client ←→ FIX TC |
| ***Test Request*** | 1 | FIX Client ←→ FIX TC |
| ***Resend Request*** | 2 | FIX Client ←→ FIX TC |
| ***Reject (Session-Level)*** | 3 | FIX Client ←→ FIX TC |
| ***Sequence Reset Request*** | 4 | FIX Client ←→ FIX TC |
| ***Logout Message*** | 5 | FIX Client ←→ FIX TC |

## 5.2. SUPPORTED APPLICATION MESSAGE TYPES

| Message | MsgType (Tag 35) | Message Direction |
|---|---|---|
| ***Security Definition Request*** | c | FIX Client → FIX TC |
| ***Security Definition Response*** | d | FIX Client ← FIX TC |
| ***Defined Strategy*** | UDS | FIX Client ← FIX TC |
| ***News*** | B | FIX Client ← FIX TC |
| ***User Company Request*** | UCP | FIX Client → FIX TC |
| ***User Company Response*** | UCR | FIX Client ← FIX TC |
| ***Trade Capture Report Request*** | AD | FIX Client ← FIX TC |
| ***Trade Capture Report Request Ack*** | AQ | FIX Client ← FIX TC |
| ***Trade Capture Report*** | AE | FIX Client ← FIX TC |



© 2005-2023 Intercontinental Exchange, Inc. All rights reserved.

# 6. MESSAGE TYPE SPECIFICATIONS

## 6.1. COMMON MESSAGE COMPONENTS

Every message sent to a FIX client will have some of the common message components. Instead of repeating these tags in each section of this manual, they are added here for brevity and reference.

### 6.1.1. MESSAGE HEADER

This is the common message header for all supported messages. It must be included on all messages.

| Tag # | Message Header (All) Field Name | Data Type (Max Length) | Required | Additional Comments |
|---|---|---|---|---|
| 8 | BeginString | **String** | Y | Identifies beginning of new message. |
| 9 | BodyLength | **Int** | Y | Message length, in bytes. |
| 35 | MsgType | **String** | Y | Defines the message type. |
| 49 | SenderCompID | **String** | Y | Company ID value for client request |
| 56 | TargetCompID | **String** | Y | Always set to '`ICE`' |
| 57 | TargetSubID | **String** | C | |
| 34 | MsgSeqNum | **Int** | Y | Integer message sequence number |
| 50 | SenderSubID | **String** | Y | |
| 43 | PossDupFlag | **Boolean** | C | Indicates possible retransmission of message with this sequence number<br>Supported value(s):<br>Y = Possible duplicate |



© 2005-2023 Intercontinental Exchange, Inc. All rights reserved.

| Tag # | Message Header (All) Field Name | Data Type (Max Length) | Required | Additional Comments |
|---|---|---|---|---|
| 52 | Sending Time | **UTCTimeStamp** | Y | The precision is controlled by the `TimeStampPreference` (Tag 9007) on the Logon Request Message.<br>Time/date combination represented in UTC (Universal Time Coordinated, also known as "GMT") in either YYYYMMDD-HH:MM:SS (whole seconds) or YYYYMMDD-HH:MM:SS.sss* format, colons, dash, and period required.<br>Supported value(s): YYYY = 0000-9999, MM = 01-12, DD = 01-31, HH = 00-23, MM = 00-59, SS = 00-60 (60 only if UTC leap second), sss* = fractions of seconds.<br>The fractions of seconds may be empty when no fractions of seconds are conveyed (in such a case the period is not conveyed), it may include 3 digits to convey milliseconds, 6 digits to convey microseconds, 9 digits to convey nanoseconds, 12 digits to convey picoseconds. |

### 6.1.2. MESSAGE TRAILER

This is the common message trailer for all supported messages. It must be included on all messages.

| Tag # | Message Trailer (All) Field Name | Data Type (Max Length) | Required | Additional Comments |
|---|---|---|---|---|
| 10 | Checksum | **String(3)** | Y | **ALWAYS LAST FIELD IN MESSAGE.** Three byte, simple checksum. Always defined as three characters. |

## 6.2. ADMINISTRATIVE MESSAGES

### 6.2.1. LOGON REQUEST [35=A]

There is a throttle limit of 1 Logon Request message request per 15 seconds for FIX clients. Any other Logon Request message requests within those 15 seconds will be rejected.

**Message Direction: FIX Client → FIX TC**



© 2005-2023 Intercontinental Exchange, Inc. All rights reserved.

| Tag # | Logon Request [35=A] Field Name | Data Type (Max Length) | Required | Additional Comments |
|---|---|---|---|---|
| Message Header | | | Y | **MsgType = A** |
| 553 | UserName | **String** | Y | **Adapted from FIX.4.4.**<br><TradeCaptureID> of FIX session |
| 554 | Password | **String** | Y | **Please note that the data type is String not Data.**<br><Password> for the <TradeCaptureID>. |
| 98 | EncryptMethod | **Int** | Y | Supported value(s):<br>0 = Clear text |
| 141 | ResetSeqNumFlag | **Boolean** | C | Indicates both sides of a FIX session should reset sequence numbers.<br>Supported value(s):<br>Y = Yes, reset sequence numbers.<br>N = No |
| 108 | HeartbeatInt | **Int** | Y | Session heart beat interval, default value **30** seconds. |
| 9001 | UserType | **Int(1)** | O | Supported value(s):<br>1 = Trading Firm ID Setup (Default if not sent)<br>2 = Clearing Firm ID Setup (Single session) |
| 9006 | StrategyPreference | **Int(1)** | O | Indicates Strategy Publication Preference.<br>Supported value(s):<br>1 = New Strategy Information (Default if not sent) |
| 9007 | TimeStampPreference | **Int(1)** | O | **This preference will be removed in Q4 2024 and will default to 1.**<br><br>Indicates Time Stamp Precision Preference for `SendingTime` (Tag 52), `TransactTime` (Tag 60), and `RFQTransactTime` (Tag 9213) on responses.<br>Supported value(s):<br>0 = Standard time precision (seconds or milliseconds) (Default if not sent)<br>1 = Increased time precision (seconds, milliseconds, or greater) |
| 9008 | PublishClearingAllocations | **Int(1)** | O | Indicates whether or not the allocations from clearing should be published over the session.<br>Supported value(s):<br>0 = Do not send clearing allocation messages (Default if not sent).<br>1 = Send clearing allocation messages. |



© 2005-2023 Intercontinental Exchange, Inc. All rights reserved.

| Tag # | Logon Request [35=A] Field Name | Data Type (Max Length) | Required | Additional Comments |
|---|---|---|---|---|
| 9009 | PublishMiFIDRegisteredDetails | **Int(1)** | O | Indicates whether or not the registered values (from ICE Identifier Admin) for the MiFIDID (Tag 9707) should be published over the session.<br>Supported value(s):<br>0 = Do not send the registered values for the `MiFIDID` (Tag 9707) (Default if not sent)<br>1 = Send the registered values for the `MiFIDID` (Tag 9707) |
| 9010 | PublishMktCreationRealtime | **Int(1)** | O | **This preference will be removed in Q4 2024 and will default to 1.**<br><br>Indicates whether or not real-time market creation notifications should be published over the session.<br>Supported Value(s):<br>0 = No (Default if not sent)<br>1 = Yes<br>~~**NOTE: `StrategyPreference` (Tag 9006) must be set to '1' if `PublishMktCreationRealtime` (Tag 9010) = '1'**~~ |
| 9450 | ApplicationName | **String(30)** | O | Should contain the name of the application. 30-character limit. |
| 9451 | ApplicationVersion | **String(30)** | O | Should contain the version of the application. 30-character limit. |
| 9452 | ApplicationVendor | **String(30)** | O | Should contain the name of the application vendor (ISV, QV, etc.) or the name of the company if proprietary. 30-character limit. |
| Message Trailer | | | Y | |

### 6.2.2. LOGON RESPONSE [35=A]

The FIX TC sends a Logon Response message as a response to the successful Logon Request message received from the FIX client.

**Message Direction: FIX Client ← FIX TC**



© 2005-2023 Intercontinental Exchange, Inc. All rights reserved.

| Tag # | Logon Response Message [35=A] Field Name | Data Type (Max Length) | Required | Additional Comments |
|---|---|---|---|---|
| Message Header | | | Y | **MsgType = A** |
| 98 | EncryptMethod | **Int** | Y | Supported value(s):<br>0 = Clear text |
| 108 | HeartbeatInt | **Int** | Y | Session heart beat interval, default value **30** seconds. |
| 58 | Text | **String** | O | |
| Message Trailer | | | Y | |

### 6.2.3. HEARTBEAT [35=0]

The Heartbeat message is bidirectional and should be sent by both the FIX Client and FIX TC to maintain FIX connectivity in the absence of application messages.

**Message Direction: FIX Client ←→ FIX TC**

| Tag # | Heartbeat Message [35=0] Field Name | Data Type (Max Length) | Required | Additional Comments |
|---|---|---|---|---|
| Message Header | | | Y | **MsgType = 0** |
| 112 | TestReqID | **String** | C | Required when the heartbeat is the result of a Test Request message. |
| Message Trailer | | | Y | |

### 6.2.4. TEST REQUEST [35=1]

The Test Request is bidirectional and should be sent by both the FIX Client and FIX TC. The Test Request message forces a heartbeat from the opposing application. The Test Request message checks sequence numbers or verifies communication line status. The opposite application responds to the Test Request with a Heartbeat containing the TestReqID. The TestReqID verifies that the opposite application is generating the heartbeat as the result of Test Request and not a normal timeout. The opposite application includes the TestReqID in the resulting Heartbeat.



© 2005-2023 Intercontinental Exchange, Inc. All rights reserved.

**Message Direction: FIX Client ←→ FIX TC**

| Tag # | Test Request [35=1] Field Name | Data Type (Max Length) | Required | Additional Comments |
|---|---|---|---|---|
| Message Header | | | Y | **MsgType = 1** |
| 112 | TestReqID | **String** | Y | |
| Message Trailer | | | Y | |

### 6.2.5. RESEND REQUEST [35=2]

The Resend Request is bidirectional and can be sent by both the FIX Client and FIX Engine. Please note that the messages in response to a Resend Request send by the FIX Engine will not contain `OrigSendingTime` (Tag 122) as it is not supported.

**Message Direction: FIX Client ←→ FIX TC**

| Tag # | Resend Request [35=2] Field Name | Data Type (Max Length) | Required | Additional Comments |
|---|---|---|---|---|
| Message Header | | | Y | **MsgType = 2** |
| 7 | BeginSeqNo | **Int** | Y | Message sequence number of first message in range to be resent. |
| 16 | EndSeqNo | **Int** | Y | Message sequence number of last message in range to be resent with '`0`' representing all available messages. |
| Message Trailer | | | Y | |

### 6.2.6. REJECT (SESSION LEVEL) [35=3]

The FIX TC sends a Reject (Session Level) message when a message is received but cannot be properly processed due to a session-level message violation, e.g. if FIX TC receives a message with invalid basic data, the message cannot be parsed, or the message fails data integrity checks. In this case the FIX TC will reject the message using a Reject (Session Level) message.

**Message Direction: FIX Client ← FIX TC**



© 2005-2023 Intercontinental Exchange, Inc. All rights reserved.

| Tag # | Reject Message [35=3] Field Name | Data Type (Max Length) | Required | Additional Comments |
|---|---|---|---|---|
| Message Header | | | Y | **MsgType = 3** |
| 45 | RefSeqNum | **Int** | Y | `MsgSeqNum` (Tag 34) of rejected message |
| 371 | RefTagID | **Int** | O | The tag number of the FIX field being referenced |
| 372 | RefMsgType | **String** | O | `MsgType` (Tag 35) of the FIX message being referenced. |
| 373 | SessionRejectReason | **Int** | O | Code to identify reason for a session-level Reject message. |
| 58 | Text | **String** | O | Reason for rejection |
| 354 | EncodedTextLen | **Int** | O | EncodedText field length |
| 355 | EncodedText | **String** | O | Encoded (non-ASCII characters) representation of `Text` (Tag 58) in the encoded format specified via the Message Encoding field. |
| Message Trailer | | | Y | |

### 6.2.7. SEQUENCE RESET [35=4]

If any message from a FIX client (or FIX TC) indicates a sequence number gap, the FIX TC (or FIX client) should send a Resend Request message. In response, the FIX client (or FIX TC) should send the requested messages. Sequence Reset messages can be used by FIX clients and the FIX TC to increment the incoming sequence numbers to fulfill the sequence number gap.

**Message Direction: FIX Client ←→ FIX TC**

| Tag # | Sequence Reset [35=4] Field Name | Data Type (Max Length) | Required | Additional Comments |
|---|---|---|---|---|
| Message Header | | | Y | **MsgType = 4** |
| 36 | NewSeqNo | **Int** | Y | New sequence number |
| 123 | GapFillFlag | **Boolean** | O | Supported value(s):<br>N = Sequence Reset. Ignore `MsgSeqNum` (Tag 34)<br>Y = Gap Fill Message, `MsgSeqNum` (Tag 34) is valid |
| Message Trailer | | | Y | |



© 2005-2023 Intercontinental Exchange, Inc. All rights reserved.

### 6.2.8. LOGOUT REQUEST [35=5]

The FIX client can terminate FIX connectivity and network connectivity to the FIX TC by sending a Logout Request message.

**Message Direction: FIX Client → FIX TC**

| Tag # | Logout Request Message [35=5] Field Name | Data Type (Max Length) | Required | Additional Comments |
|---|---|---|---|---|
| Message Header | | | Y | **MsgType = 5** |
| Message Trailer | | | Y | |

### 6.2.9. LOGOUT RESPONSE [35=5]

The FIX TC sends a Logout Response message in response to a successful Logout Request message from the FIX client.

**Message Direction: FIX Client ← FIX TC**

| Tag # | Logout Response Message [35=5] Field Name | Data Type (Max Length) | Required | Additional Comments |
|---|---|---|---|---|
| Message Header | | | Y | **MsgType = 5** |
| 58 | Text | **String** | O | |
| Message Trailer | | | Y | |

## 6.3. APPLICATION MESSAGES

### 6.3.1. SECURITY DEFINITION REQUEST [35=c]

The Security Definition Request can be used to obtain the market information for Futures, Options, and/or Defined Strategies. Throttle rate is 1000 Msgs/Min.

**Message Direction: FIX Client → FIX TC**



© 2005-2023 Intercontinental Exchange, Inc. All rights reserved.

| Tag # | Security Definition Request [35=c] Field Name | Data Type (Max Length) | Required | Additional Comments |
|---|---|---|---|---|
| Message Header | | | Y | **MsgType = c** |
| 320 | SecurityReqID | **String** | Y | Unique ID of request. |
| 321 | SecurityRequestType | **Int** | Y | Supported value(s):<br>3 = Request List of Securities<br>101 = Request List of Defined Strategies (UDS) |
| 48 | SecurityID | **String** | Y | Required if 321=3 and Tag 55 is not sent. Also required if 321=101.<br>This should contain the Market Type name (e.g. '`IPE Brent Futures`') or the Market Type ID (e.g. '`5`'). For supported Market Type names and IDs please refer to the *Supported Market Types document* (*https://www.theice.com/publicdocs/technology/Supported_Market_Types_on_ICE_API.pdf*). |
| 55 | Symbol | **Int** | C | Required if 321=3 and if Tag 48 is not sent. Should not be sent if 321=101. Contains value of market id. Outright Options are not supported. |
| 461 | CFICode | **String** | C | Required if `SecurityRequestType` (Tag 321) = '`3`'. Should not be sent with tag 55 (Symbol).<br><br>Supported value(s):<br>FXXXXX = Futures (default if not sent)<br>OXXFXX = Unique Option market IDs<br>OXXXXX = Options **In Q4 2024 this value will be removed** |
| Message Trailer | | | Y | |

Security Definition Request Examples (for demonstrative purposes only):

**Request Futures by number or name:**

8=FIX.4.4☺9=65☺35=c☺49=35☺56=ICE☺34=2☺52=20050505-18:07:44☺320=1☺**321=3☺48=2☺461=FXXXXX** ☺10=189☺

8=FIX.4.4☺9=65☺35=c☺49=35☺56=ICE☺34=2☺52=20050505-18:07:44☺320=1☺**321=3☺48=Oil☺461=FXXXXX** ☺10=189☺



© 2005-2023 Intercontinental Exchange, Inc. All rights reserved.

**Request Options by number or name:**
8=FIX.4.4☺9=65☺35=c☺49=35☺56=ICE☺34=2☺52=20050505-18:07:44☺320=1☺**321=3☺48=2☺461=OXXXXX** ☺10=189☺
8=FIX.4.4☺9=65☺35=c☺49=35☺56=ICE☺34=2☺52=20050505-18:07:44☺320=1☺**321=3☺48=Oil☺461=OXXXXX** ☺10=189☺

**Request Option Market IDs by number or name:**
8=FIX.4.4☺9=65☺35=c☺49=35☺56=ICE☺34=2☺52=20050505-18:07:44☺320=1☺**321=3☺48=5☺461=OXXFXX** ☺10=189☺
8=FIX.4.4☺9=65☺35=c☺49=35☺56=ICE☺34=2☺52=20050505-18:07:44☺320=1☺**321=3☺48=IPE Brent Futures☺461=OXXFXX**☺10=189☺

**Request by Symbol (Market ID)**
8=FIX.4.4☺9=93☺35=c☺49=12345☺56=ICE☺34=2 ☺52=20230608-19:12:31.377☺320=1☺321=3☺55=5430839☺10=020☺

### 6.3.2. SECURITY DEFINITION RESPONSE [35=d]

The Security Definition response is sent in response to Security Definition request. The FIX TC sends one or more messages that contain all of the static data for all securities related to the requested Market Type.

**Message Direction: FIX Client ← FIX TC**

| Tag # | Security Definition Response [35=d] Field Name | Data Type (Max Length) | Required | Additional Comments |
|---|---|---|---|---|
| Message Header | | | Y | **MsgType = d** |
| 322 | SecurityResponseID | **String** | Y | Unique identifier for Security Definition Response |
| 323 | SecurityResponseType | **Int** | Y | Supported value(s):<br>4 = List of securities returned per request<br>5 = Security proposal is rejected<br>6 = Cannot match selection criteria |
| 320 | SecurityReqID | **String** | Y | |
| 48 | SecurityID | **String** | C | Security Type ID of the product |



© 2005-2023 Intercontinental Exchange, Inc. All rights reserved.

| Tag # | Security Definition Response [35=d] Field Name | | Data Type (Max Length) | Required | Additional Comments |
|---|---|---|---|---|---|
| 55 | Symbol | | **Int** | C | **Please note that this data type is Int and not String.** Underlying future Market ID that the options in the security list are derived from. |
| 9064 | ExchangeSilo | | **Int** | O | Indicates the Exchange Silo of the Market.<br>Supported value(s):<br>0 = ICE<br>1 = ENDEX<br>2 = LIFFE |
| 393 | TotalNumSecurities | | **Int** | C | Total number of securities in this security type unless security definition requested is invalid. |
| 82 | NoRpts | | **Int** | C | Total number of messages will be sent as a response of the request. |
| 67 | ListSeqNo | | **Int** | C | Sequence of the message (i.e. ListSeqNo of NoRpts = 1 of 10, 2 of 10, etc.). This field can be used to identify remaining messages to receive as a part of this response. |
| 58 | Text | | **String** | O | |
| 711 | NoUnderlyings | | **NumInGroup** | C | **Adapted from FIX.4.4.** Total number of securities in this security definition response message. |
| → | 311 | UnderlyingSymbol | **Int** | C | **Always exists if `NoUnderlyings (Tag 711)` value > 0. Please note that this data type is Int and not String**. Contains the MarketID, `Symbol` (Tag 55) needed to submit orders via FIX TC. **Please note that this tag will contain the ProductID in response to Security Definition request for Products.** |
| → | 309 | UnderlyingSecurityID | **String** | O | **Please note that this value should not be used for order submission. Clients should use the MarketID in `UnderlyingSymbol` (Tag 311) for order submission.** For information on contract symbols, please see our *Instrument Naming Convention* (*https://www.theice.com/publicdocs/technology/Instrument_Naming_Convention.pdf*). |
| → | 305 | UnderlyingSecurityIDSource | **Int(1)** | C | **Please note that this data type is Int and not String**. Present if `UnderlyingSecurityID` (Tag 309) exists.<br>Supported value(s):<br>8 = Exchange Symbol |



© 2005-2023 Intercontinental Exchange, Inc. All rights reserved.

| Tag # | Security Definition Response [35=d] Field Name | | Data Type (Max Length) | Required | Additional Comments |
|---|---|---|---|---|---|
| → | 457 | NoUnderlyingSecurityAltID | **NumInGroup** | C | Number of `UnderlyingSecurityAltID` (Tag 458) entries. |
| →→ | 458 | UnderlyingSecurityAltID | **String** | C | Will contain the ISIN of the instrument if `UnderlyingSecurityAltIDSource` (Tag 459) = '`U4`'. Will contain the ISIN of the underlying equity if `UnderlyingSecurityAltIDSource` (Tag 459) = '`4`'. |
| →→ | 459 | UnderlyingSecurityAltIDSource | **String** | C | Supported value(s):<br>4 = ISIN (Underlying ISIN of Equity related market)<br>U4 = ISIN (ISIN of Instrument as required by MiFID). **Only supported for Futures and Options MiFID regulated markets. Not supported for strategies.** |
| → | 463 | UnderlyingCFICode | **String** | C | Supported value(s):<br>FXXXXX = Future<br>OXXXXX = Options<br>OCXXXX = Call Options (Call Options with defined Market IDs)<br>OPXXXX = Put Options (Put Options with defined Market IDs) |
| → | 763 | UnderlyingSecuritySubType | **String** | C | Contains the Strategy Code when present. For Supported value(s) please see: *https://www.theice.com/publicdocs/technology/ICE_Strategy_Code_Reference_Manual.pdf* |
| → | 307 | UnderlyingSecurityDes | **String** | C | Market name description. Always exist if `NoUnderlyings` (Tag 711) > 0 and `UnderlyingCFICode` (Tag 463) = FXXXXX. |
| → | 308 | UnderlyingSecurityExchange | **String** | O | Supports Market Identifier Code (MIC) values. Examples of possible values are “IFEU”, “IFUS”, “IFCA”, “IFED”, etc. Not be sent for options markets. |
| → | 542 | UnderlyingMaturityDate | **LocalMktDate** | C | Always exist if `NoUnderlyings` (Tag 711) > 0 and `ProductDescription` (Tag 9063) does not exist. |
| → | 9086 | ScreenLastTradeDate | **LocalMktDate** | C | The last date, by Exchange rule, that the market is available for trading on the Central Limit Order Book |
| → | 435 | UnderlyingCouponRate | **Float** | C | CDS and IRS Futures - Fixed Rate: The fixed rate for an instrument. |
| → | 436 | UnderlyingContractMultiplier | **Float** | C | |
| → | 2041 | UnderlyingDatedDate | **UTCDate** | C | CDS and IRS Futures - Cash Flow Alignment Date: The cash flow alignment date is a date not adjusted for holidays used to derive interest payment dates. Any calendar day. |



© 2005-2023 Intercontinental Exchange, Inc. All rights reserved.

| Tag # | Security Definition Response [35=d] Field Name | | Data Type (Max Length) | Required | Additional Comments |
|---|---|---|---|---|---|
| → | 2042 | UnderlyingInterestAccrualDate | **UTCDate** | C | CDS and IRS Futures - Effective Date: The effective date of the swap future. Any business day. |
| → | 242 | UnderlyingIssueDate | **UTCDate** | C | IRS Futures - First Fixing Date: The first Fixing Date is the date at which the float rate is set during the first float period. Any acceptable business day. Not applicable for CDS. |
| → | 245 | UnderlyingRepurchaseRate | **Float** | C | IRS Futures - Previous Fixing Rate: The rate set on the last reset date. Sent for float leg on aged or spot starting swap futures. Not sent for forward starting swap futures. Not applicable for CDS. |
| → | 246 | UnderlyingFactor | **Float** | C | CDS and IRS Futures - Index Factor: Percentage of the original index that is still accruing interest. |
| → | 256 | UnderlyingCreditRating | **String** | C | IRS Futures - Rate Descriptor: The description of Float Rate. Sent for float leg on aged or spot starting swap futures. Not applicable for CDS. |
| → | 595 | UnderlyingInstrRegistry | **String(2)** | C | IRS Futures - Payment Frequency: The interest rate swap future payment frequency. Not applicable for CDS.<br>Supported value(s):<br>6M = 6 months<br>1Y = 1 year |
| → | 916 | StartDate | **LocalMktDate** | C | |
| → | 917 | EndDate | **LocalMktDate** | C | |
| → | 998 | UnderlyingUnitOfMeasure | **String** | C | **Adapted from FIX 5.0.** |
| → | 315 | UnderlyingPutOrCall | **Int(1)** | C | Supported value(s):<br>0 = Put<br>1 = Call |
| → | 316 | UnderlyingStrikePrice | **Price** | C | |



© 2005-2023 Intercontinental Exchange, Inc. All rights reserved.

| Tag # | Security Definition Response [35=d] Field Name | | Data Type (Max Length) | Required | Additional Comments |
|---|---|---|---|---|---|
| → | 326 | SecurityTradingStatus | **Int** | C | Always exist if `NoUnderlyings` (Tag 711) > 0.<br>Supported value(s):<br>2 = Trading Halt (Suspended)<br>4 = No Open/No Resume (Pre-Close)<br>17 = Ready to Trade (Open)<br>18 = Not Available for Trading (Close)<br>19 = Not traded<br>20 = Unknown or Invalid (Expired)<br>21 = Pre-Open<br>100 = Open for trading as Strategy Leg Only |
| → | 318 | UnderlyingCurrency | **String** | O | **Please note that you may receive values that are not ISO 4217 Currency codes.** |
| → | 1039 | UnderlyingSettlMethod | **Char** | C | **Adapted from FIX 5.0.**<br>Supported value(s):<br>C = Cash/Financial<br>P = Physical |
| → | 1304 | StrikeExerciseStyle | **Int(1)** | C | **Adapted from FIX 5.0.** Only supported for FLEX Expiry Option products.<br>Supported value(s):<br>0 = European<br>1 = American<br>3 = Asian |
| → | 9014 | IncrementQty | **Float** | C | Always exist if `NoUnderlyings` (Tag 711) > 0. |
| → | 9013 | IncrementPrice | **Price** | C | Always exist if `NoUnderlyings` (Tag 711) > 0. |
| → | 9015 | MinPrice | **Price** | C | Absolute min price for the contract |
| → | 9016 | MaxPrice | **Price** | C | Absolute max price for the contract |
| → | 9133 | ScreenTickValue | **Float** | C | Identifies the dollar amount per tick move when calculated from the Central Limit Order Book (CLOB) |
| → | 9134 | BlockTickValue | **Float** | C | Identifies the dollar amount per tick move when calculated for Off Exchange Deals |
| → | 9040 | OffExchangeIncrementPrice | **Price** | C | |
| → | 9041 | OffExchangeIncrementQty | **Float** | C | |



© 2005-2023 Intercontinental Exchange, Inc. All rights reserved.

| Tag # | Security Definition Response [35=d] Field Name | | Data Type (Max Length) | Required | Additional Comments |
|---|---|---|---|---|---|
| → | 9017 | LotSize | **Float** | C | Always exist if `NoUnderlyings` (Tag 711) > 0. |
| → | 9087 | ContractSize | **Qty** | O | The deliverable quantity of a stock, commodity, or other financial instrument that underlies a futures or options contract. |
| → | 9062 | ProductName | **String** | C | |
| → | 9063 | ProductDesc | **String** | C | |
| → | 9083 | NumOfDecimalPrice | **Float** | C | Always exist if `NoUnderlyings` (Tag 711) > 0. |
| → | 9084 | NumOfDecimalQty | **Float** | C | Always exist if `NoUnderlyings` (Tag 711) > 0 and `UnderlyingCFICode` (Tag 463) = FXXXXX. |
| → | 9085 | Granularity | **String** | C | |
| → | 9030 | BaseNumLots | **Int** | O | |
| → | 9032 | TickValue | **Float** | O | |
| → | 9132 | LegacyTickValue | **Float** | O | |
| → | 9061 | ProductID | **Int** | O | |
| → | 9025 | Clearable | **Boolean** | O | Supported value(s):<br>Y = Clearable<br>N = Not Clearable |
| → | 9026 | HedgeProductID | **Int** | O | Unique product id for the corresponding Hedge Product. |
| → | 9027 | HedgeMarketID | **Int** | O | MarketID for the corresponding Hedge market. |
| → | 9033 | HedgeOnly | **Int(1)** | O | Indicates whether a market can only be used as a hedge.<br>Supported value(s):<br>0 = No (Default if not sent)<br>1 = Yes, Hedge only |
| → | 9042 | HomeExchange | **String** | O | Indicates where the equity is listed. |
| → | 9043 | IsDividendAdjusted | **Int(1)** | O | Indicates whether or not the equity will be adjusted for dividends.<br>Supported value(s):<br>0 = No (Default if not sent)<br>1 = Yes |
| → | 9091 | ClearedAlias | **String** | O | |
| → | 9092 | Denominator | **Int** | O | |



© 2005-2023 Intercontinental Exchange, Inc. All rights reserved.

| Tag # | Security Definition Response [35=d] Field Name | | Data Type (Max Length) | Required | Additional Comments |
|---|---|---|---|---|---|
| → | 9093 | InitialMargin | **Int** | O | |
| → | 9095 | ProductType | **String** | O | Supported value(s):<br>Energy<br>Futures<br>Spreads |
| → | 9002 | ImpliedType | **Char** | O | Supported value(s):<br>F = Full Spread |
| → | 9004 | PrimaryLegSymbol | **Int** | O | Exists for spread products. |
| → | 9005 | SecondaryLegSymbol | **Int** | O | Exists for spread products. |
| → | 9100 | PriceDenomination | **String** | O | Trading denomination of the contract e.g., GB pence, USD cents. |
| → | 9101 | PriceUnit | **String** | O | |
| → | 9185 | NumOfDecimalStrikePrice | **Price** | O | Number of decimals to display for strike price. |
| → | 9022 | NumOfCycles | **Int** | O | |
| → | 9024 | LotSizeMultiplier | **Float** | O | |
| → | 9200 | StripType | **Int** | O | Please see *https://service.theice.com/s/article/ice-fix-api-custom-field-definitions-21606* for the complete definition of ICE FIX API custom fields. |
| → | 9201 | StripID | **Int** | O | |
| → | 9202 | StripName | **String** | O | |
| → | 9203 | BlockOnly | **Int(1)** | O | Indication of whether the market is only traded as a block and not in the central limit order book.<br>Supported value(s):<br>0 = No (default if not sent)<br>1 = Yes |
| → | 9204 | FlexAllowed | **Int(1)** | O | Indication of whether a market allows FLEX expiries.<br>Supported value(s):<br>0 = No (default if not sent)<br>1 = Yes |



© 2005-2023 Intercontinental Exchange, Inc. All rights reserved.

| Tag # | Security Definition Response [35=d] Field Name | | Data Type (Max Length) | Required | Additional Comments |
|---|---|---|---|---|---|
| → | 9205 | GTAllowed | **Int(1)** | O | Indication of whether a market allows GTC and GTD orders.<br>Supported value(s):<br>0 = No (default if not sent)<br>1 = Yes |
| → | 9215 | MiFIDRegulatedMarket | **Int(1)** | O | Indication of whether the market falls under MiFID regulations.<br>Supported value(s):<br>0 = No (default if not sent)<br>1 = Yes |
| → | 9216 | AONAllowed | **Int(1)** | O | Indication of whether a market allows Flexible options.<br>Supported value(s):<br>0 = No (default if not sent)<br>1 = Yes |
| → | 9300 | HubID | **Int** | O | |
| → | 9301 | HubName | **String** | O | |
| → | 9302 | HubAlias | **String** | O | |
| → | 9303 | PhysicalCode | **String** | O | |
| → | 9400 | IncrementStrike | **Float** | O | Exists for options |
| → | 9401 | MinStrike | **Price** | O | Exists for options |
| → | 9402 | MaxStrike | **Price** | O | Exists for options |
| → | 9900 | UnderlyingAccruedPremiumAmt | **Price** | O | CDS and IRS Futures - Total Premium Accrual: Premium that has accrued during the current quarterly payment period. Based on 100 Notional and will be applied to the 'A' value. |
| → | 9901 | UnderlyingEventPaymentAmt | **Price** | O | CDS Futures - Premium & Credit Event Payments (B Value): This value represents historical premium and credit event payments for 100 notional, and is one of the primary inputs needed for calculating a futures price for a swap future. |
| → | 9902 | UnderlyingAlignmentInterestRate | **Float** | O | IRS Futures - Accrued Coupons (B Value): This value represents historical fixed and floating payments for 100 notional, and is one of the primary inputs needed for calculating a futures price for an interest rate swap future. |



© 2005-2023 Intercontinental Exchange, Inc. All rights reserved.

| Tag # | Security Definition Response [35=d] Field Name | | Data Type (Max Length) | Required | Additional Comments |
|---|---|---|---|---|---|
| → | 9903 | UnderlyingRepurchaseDate | **UTCDate** | O | CDS and IRS Futures - Price Alignment Interest (C Value): PAI is the cumulative daily interest on variation margin adjustment for 100 notional. PAI is one of the primary inputs needed for calculating a futures price for a swap future. |
| → | 9904 | UnderlyingInterpolationFactor | **Float** | O | IRS Futures - Previous Fixing Date: The date (YYYYMMDD) the floating rate was set for the next floating payment. Not applicable for CDS. |
| → | 9034 | OverrideBlockMin | **Int(1)** | O | Indication of whether the market allows brokers/traders to bypass off-exchange/self block minimums<br>Supported value(s):<br>0 = No (default if not sent)<br>1 = Yes |
| → | 9070 | NoBlockDetails | **NumInGroup** | O | Number of block details. |
| →→ | 9071 | BlockDetailsBlockType | **Int(1)** | C | **First tag in the repeating group.** Required with `NoBlockDetails` (Tag 9070) > '`0`'.<br>Supported value(s):<br>0 = Regular<br>1 = PNC<br>2 = DP<br>3 = LIS |
| →→ | 9072 | BlockDetailsTradeType | **String** | C | Required with `NoBlockDetails` (Tag 9070) > '`0`'.<br>Supported value(s):<br>See `TrdType` (Tag 828) for Supported value(s). |
| →→ | 9073 | BlockDetailsMinQty | **Qty** | C | Required with `NoBlockDetails` (Tag 9070) > '`0`'. Block minimum quantity. |
| → | 9217 | TestMarketIndicator | **Int(1)** | O | Indication of whether the market is a production or test market.<br>Supported value(s):<br>0 = No, this is a production market (default if not sent).<br>1 = Yes, this is a test market only. |
| → | 9049 | UDSAllowed | **Int(1)** | O | Indicates whether or not the market can be used as a leg to create a Defined Strategy.<br>Supported value(s):<br>0 = No (Default if not sent)<br>1 = Yes |



© 2005-2023 Intercontinental Exchange, Inc. All rights reserved.

| Tag # | Security Definition Response [35=d] Field Name | | Data Type (Max Length) | Required | Additional Comments |
|---|---|---|---|---|---|
| → | 9074 | MarketTransparencyType | **Int(1)** | O | Supported value(s)<br>0 = ICE Market (Default if not sent)<br>1 = Platts market |
| → | 9075 | ProductGroup | **String(100)** | O | |
| → | 9425 | NonCommoditizedMarket | **Int** | O | Indicates whether a market is non-commoditized.<br>Support Value(s):<br>0 = No (default if not sent)<br>1 = Yes |
| Message Trailer | | | | Y | |

### 6.3.3. DEFINED STRATEGY [35=UDS]

The Defined Strategy is in response to a Security Definition request with `SecurityRequestType` (Tag 321) = '`1`' (supported for FIX OS and FIX POF only) or '`101`'. Defined Strategy messages will include both user- and exchange-defined strategies.

**Message Direction: FIX Client ← FIX TC**

| Tag # | Defined Strategy [35=UDS] Field Name | Data Type (Max Length) | Required | Additional Comments |
|---|---|---|---|---|
| Message Header | | | Y | **MsgType = UDS** |
| 322 | SecurityResponseID | **String** | Y | Unique identifier for Security Definition Response |
| 323 | SecurityResponseType | **Int** | Y | Supported value(s):<br>1 = Accept security proposal as is<br>4 = List of securities returned per request<br>5 = Security proposal is rejected<br>10 = Security proposal already defined |
| 320 | SecurityReqID | **String** | Y | |
| 9052 | MarketTypeID | **Int** | O | |
| 55 | Symbol | **Int** | C | **Please note that this data type is Int and not String.** UDS Market ID. |
| 48 | SecurityID | **String** | O | UDS contract symbol |



© 2005-2023 Intercontinental Exchange, Inc. All rights reserved.

| Tag # | Defined Strategy [35=UDS] Field Name | Data Type (Max Length) | Required | Additional Comments |
|---|---|---|---|---|
| 22 | SecurityIDSource | **String** | O | Supported value(s):<br>8 = Exchange Symbol |
| 207 | SecurityExchange | **String** | O | |
| 9048 | StrategySecurityID | **String** | O | Strategy contract symbol. |
| 9055 | UnderlyingStrategySymbol | **Int** | O | Market ID of underlying strategy, e.g. Market ID of Q1 for a Q1 option strategy. |
| 167 | SecurityType | **String** | O | Supported value(s):<br>MLEG = Multi-leg instrument |
| 541 | MaturityDate | **LocalMktDate** | O | |
| 107 | SecurityDesc | **String** | O | |
| 326 | SecurityTradingStatus | **Int** | O | |
| 762 | SecuritySubType | **String** | O | Contains the Strategy Code for defined market where applicable. For Supported value(s) please see: *https://www.theice.com/publicdocs/technology/ICE_Strategy_Code_Reference_Manual.pdf* |
| 996 | UnitOfMeasure | **String** | O | **Adapted from FIX 5.0.** |
| 9064 | ExchangeSilo | **Int** | O | Identifies the Exchange Silo of a Market.<br>Supported value(s):<br>0 = ICE<br>1 = ENDEX<br>2 = LIFFE |



© 2005-2023 Intercontinental Exchange, Inc. All rights reserved.

| Tag # | Defined Strategy [35=UDS] Field Name | Data Type (Max Length) | Required | Additional Comments |
|---|---|---|---|---|
| 60 | TransactTime | **UTCTimeStamp** | C | Creation time of strategy. The precision is controlled by the `TimeStampPreference` (Tag 9007) on the Logon Request Message.<br><br>Time/date combination represented in UTC (Universal Time Coordinated, also known as "GMT") in either YYYYMMDD-HH:MM:SS (whole seconds) or YYYYMMDD-HH:MM:SS.sss* format, colons, dash, and period required.<br><br>Supported value(s): YYYY = 0000-9999, MM = 01-12, DD = 01-31, HH = 00-23, MM = 00-59, SS = 00-60 (60 only if UTC leap second), sss* = fractions of seconds. The fractions of seconds may be empty when no fractions of seconds are conveyed (in such a case the period is not conveyed), it may include 3 digits to convey milliseconds, 6 digits to convey microseconds, 9 digits to convey nanoseconds, 12 digits to convey picoseconds. |
| 9013 | IncrementPrice | **Price** | O | |
| 9014 | IncrementQty | **Float** | O | |
| 9015 | MinPrice | **Price** | O | Absolute min price for the contract |
| 9016 | MaxPrice | **Price** | O | Absolute max price for the contract |
| 9083 | NumOfDecimalPrice | **Float** | O | |
| 9084 | NumOfDecimalQty | **Float** | O | |
| 9061 | ProductID | **Int** | O | |
| 9030 | BaseNumLots | **Int** | O | |
| 9091 | ClearedAlias | **String** | O | |
| 9092 | Denominator | **Int** | O | |
| 9002 | ImpliedType | **Char(1)** | O | |
| 9040 | OffExchangeIncrementPrice | **Price** | O | The increment price for off-exchange market. |
| 9041 | OffExchangeIncrementQty | **Float** | O | The increment quantity for off-exchange market. |
| 9100 | PriceDenomination | **String** | O | Trading denomination of the contract e.g., GB pence, USD cents. |
| 9101 | PriceUnit | **String** | O | |



© 2005-2023 Intercontinental Exchange, Inc. All rights reserved.

| Tag # | Defined Strategy [35=UDS] Field Name | Data Type (Max Length) | Required | Additional Comments |
|---|---|---|---|---|
| 9185 | NumOfDecimalStrikePrice | **Price** | O | Number of decimals to display for strike price. |
| 9022 | NumOfCycles | **Int** | O | |
| 9024 | LotSizeMultiplier | **Float** | O | |
| 9203 | BlockOnly | **Int(1)** | O | Indication of whether the market is only traded as a block and not in the central limit order book.<br>Supported value(s):<br>0 = No (default if not sent)<br>1 = Yes |
| 9204 | FlexAllowed | **Int(1)** | O | Indication of whether a market allows FLEX expiries or strikes.<br>Supported value(s):<br>0 = No (default if not sent)<br>1 = Yes |
| 9205 | GTAllowed | **Int(1)** | O | Indication of whether the market supports GTC and GTD orders.<br>Supported value(s):<br>0 = No (default if not sent)<br>1 = Yes |
| 9215 | MiFIDRegulatedMarket | **Int(1)** | O | Indication of whether the market falls under MiFID regulations.<br>Supported value(s):<br>0 = No (default if not sent)<br>1 = Yes |
| 9011 | LegDealsSuppressed | **Int(1)** | O | Indicates whether or not the client can expect to receive legs deals when trading the strategy<br>Supported value(s):<br>0 = No, leg deals will be sent (Default value if not sent)<br>1 = Yes, leg deals will NOT be sent |
| 9062 | ProductName | **String** | C | |
| 9200 | StripType | **Int** | O | |
| 9202 | StripName | **String** | O | |
| 9300 | HubID | **Int** | O | |
| 9301 | HubName | **String** | O | |
| 9302 | HubAlias | **String** | O | |
| 9303 | PhysicalCode | **String** | O | |



© 2005-2023 Intercontinental Exchange, Inc. All rights reserved.

| Tag # | Defined Strategy [35=UDS] Field Name | | Data Type (Max Length) | Required | Additional Comments |
|---|---|---|---|---|---|
| 9034 | OverrideBlockMin | | **Int(1)** | O | Indication of whether the market allows brokers/traders to bypass off-exchange/self block minimums<br>Supported value(s):<br>0 = No (default if not sent)<br>1 = Yes |
| 9070 | NoBlockDetails | | **NumInGroup** | O | Number of block details. |
| → | 9071 | BlockDetailsBlockType | **Int(1)** | C | First tag in the repeating group.<br>Required with NoBlockDetails (Tag 9070) > 0.<br>Supported value(s):<br>0 = Regular<br>1 = PNC<br>2 = DP<br>3 = LIS |
| → | 9072 | BlockDetailsTradeType | **String** | C | Required with `NoBlockDetails` (Tag 9070) > 0.<br>Supported value(s):<br>See `TrdType` (Tag 828) for Supported value(s). |
| → | 9073 | BlockDetailsMinQty | **Qty** | C | Required with `NoBlockDetails` (Tag 9070) > 0. Block minimum quantity. |
| 9217 | TestMarketIndicator | | **Int(1)** | O | Indication of whether the market is a production or test market.<br>Supported value(s):<br>0 = No, this is a production market (default if not sent).<br>1 = Yes, this is a test market only. |
| 9133 | ScreenTickValue | | **Float** | C | Identifies the dollar amount per tick move when calculated from the Central Limit Order Book (CLOB). Only present when `SecuritySubType` (Tag 762) = '`15`'. |
| 9134 | BlockTickValue | | **Float** | C | Identifies the dollar amount per tick move when calculated for Off Exchange Deals. Only present when `SecuritySubType` (Tag 762) = '`15`'. |
| 457 | NoUnderlyingSecurityAltID | | **NumInGroup** | C | Number of `UnderlyingSecurityAltID` (Tag 458) entries. |
| → | 458 | UnderlyingSecurityAltID | **String** | C | Will contain the ISIN of the instrument if `UnderlyingSecurityAltIDSource` (Tag 459) = '`U4`'. Will contain the ISIN of the underlying equity if `UnderlyingSecurityAltIDSource` (Tag 459) = '`4`'. |



© 2005-2023 Intercontinental Exchange, Inc. All rights reserved.

| Tag # | Defined Strategy [35=UDS] Field Name | | Data Type (Max Length) | Required | Additional Comments |
|---|---|---|---|---|---|
| → | 459 | UnderlyingSecurityAltIDSource | **String** | C | Supported value(s):<br>4 = ISIN (Underlying ISIN of Equity related market)<br>U4 = ISIN (ISIN of Instrument as required by MiFID). **Only supported for Futures and Options MiFID regulated markets. Not supported for strategies.** |
| 58 | Text | | **String** | O | |
| 555 | NoLegs | | **Int** | C | **Please note data type of Int and not NumInGroup.** Number of legs in strategy. |
| → | 600 | LegSymbol | **Int** | C | **Please note data type of Int and not String.** Option or Future Market ID for this leg of the UDS. Must be first tag in repeating group. Required if `NoLegs` (Tag 555) > 0. |
| → | 609 | LegSecurityType | **String** | C | Multi-leg instrument's individual security's SecurityType. Required if `NoLegs` (Tag 555) > 0. |
| → | 624 | LegSide | **Char** | C | The side of this individual leg. Required if `NoLegs` (Tag 555) > 0. |
| → | 623 | LegQuantity | **Float** | C | Required if `LegSecurityType` (Tag 609) = '`OPT`'. |
| → | 566 | LegPrice | **Price** | C | |
| → | 764 | LegSecuritySubType | **String** | C | Contains the Strategy Code for defined market where applicable. For Supported value(s) please see: *https://www.theice.com/publicdocs/technology/ICE_Strategy_Code_Reference_Manual.pdf* |
| → | 1017 | LegOptionDelta | **Int** | C | **Adapted from FIX 5.0. Please note data type of Int and not Float.** Required if `LegSecurityType` (Tag 609) = '`FUT`' or '`CS`'. Supported value(s) are integers with a minimum value of '`1`'. |
| → | 9623 | LegRatioQtyDenominator | **Int** | C | |
| → | 9624 | LegRatioQtyNumerator | **Int** | C | |
| → | 9566 | LegRatioPriceDenominator | **Int** | C | |
| → | 9567 | LegRatioPriceNumerator | **Int** | C | |
| Message Trailer | | | | Y | |



© 2005-2023 Intercontinental Exchange, Inc. All rights reserved.

### 6.3.4. NEWS [35=B]

The News message is sent to the FIX Client to communicate general information related to the Trading System and supplemental information specifically about the FIX session or trading activity.

**Message Direction: FIX Client ← FIX TC**

| Tag # | News Message [35=B] Field Name | | Data Type (Max Length) | Required | Additional Comments |
|---|---|---|---|---|---|
| Message Header | | | | Y | **MsgType = B** |
| 148 | Headline | | **String** | Y | |
| 61 | Urgency | | **Int(1)** | Y | **Please note that this data type is Int and not Char.** Priority of the notification.<br>Supported value(s):<br>0 = Normal<br>1 = Flash<br>2 = Background<br>3 = Error |
| 553 | UserName | | **String** | O | Gateway ID |
| 33 | LinesOfText | | **Int** | Y | Number of lines in the notification. |
| → | 58 | Text | **String** | C | Required if `LinesOfText` (Tag 33) > 0. |
| Message Trailer | | | | Y | |

### 6.3.5. USER COMPANY REQUEST [35=UCP]

The User Company Request can be used to retrieve the list of companies that the TC ID has access to. This request allows the trading company to receive child companies and clearing firms to receive participant companies. Throttle rate is 100 Msgs/Min.

**Message Direction: FIX Client → FIX TC**

| Tag # | User Company Request [35=UCP] Field Name | Data Type (Max Length) | Required | Additional Comments |
|---|---|---|---|---|
| Message Header | | | Y | **MsgType = UCP** |



© 2005-2023 Intercontinental Exchange, Inc. All rights reserved.

| Tag # | User Company Request [35=UCP] Field Name | Data Type (Max Length) | Required | Additional Comments |
|---|---|---|---|---|
| 58 | Text | **String** | O | |
| Message Trailer | | | Y | |

### 6.3.6. USER COMPANY RESPONSE [35=UCR]

The User Company Response is used to list the trading firm and participant company details.

**Message Direction: FIX Client ← FIX TC**

| Tag # | User Company Response [35=UCR] Field Name | | Data Type (Max Length) | Required | Additional Comments |
|---|---|---|---|---|---|
| Message Header | | | | Y | **MsgType = UCR** |
| 453 | NoPartyIDs | | **NumInGroup** | Y | |
| → | 448 | PartyID | **String** | C | Required if `NoPartyIDs` (Tag 453) > '0'. |
| → | 447 | PartyIDSource | **Char** | C | Required if `NoPartyIDs` (Tag 453) > '0'.<br>Supported value(s):<br>D = Proprietary/Custom code |
| → | 452 | PartyRole | **Int** | C | Required if `NoPartyIDs` (Tag 453) > '0'.<br>Supported value(s):<br>3 = Client ID |
| → | 802 | NoPartySubIDs | **NumInGroup** | O | |
| →→ | 523 | PartySubID | **String** | C | Required if `NoPartySubIDs` (Tag 802) > '0'. |
| →→ | 803 | PartySubIDType | **Int** | C | Required if `NoPartySubIDs` (Tag 802) > '0'.<br>Supported value(s):<br>**1 = Company Name**<br>**4001 = Company short name/abbreviation**<br>**4002 = ICE EU Member**<br>**4003 = ICE Singapore Member**<br>**4004 = ICE Canada Member**<br>**4005 = ICE Netherlands Member** |



© 2005-2023 Intercontinental Exchange, Inc. All rights reserved.

| Tag # | User Company Response [35=UCR] Field Name | Data Type (Max Length) | Required | Additional Comments |
|---|---|---|---|---|
| 58 | Text | **String** | O | |
| Message Trailer | | | Y | |

### 6.3.7. TRADE CAPTURE REPORT REQUEST [35=AD]

The Trade Capture Report Request is sent by the FIX Client to the FIX TC to receive historical and real-time trades from the ICE Trading System. FIX TC supports two (2) days of historical deals (current trading session + previous trading session). The dates and times sent in `TradeDate` (Tag 75) and `TransactTime` (Tag 60) must be from the current or previous trading day. Any other dates sent may result in incomplete data in response. Throttle rate is 100 Msgs/Min.

***Intraday Market Rolls***

For markets that roll intraday and expired markets, we recommend that you keep the previous trading day's security definition for historical trade capture requests.

***Off-exchange trades***

If off-exchange trades are submitted with transact time before the block submission time, then the FIXTC snapshot history response includes all such off-exchange trades if the block submission time is within the snapshot history request time frame.

**Message Direction: FIX Client → FIX TC**

| Tag # | Trade Capture Report Request [35=AD] Field Name | Data Type (Max Length) | Required | Additional Comments |
|---|---|---|---|---|
| Message Header | | | Y | **MsgType = AD** |
| 568 | TradeRequestID | **String** | Y | Must be unique if `SubscriptionRequestType` (Tag 263) = '`0`' or '`1`'. Must be the ID of previous Trade Capture Report Request if `SubscriptionRequestType` (Tag 263) = '2'. |
| 569 | TradeRequestType | **Int** | Y | Supported value(s):<br>0 = All trades |



© 2005-2023 Intercontinental Exchange, Inc. All rights reserved.

| Tag # | Trade Capture Report Request [35=AD] Field Name | | Data Type (Max Length) | Required | Additional Comments |
|---|---|---|---|---|---|
| 263 | SubscriptionRequestType | | **Int(1)** | Y | **Please note type of Int and not Char.**<br>**Supported value(s):**<br>**0 = Snapshot**<br>**1 = Snapshot + Updates**<br>**2 = Unsubscribe** |
| 453 | NoPartyIDs | | **NumInGroup** | O | If `NoPartyIDs` (Tag 453) = '`0`', subscribe to all companies for the <TradeCaptureID>. |
| → | 448 | PartyID | **String** | C | **Required if** `NoPartyIDs` (Tag 453) **> '0', can be used to send Company IDs to subscribe to or unsubscribe from markets.** |
| → | 447 | PartyIDSource | **Char** | C | **Required if** `NoPartyIDs` (Tag 453) **> '0'.**<br>Supported value(s):<br>D = Proprietary/Custom code |
| → | 452 | PartyRole | **Int** | C | **Required if** `NoPartyIDs` (Tag 453) **> '0'.**<br>Supported value(s):<br>3 = Client ID (i.e. Company ID from ICE system) |
| 461 | CFICode | | **String** | O | Absence of this field is interpreted as both FXXXXX and OXXXXX.<br>Supported value(s):<br>FXXXXX = Futures only<br>OXXXXX = Options only<br>**If you are trading strategies it is recommended leaving this tag blank. If you trade strategies and request only FXXXXX or OXXXXX, it is possible that the hedge leg in the option/future market will not be reported.** |
| 48 | SecurityID | | **String** | O | **Value of this tag is ICE Market Type name or number to request trade capture reports. For Supported value(s) please refer to *Supported Security Types*.**<br>**If blank and NoUnderlyings (Tag 711) is present, it is interpreted as to subscribe to all markets.**<br>**Only applicable for live requests. A snapshot request is always for all markets.** |



© 2005-2023 Intercontinental Exchange, Inc. All rights reserved.

| Tag # | Trade Capture Report Request [35=AD] Field Name | | Data Type (Max Length) | Required | Additional Comments |
|---|---|---|---|---|---|
| 711 | NoUnderlyings | | **NumInGroup** | O | **Absence of this field is interpreted as to subscribe to all symbols/markets that come under given SecurityID.**<br>**NOTE: If neither this tag nor 48 is present it is interpreted as to subscribe to all markets..**<br>**A snapshot request is always for "all" markets for the current company. So this tag is applicable only for live requests.** |
| → | 311 | UnderlyingSymbol | **Int** | C | Required if `NoUnderlyings` (Tag 711) > '0'. |
| 580 | NoDates | | **Int** | C | Required if `SubscriptionRequestType` (Tag 263) = '`0`'.<br>**If `SubscriptionRequestType` (Tag 263) = '`1`' and this field is absent then it is interpreted as only to subscribe for updates and do not send snapshot.**<br>If `NoDates` (Tag 580) = '`1`' then the snapshot will be sent using `TradeDate` (Tag 75) or `TransactTime` (Tag 60) as start time and the current GMT time will be used as end time. |
| → | 75 | TradeDate | **LocalMktDate** | | Always required if `NoDates` (Tag 580) > '0'<br>Date should be the same as in `TransactTime` (Tag 60) in YYYYMMDD format |
| → | 60 | TransactTime | **UTCTimestamp** | | Always required if `NoDates` (Tag 580) > '0'<br>Value should be in GMT date and time<br>Format YYYYMMDD-HH:mm:SS or YYYYMMDD-HH:mm:SS.sss |
| Message Trailer | | | | Y | |

### 6.3.8. TRADE CAPTURE REPORT REQUEST ACK [35=AQ]

The Trade Capture Report Request Ack is used to acknowledge Trade Capture Report Request. A Trade Capture Request Ack will be sent immediately after a Trade Capture Report Request is received. The `TradeRequestStatus` (Tag 750) will be set to '`0`' (Accepted) or '`2`' (Rejected). If rejected, there will be more information in Text (Tag 58). Once the request for snapshot data has been completed, a second Trade Capture Report Request Ack will be sent with status set to '`1`' (Completed). The TradeRequestResult (Tag 749) may be '`0`' (Successful) or '`99`' (Other) if there has been an error while retrieving the snapshot data. For a request for snapshot + updates, reports received after the second ack are the updates. For a request of updates only, there will only be the initial ack message and no completed ack message.



© 2005-2023 Intercontinental Exchange, Inc. All rights reserved.

**Message Direction: FIX Client ← FIX TC**

| Tag # | Trade Capture Report Request Ack [35=AQ] Field Name | | Data Type (Max Length) | Required | Additional Comments |
|---|---|---|---|---|---|
| Message Header | | | | Y | **MsgType = AQ** |
| 568 | TradeRequestID | | **String** | Y | |
| 569 | TradeRequestType | | **Int** | Y | Type of Trade Report.<br>Supported value(s):<br>0 = All trades |
| 749 | TradeRequestResult | | **Int** | Y | Supported value(s):<br>0 = Successful<br>99 = Other |
| 750 | TradeRequestStatus | | **Int(1)** | Y | Supported value(s):<br>0 = Accepted<br>1 = Completed<br>2 = Rejected |
| 461 | CFICode | | **String** | O | Supported value(s):<br>FXXXXX = Futures<br>OXXXXX = Options |
| 48 | SecurityID | | **String** | O | Contract symbol. **Please note that contract symbols are not currently supported for OTC markets and may contain '?' characters that reflect blank or empty data.** |
| 711 | NoUnderlyings | | **NumInGroup** | C | Absence of this field is interpreted as to subscribe to all symbols/markets for a given `SecurityID` (Tag 48). If this tag is absent then `SecurityID` (Tag 48) must exist on this message. |
| → | 311 | UnderlyingSymbol | **Int** | C | Required if `NoUnderlyings` (Tag 711) > '`0`'. |
| 58 | Text | | **String** | O | Provides more information if request is unsuccessful or rejected. |
| Message Trailer | | | | Y | |



© 2005-2023 Intercontinental Exchange, Inc. All rights reserved.

### 6.3.10. TRADE CAPTURE REPORT [35=AE]

FIX clients will receive deal/trade information via the Trade Capture Report based on the subscription instructions in the Trade Capture Report Request.

***Trade Dissemination***

FIX clients on one side of the deal will receive one Trade Capture Report with `NoSides` (Tag 552) = '`1`'. FIX clients on both sides of the deal will receive two Trade Capture Reports with `NoSides` (Tag 552) = '`1`' for each side of the trade.

***Strategy Deals (Spreads, Composites, Packs & Bundles, UDS)***

Trade Capture Reports for Strategy Deals will contain trade information for the strategy as well as trade information for the legs of the strategy. The trade information for the legs of the strategy is in the `NoLegs` (Tag 555) repeating group.

***ICE Block Trades***

For block trades entered using ICE Block or the Trade Registration API (TRAPI), the components of the block trade will be sent in separate Trade Capture Reports with `GroupIndicator` (Tag 9820) on the report. The `GroupIndicator` (Tag 9820) can be used to link the related components of the block trade.

***Deal Change***

When a FIX TC session has requested Snapshots + Updates (`SubscriptionRequestType` (Tag 263) = '`1`') via a Trade Capture Report Request, a Trade Capture Report may be sent for the trading firm, the counterparty, or both if there is a modification to a deal. On the Trade Capture Report, `ExecType` (Tag 150) will equal '`5`' to indicate a deal modification.

Please note that the Trade Capture Report for a deal modification may be sent for a strategy or any of the legs of the strategy. **FIX Clients should confirm the ability to process Trade Capture Reports of both the strategy and the legs of the strategy separately.**

The Trade Capture Report for the strategy and the legs of the strategy will have the same `ClOrdID` (Tag 11). The legs of strategy can be linked to the strategy by the `ExecID` (Tag 17) and the `LegRefID` (Tag 654).

**Message Direction: FIX Client ← FIX TC**



© 2005-2023 Intercontinental Exchange, Inc. All rights reserved.

| Tag # | Trade Capture Report [35=AE] Field Name | Data Type (Max Length) | Required | Additional Comments |
|---|---|---|---|---|
| Message Header | | | **Y** | **MsgType = AE** |
| 571 | TradeReportID | **String** | **Y** | Unique identifier of Trade Capture Report. |
| 487 | TradeReportTransType | **Int(1)** | **Y** | Supported value(s):<br>0 = New |
| 856 | TradeReportType | **Int(1)** | **O** | Supported value(s):<br>0 = Submit |
| 568 | TradeRequestID | **String** | **O** | TradeRequestID of the Trade Capture Report Request. |
| 828 | TrdType | **String(3)** | **O** | Please note type of String and not Int. Supported value(s):<br>0 = Regular Trade<br>2 = ICE EFRP<br>3 = ICEBLK<br>4 = Basis Trade<br>5 = Guaranteed Cross<br>6 = Volatility Contingent Trade<br>7 = Stock Contingent Trade<br>9 = CCX EFP Trade<br>A = Other Clearing Venue<br>D = N2EX<br>E = EFP Trade/Against Actual<br>G = EEX<br>F = EFS/EFP Contra Trade<br>I = EFM Trade<br>J = EFR Trade<br>K = Block Trade<br>O = NG EFP/EFS Trade<br>Q = EOO Trade<br>S = EFS Trade<br>T = Contra Trade<br>U = CPBLK<br>V = Bilateral Off-Exchange Trade<br>Y = Cross Contra Trade<br>AA = Asset Allocation<br>SBK = Trade at Market (TAM) |



© 2005-2023 Intercontinental Exchange, Inc. All rights reserved.

| Tag # | Trade Capture Report [35=AE] Field Name | Data Type (Max Length) | Required | Additional Comments |
|---|---|---|---|---|
| 1126 | OrigTradeID | **Int** | **O** | **Adapted from FIX.5.0. Please note data type of Int not String.** Only present on Trade Capture Reports resulting from deal change (bust/adjust) and will contain the ExecID (Tag 17) of the original trade. |
| 150 | ExecType | **Char** | **C** | **Please note that ExecType (Tag 150) will not be sent on snapshot Trade Capture Reports. Duplicate Trade Capture Reports may be sent with ExecType (Tag 150) = '5' to indicate a change on either side of the trade.**<br>Supported value(s):<br>5 = Replace<br>F = Trade (partial fill or fill)<br>H = Trade Cancel |
| 820 | TradeLinkID | **Int** | **O** | Deal ID that links the futures market trade to the OTC market trade. **Please note data type of Int and not String.** |
| 9820 | GroupIndicator | **String** | **O** | ID used to group components of a block trade submitted via ICE Block or the Trade Registration API. |
| 9414 | TradeLinkMktID | **Int** | **O** | Market ID of the futures market linked to the OTC Trade. |
| 17 | ExecID | **String** | **Y** | Deal ID of the trade. **Please note that this value is unique per Market ID (`Symbol` (Tag 55)) per `Side` (Tag 54) per Trading Session.** |
| 39 | OrdStatus | **Char** | **O** | Supported value(s):<br>2 = Filled<br>4 = Canceled |
| 570 | PreviouslyReported | **Boolean** | **Y** | Indicates if the trade capture report was previously reported to the counterparty.<br>Supported value(s):<br>N : not reported to counterparty |
| 55 | Symbol | **Int** | **Y** | Market ID. **Please note type of Int and not String.** |
| 48 | SecurityID | **String** | **O** | Contract symbol. **Please note that contract symbols are not currently supported for OTC markets and may contain '?' characters that reflect blank or empty data.** |



© 2005-2023 Intercontinental Exchange, Inc. All rights reserved.

| Tag # | Trade Capture Report [35=AE] Field Name | Data Type (Max Length) | Required | Additional Comments |
|---|---|---|---|---|
| 22 | SecurityIDSource | **String** | **C** | Exists if `SecurityID` (Tag 48) is present.<br>Supported value(s):<br>8 = Exchange Symbol |
| 461 | CFICode | **String** | **Y** | Supported value(s):<br>FXXXXX = Futures<br>OPXXXX = Put<br>OCXXXX = Call<br>OMXXXX = Other (UDS) |
| 202 | StrikePrice | **Price** | **C** | |
| 9403 | OptionsSymbol | **Int** | **O** | Market ID of pre-defined option markets. |
| 207 | SecurityExchange | **String** | **O** | Exchange MIC |
| 9064 | ExchangeSilo | **Int** | **O** | Identifies the Exchange Silo of a market.<br>Supported value(s):<br>0 = ICE<br>1 = Endex<br>2 = Liffe |
| 916 | StartDate | **LocalMktDate** | **O** | Format: YYYYMMDD. Present on custom strips for bilateral trades. |
| 917 | EndDate | **LocalMktDate** | **O** | Format: YYYYMMDD. Present on custom strips for bilateral trades. |
| 9520 | DeliveryStartDate | **UTCTimestamp** | **O** | Endex Spot markets-date and time in which delivery begins. |
| 9521 | DeliveryEndDate | **UTCTimestamp** | **O** | Endex Spot markets-date and time in which delivery ends. |
| 9522 | Location Code | **String(6)** | **O** | Endex Spot specific: Only populated for OCM Locational markets. |
| 9523 | MeterNumber | **String(10)** | **O** | Endex Spot specific: Only populated for OCM Locational markets. |
| 9524 | LeadTime | **Int** | **O** | Endex Spot specific: Only populated for OCM Locational markets.<br>Number of hours offset from delivery. **Must be ≥ 1 and ≤ 24.** |
| 9525 | ReasonCode | **String(4)** | **O** | Endex Spot specific: Only populated for authorized companies for OCM markets. |
| 32 | LastQty | **Qty** | **Y** | |
| 31 | LastPx | **Price** | **Y** | |
| 669 | LastParPx | **Price** | **C** | CDS Futures Price: The CDS Futures price of this fill.<br>Trade at Market (TAM/SBK): Submitted price for block. |



© 2005-2023 Intercontinental Exchange, Inc. All rights reserved.

| Tag # | Trade Capture Report [35=AE] Field Name | Data Type (Max Length) | Required | Additional Comments |
|---|---|---|---|---|
| 423 | PriceType | **Int** | C | Indicates calculated price for Trade at Market (TAM/SBK) blocks<br>Supported value(s):<br>2 = Per contract |
| 662 | BenchmarkPrice | **Price** | C | **Adapted from FIX.4.4.** Price of benchmark for Trade at Market (TAM/SBK) blocks. |
| 663 | BenchmarkPriceType | **Int** | C | **Adapted from FIX.4.4.** Price type of benchmark for Trade at Market (TAM/SBK) blocks.<br>Supported value(s):<br>3 = Fixed Amount (absolute value) |
| 9018 | NumOfLots | **Qty** | **O** | Trade quantity represented in number of lots. **Please note that the value should be ignored for strategy trades.** |
| 9022 | NumOfCycles | **Int** | **Y** | Number of days remaining in a flow contract. |
| 75 | TradeDate | **LocalMktDate** | **Y** | |
| 60 | TransactTime | **UTCTimestamp** | **Y** | The precision is controlled by the `TimeStampPreference` (Tag 9007) on the Logon Request Message.<br>Time/date combination represented in UTC (Universal Time Coordinated, also known as “GMT”) in either YYYYMMDD-HH:MM:SS (whole seconds) or YYYYMMDD-HH:MM:SS.sss* format, colons, dash, and period required.<br>Supported value(s): YYYY = 0000-9999, MM = 01-12, DD = 01-31, HH = 00-23, MM = 00-59, SS = 00-60 (60 only if UTC leap second), sss* = fractions of seconds. The fractions of seconds may be empty when no fractions of seconds are conveyed (in such a case the period is not conveyed), it may include 3 digits to convey milliseconds, 6 digits to convey microseconds, 9 digits to convey nanoseconds, 12 digits to convey picoseconds. |



© 2005-2023 Intercontinental Exchange, Inc. All rights reserved.

| Tag # | Trade Capture Report [35=AE] Field Name | | Data Type (Max Length) | Required | Additional Comments |
|---|---|---|---|---|---|
| 9413 | ClientAppType | | **Int(2)** | **Y** | Used to indicate the source application on the request. Can be used to differentiate WebICE deals from FIXOS deals.<br>Supported value(s):<br>0 = WebICE<br>1 = FIX OS<br>2 = FIXml<br>3 = ICEBlock<br>4 = Other<br>5 = FPML<br>6 = UPS<br>7 = Mobile<br>8 = FIX POF<br>9 = YJ ISV<br>11 = IOA<br>12 = ICEXL<br>13 = Connect |
| 762 | SecuritySubType | | **String** | **O** | Contains the Strategy Code when present. For Supported value(s) please see: *https://www.theice.com/publicdocs/technology/ICE_Strategy_Code_Reference_Manual.pdf* |
| 9028 | SequenceWithinMillis | | **Int(6)** | **O** | Sequence of the message within the millisecond. SequenceWithinMillis / 1000 = # of microseconds. **Please note that the last 3 digits are sequence numbers within the microsecond (not nanoseconds).** |
| 15 | Currency | | **String** | O | Indicates the designated currency of the trade |
| 9097 | Contract | | **String** | O | Company short name (abbreviation) whose contract terms are agreed for the deal |
| 9098 | GeneralTerms | | **String** | O | Company short name (abbreviation) whose general terms and conditions are agreed upon for the deal |
| 9500 | NumOfCombiDefinitions | | **NumInGroup** | **O** | |
| → | 9501 | CombiPercentage | **Int** | **O** | Repeating group used to convey Platts specific combi fields. |
| → | 9502 | CombiPriceBasis | **String** | **O** | Returns the pricing basis for Platts combi deals. |
| → | 9503 | CombiPriceBasisPeriod | **String** | **O** | Returns the Platts basis period ex: Full month, quarter, 5 days, etc. |



© 2005-2023 Intercontinental Exchange, Inc. All rights reserved.

| Tag # | Trade Capture Report [35=AE] Field Name | | Data Type (Max Length) | Required | Additional Comments |
|---|---|---|---|---|---|
| → | 9504 | CombiPriceBasisSubLevel | **String** | **O** | Returns the selected sub level. |
| → | 9505 | CombiLegPrice | **Price** | **O** | Returns the price of the combi leg. |
| 9510 | TermsQualityComments | | **String** | **O** | Terms of Platts deal |
| 8013 | WaiverIndicator | | **String** | **C** | MiFID waiver indicator on off-exchange deals in MiFID-regulated markets and products.<br>Supported value(s):<br>LRGS = Large In Scale (LIS): Off-exchange trade (except EFP) ≥ LIS<br>SIZE = Above specified size: Off-exchange trade (except EFP) < LIS<br>ILQD = Illiquid instrument |
| 9700 | DirectElectronicAccess | | **Int** | **C** | Only required for MiFID II related markets when MIFIDID (Tag 9707) is not provided.<br>Supported value(s):<br>0 = False<br>1 = True |
| 9701 | TradingCapacity | | **Int** | **C** | Only required for MiFID II related markets when MIFIDID (Tag 9707) is not provided.<br>Supported value(s):<br>0 = DEAL (own account)<br>1 = MTCH (matched principal)<br>2 = AOTC (any other capacity) |
| 9702 | LiquidityProvision | | **Int** | **C** | Only required for MiFID II related markets when MIFIDID (Tag 9707) is not provided.<br>Supported value(s):<br>0 = False<br>1 = True |
| 9703 | CommodityDerivIndicator | | **Int** | **O** | Optional for MiFID II related markets when MIFIDID (Tag 9707) is not provided.<br>Supported value(s):<br>0 = False (Default if not sent)<br>1 = True |



© 2005-2023 Intercontinental Exchange, Inc. All rights reserved.

| Tag # | Trade Capture Report [35=AE] Field Name | Data Type (Max Length) | Required | Additional Comments |
|---|---|---|---|---|
| 9704 | InvestmentDecision | **Int** | **C** | **Must be > 0. Maximum value of 9,223,372,036,854,775,807.** Only required for MiFID II related markets when MIFIDID (Tag 9707) is not provided and TradingCapacity (Tag 9701) = '0'. |
| 9705 | ExecutionDecision | **Int** | **C** | **Must be > 0. Maximum value of 9,223,372,036,854,775,807.** Only required for MiFID II related markets when MIFIDID (Tag 9707) is not provided. |
| 9706 | ClientIDCode | **Int** | **C** | **Must be > 0. Maximum value of 9,223,372,036,854,775,807.** Only required for MiFID II related markets when MIFIDID (Tag 9707) is not provided and TradingCapacity (Tag 9701) = '1' or '2'. |
| 9707 | MiFIDID | **Int** | **C** | **Must be > 0. Maximum value of 9,223,372,036,854,775,807.** Only required for MiFID II related markets when Tags 9700-9706 are not provided. Please note that this field (in lieu of 9700-9706) will be the only MiFID-related field processed if sent. |
| 9036 | CDIOverride | **Int** | **C** | Indication that brokers submitted CDIOverride. Applicable only for trades less than LIS minimum in MIFID regulated markets.<br>Supported values:<br>0 = No (Default if not sent)<br>1 = Yes |
| 9124 | DealAdjustIndicator | **Int (1)** | **C** | Indicates that a deal is adjusted on a deal bust.<br>Supported value(s):<br>0 = No (Default if not sent)<br>1 = Yes |
| 9821 | SelfMatchPreventionID | **Int (7)** | O | Identifier used to prevent self trading |
| 9822 | SelfMatchPreventionInstruction | **Char (1)** | O | Indicates cancel instruction when self match prevention is triggered. Used in conjunction with `SelfMatchPreventionID` (Tag 9821)<br>Supported value(s):<br>R = Cancel Resting Order (Default if not sent)<br>T = Cancel Taking Order<br>B = Cancel Both Orders |
| 9512 | QuantityMax | **Int** | **O** | Platts specific field. QuantityTo used in Platts market. |
| 9513 | PlattsMinQuantity | **Qty** | O | Platts market: indicative of Optol or GHV minimum quantity |



© 2005-2023 Intercontinental Exchange, Inc. All rights reserved.

| Tag # | Trade Capture Report [35=AE] Field Name | | Data Type (Max Length) | Required | Additional Comments |
|---|---|---|---|---|---|
| 9514 | PlattsMaxQuantity | | **Qty** | O | Platts market: indicative of Optol or GHV maximum quantity |
| 9515 | OptolPriceBasis | | **String** | O | Platts market: returns the Optol pricing basis |
| 9516 | PlattsTerms | | **String** | O | Platts market: Optol or GHV basis period (e.g. Full month, quarter, 5 days, etc.) or GHV Units |
| 9518 | OptolPriceBasisSubLevel | | **String** | O | Platts market: returns the Optol price basis sub level |
| 9517 | OptolPrice | | **Price** | O | Platts market: returns the Optol price |
| 552 | NoSides | | **NumInGroup** | **Y** | Always '1'. |
| → | 54 | Side | **Char** | **Y** | Supported value(s):<br>1 = Buy<br>2 = Sell |
| → | 37 | OrderID | **Int** | **Y** | **Please note type of Int and not String.** |
| → | 11 | ClOrdID | **String** | **O** | **Please note that this data type is listed as a String, but internally all ClOrdIDs are represented as Int.** |
| → | 453 | NoPartyIDs | **NumInGroup** | **O** | Number of party roles. |
| →→ | 448 | PartyID | **String** | **C** | Required if NoPartyIDs (Tag 453) > '0'. |
| →→ | 447 | PartyIDSource | **Char** | **C** | Required if NoPartyIDs (Tag 453) > '0'.<br>Supported value(s):<br>D = Proprietary/Custom code |
| →→ | 452 | PartyRole | **Int** | **C** | Required if NoPartyIDs (Tag 453) > '0'. Please see *Appendix A* for Supported value(s). |
| → | 376 | ComplianceID | **String** | **O** | Unique Swap/Trade Identifier. |



© 2005-2023 Intercontinental Exchange, Inc. All rights reserved.

| Tag # | Trade Capture Report [35=AE] Field Name | | Data Type (Max Length) | Required | Additional Comments |
|---|---|---|---|---|---|
| → | 1031 | CustOrderHandlingInst | **String** | **O** | **Adapted from FIX 5.0. Please note the data type of String and not MultipleStringValue.**<br>**For more information about FIA usage guidelines please see the following link:**<br>*https://www.fia.org/sites/default/files/2020-03/Guidelinesfor%20the%20simplified%20FIA%20Execution%20Source%20Code%20Schema.pdf*<br>Supported value(s):<br>C = Vendor-provided Platform billed by Executing Broker<br>D = Other, including Other-provided Screen<br>G = Sponsored Access via Exchange API or FIX provided by Executing Broker<br>H = Premium Algorithmic Trading Provider billed by Executing Broker<br>W = Desk<br>Y = Electronic (Preferred default value as per FIA usage guidelines. Not set as a default if not sent.) |
| → | 77 | PositionEffect | **Char** | **O** | Supported value(s):<br>O = Open<br>C = Close |
| → | 9121 | MemoField | **String(30)** | **O** | |
| → | 9123 | TransactDetails | **String** | **O** | |
| → | 9405 | CrossExecutionType | **Int(1)** | **O** | Indicates the type of deal derived from a new order cross.<br>Supported value(s):<br>0 = Basic Crossing Order |
| → | 58 | Text | **String** | **O** | |
| → | 78 | NoAllocs | **NumInGroup** | **O** | Number of Allocations. Maximum value of '`1`'. |
| →→ | 79 | AllocAccount | **String** | **C** | Required if `NoAllocs` (Tag 78) > '`0`'. **Please note that the value will default to '`N/A`' if left blank while submitting the order.** |
| →→ | 756 | NoNested2PartyIDs | **NumInGroup** | **C** | Must be '`1`' or '`2`'. |



© 2005-2023 Intercontinental Exchange, Inc. All rights reserved.

| Tag # | Trade Capture Report [35=AE] Field Name | | Data Type (Max Length) | Required | Additional Comments |
|---|---|---|---|---|---|
| →→→ | 757 | Nested2PartyID | **String** | **C** | Required if `NoNested2PartyIDs` (Tag 756) > '`0`'.<br>Supported value(s) when `Nested2PartyRole` (Tag 759) = '`62`':<br>A = Average Price Transaction (APT)<br>G = Give Up<br>Otherwise Clearing Firm Mnemonic if `Nested2PartyRole` (Tag 759) = '`4`'. |
| →→→ | 758 | Nested2PartyIDSource | **Char** | **C** | Required if `NoNested2PartyIDs` (Tag 756) > '`0`'.<br>Supported value(s):<br>D = Proprietary/Custom code |
| →→→ | 759 | Nested2PartyRole | **Int** | **C** | Required if `NoNested2PartyIDs` (Tag 756) > '`0`'.<br>Supported value(s):<br>4 = Clearing Firm<br>62 = Give up type |
| 555 | NoLegs | | **Int** | **O** | **Please note data type of Int and not NumInGroup.** Number of leg trade information. |
| → | 600 | LegSymbol | **Int** | **C** | Required if `NoLegs` (Tag 555) > '`0`'. **Please note type of Int and not String.** |
| → | 602 | LegSecurityID | **String** | **O** | Contract symbol. **Please note that contract symbols are not currently supported for OTC markets and may contain '?' characters that reflect blank or empty data.** |
| → | 603 | LegSecurityIDSource | **String** | **O** | |
| → | 608 | LegCFICode | **String** | **Y** | Supported value(s):<br>FXXXXX = Futures<br>OPXXXX = Put<br>OCXXXX = Call |
| → | 612 | LegStrikePrice | **Price** | **O** | |
| → | 9404 | LegOptionSymbol | **Int** | **O** | Market ID for pre-defined option markets. |
| → | 616 | LegSecurityExchange | **String** | **O** | Exchange MIC |
| → | 624 | LegSide | **Char** | **C** | Required if `NoLegs` (Tag 555) > '`0`'. |
| → | 637 | LegLastPx | **Price** | **C** | Required if `NoLegs` (Tag 555) > '`0`'. |
| → | 9669 | LegParPx | **Price** | **C** | CDS Futures Price: The CDS Futures price of this fill. |



© 2005-2023 Intercontinental Exchange, Inc. All rights reserved.

| Tag # | Trade Capture Report [35=AE] Field Name | | Data Type (Max Length) | Required | Additional Comments |
|---|---|---|---|---|---|
| → | **686** | **LegPriceType** | **Int** | **C** | **Reserved for future use.** |
| → | **679** | **LegBenchmarkPrice** | **Price** | **C** | **Reserved for future use.** |
| → | **680** | **LegBenchmarkPriceType** | **Int** | **C** | **Reserved for future use.** |
| → | 687 | LegQty | **Qty** | **C** | |
| → | 1017 | LegOptionDelta | **Int** | **O** | **Adapted from FIX 5.0. Please note type of Int and not Float.** Contains the hedge volume ratio (as percentage). |
| → | 654 | LegRefID | **Int** | **C** | Required if `NoLegs` (Tag 555) > '`0`'. **Please note type of Int and not String.** Trade ID of the strategy leg. |
| → | 9527 | LinkExecID | **Int** | **C** | Exists on leg fills of strategy trades and contains the `LegRefID` (Tag 654) of the intermediate spread fill. |
| → | 9019 | LegNumOfLots | **Qty** | **O** | |
| → | 9023 | LegNumOfCycles | **Int** | **C** | Required if `NoLegs` (Tag 555) > '`0`'. |
| → | 9020 | LegStartDate | **LocalMktDate** | **C** | Required if `NoLegs` (Tag 555) > '`0`'. |
| → | 9021 | LegEndDate | **LocalMktDate** | **C** | Required if `NoLegs` (Tag 555) > '`0`'. |
| → | 9122 | LegMemoField | **String(12)** | **O** | |
| → | 539 | NoNestedPartyIDs | **NumInGroup** | **O** | |
| →→ | 524 | NestedPartyID | **String** | **C** | Required if `NoNestedPartyIDs` (Tag 539) > '`0`'. |
| →→ | 525 | NestedPartyIDSource | **Char** | **C** | Required if `NoNestedPartyIDs` (Tag 539) > '`0`'.<br>Supported value(s):<br>D = Proprietary/Custom code |
| →→ | 538 | NestedPartyRole | **Int** | **C** | Required if `NoNestedPartyIDs` (Tag 539) > '`0`'. Please see *Appendix A* for Supported value(s). |
| → | 9376 | LegComplianceID | **String** | **O** | Unique Swap/Trade Identifier. |
| → | 9426 | LegCustOrderHandlingInst | **String** | **O** | See supported values for `CustOrderHandlingInst` (Tag 1031) |
| Message Trailer | | | | **Y** | |



© 2005-2023 Intercontinental Exchange, Inc. All rights reserved.

### 6.3.11. ALLOCATION REPORT [35=AS]

The Allocation Report message is used to send post trade allocations from ICE Clearing to trading firms via TC. **The client is not required to acknowledge the Allocation message with an Allocation Acknowledgement. Please note that clients must send Trade Capture Report Requests [35=AD] to subscribe to Allocation Reports and that the Allocation report is also supported in responses to Trade Capture snapshot/historical requests.**

**Message Direction: FIX Client ← FIX TC**

| Tag # | Allocation Report [35=AS] Field Name | Data Type (Max Length) | Required | Additional Comments |
|---|---|---|---|---|
| Message Header | | | **Y** | **MsgType = AS** |
| 70 | AllocID | **String** | Y | Unique identifier for Allocation message. |
| 71 | AllocTransType | **Char** | Y | Identifies allocation transaction type<br>Supported value(s):<br>0 = New<br>1 = Replace<br>2 = Cancel (Bust)<br>6 = Reversal (custom value) |
| 715 | ClearingBusinessDate | **LocalMktDate** | Y | **Not native to the message.** Format YYYYMMDD. |
| 794 | AllocReportType | **Int** | Y | Describes the specific type or purpose of an Allocation Report message<br>Supported value(s):<br>2 = Preliminary Request to Intermediary<br>8 = Request to Intermediary<br>9 = Accept (only for Give-Up side)<br>10 = Reject<br>12 = Complete (only for Take-Up side)<br>14 = Reverse Pending<br>30 = Full Service Trade |



© 2005-2023 Intercontinental Exchange, Inc. All rights reserved.

| Tag # | Allocation Report [35=AS] Field Name | | Data Type (Max Length) | Required | Additional Comments |
|---|---|---|---|---|---|
| 87 | AllocStatus | | **Int** | Y | Supported value(s):<br>0 = Accepted<br>3 = Received<br>5 = Rejected in error (by clearing house)<br>6 = Pending Acceptance |
| 568 | TradeRequestID | | **String** | O | TradeRequestID of the Trade Capture Report Request. Only sent for Allocation reports resulting from a snapshot request. |
| 73 | NoOrders | | **NumInGroup** | Y | Always '`1`' |
| → | 11 | ClOrdID | **String** | C | **Required if `NoOrders` (Tag 73) > '0'.** `ClOrdID` (Tag 11) from Trading System. **Please note that this data type is listed as a String, but internally all ClOrdIDs are represented as Int.** |
| 124 | NoExecs | | **NumInGroup** | Y | No of execution repeating group entries to follow. |
| → | 32 | LastShares | **Qty** | Y | **Required if `NoExecs` (Tag 124) > '0'.** Number of shares in individual execution. |
| → | 17 | ExecID | **String** | Y | The Exchange Deal/Trade ID. |
| → | 31 | LastPx | **Price** | N | |
| → | 1003 | TradeID | **String** | Y | **Adapted from FIX.5.0. The Clearing Deal/Trade ID of the trade being allocated. Please note that the Exchange Deal/Trade ID is different.** |
| → | 9413 | ClientAppType | **Int(2)** | N | |
| 54 | Side | | **Char** | Y | |
| 828 | TrdType | | **String(3)** | N | **Not native to the message.**<br><br>The values for this field will be the supported values from clearing. Please refer to *this document* for the possible values. |
| 55 | Symbol | | **Int** | Y | **Note data type of Int and not String.** MarketID in the trading system |
| 167 | SecurityType | | **String** | N | Supported value(s):<br>FUT = Futures<br>OPT = Options |



© 2005-2023 Intercontinental Exchange, Inc. All rights reserved.

| Tag # | Allocation Report [35=AS] Field Name | | Data Type (Max Length) | Required | Additional Comments |
|---|---|---|---|---|---|
| 200 | MaturityMonthYear | | **MonthYear** | N | |
| 201 | PutOrCall | | **Int(1)** | N | |
| 202 | StrikePrice | | **Price** | N | |
| 9403 | OptionsSymbol | | **Int** | **O** | Market ID of pre-defined option markets. |
| 207 | SecurityExchange | | **String** | N | |
| 53 | Shares | | **Qty** | Y | Total number of shares allocated. |
| 6 | AvgPx | | **Price** | Y | Calculated average price of all fills on this order. |
| 75 | TradeDate | | **LocalMktDate** | Y | Indicates date of trade referenced in this message in YYYYMMDD format. |
| 60 | TransactTime | | **UTCTimestamp** | Y | |
| 58 | Text | | **String** | N | Only visible for the Give Up |
| 578 | TradeInputSource | | **String** | Y | |
| 9120 | LiquidityIndicator | | **Char** | Y | Supported value(s):<br>A = Added Liquidity<br>R = Remove Liquidity |
| 78 | NoAllocs | | **NumInGroup** | N | Always 1 |
| → | 80 | AllocShares | **Qty** | Y | **Must be first field in repeating group. Required if `NoAllocs` (Tag 78) > '0'.** Number of shares to be allocated to specific sub-account. |
| → | 79 | AllocAccount | **String** | N | Allocation account |
| → | 366 | AllocPrice | **Price** | N | |
| → | 989 | SecondaryIndividualAllocID | **Int(12)** | N | **Adapted from FIX.5.0** |
| → | 992 | IndividualAllocType | **Char** | Y | **Adapted from FIX.5.0 with custom added values.** Identifies whether the allocation is to be sub-allocated or allocated to a third party.<br>Supported value(s):<br>2 = Give Up Allocation (Only for the Give Up side)<br>3 = Take Up Allocation (Only for the Take Up side) |
| → | 993 | AllocCustomerCapacity | **Int(12)** | N | **Adapted from FIX.5.0** |



© 2005-2023 Intercontinental Exchange, Inc. All rights reserved.

| Tag # | Allocation Report [35=AS] Field Name | | Data Type (Max Length) | Required | Additional Comments |
|---|---|---|---|---|---|
| → | 1047 | AllocPositionEffect | **Char** | N | **Adapted from FIX.5.0** |
| → | 161 | AllocText | **String(20)** | N | Only provided for the Give Up |
| → | 9194 | SettlementAccountCode | **String** | N | **EU Supported value(s):**<br>1 = Customer (Margining Account of S)<br>2 = House (Margining Account of H)<br>3 = Client Segregated – F<br>4 = FCM Customer Seg Futures<br>5 = FCM Customer Seg Swaps<br>6 = Client Segregated – T<br>7 = Individual Client Segregated (ISOC) – I<br>8 = Individual Client Segregated (ISOC) – J<br>10 = Client Segregated – O<br>11 = Client Segregated – P<br>12 = Client Segregated – X<br>13 = Client Segregated – Y<br>15 = Client Segregated – E<br>16 = Client Segregated – K<br>17 = Client Segregated – R<br>18 = Individual Client Segregated Gross (ISOC) – A<br>19 = Individual Client Segregated Gross (ISOC) – B<br>**SG Supported value(s):**<br>1 = Customer (Margining Account of S)<br>2 = House (Margining Account of H)<br>6 = Client Segregated – T<br>**US & CA Supported value(s):**<br>1 = Customer (Margining Account of C)<br>2 = House (Margining Account of H)<br>**NL Supported value(s):**<br>1 = Customer (Margining Account of S)<br>2 = House (Margining Account of H)<br>3 = Client Segregated – F<br>7 = Individual Client Segregated (ISOC) – I<br>12 = Client Segregated – X<br>18 = Individual Client Segregated Gross (ISOC) – A |
| → | 9060 | AcceptanceTime | **UTCTimeStamp** | C | Allocation acceptance time. **Required if `AllocReportType` (Tag 794) is '`9`' or '`12`'** |



© 2005-2023 Intercontinental Exchange, Inc. All rights reserved.

| Tag # | Allocation Report [35=AS] Field Name | | Data Type (Max Length) | Required | Additional Comments |
|---|---|---|---|---|---|
| → | 9140 | NoAllocInfo | **Int** | Y | Always '2' |
| → → | 9141 | AllocSideInfo | **Int** | Y | Supported value(s):<br>1 = Give Up<br>2 = Take Up |
| → → | 109 | ClientID | **Int** | Y | ICE Company ID |
| → → | 9065 | BrokerCompID | **Int** | N | ICE Broker Company ID for the Give Up. |
| → → | 9139 | OriginatorUserID | **String** | N | TraderID for Allocation |
| → → | 9195 | AccountCode | **Char** | N | |
| → → | 9103 | TMMnemonic | **String** | Y | Trading member mnemonic. |
| → → | 9603 | RIMnemonic | **String** | N | Exists only when `AllocSideInfo` (Tag 9141) = '1'. Trader mnemonic for Give Up. |
| → → | 9604 | CMMnemonic | **String** | N | Clearer mnemonic. |
| → → | 9609 | ClrHouseCode | **String** | N | Clearing house code. |
| → → | 9207 | CustomerAccountRefID | **String** | N | Contains customer account reference ID. |
| → → | 9207 | CustomerAccountRefID | **String** | N | Contains customer account reference ID. |
| → → | 9208 | CTICode | **Int(1)** | N | Required if trading ICE Futures US with an ITM.<br>Supported value(s):<br>1 = Broker/trader trading for own account.<br>2 = Broker/trader trading for house or prop account.<br>3 = Broker/trader trading for the account of another broker/trader.<br>4 = Broker/trader trading for any other customer's account that does not have direct trading access. |
| **Message Trailer** | | | | **Y** | |

# 7. CUSTOM FIELD DEFINITIONS

Please see *https://service.theice.com/s/article/ice-fix-api-custom-field-definitions-21606* for the complete definition of ICE FIX API custom fields.



© 2005-2023 Intercontinental Exchange, Inc. All rights reserved.

# 8. SUPPORTED SECURITY TYPES

Please see *https://www.theice.com/publicdocs/technology/Supported_Market_Types_on_ICE_API.pdf* for the complete list of supported market types for the ICE FIX APIs.



© 2005-2023 Intercontinental Exchange, Inc. All rights reserved.

# 9. APPENDIX A: PARTY ROLE DEFINITIONS

The following table provides a description of the supported party roles that may be included in the various PartyID repeating groups.

For cleared trades there is a distinction between a locally managed account (LMA) and a system-managed account (SMA). To trade on the ICE platform a user needs to have an individual trader mnemonic (ITM), i.e. locally managed account, or a clearing account, i.e. system-managed account. The ITM is setup while creating a user profile and Trader ID by ICE User Administration. The clearing account is setup by the clearing firm and associated to the trader by the trading firm.

| FIX TC Party Roles | | |
|---|---|---|
| ***Party Role*** | ***Description*** | ***Usage*** |
| 1 = Executing Firm | Name of firm executing the trade | Trades executed by a broker company on behalf of the originating firm |
| 4 = Clearing Firm | ID of clearing firm used for this trade | All cleared trades using SMA |
| 11 = Order Origination Trader | User ID of trader who submitted order for side being reported | Always |
| 12 = Executing Trader | User ID of the trader entering the trade | The executing broker in non-ICE Block broker-enabled markets. |
| 13 = Order Origination Firm | Name of order origination trader's company | Always |
| 17 = Contra Firm | Name of counterparty trader's company | Bilateral trades |
| 21 = Clearing Organization | Clearing Destination | Broker enabled markets |
| 35 = Liquidity Provider | ID of company who submitted order that added liquidity to market | Only on orders that added liquidity to market. This is the originator on the deal. |
| 37 = Contra Trader | User ID of counterparty trader | Bilateral trades |
| 50 = Contra Firm ID | ID of counterparty trader's company | Bilateral trades |
| 51 = Clearing Account ID | Clearing Account ID used for this trade | All cleared trades using SMA |
| 52 = CTI Code | Customer Type Indicator Code | Cleared trades using LMA in ICE Futures US markets.<br>Supported value(s) in corresponding PartyID field:<br>1 = Broker/trader trading for own account.<br>2 = Broker/trader trading for house or prop account.<br>3 = Broker/trader trading for the account of another broker/trader.<br>4 = Broker/trader trading for any other customer's account that does not have direct trading access. |



© 2005-2023 Intercontinental Exchange, Inc. All rights reserved.

| | | |
|---|---|---|
| 53 = House Number | House Number | Cleared trades using LMA in ICE Futures US markets. |
| 54 = Account Code | Segregation Type | Please see values for `AccountCode` (Tag 9195) in *https://service.theice.com/s/article/ice-fix-api-custom-field-definitions-21606* for supported values. |
| 55 = Account ID | ID of locally managed account | |
| 56 = Order Origination Firm ID | ID of order origination trader's company | Always |
| 57 = OnBehalfOfCompID | Value sent in tag 115 of FIX order | All trades submitted through FIX |
| 58 = OnBehalfOfSubID | Value sent in tag 116 of FIX order | All trades submitted through FIX |
| 59 = OnBehalfOfLocationID | Value sent in tag 144 of FIX order | All trades submitted through FIX |
| 60 = Clearing Firm Name | Clearing Firm used for this trade | All cleared trades using SMA |
| 61 = ExecutingFirmID | Firm ID executing the trade | Trades executed by a broker company on behalf of the originating firm |
| 63 = Clearing Firm Mnemonic | Clearing Firm Mnemonic used for this trade | |
| 64 = First Name | Trader First Name | Sent for off exchange trades. This is only sent back in FIXTC Broker feeds |
| 65 = Last Name | Trader Last Name | Sent for off exchange trades. This is only sent back in FIXTC Broker feeds |



© 2005-2023 Intercontinental Exchange, Inc. All rights reserved.

# APPENDIX B: ICE FIX TC REQUEST MATRIX

| FIX TC Party Roles | | | | | | |
|---|---|---|---|---|---|---|
| ***SubscriptionRequestType (Tag 263)*** | ***NoDates (Tag 580)*** | ***TransactTime (Tag 60)[1]*** | ***TradeDate (Tag 75)[1]*** | ***TransactTime (Tag 60)[2]*** | ***TradeDate (Tag 75)[2]*** | ***Results*** |
| 0 | **0** | **Date & Time** | **Date** | **Date & Time2** | **Date2** | **Snapshot request with no dates. No Trade Capture Reports will be sent. Please note that `TransactTime` (Tag 60) and `TradeDate` (Tag 75) are ignored when `NoDates` (Tag 580) = '0'.** |
| 1 | **0** | **Date & Time** | **Date** | **Date & Time2** | **Date2** | **Snapshot + Updates request with no dates.** Only Trade Capture Reports for real-time trades will be sent. **Please note that `TransactTime` (Tag 60) and `TradeDate` (Tag 75) are ignored when `NoDates` (Tag 580) = '0'.** |
| 0 | **0** | **BLANK** | **BLANK** | **BLANK** | **BLANK** | **Snapshot request with no dates. No Trade Capture Reports will be sent. Please note that `TransactTime` (Tag 60) and `TradeDate` (Tag 75) are ignored when `NoDates` (Tag 580) = '0'.** |
| 1 | 0 | BLANK | BLANK | BLANK | BLANK | **Snapshot + Updates request with no dates. Only Trade Capture Reports for real-time trades will be sent.** |
| 0 | 1 | Date & Time | Date | BLANK | BLANK | **Snapshot request with one date.** Only Trade Capture Reports for trades that happened between the Date & Time and the current GMT time will be sent. |



© 2005-2023 Intercontinental Exchange, Inc. All rights reserved.

| FIX TC Party Roles | | | | | | |
|---|---|---|---|---|---|---|
| ***SubscriptionRequestType (Tag 263)*** | ***NoDates (Tag 580)*** | ***TransactTime (Tag 60)[1]*** | ***TradeDate (Tag 75)[1]*** | ***TransactTime (Tag 60)[2]*** | ***TradeDate (Tag 75)[2]*** | ***Results*** |
| 0 | **1** | Date & Time | Date | **Date & Time2** | **Date2** | **Snapshot request with one date.** Only Trade Capture Reports for trades that happened between the Date & Time and the current GMT time will be sent. **Please note that `TransactTime` (Tag 60) and `TradeDate` (Tag 75) are ignored when `NoDates` (Tag 580) does not match the items in the repeating group.** |
| 0 | **1** | **BLANK** | **BLANK** | **BLANK** | **BLANK** | **Snapshot request with one date. The request is rejected.** |
| 1 | 1 | BLANK | BLANK | BLANK | BLANK | **Snapshot + Updates request with one date. Only Trade Capture Reports for real-time trades will be sent.** |
| 1 | 1 | Date & Time | Date | BLANK | BLANK | **Snapshot + Updates request with one date.** Trade Capture Reports for real-time trades will be sent in addition to trades that happened between the Date & Time and the current GMT time will be sent. |
| 1 | **1** | Date & Time | Date | **Date & Time2** | **Date2** | **Snapshot + Updates request with one date.** Trade Capture Reports for real-time trades will be sent in addition to trades that happened between the Date & Time and the current GMT time will be sent. **Please note that `TransactTime` (Tag 60) and `TradeDate` (Tag 75) may be ignored when `NoDates` (Tag 580) does not match the items in the repeating group.** |



© 2005-2023 Intercontinental Exchange, Inc. All rights reserved.

| FIX TC Party Roles | | | | | | |
|---|---|---|---|---|---|---|
| ***SubscriptionRequestType (Tag 263)*** | ***NoDates (Tag 580)*** | ***TransactTime (Tag 60)[1]*** | ***TradeDate (Tag 75)[1]*** | ***TransactTime (Tag 60)[2]*** | ***TradeDate (Tag 75)[2]*** | ***Results*** |
| 0 | **2** | Date & Time | Date | **BLANK** | **BLANK** | **Snapshot request with two dates.** Only Trade Capture Reports for trades that happened between the Date & Time and the current GMT time will be sent. **Please note that `TransactTime` (Tag 60) and `TradeDate` (Tag 75) may be ignored when `NoDates` (Tag 580) does not match the items in the repeating group.** |
| 0 | 2 | Date & Time | Date | Date & Time2 | Date2 | **Snapshot request with two dates.** Only Trade Capture Reports for trades that happened between the Date & Time and Date & Time2 will be sent. |
| 0 | **2** | **BLANK** | **BLANK** | **BLANK** | **BLANK** | **Snapshot request with two dates. The request is rejected.** |
| 1 | **2** | Date & Time | Date | **BLANK** | **BLANK** | **Snapshot + Updates request with two dates.** Trade Capture Reports for real-time trades will be sent in addition to trades that happened between the Date & Time and the current GMT time will be sent. |
| 1 | 2 | Date & Time | Date | Date & Time2 | Date2 | **Snapshot + Updates request with two dates.** Trade Capture Reports for real-time trades will be sent in addition to trades that happened between the Date & Time and Date & Time2 will be sent. |
| 1 | **2** | **BLANK** | **BLANK** | **BLANK** | **BLANK** | **Snapshot + Updates request with two dates.** Only Trade Capture Reports for real-time trades will be sent. **Please note that `TransactTime` (Tag 60) and `TradeDate` (Tag 75) may be ignored when `NoDates` (Tag 580) does not match the items in the repeating group.** |



© 2005-2023 Intercontinental Exchange, Inc. All rights reserved.