

CSC411 Machine Learning

Project 2: Deep Neural Networks

Ariel Kelman

Student No: 1000561368

Gideon Blinick

Student No: 999763000

22 February 2018

1 Introduction

This section provides an introduction to Project 2, including the data used, and notes on reproducing the results. Sections 2-6 discuss the implementation of a simple neural network to classify images from the MNIST database, section 7 is a theoretical analysis of the efficiency of backpropagation, and sections 8-10 work with deep neural networks.

1.1 Digits

The following figure shows 10 random images from the training set of each of the digits.

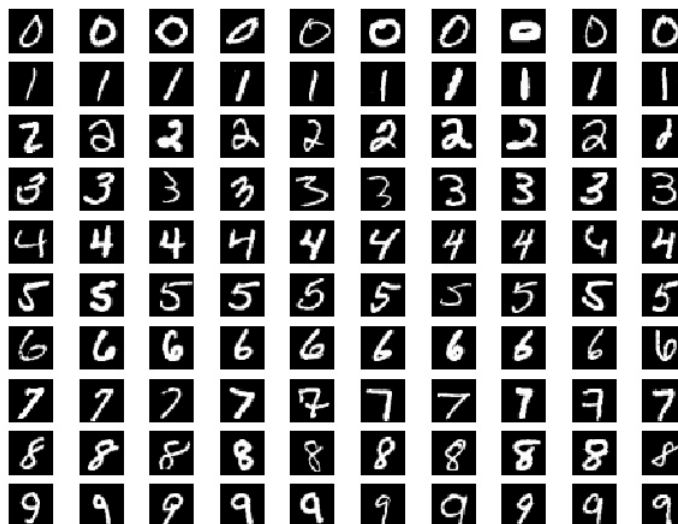


Figure 1: 10 random samples from the training set for each digit. This image was generated using `plot_samples()`.

The data was downloaded from the assignment webpage, and imported into Python using the provided code. The data was already divided into training and testing sets.

1.2 Results & Report Reproducibility

All results and plots can be generated using the appropriate python files. Code for sections 1-6 can be found in `digits.py`, for part 8 and 9 in `deepfaces.py`, and for part 10... Running the code will save all generated images in the `resources` folder, where they are used by L^AT_EX. Note that some of the sections require the code for other sections to be run first. To reproduce the report, simply run it through L^AT_EX.

2 The Network

The following function implements a neural network with no hidden layers, with the output passed through a softmax layer to estimated probabilities.

```
def no_hidden_layers(x, W, b):
    '''Compute the network'''
    #the first column of W contains the weights for output 1
    # W is (784x10), x is (784x60 000) and b is (10x60 000)
    # So L1 is (10x60000)
    L1 = np.dot(W.T, x) + tile(b, (1, np.shape(x)[1] ))
    return softmax(L1)
```

The network is described by the weights and biases from the $784 = 28*28$ inputs (representing pixel intensities of the input image) to ten “output” nodes (with the identity as the activation function). The output from this layer is what is passed through the softmax function $p_k = \frac{e^{o_k}}{\sum_q e^{o_q}}$.

The weights are represented as a 784 by 10 matrix W , where w_{ij} (i^{th} row, j^{th} column) represents the weight from the i^{th} input to the j^{th} output. When computing the network on a given sample, the transpose of W is multiplied by the column vector (or matrix when computing on multiple samples) representing the input. The biases are represented by a 10 by 1 vector, one entry for each output. We use the `tile()` function to duplicate the biases b up to appropriate dimensions (10 by 60000) to be added to the result of $W^T X$.

Throughout the code, y_- is a matrix representing the correct results for each image; each column is a vector of zeros with a 1 in the place representing the correct digit. y is a matrix representing the output probabilities from the network of the same dimensions as y_- (in the derivations below, as well as some comments on the code, p is used in place of y); each column is a vector representing the probabilities for each digit for a particular sample.

3 Gradient

The cost function is taken to be $-\sum_k y_k \ln(p_k)$ for one sample, where y_k is 1 for the correct class and 0 otherwise, and p_k is the prediction probability for class k . Writing this in vector notation (replacing the sum with a vector dot product) and summing over all the samples gives:

$$C = -\sum_s y^{(s)} \ln(p^{(s)})$$

where \ln is applied pointwise, and s is an index over the samples. $y^{(s)}$ is a vector of 0's with a 1 in the position representing the correct digit.

The following results will be used in the derivations throughout this section:

$$\frac{\partial p_k}{\partial o_q} = \begin{cases} -p_k p_q & \text{if } k \neq q \\ p_q(1 - p_q) & \text{if } k = q \end{cases}$$

These results follow directly from the definition of the softmax function.

3.1 Gradient wrt w_{ij}

First, we derive $\frac{\partial C}{\partial o_q}$ (for one sample), to be used in the derivation of $\frac{\partial C}{\partial w_{ij}}$.

$$\begin{aligned} \frac{\partial C}{\partial o_q} &= \left[\frac{\partial C}{\partial p_q} \frac{\partial p_q}{\partial o_q} + \sum_{k \neq q} \frac{\partial C}{\partial p_k} \frac{\partial p_k}{\partial o_q} \right] \\ &= - \left[y_q \frac{1}{p_q} p_q (1 - p_q) + \sum_{k \neq q} y_k \frac{-1}{p_k} p_k p_q \right] \\ &= - \left[y_q (1 - p_q) - \sum_{k \neq q} y_k p_q \right] \\ &= \left[-y_q + \sum_k y_k p_q \right] \\ &= p_q - y_q \end{aligned}$$

The last line follows because $\sum_k y_k = 1$. Using this result, and applying the chain rule gives:

$$\begin{aligned} \frac{\partial C}{\partial w_{ij}} &= \frac{\partial}{\partial w_{ij}} \sum_s y^{(s)} \ln(p^{(s)}) \\ &= \sum_s \sum_q \frac{\partial C}{\partial o_q} \frac{\partial o_q}{\partial w_{ij}} \\ &= \sum_s \sum_q (p_q - y_q) x_i \delta_{jq} \\ &= \sum_s (p_j - y_j) x_i \end{aligned}$$

As the outputs are linear functions of both the inputs and the weights, the derivative with respect to a weight is given by the value of the input to that weight, namely x_i . The Kronecker delta δ_{jq} results from $\frac{\partial o_q}{\partial w_{ij}}$ being nonzero only when $j = q$. The (s) superscript indicating the sample index was omitted throughout the derivation for clarity of presentation.

3.2 Vectorized Gradient Code

The following code computes the gradient with respect to the weights and biases (representing all input training images in a matrix X , 784 by the number of samples, in this case 60000):

```
def grad(y_, y, x):
    '''Compute the gradient wrt weights and biases'''
    #y and y_ have dimension (10x60000)
    #x has dimension (784x60000)

    diff = (y - y_) #y is output of softmax
    # diff is p-j - y-j
```

```

grad_W = np.dot( x, diff.T )
grad_b = np.sum( diff, 1)
grad_b = np.reshape(10,1)

return grad_W, grad_b

```

The above code works by creating a matrix ∇C which is of dimension 784x10 (same as the weight matrix), and where every element contains $\frac{\partial C}{\partial w_{ij}}$ for the corresponding w_{ij} . It does this by implementing $\sum_s (p_j - y_j)x_i$ for each matrix element, where i increases as you go down a column (from 1 to 784) and j increases as you go accross a row (from 1 to 10). Each element itself contains 60000 terms added together to aggregate the information from all samples.

4 Training

The neural network was trained on the full training set of 60000 images without momentum. The weights and biases were initialized using a uniform distribution to values between 0 and 1. A learning rate of 10^{-4} was used for 1000 iterations, giving a training accuracy of 92.6%, validation accuracy of XXX, and a testing accuracy of 92.2%. To determine the optimal learning rate, the function `optimize_rate()` tested several learning rates, outputting the validation accuracy for each. Learning curves for each weight are saved as images in the `resources` directory.

The following figure shows the learning curve for the final parameters used:

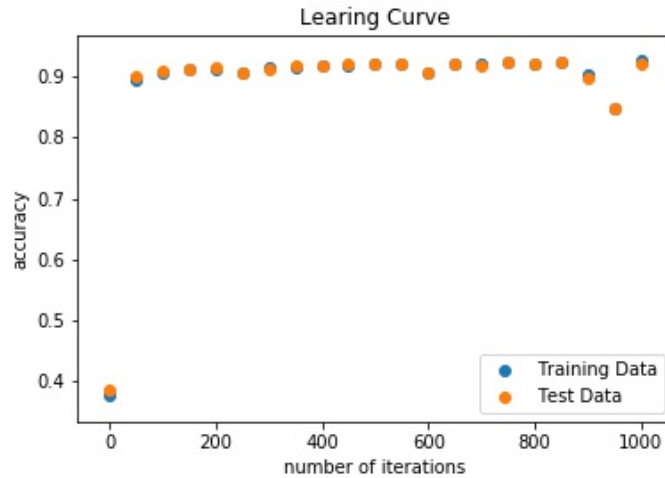


Figure 2: Learning curve with a learning rate of 10^{-4} .

The following figure, generated using `image_W()` shows the weights input to each output neuron (before the softmax layer), corresponding to the digits 1...10:



Figure 3: Visualization of the weights

5 Training with Momentum

The neural network was trained on the full training set of 60000 images with momentum, set to xxx . A learning rate of xxx was used for xxx iterations, giving a training accuracy of xxx and a testing accuracy of xxx . The weights and biases were initialized using a uniform distribution to values between 0 and 1.

The following figure shows a learning curve...

6 Analysis of Momentum

For the analysis in this section, the weights w_{ab} and w_{cd} were used (recall that W is a 784 by 10 matrix). After training the network as described in the previous section, these weights had the values $w_{ab} = xxx$ and $w_{cd} = yyy$.

6.1 Contour Plot

The following plot shows the variation of the cost function (negative log loss) around the values for w_{ab} and w_{cd} chosen above.

6.2 Trajectory without Momentum

6.3 Trajectory with Momentum

6.4 Discussion

7 Efficiency of Vectorized Backpropagation

Consider a fully connected neural network with N layers each containing K neurons. By convention, the input layer will not be counted toward N layers, but the final output layer will be counted (thus there are N sets of weights and biases that must be learned). Any function (such as softmax) applied to the final layer is ignored; none of these conventions will affect the asymptotic runtime. We also assume that the results of the forward pass of the network are cached, to be used for both vectorized

backpropagation and computing the gradient with respect to each weight independently. We can also ignore the biases; including them could be accommodated by adding an extra neuron to every layer (except the last) with a constant value of 1. This would be equivalent to increasing K by 1. As a final note, any functions (such as softmax) applied to the output are ignored; these would have no asymptotic effect on N and would increase linearly with K .

Denote each layer by the numbers $1, 2 \dots N$ (we can refer to the input layer as layer 0). The efficiency of computing the gradient with respect to a weight to/from a particular layer does not depend on which weight it is, so w^a can stand for an arbitrary weight from layer $a - 1$ to a . A particular neuron in layer n will be denoted by σ^n with a subscript to denote that one specific neuron in the layer is intended (the one which the weight under consideration leads to).

Then the following holds:

$$\begin{aligned}\frac{\partial C}{\partial w^N} &= \frac{\partial C}{\partial \sigma_q^N} \frac{\partial \sigma_q^N}{\partial w^N} \\ \frac{\partial C}{\partial w^{N-1}} &= \sum_q^K \frac{\partial C}{\partial \sigma_q^N} \frac{\partial \sigma_q^N}{\partial \sigma_m^{N-1}} \frac{\partial \sigma_m^{N-1}}{\partial w^{N-1}} \\ \frac{\partial C}{\partial w^{N-2}} &= \sum_q^K \sum_m^K \frac{\partial C}{\partial \sigma_q^N} \frac{\partial \sigma_q^N}{\partial \sigma_m^{N-1}} \frac{\partial \sigma_m^{N-1}}{\partial \sigma_h^{N-2}} \frac{\partial \sigma_h^{N-2}}{\partial w^{N-2}}\end{aligned}$$

Again, in each case, the derivative of the last neuron ($\sigma_q, \sigma_m, \sigma_h$ respectively in the equalities above) with respect to a weight leading to that layer refers to the neuron where that weight terminates. Since there are K neurons in each layer, each sum goes up to K .

With K neurons in each layer, there are K^2 weights between layers; thus the efficiency of finding $\frac{\partial C}{\partial w^N}$ for a specific weight is $O(1)$ with respect to N and K , but for all the weights is $O(K^2)$. For a specific weight into layer $N - 1$, the efficiency would be $O(K)$; scaling this to all the weights is $O(K^3)$, since the results for other weights are not cached. Continuing this trend backward (each sum adds a factor of K), the efficiency of finding the derivative of all the weights into the second hidden layer is $O(K^N)$. If we make the simplifying assumption that there are K input neurons, then the efficiency of finding all the derivatives for the weights in the first layer is $O(K^{N+1})$. Taking only the highest order, gives an overall efficiency of $O(K^N)$.

The exponential dependence on N also follows intuitively - as adding an extra layer exponentially increases the number of paths from the cost to the weight, and to find the derivative, each of these paths must be followed.

For vectorized backpropagation, the derivative of the cost with respect to each layer can be computed using the cached values and matrix multiplication. Ignoring the complexity of carrying the derivative through the activation function, the derivative with respect to each weight between layers $N - 1$ and N requires just one matrix multiplication. Moving backward through each layer adds one more matrix multiplication. With each layer having K neurons, these matrices have dimension K by K . The complexity of matrix multiplication is polynomial in their dimensions; multiplying two K by K matrices has complexity $O(K^3)$ (there are algorithms with slightly lower powers, but we'll take 3 as a baseline here). Therefore, to compute the gradient with respect to all the weights from the input to the first hidden layer is $O(NK^3)$, and if this is done one matrix at a time (i.e. propagating backwards one layer at a time), the derivative with respect to all the intermediate weights falls out at no extra cost (they are the result of already computed matrix multiplications). Thus the complexity of vectorized backpropagation with caching is $O(NK^3)$ for a network with N layers (excluding the input layer) each of K neurons.

For large neural networks, particularly those with several hidden layers, fully vectorized and cached backpropagation reduces the asymptotic runtime from exponential in N to being linear in N , a huge speedup.

8 Classifying Faces

The data for this section was downloaded using the file `get_data.py`. Carrying over a blacklist for bad images from Project 1, and adding in a check to ensure the hashes were correct, the images were downloaded, converted to grayscale, and cropped according to the given bounding box. The resulting image was rescaled to 32 by 32 pixels. While over 90 images were downloaded for Lorraine Bracco, Angie Harmon, Alec Baldwin, Bill Hader, and Steve Carell, only 57 images were downloaded for Peri Gilpin. Therefore, 70 images were used in the training set for each actor, while 37 were used for Gilpin, leaving 20 images (per actor) for the validation and test sets. Rather than use an additional 10 images for the test set (for 20 test images per actor), and possibly even doing the same for the validation set, cross-validation (i.e. choosing the training/validation/testing set differently) was used as described below.

The supplied code was modified to create a fully connected, single hidden layer (with RELU activation function) neural network. The data was loaded and formatted using the `format_data()` function, which creates a dictionary similar to the format in which the MNIST data was loaded: a key for the training, validation, and testing set for each actor, with the value holding a `numpy` array holding the appropriate data. The function `get_set_data()` then retrieves these arrays for use in the neural network, and creates the arrays holding the correct classification for each image.

The network was trained using the entire training set, divided into random mini-batches at the start of each epoch (6 mini-batches per epoch), using `Adam` as the optimizer. The weights and biases were initialized randomly using `torch`'s `randn()` function. The following figure shows the learning curve for the training and validation sets for the training with the final parameters: learning rate of 10^{-3} , 25 hidden neurons, and 5 epochs each with 6 mini-batches of 1000 iterations.

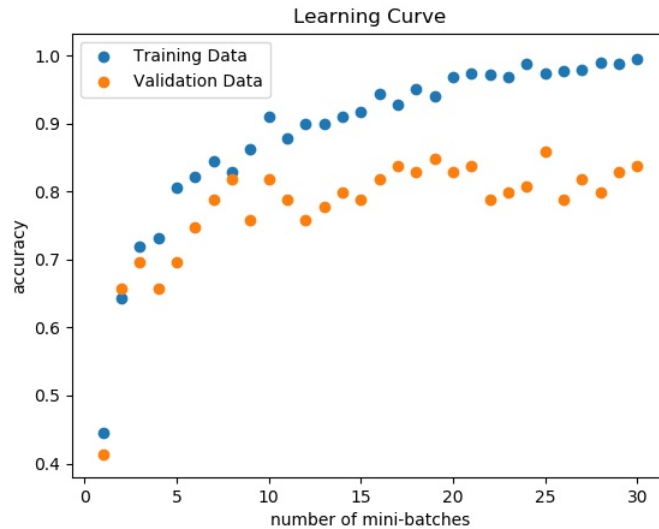


Figure 4: Learning Curve: the oscillations are due to changing the training set using mini-batches. There are six mini-batches to an epoch.

Because of the large number of hyperparameters (learning rate, number of epochs, size of the training/validation sets, number of neurons in the hidden layer, etc.), it was difficult to optimize the network. Rather than iteratively fully exploring a subspace of possible hyperparameters (which would grow extremely quickly even for few choices for each parameter), the function `optimize_params()` was used to sample several options, and was run several times with different divisions into training/validation/testing sets (changed by setting the seed in `format_data()` to 0, 1, 2, and 3). The validation

results for each set of parameters were then approximately averaged, and that result led to a choice of trial 2 (as defined in the `optimize_params()` function), i.e. the parameters given above. Small changes around these values (particularly increasing the number of epochs) had small effects on the results.

These parameters give a final training accuracy of 99.5%, validation accuracy of 83.8%, and testing accuracy of 81.7% (when the data seed is set to 2). While the validation set did have an effect on training through the choice of hyper-parameters, this is mitigated by the cross-validation; taking it to be part of the testing set gives an accuracy of 82.8%. Averaging the testing accuracy (again including the validation set) over the cross-validation samples (i.e. seed of 0,1,2,3) gives an accuracy of 80.5%.

9 Visualizing Weights

The following image...

10 AlexNet