


Time-based CRDTs

Where things get real messy, real quick

A register is a structure that can hold a single value,
and supports *get* and *set* operations

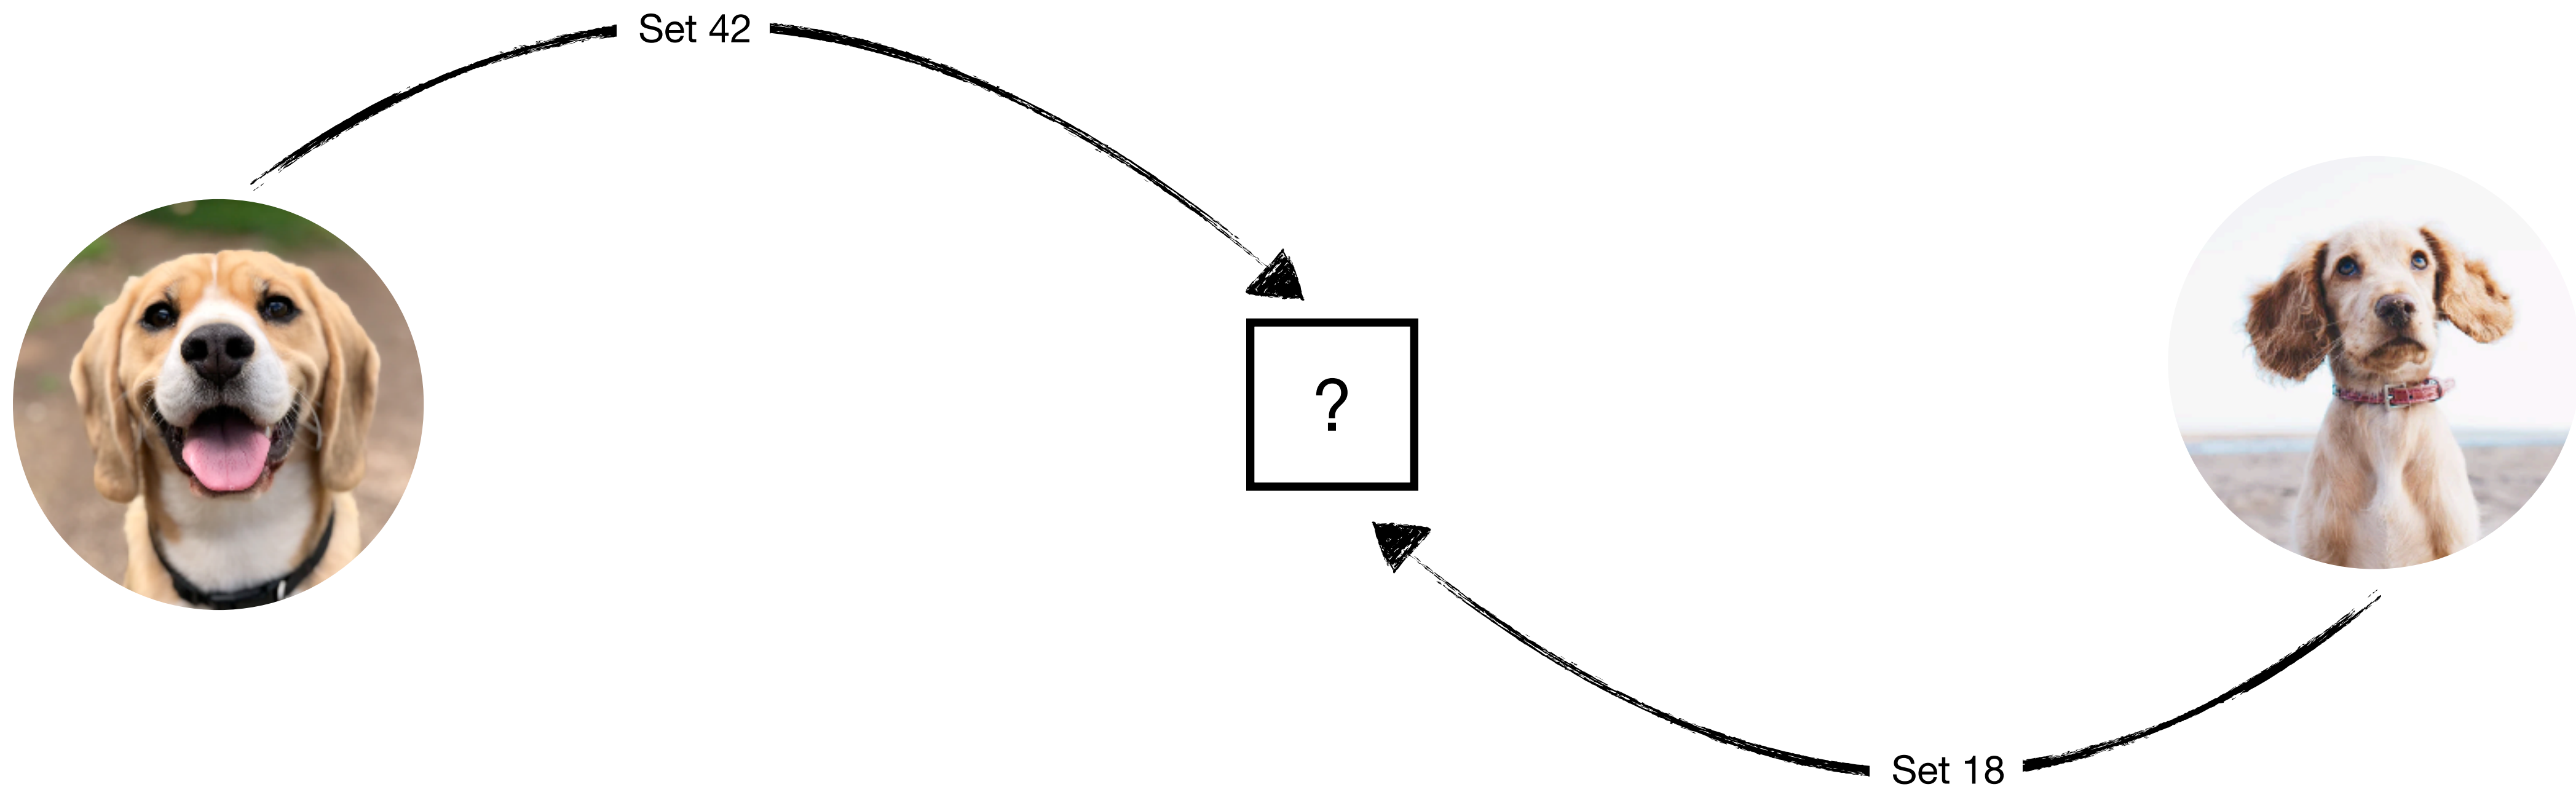

How can we reconcile conflicting replicas?