
## A multi-value register contains either one or many values

When one state precedes the other\*, the CRDT behaves like a LWW-Register

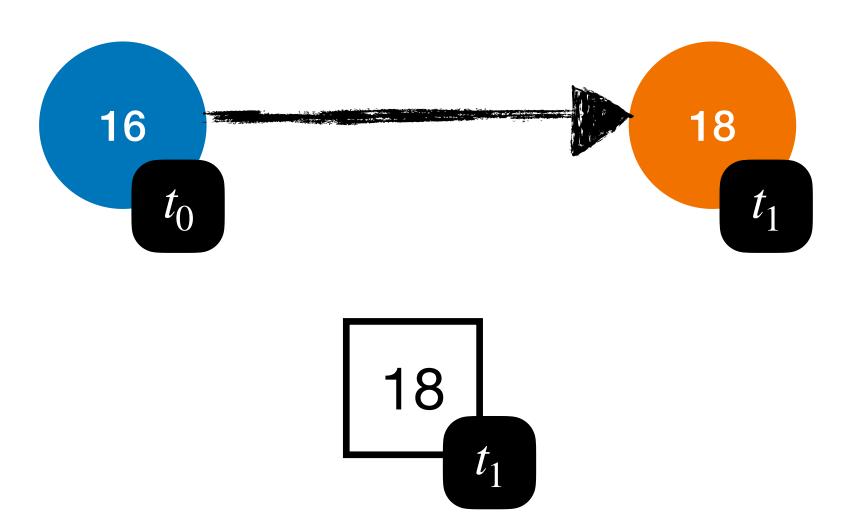

\*with regard to the *happened-before* relation, symbolised by