
GuidedOR User Guide

GuidedOR is a medication safety software platform for the Operating Room (OR). GuidedOR uses real-time data to generate patient-specific recommendations to prevent medication errors. It launches from the patient's chart in the EHR and is fully integrated with clinical systems.

How-to Guide

1. When selecting your macro, choose one of the GuidedOR macros: **GuidedOR GETA**, **GuidedOR LMA**, or **GuidedOR MAC** from the available public macros.

Fig 1: GuidedOR Launch Button

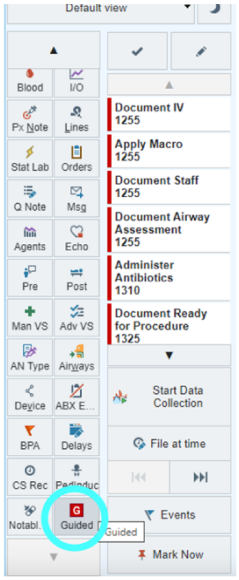

2. To launch GuidedOR, click on the **red G "Guided" button** on the left side of the intra-operative tab in Epic (see Fig 1). For safety, GuidedOR automatically logs out when you log out of Epic (e.g., on a lunch break). Click on the red G "Guided" button to re-launch GuidedOR when you log back in to Epic.

3. Immediately prior to administering a medication, scan the medication barcode using the barcode scanner (labeled GuidedOR). You will see the GuidedOR medication dosing window and hear a read-back of the medication name (volume is controlled via the native computer monitor speakers in the bottom right corner of the monitor). The GuidedOR dosing window will include applicable recommendations and/or default doses (see Fig 2).

4. Multiple medications can be scanned in rapid succession (e.g., during induction) and saved later. Unsaved dosing windows will remain open in separate tabs in the GuidedOR window (see Fig 2). You can continue to work in Epic before completing the medication documentation.

5. When you are ready, click **Save** to document and save your medication administration(s). Alternatively, click **Cancel** if you decide not to administer a medication after you scan it. Once saved, the medication(s) will automatically

document in the patient chart in Epic. This may take up to 60 seconds (similar to vital signs appearing in Epic) because Epic refreshes every 60 seconds.

6. Once the case is complete, GuidedOR will automatically close. You can exit GuidedOR at any time by clicking the X in the top right corner (see Fig 2). Make sure you re-launch GuidedOR at the start of your next case.

Fig 2: GuidedOR Dosing Window

