


Biomedical Wearable Technologies
for Healthcare and Wellbeing

The Flutter Framework

A.Y. 2025-2026

Giacomo Cappon

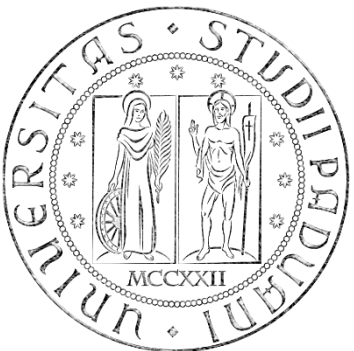

Outline

➤ **Flutter**

- Creating a new project
 - App dissection
 - Expanding our first app
-
- Homework & Resources

Flutter

➤ What is Flutter?

- Simply a declarative framework for Dart

➤ Why this choice?


- State-of-the-art and Google-maintained
- Single codebase for iOS and Android (and Mac, Windows, Web)
- Relatively easy to learn
- Lots of examples
- Fastly growing job market

➤ Today we will create and study our first Flutter app



Before starting...

- What you'll see in these labs about Flutter capabilities
- Actual things that you will probably use
- Flutter possibilities

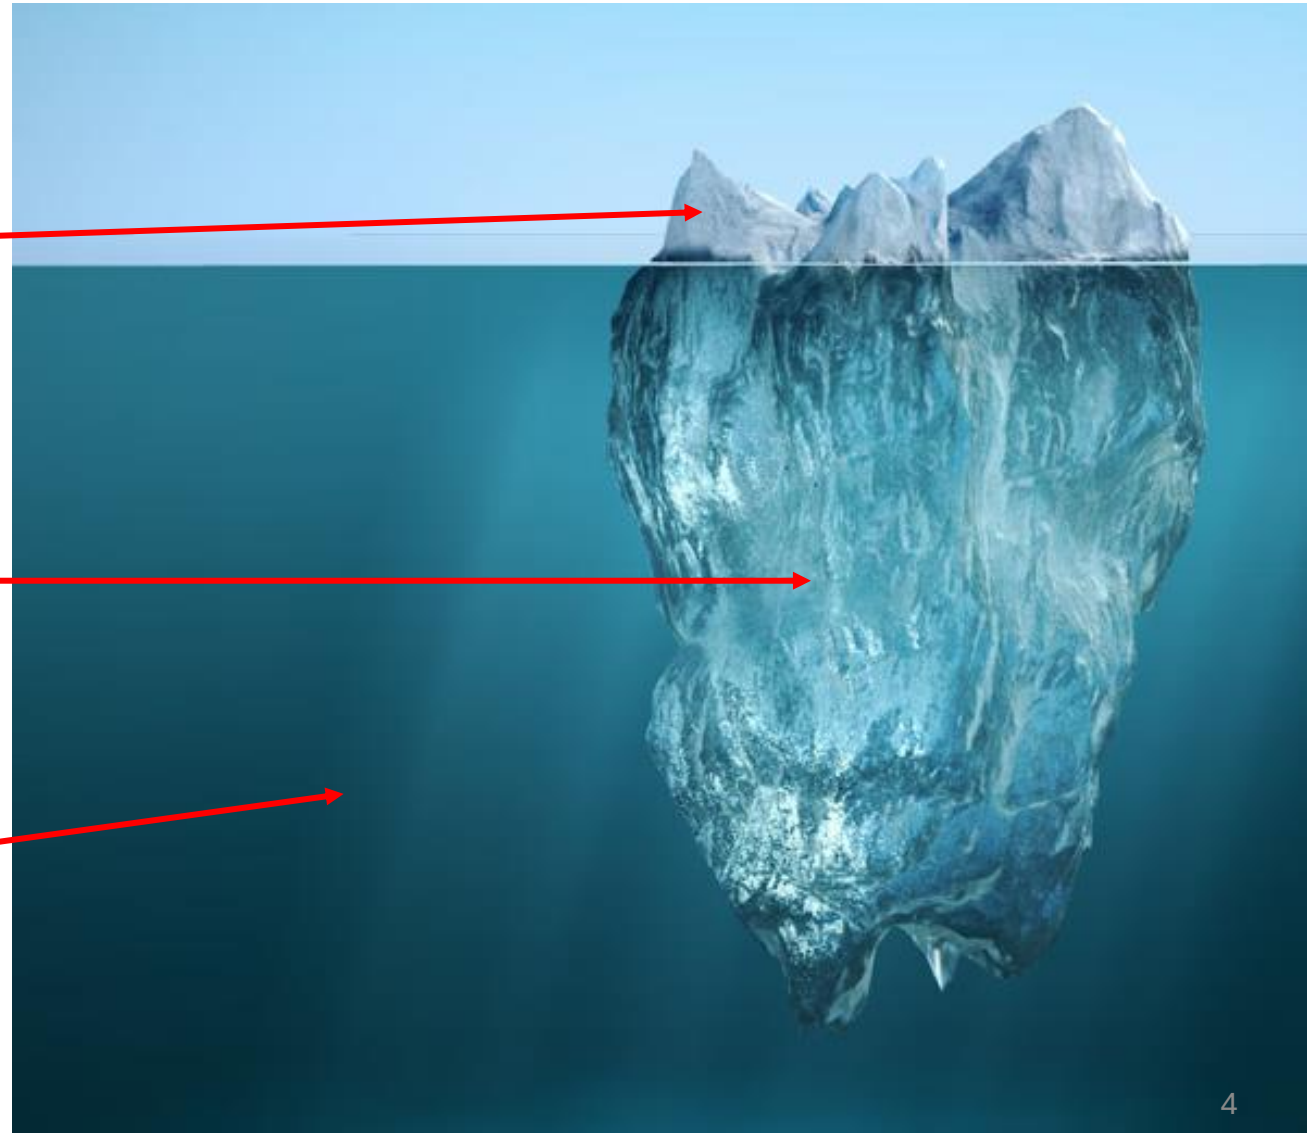

Outline

- Flutter
- **Creating a new project**
- App dissection
- Expanding our first app

- Homework & Resources

Hello, Flutter!

- In this lesson, we will run and analyse our first Flutter app
- First, setup VS Code to work with Flutter (**this should have already been done**)
 1. Start VS Code.
 2. Invoke **View > Command Palette...**
 3. Type “install”, and select **Extensions: Install Extensions**.
 4. Type “flutter” in the extensions search field, select **Flutter** in the list, and click **Install**. This also installs the required Dart plugin.
- Then, create the app
 1. Invoke **View > Command Palette**.
 2. Type “flutter”, and select the **Flutter: New Project**.
 3. Select **Application**
 4. Select the parent directory that will contain the app
 5. Enter a project name, such as “my_first_app”, and press **Enter**.
 6. Wait for project creation to complete and the main.dart file to appear.

Hello, Flutter!

➤ Replace all the code of main.dart with


```
import 'package:flutter/material.dart';
void main() {
  runApp(MyApp());
} //main
class MyApp extends StatelessWidget {
  MyApp({Key? key}) : super(key: key);

  @override
  Widget build(BuildContext context) {
    return MaterialApp(
      title: 'Welcome to Flutter',
      home: Scaffold(
        appBar: AppBar(title: Text('Welcome to Flutter')),
        body: Center(child: Text('Hello World')),
      ),
    );
  } //build
} //MyApp
```

Hello, Flutter!

➤ Finally, run the app!

1. Locate the VS Code status bar (the bar at the bottom of the window):



UTF-8 LF {} Dart iPhone 15 Pro Max (ios simulator)

2. Select a mobile device from the **Device Selector** area
3. Invoke **Run > Start Debugging** or press **F5**
4. Wait for the app to launch — progress is printed in the **Debug Console** view.
5. After the app build completes, you'll see the starter app on your device.



A great feature: Hot reload

- Dart offers a fast development cycle with *Stateful Hot Reload*, the ability to reload the code of a live running app without restarting or losing app state. Make a change to app source, tell your IDE or command-line tool that you want to hot reload, and see the change in your simulator, emulator, or device.
- Try that!
 1. Open lib/main.dart.
 2. Change the string
‘Hello World’
with
‘Hello, Flutter!’
 3. Save your changes: invoke **Save All**, or click **Hot Reload**
 4. You’ll see the updated string in the running app almost immediately.



Outline

- Flutter
- Creating a new project
- **App dissection**
- Expanding our first app


- Homework & Resources

Let's dissect the app

- Let's understand what we have done.

Let's dissect the app – Project folder

- First, what's inside the project folder?
- Important things
 - **lib folder:** it contains the app source code
 - **main.dart file:** the entry point for the compiler
 - **pubspec.yaml file:** it specifies high level app features as well as listing which third party libraries our app needs and uses
 - **README.md file:** a markdown file describing the app
- (Less) Important things
 - **android/ios/linux/macos/windows/web folders:** where native specific code can be defined if needed
 - **test folder:** where to put code for running automatic testers
- (Even less) Important things
 - All other folders and files are very use case specific and probably you will never use those in this course. If you are curious...

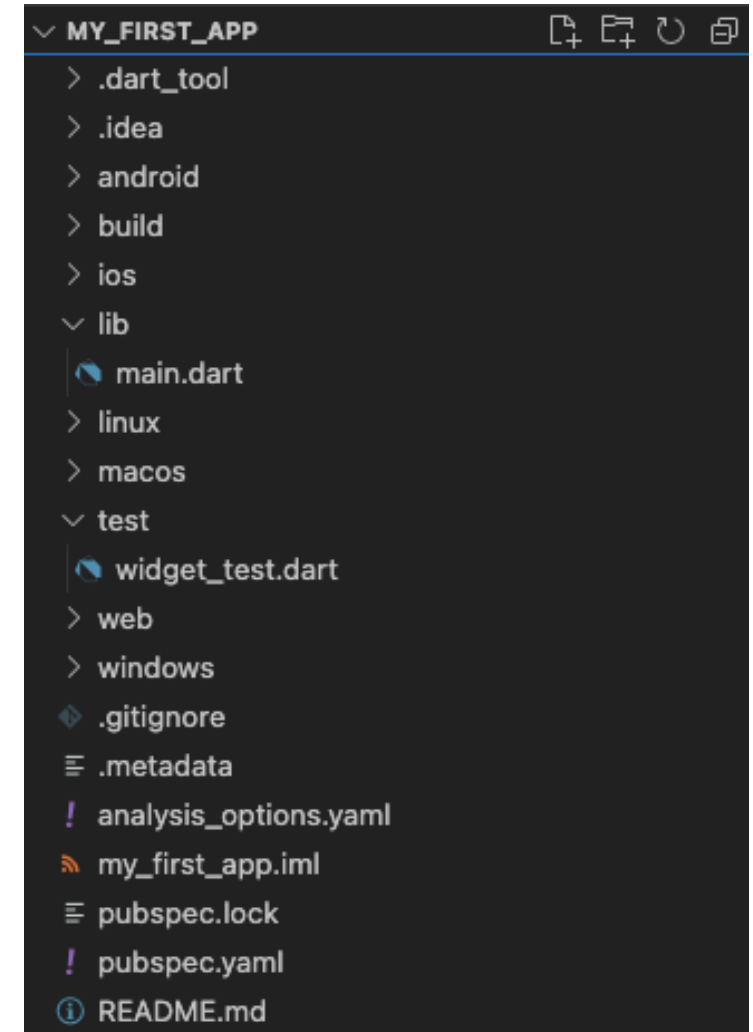

Let's dissect the app – main.dart

➤ Let's understand the main.dart file.

```
import 'package:flutter/material.dart';
void main() {
  runApp(MyApp());
} // main
class MyApp extends StatelessWidget {
  MyApp({Key? key}) : super(key: key);

  @override
  Widget build(BuildContext context) {
    return MaterialApp(
      title: 'Welcome to Flutter',
      home: Scaffold(
        appBar: AppBar(title: Text('Welcome to Flutter')),
        body: Center(child: Text('Hello World')),
      ),
    );
  } // build
} // MyApp
```

To run an app using the Flutter framework we can use the **runApp** method which takes a **Widget** object as an input.

What's a Widget?

Everything is a Widget

- In Flutter, almost everything is (inherits from) a Widget!
- A Widget is a building block for your user interface (UI). Using widgets is like combining Legos.
- More technically, a Widget is a sort of blueprint for displaying your app state.
- Widgets can be thought as a function of UI. Given a state, the build() method (that every custom Widget must override and implement) constructs the widget UI:



$$\text{UI} = f(\text{state})$$

Screen build

Let's dissect the app – main.dart

➤ In **bold** the Widgets of our app

```
import 'package:flutter/material.dart';
void main() {
  runApp(MyApp());
} // main
class MyApp extends StatelessWidget {
  MyApp({Key? key}) : super(key: key);

  @override
  Widget build(BuildContext context) {
    return MaterialApp(
      title: 'Welcome to Flutter',
      home: Scaffold(
        appBar: AppBar(title: Text('Welcome to Flutter')),
        body: Center(child: Text('Hello World'))),
    );
  } // build
} // MyApp
```

Key method for building the Widget that must be implemented


But how Widgets are combined together?

The Widget Tree

- Widgets are combined together using a **tree structure**

```
import 'package:flutter/material.dart';
void main() {
  runApp(MyApp());
} // main
class MyApp extends StatelessWidget {
  MyApp({Key? key}) : super(key: key);

  @override
  Widget build(BuildContext context) {
    return MaterialApp(
      title: 'Welcome to Flutter',
      home: Scaffold(
        appBar: AppBar(title: Text('Welcome to Flutter')),
        body: Center(child: Text('Hello World'))),
    );
  } // build
} // MyApp
```

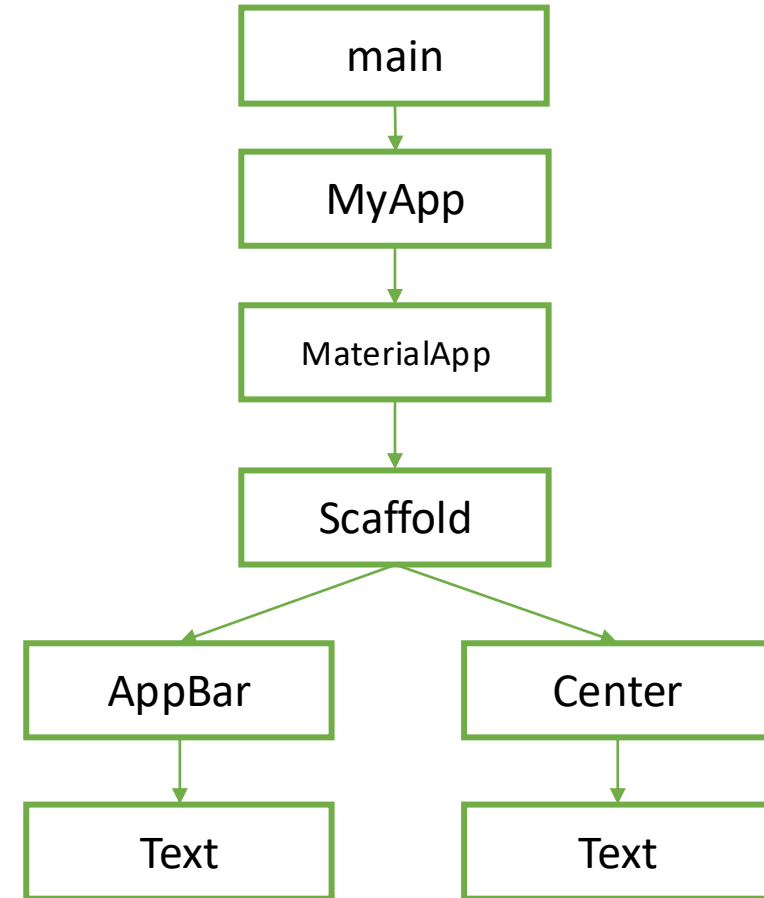

State and widgets

➤ In **bold** the Widgets of our app

```
import 'package:flutter/material.dart';
void main() {
  runApp(MyApp());
} // main

class MyApp extends StatelessWidget {
  MyApp({Key? key}) : super(key: key);

  @override
  Widget build(BuildContext context) {
    return MaterialApp(
      title: 'Welcome to Flutter',
      home: Scaffold(
        appBar: AppBar(title: Text('Welcome to Flutter')),
        body: Center(child: Text('Hello World'))),
    );
  } // build
} // MyApp
```

MyApp is not just a Widget, it is a StatelessWidget

Stateless vs. Stateful widgets

- **StatelessWidgets** are Widgets that always build the same way given a particular configuration and ambient state. So, they never re-build while they are displayed to the user (their lifetime).
- **StatefulWidgets** for widgets that can build differently several times over their lifetime.
- You can think about StatelessWidget as a sort of constant and StatefulWidget as a variable.

We will learn the State mechanism and how to manage the State in lesson 11 and 12

Let's dissect the app – pubspec.yaml

- pubspec.yaml contains high-level instructions for the development environment and information on the app

```
name: my_first_app
description: A new Flutter project.
publish_to: 'none'
version: 1.0.0+1
```

my_first_app information (name, description, version, ...)

```
environment:
  sdk: ">=3.2.4 <4.0.0"
```

Flutter sdk version to be used

```
dependencies:
  flutter:
    sdk: flutter
```

App dependencies: what the app needs in order to work: other packages? Other libraries? Put them here.

```
cupertino_icons: ^1.0.2
```

```
dev_dependencies:
  flutter_test:
    sdk: flutter
  flutter_lints: ^2.0.0
```

App dependencies while developing the app

```
flutter:
  uses-material-design: true
```

Information for the Flutter environment such as where to find assets.

Outline


- Flutter
- Creating a new project
- App dissection
- **Expanding our first app**
- Homework & Resources

My (custom) first app

- Let's play with `my_first_app` and let's expand it
- We will learn how to:
 - Install an external package and add it as a dependency
 - Use the external package inside our app
 - How to (slightly) modify the UI

My (custom) first app

- **Aim:** The result will be a very simple app that, each time you open it, a new random "Hello" message is shown to the user.

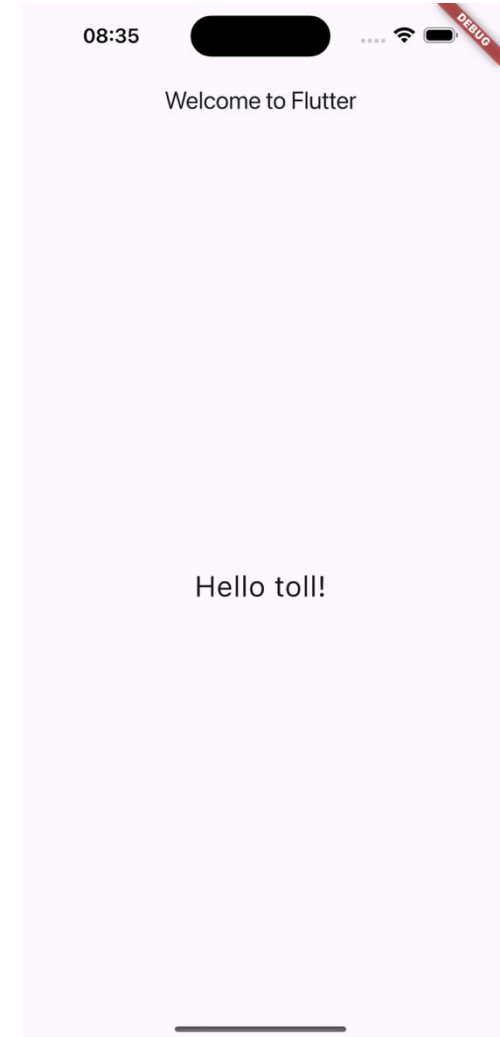


My (custom) first app

➤ Roadmap

1. Understand what to use to generate a random word
2. Generate a random word and check that everything is working
3. Display the word in the “Hello” message

Solving point 1

- We do not want to code a random English word generator!
- On the Internet we can find a lot of already made code and ready-to-use packages that can fit your needs
- A place that we will visit often during this course is pub.dev:

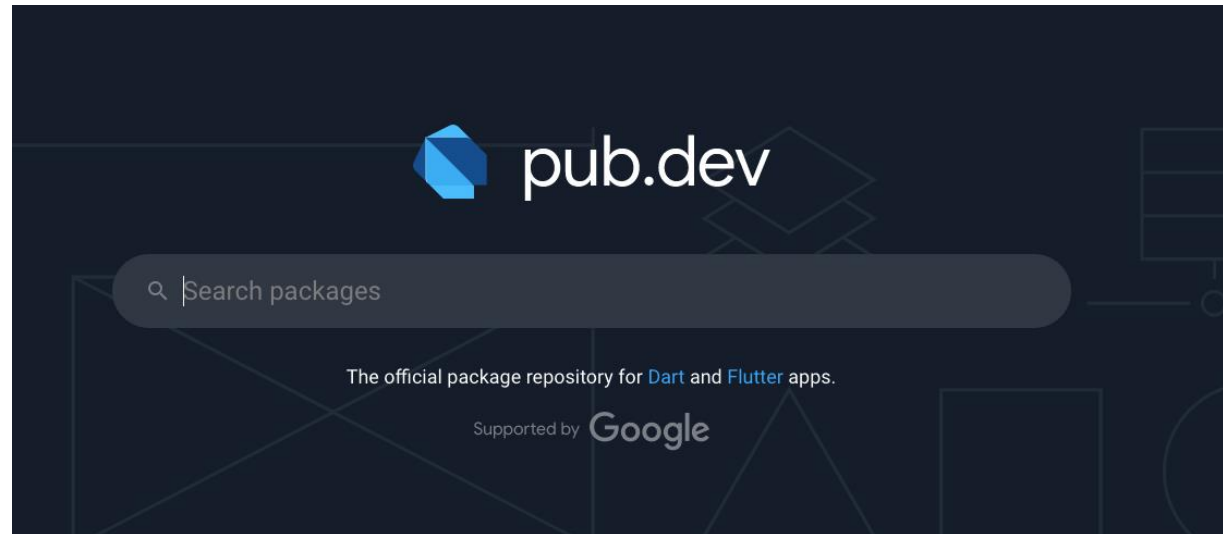

This is the package I was looking for

➤ After some research, it seems like the **english_words package** can solve our needs

➤ It can generate words and words pairs!

How to use it? Docs!

Code is available too!

english_words 4.0.0

Published 9 months ago • [filiph.net](#) [Null safety](#)

[DART](#) [NATIVE](#) [JS](#) [FLUTTER](#) [ANDROID](#) [IOS](#) [LINUX](#) [MACOS](#) [WEB](#) [WINDOWS](#)

311

[Readme](#) [Changelog](#) [Example](#) [Installing](#) [Versions](#) [Scores](#)

english_words

build passing

A package containing the most ~5000 used English words and some utility functions.

Usage

Printing the top 50 most used nouns in the English language:

```
import 'package:english_words/english_words.dart';

main() {
  nouns.take(50).forEach(print);
}
```

Computing number of syllables in a word:

```
syllables('beautiful'); // 3
syllables('abatement'); // 3
syllables('zoology'); // 4
```

Generating 5 interesting 2-syllable word combinations:

```
generateWordPairs().take(5).forEach(print);
```

311 130 98%
LIKES PUB POINTS POPULARITY

Publisher

[filiph.net](#)

Metadata

Utilities for working with English words. Counts syllables, generates well-sounding word combinations, and provides access to the top 5000 English words by usage.

[Repository \(GitHub\)](#)
[View/report issues](#)

Documentation
[API reference](#)

License
MIT ([LICENSE](#))

Dependencies
[string_scanner](#)

More 25
[Packages that depend on english_words](#)

Including english_words in the app


- Installing the english_words package in our app is very easy.
- By definition, it is a dependency right?
- So, let's add it under the dependency list of our app into pubspec.yaml
- After adding it, save pubspec.yaml and you will see VSCode running **flutter pub get** for you.
- Done!

```
...  
  
dependencies:  
  flutter:  
    sdk: flutter  
  
  cupertino_icons: ^1.0.2  
  
  english_words: ^4.0.0  
  
...
```

My (custom) first app

➤ Roadmap

1. **Understand what to use to generate a random word**
2. Generate a random word and check that everything is working
3. Display the word in the “Hello” message



Generating a random word

- Let's add some line of code to main.dart to generate a word using the english_words package

- Modify the build method by adding

```
final word = WordPair.random().first;
```

before the return statement and run the app.

- Nothing it's happening. How to see if we are generating a random word?
- We can use the logger and the debug console!

Logging things

- Simply try to print the word value as a normal Dart program:


```
final word = WordPair.random().first;  
print(word);
```

- If you run the application now you will see something like this in the **Debug Console** of VS Code:

```
Launching lib/main.dart on iPhone 15 Pro Max in debug mode...  
Xcode build done.                                     7.4s  
[ERROR:flutter/shell/platform/darwin/graphics/FlutterDarwinContextMetalImpeller.mm(42)] Using the  
Impeller rendering backend.  
Connecting to VM Service at ws://127.0.0.1:57673/3DHwaPh0oRM=/ws  
flutter: kid
```

Logging things

- Every time you reload/restart the app

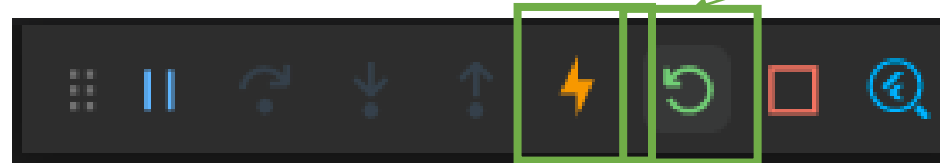

Restart button

Reload button



- ...you will see a different word

```
PROBLEMS 3 OUTPUT DEBUG CONSOLE TERMINAL
Restarted application in 416ms.
flutter: left
```

My (custom) first app

➤ Roadmap

1. **Understand what to use to generate a random word**
2. **Generate a random word and check that everything is working**
3. Display the word in the “Hello” message



Change the Hello message

➤ You should be able to solve this point by yourself now

➤ Simply, using string interpolation, change

'Hello, Flutter!' to 'Hello, \$word!'

➤ and save to reload the app and see the changes.






Hello, soft!

My (custom) first app

➤ Roadmap

1. Understand what to use to generate a random word
2. Generate a random word and check that everything is working
3. Display the word in the “Hello” message



Outline

- Flutter
- Creating a new project
- App dissection
- Expanding our first app

- **Homework & Resources**

Homework

- Play with our first example
- Get familiar with the structure of a Flutter project and how to install new packages using pubspec.yaml
- Get familiar with the concept of Widget
- Understand the Flutter flow

Resources

- Code repository of today's lesson and exercises solution
 - https://github.com/gcappon/bwthw/tree/master/lesson_05-the_flutter_framework
- Introduction to Widgets
 - <https://docs.flutter.dev/development/ui/widgets-intro>
- Write your first Flutter app, part 1 codelab
 - <https://docs.flutter.dev/get-started/codelab>
- DevTools
 - <https://docs.flutter.dev/development/tools/devtools/overview>